





3 CIRCUIT 70 AMP. LOAD CENTER
30AMP. BREAKER 1-POLE
20AMP. GFI BREAKER 1-POLE

LOOP FEED LUG TERMINAL BARS




5-20R2
20AMP.
DUPLEX
R32U
30AMP.
RECEPTACLE

43.5

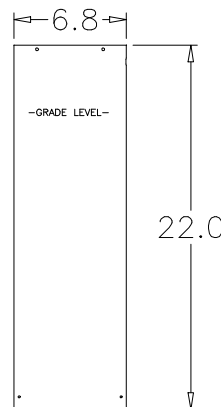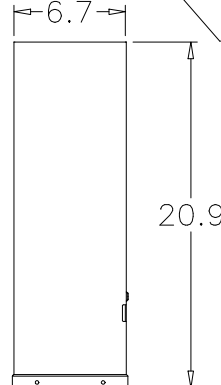


3-1/2"x4" LENS



PHOTOCELL

38.0



GRADE

-GRADE LEVEL-

24.0

6.6

3.3


SH27

WIRE RANGE TABLE :

CONNECTOR	COPPER		ALUMINUM	
	SOLID	STRAND	SOLID	STRAND
LINE	14-8	14-2	12-8	12-2
LOAD	14-10	14-10	---	---
NEUTRAL END HOLE	14-8	14-2	12-8	12-2
NEUTRAL SIDE HOLE	14-8	14-4	12-8	12-4
EQUIP. GRND.	12-8	12-2	12-8	12-2
POST LINE CONNECTORS SUITABLE FOR LOOP FEED	14-1/0		14-1/0	
EQUIP. GRND.	12-2	12-2	12-2	12-2

Y
NOTES: EARTH BURIAL POST
X

MIDWEST ELECTRIC
PRODUCTS, INC.
Mankato, MN



* = Critical To Quality
Unless Otherwise
Specified

Tolerances On:
3 Pl. Decimals ± .010
2 Pl. Decimals ± .030
Fractions ± 1/32
Angles ± 1/2°
Holes ± .003
Dimensions Are In Inches

AutoCad
Generated

SCALE
1 : 1

SIZE
A

TITLE: U041GP6L
OUTLINE DRAWING

DWG NO:
198B8603

SHEET 1 OF 1

Rev.1 CR R0815611 JE 3-12-08
Rev.2 CR R1111415 CLS 1-19-12