



ARIENS®



2019-20

THE FAMILY THAT FEARS

NO FORECAST



FROM A SMALL DUSTING TO THE NEXT HUNDRED-YEAR STORM, THERE'S A BRIGHT ORANGE ARIENS® SNO-THRO® OUTPERFORMING EXPECTATIONS.

Our family of time-tested machines continue to uphold the Ariens name with generations of performance. Whichever Sno-Thro® you choose, you'll experience an unrivaled level of power, performance and durability. Explore the Ariens lineup to find the Sno-Thro for your driveway.

Going the **extra** mile feels like you're just getting started.

YOUR DRIVEWAY IS ONLY THE BEGINNING WHEN YOUR GARAGE IS HOME TO AN ARIENS® SNO-THRO®.

With best-in-class power and performance, there isn't much you can't handle. Take care of what Mother Nature dishes out with the all-day comfort and world-class engineering you'll only find with the King of Snow™. From now on, extra is just the beginning.



MOVE

MOUNTAINS

AT A MOMENT'S NOTICE



NEVER BUCKLE WHEN WINTER SHROUDS YOUR WORLD. TURN TO THE TRUSTY ORANGE ANSWER FOR MOTHER NATURE'S WORST.

We've been chewing up and throwing out winter storms for decades. Dependability is built into every Ariens® snow blower. Hand assembled in Wisconsin and rigorously tested worldwide, our machines deliver a quick start, powerful performance, and legendary reliability.



MADE IN THE
USA
WITH GLOBALLY SOURCED PARTS

4 MILLION

BRILLION, WISCONSIN PUT AN ENTIRE INDUSTRY ON THE MAP.

Each of the 4 million Ariens® machines designed, fabricated and hand assembled in Brillion, Wisconsin are a reminder that it's the size of your heart, not the size of your factory that matters. In 24 countries around the world, the product of Ariens craftsmen pushes blizzards aside and clears the way for work to get done. In every corner winter touches, Ariens means performance.






GOOD DEEDS **ACCUMULATE**

WHEN AN ARIENS® SNO-THRO® RUMBLES TO LIFE, LIVING IN WINTER'S GRIP GETS A LITTLE EASIER AND NEIGHBORHOODS GET A LITTLE CLOSER.

Why stop with your driveway when you're in the zone with your Ariens snow blower? Across the world and online you'll see Ariens owners going the extra mile to clear a path for their neighbors.




#ARIENSHERO #KINGOFSNOW #QUEENOFSSNOW

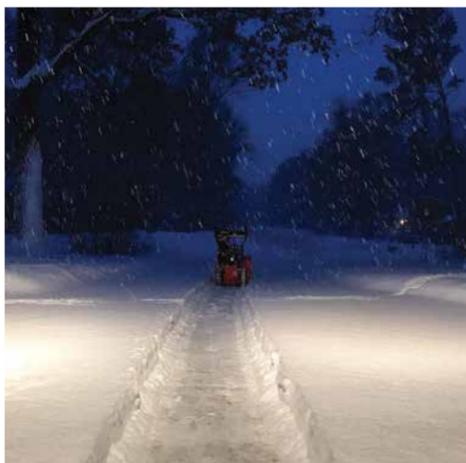

NOW YOUR COMFORT ZONE
EXTENDS TO EVERY DRIVEWAY.

IT'S A BREEZE TO EXPAND YOUR WINTER WONDERLAND WITH THE EASY TO
START, EASY TO HANDLE, ALWAYS RELIABLE ARIENS® SNO-THRO®.

Armed with the technical efficiency and unshakable performance of Ariens, you'll blow
through your driveway. Where some see a chore, you'll see a chance to rise above the rest.

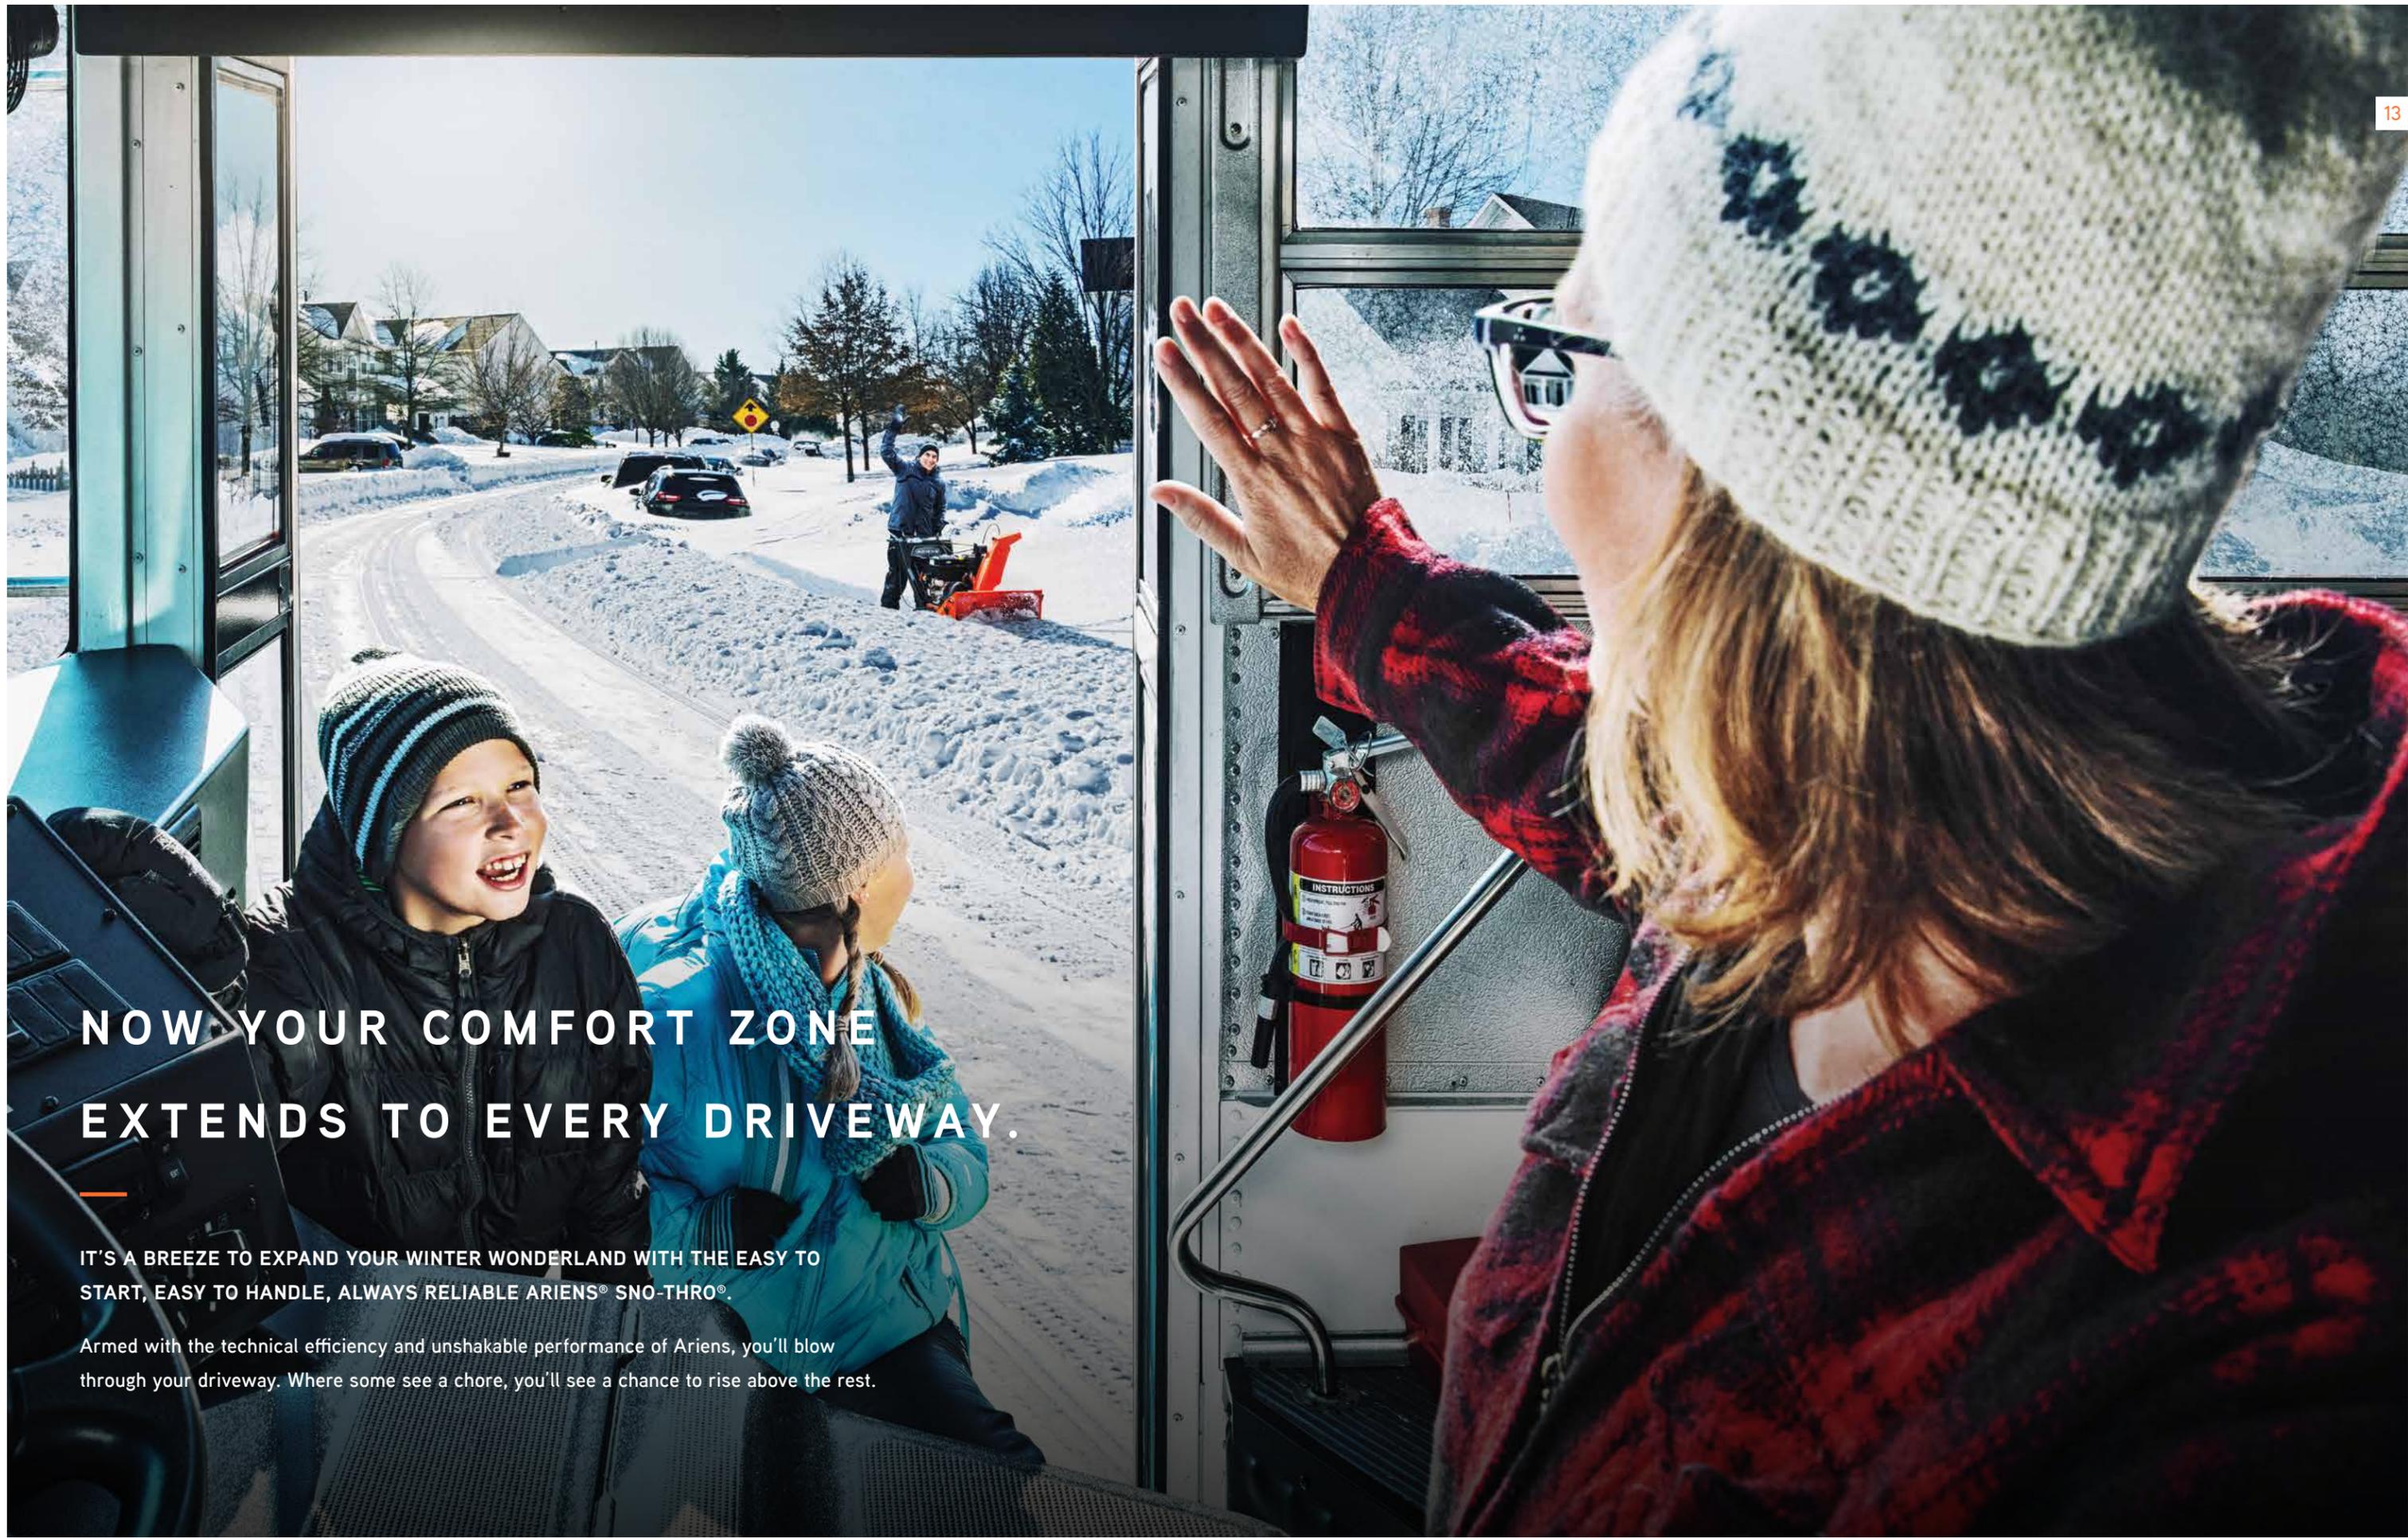

12 HOURS AT 20 BELOW

IS JUST THE BEGINNING

EVERY ARIENS® SNO-THRO® DESIGN IS TESTED IN A SPECIAL FACILITY JUST NORTH OF RIGOROUS.

The plan is simple. Find the most insane winter conditions and then test like crazy. Ariens snow blowers are put through their paces from top to bottom during non-stop, twelve-hour testing in some of nature's harshest conditions. Day after day, night after night, Ariens machines chew through over 200 inches of accumulation. In temperatures plummeting to -20 degrees Fahrenheit, engineers chew through tons of wet, back-breaking, lake-effect snow to ensure every feature lives up to the legendary performance only an Ariens Sno-Thro delivers.



ROI DE LA NEIGE

눈의 왕

KUNGEN AV SNØ

ج ل ث ل ا ك ل م

КОРОЛЬ СНЕГА

කරුණ

DAS SCHNEEWUNDER

キング・オブ・スノー

KONGEN AV SNØ

THE KING OF SNOW

雪之王者

DE SNEEUWKONING

REY DE LA NIEVE

KRÓL ŚNIEGU

WE DIDN'T REINVENT THE WHEEL. WE REVOLUTIONIZED IT.

Winter is a wicked beast. It doesn't care that your driveway has a steep incline, has no mercy on a property positioned on a mountainside, and laughs at the ice lurking beneath the 10-inch bed of snow you're burdened with.

In the constant uphill battle against winter's brutal conditions, Ariens® has completely changed the competitive landscape. Our exclusive RapidTrak™ drive system puts you in full control of powering forward. Conquer the conditions on any terrain with superior handling and uninterrupted momentum.

With RapidTrak, Ariens leads the industry with our innovative combination of undisputed speed, command, versatility and maneuverability.

Experience the power and functionality of a track with the speed and maneuverability of a wheel.



SPEED AND TRACTION

Ariens® RapidTrak™ combines track-system stability with the speed of a wheel driven Sno-Thro®.

MAXIMUM MANEUVERABILITY

Adjust on the go by moving the back wheel up to turn with the ease of a wheeled Sno-Thro.

UNDISPUTED POWER

The dual-belt auger drive system delivers maximum torque quickly, so you can power through piles of snow.



POSITION 1 - TRACK

A traditional track position with the grip of a track for normal operation.

POSITION 2 - WHEEL

Effortlessly raise the rear wheel to make the machine function like a wheel-driven model.

POSITION 3 - DIG-IN

Shift the rear wheel down to pitch the auger housing and dig into hard-packed snow.

FLEXIBLE MUSCLE.

MEET THE PROFESSIONAL 21. COMMERCIAL POWER AND DURABILITY IN A COMPACT DESIGN.

Don't skip a beat from jobsite to jobsite with the Professional 21. The compact, functional design allows commercial users to clear snow with an easily transportable machine. Built with a tough, reinforced steel housing, a spring-loaded scraper bar and high-wear paddles, the Professional 21 is the Goldilocks machine for snow removal specialists. Remote chute rotation is also available.

EASY ACCESS OPEN-ENGINE DESIGN

The Ariens AX 208cc engine is fully accessible for quick oil changes and spark plug replacements.

REINFORCED STEEL HOUSING

Heavy-duty steel construction built for commercial use and frequent transportation. Reinforced steel rod helps maintain housing geometry and effectiveness.

SCRAPER BAR

A spring-loaded, self-adjusting scraper bar ensures snow is cleared to the pavement surface.



COMMERCIAL PADDLE
Thick, high-wear paddles clean to the pavement surface and are built to withstand much more concrete grading than traditional paddles.






INTELLIGENCE MEETS POWER.

Not freezing your fingertips off while fiddling with your engine. That's a first. Not being bogged down by wet and heavy snow. That's a first. Firing up with one pull. That's a first. Ariens® is proud to have been the first to feature the ease and efficiency of EFI engine technology in a snow blower.

Simply turn the key and start it up. No matter what the conditions. The Ariens AX EZ-Launch™ EFI starts easier, uses less fuel and throws with more consistent power. EZ-Launch™ EFI allows you to be the first to start and first to finish.

Which is why before you start, think Ariens.

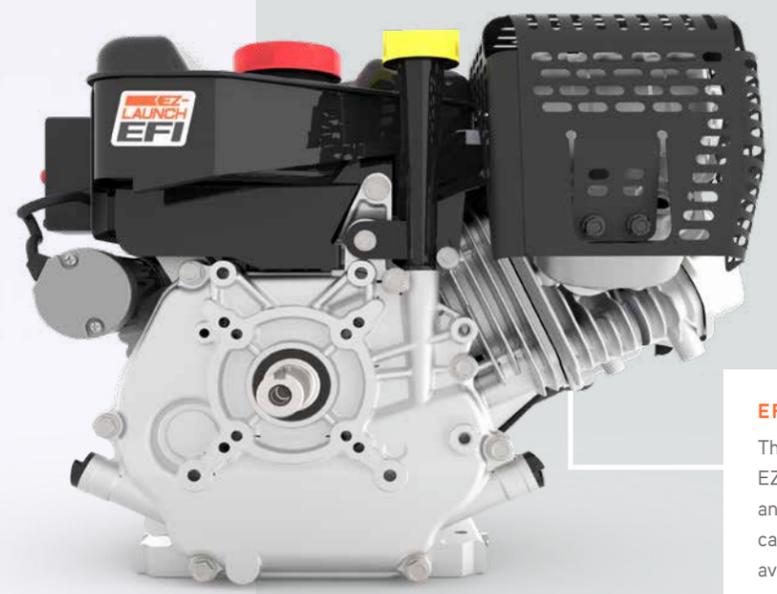

EFI/E-GOV POWER ADVANTAGE
Thanks to an electronic governor, EZ-Launch EFI maintains consistent speed and throwing performance. Unlike a typical carbureted engine, it will maintain the power available even in deep and wet drifts.



PROFESSIONAL SERIES



**PRE-DAWN IS NO TIME FOR AMATEUR HOUR.
LEAVE IT TO A PROFESSIONAL.**

Designed and built for professionals, but also used by homeowners who don't mess around. The Professional series takes on the deepest, toughest and most treacherous jobs with ease. A massive 23.5" housing height and 16" auger team up with a tireless 420cc engine to swallow up to 102 tons of snow per hour and send it flying up to 60 feet.

1 YEAR
LTD. COMMERCIAL
WARRANTY

3 YEAR
LTD. RESIDENTIAL
WARRANTY



MODEL OVERVIEW

DESIGNATION	PROFESSIONAL 28	PROFESSIONAL 28 HYDRO EFI	PROFESSIONAL 28 HYDRO RAPIDTRAK®	PROFESSIONAL 32	PROFESSIONAL 32 HYDRO RAPIDTRAK®	PROFESSIONAL 36 HYDRO EFI
MODEL	926077	926068	926078	926076	926079	926070
ENGINE	ARIENS AX 420CC (21 FT/LBS)	ARIENS AX EZ- LAUNCH EFI 420CC (21 FT/LBS)	ARIENS AX 420CC (21 FT/LBS)	ARIENS AX 420CC (21 FT/LBS)	ARIENS AX 420CC (21 FT/LBS)	ARIENS AX EZ- LAUNCH EFI 420CC (21 FT/LBS)
STARTING SYSTEM	120V/RECOIL	120V/RECOIL	120V/RECOIL	120V/RECOIL	120V/RECOIL	120V/RECOIL
THROWING DISTANCE	3 FT - 60 FT (.9 - 18.29 M)	3 FT - 60 FT (.9 - 18.29 M)	3 FT - 60 FT (.9 - 18.29 M)	3 FT - 60 FT (.9 - 18.29 M)	3 FT - 60 FT (.9 - 18.29 M)	3 FT - 60 FT (.9 - 18.29 M)
CHUTE ROTATION	QUICK-TURN™	QUICK-TURN	QUICK-TURN	QUICK-TURN	QUICK-TURN	QUICK-TURN
AUGER DIAMETER	16" (40.6 CM)	16" (40.6 CM)	16" (40.6 CM)	16" (40.6 CM)	16" (40.6 CM)	16" (40.6 CM)
HOUSING	28" W X 23.5" H (71.1 X 59.7 CM)	28" W X 23.5" H (71.1 X 59.7 CM)	28" W X 23.5" H (71.1 X 59.7 CM)	➔ 32" W X 23.5" H (81.3 X 59.7 CM)	32" W X 23.5" H (81.3 X 59.7 CM)	➔ 36" W X 23.5" H (91.4 X 59.7 CM)
TIRE SIZE	16" X 4.8" (40.6 X 12.2 CM)	16" X 4.8" (40.6 X 12.2 CM)	5.5" WIDE TRACK (14 CM)	➔ 16" X 6.5" (40.6 X 16.5 CM)	5.5" WIDE TRACK (14 CM)	16" X 6.5" (40.6 X 16.5 CM)
TONS / HOUR	79 TONS	79 TONS	79 TONS	➔ 90 TONS	90 TONS	➔ 102 TONS

➔ ENHANCED OR STEP-UP FEATURE

AUTO-TURN™ STEERING

Zero-degree turning radius.

ENGINE

Reliable Ariens® AX engine.

HAND WARMERS

Stay warm and comfortable.

AUGER

16" auger diameter.

RAPIDTRAK®

Maintain unmatched speed, stability and maneuverability.

HYDROSTATIC TRANSMISSION

Available option for infinite speed control.

DRIFT CUTTERS

Carve through deep snow.

EZ-LAUNCH™ EFI ENGINE

Available EFI engine starts easier and uses less fuel with consistent power.

SKID SHOES

Commercial-grade steel shoes.

DUAL-BELT DRIVE

Delivers maximum power and extended belt life.

PLATINUM SERIES



MODEL OVERVIEW

DESIGNATION	PLATINUM 24 SHO	PLATINUM 24 SHO EFI	PLATINUM 30 SHO	PLATINUM 28 SHO RAPIDTRAK®
MODEL	921050	921053	921051	921057
ENGINE	ARIENS AX 369CC GEN 3 (17 FT/LBS)	ARIENS AX EZ-LAUNCH 369CC EFI/E-GOV (17 FT/LBS)	ARIENS AX 414CC GEN 3 (20 FT/LBS)	ARIENS AX 369CC (17 FT/LBS)
STARTING SYSTEM	120V/RECOIL	120V/RECOIL	120V/RECOIL	120V/RECOIL
THROWING DISTANCE	3 FT - 55 FT (.9-16.76 FT/LBS)	3 FT - 55 FT (.9-16.76 FT/LBS)	3 FT - 55 FT (.9-16.76 FT/LBS)	3 FT - 55 FT (.9-16.76 FT/LBS)
CHUTE ROTATION	QUICK-TURN™	QUICK-TURN	QUICK-TURN	QUICK-TURN
AUGER DIAMETER	14" (35.6 CM)	14" (35.6 CM)	14" (35.6 CM)	14" (35.6 CM)
HOUSING	24" W X 21" H (71 X 53.3 CM)	24" W X 21" H (71 X 53.3 CM)	30" W X 21" H (76.2 X 53.3 CM)	28" W X 21" H (71.1 X 53.3 CM)
TIRE SIZE	16" X 4.8" (40.6 X 12.2 CM)	16" X 4.8" (40.6 X 12.2 CM)	16" X 4.8" (40.6 X 12.2 CM)	5.5" W (14 CM)
TONS / HOUR	73 TONS	73 TONS	82 TONS	77 TONS

ENHANCED OR STEP-UP FEATURE

AUTO-TURN™ STEERING

Zero-degree turning radius.

HAND WARMERS

Stay warm and comfortable.

AUGER

14" auger diameter.

SUPER HIGH OUTPUT (SHO)

SHO impeller throws up to 82 tons of snow/hour.

RAPIDTRAK®

Maintain unmatched speed, stability and maneuverability.

DUAL-BELT DRIVE

Delivers maximum power and extended belt life.

EZ-LAUNCH™ EFI ENGINE

Available EFI engine starts easier and uses less fuel with consistent power.

ENGINE

Reliable Ariens AX engine.

FULLY LOADED WITH POWER & CONVENIENT FEATURES.

For homeowners looking for a next-level snow clearing experience, the Platinum series is the clear favorite. Combining the highest levels of comfort, convenience, and Super High Output (SHO) capability, Platinum machines are fully loaded with unparalleled power and premium options, defining the leading edge of residential Sno-Thro® performance.

3 YEAR
LTD. RESIDENTIAL
WARRANTY

DELUXE SERIES

3 YEAR
LTD. RESIDENTIAL
WARRANTY



COMPACT SERIES

3 YEAR
LTD. RESIDENTIAL
WARRANTY



MODEL OVERVIEW

DESIGNATION	DELUXE 24	DELUXE 28	DELUXE 28 SHO	DELUXE 30	DELUXE 30 EFI
MODEL	921045	921046	921048	921047	921049
ENGINE	ARIENS AX 254CC (12.5 FT/LBS)	ARIENS AX 254CC (12.5 FT/LBS)	ARIENS AX 306CC (15 FT/LBS)	ARIENS AX 306CC (15 FT/LBS)	ARIENS AX EZ-LAUNCH 306CC EFI/E-GOV
THROWING DISTANCE	3 FT - 50 FT (.9 - 15.2 M)	3 FT - 50 FT (.9 - 15.2 M)	3 FT - 55 FT (.9-16.7 M)	3 FT - 50 FT (.9 - 15.2 M)	3 FT - 50 FT (.9 - 15.2 M)
CHUTE ROTATION	2.5X ICE DRILL	2.5X ICE DRILL	2.5X ICE DRILL	2.5X ICE DRILL	2.5X ICE DRILL
AUGER DIAMETER	14" (35.6 CM)	14" (35.6 CM)	14" (35.6 CM)	14" (35.6 CM)	14" (35.6 CM)
HOUSING	24" W X 21" H (71 X 53.3 CM)	28" W X 21" H (71.1 X 53.3 CM)	28" W X 21" H (71.1 X 53.3 CM)	30" W X 21" H (76.2 X 53.3 CM)	30" W X 21" H (76.2 X 53.3 CM)
TIRE SIZE	16" X 4.8" (40.6 X 12.2 CM)	16" X 4.8" (40.6 X 12.2 CM)	16" X 4.8" (40.6 X 12.2 CM)	16" X 4.8" (40.6 X 12.2 CM)	16" X 4.8" (40.6 X 12.2 CM)
TONS / HOUR	62 TONS	65 TONS	72 TONS	71 TONS	71 TONS

ENHANCED OR STEP-UP FEATURE

STRAIGHT-FORWARD POWER AND PERFORMANCE.

A no-nonsense machine that's solid as steel, the Deluxe clears snow without question or compromise. Traverse the terrain with the ease of Auto-Turn™ steering technology, while a high, 21" housing, large impeller and 14" auger diameter take on up to 72 tons of snow per hour and send it flying up to 55 feet.

AUTO-TURN™ STEERING

Zero-degree turning radius.

ENGINE

Reliable Ariens® AX engine.

DUAL-BELT DRIVE

Delivers maximum power and extended belt life.

AUGER

14" auger diameter.

SUPER HIGH OUTPUT (SHO)

Available SHO on the Deluxe 28 throws up to 72 tons per hour.

EZ-LAUNCH™ EFI ENGINE

Available EFI engine starts easier and uses less fuel with consistent power.

TIRES

16" directional tires provide improved mobility and agility.

MODEL OVERVIEW

DESIGNATION	COMPACT 20	COMPACT 24	COMPACT TRACK 24
MODEL	920026	920027	920028
ENGINE	ARIENS AX 223CC (10 FT/LBS)	ARIENS AX 223CC (10 FT/LBS)	ARIENS AX 223CC (10 FT/LBS)
THROWING DISTANCE	3 FT - 40 FT (.9-12.2 M)	3 FT - 40 FT (.9-12.2 M)	3 FT - 40 FT (.9-12.2 M)
CHUTE ROTATION	2.5X QUICK TURN	2.5X QUICK TURN	2.5X QUICK TURN
AUGER DIAMETER	11" (27.9 CM)	11" (27.9 CM)	11" (27.9 CM)
HOUSING	20" W X 20" H (50.8 X 50.8 CM)	24" W X 20" H (71 X 50.8 CM)	24" W X 20" H (71 X 50.8 CM)
TIRE SIZE	15" X 5" (38.1 X 12.7 CM)	15" X 5" (38.1 X 12.7 CM)	5.5" WIDE TRACK (14 CM)
TONS / HOUR	56 TONS	59 TONS	59 TONS

ENHANCED OR STEP-UP FEATURE

SURE, IT LOOKS SMALL, BUT OUR COMPACT POWERHOUSE PACKS A BIG-TIME PUNCH.

From a light dusting to residential sidewalk duty, the Compact Sno-Thro® combines effortless agility and legendary Ariens® ability. Light and easy to handle, this all-steel workhorse features a high, 20" housing and 11" auger to clear up to 59 tons of snow per hour while sending it flying up to 40 feet.

AUGER

11" auger diameter.

ENGINE

Reliable Ariens AX engine and electric start gets you running with ease.

TRACK

Available track system for improved traction on any terrain.

TIRES

15" directional tires provide improved mobility and agility.

CLASSIC SERIES



3 YEAR
LTD. RESIDENTIAL
WARRANTY

PATH-PRO® SERIES



3 YEAR
LTD. RESIDENTIAL
WARRANTY

MODEL OVERVIEW

DESIGNATION	CLASSIC 24
MODEL	920025
ENGINE	ARIENS AX 208CC (9.5 FT/LBS)
STARTING SYSTEM	120V/RECOIL
THROWING DISTANCE	3 FT - 40 FT (.9-12.2 M)
CHUTE ROTATION	2.5X QUICK TURN
AUGER DIAMETER	11" (27.9 CM)
HOUSING	24" (60.9 CM) W X 20" (50.8 CM) H
TIRE SIZE	13" X 4" (33 X 10.2 CM)
TONS / HOUR	58

 ENHANCED OR STEP-UP FEATURE

BUILT TO STAND THE TEST OF TIME.

For consistent clearing performance that pays off, turn to the Classic Sno-Thro® from Ariens®. From the handlebars to the housing, the all-steel Classic is built to stand the test of time. The compact design makes it light and easy to control while interlocking levers allow for effortless, one-handed operation. A steel serrated auger cuts through snow allowing a 12-inch, high-speed impeller to send it flying through a steel quick turning chute.

EASY TO USE

The compact design makes it light and easy to control.

INTERLOCKING LEVERS

Gain the upper hand with interlocking levers that allow for effortless, one-handed operation.

SERRATED AUGER

Cut through the toughest snow in a snap with a steel, serrated auger.

2.5X QUICK-TURN CHUTE

Put powder in its place with a 2.5X Quick-Turn Chute with 205-degree rotation.

ALL-STEEL CONSTRUCTION

From the handlebars to the housing, Classic is built to stand the test of time.

MODEL OVERVIEW

DESIGNATION	PATH-PRO® 208E	PATH-PRO® 208EC
MODEL	938032	938033
ENGINE	ARIENS AX 208CC (9.5 FT/LBS)	ARIENS AX 208CC (9.5 FT/LBS)
STARTING SYSTEM	120V/RECOIL	120V/RECOIL
THROWING DISTANCE	3 FT - 35 FT (.9 - 10.7 M)	3 FT - 35 FT (.9 - 10.7 M)
CHUTE ROTATION	MANUAL	 REMOTE
AUGER DIAMETER	8.375" (21.3 CM)	8.375" (21.3 CM)
HOUSING	21" (52.7 CM) W X 12.2" (31 CM) H	21" (52.7 CM) W X 12.2" (31 CM) H
TONS / HOUR	57	57

 ENHANCED OR STEP-UP FEATURE

MANEUVERABILITY AND DURABILITY COMBINED.

While lightweight and easy to move, the Path-Pro® is no pushover. A single stage that performs like a two stage, Path-Pro® features a tireless Ariens® AX engine, a 12.2-inch housing height and 8.375-inch paddles capable of clearing up to 9 inches of snow straight down to the pavement.

HOUSING & PADDLE

Steel-walled housing shears through snow, while the reinforced rubber paddles and adjustable scraper bar keep things moving.

FOLDING HANDLEBARS

Folding handlebars make storage a cinch.

QUICK-ACCESS COVER

With an easy-access maintenance hatch, we make it easy to keep your Ariens® Sno-Thro® running like an Ariens.

AVAILABLE REMOTE CHUTE

Remote chute rotation gives you the power to let snow fly in any direction you please. Available on specific models.

WHEELS

Enjoy the mobility and agility of semi-pneumatic wheels.

ELECTRIC START

Go ahead. Hit snooze. We promise your Path-Pro will be up and at 'em as soon as you start.

PROFESSIONAL 21 SERIES



WHEN THE WINTER FORECAST BRINGS A HEAVY WORKLOAD, THE PROFESSIONAL 21 IS BUILT TO HANDLE THE JOB.

This single-stage workhorse was built to handle heavy-duty commercial detail without breaking a sweat. From starting and clearing to maintenance and transport, the Professional 21 will easily prove to be a welcome addition to any successful commercial snow-clearing fleet.

1 YEAR
LTD. COMMERCIAL
WARRANTY

3 YEAR
LTD. RESIDENTIAL
WARRANTY



MODEL OVERVIEW

DESIGNATION	PROFESSIONAL 21 SSR	PROFESSIONAL 21 SSRC
MODEL	938024	938025
ENGINE	ARIENS AX 208CC (9.5 FT/LBS)	ARIENS AX 208CC (9.5 FT/LBS)
STARTING SYSTEM	RECOIL	RECOIL
THROWING DISTANCE	3 FT - 35 FT (0.9 - 10.7 M)	3 FT - 35 FT (0.9 - 10.7 M)
CHUTE ROTATION	MANUAL	 REMOTE
AUGER DIAMETER	8.375" (21.3 CM)	8.375" (21.3 CM)
HOUSING	21" W X 21.1" H (53.3 X 53.6 CM)	21" W X 21.1" H (53.3 X 53.6 CM)
TIRE SIZE	7.5" X 2" (19.1 X 4.4 CM)	7.5" X 2" (19.1 X 4.4 CM)
TONS / HOUR	57 TONS	57 TONS

 ENHANCED OR STEP-UP FEATURE

NO SWEAT START

Effortless, keyless start sequence featuring an on/off switch helps ensure a successful start in any weather condition.

EASY OPERATION

Handlebar positions optimize system performance and user comfort.

STRAIGHTFORWARD CLEARING

Spring-loaded, self-adjusting scraper bar follows the contours of the ground, while a high-wear paddle cleans to the surface.

SIMPLE MAINTENANCE

Open engine design allows easy access to the oil fill, oil drain and spark plug.

EFFORTLESS LOADING

Smart Lift handlebar geometry allows for easy, single-person loading and unloading onto a truck bed.

POWER BRUSH SERIES



3 YEAR
LTD. RESIDENTIAL
WARRANTY

MODEL OVERVIEW

DESIGNATION	POWER BRUSH 28	POWER BRUSH 36	HYDRO POWER BRUSH 36
MODEL	921056	926074	926075
ENGINE	KOHLER CH255 177CC	 KOHLER CH395 277CC	KOHLER CH395 277CC
STARTING SYSTEM	120V/RECOIL	120V/RECOIL	 12V KEY START
CLEARING WIDTH	28" (71.2 CM)	 36" (91.4 CM)	36" (91.4 CM)
BRUSH ROTATION	20° EACH DIRECTION	20° EACH DIRECTION	20° EACH DIRECTION
DRIVE TYPE	DISC-O-MATIC	DISC-O-MATIC	 HYDROSTATIC
BRISTLE LENGTH	6" (15.2 CM)	 7" (17.8 CM)	7" (17.8 CM)
TIRE SIZE	16" X 4.8" (40.6 X 12.2 CM)	 16" X 6.5" (40.6 X 16.5 CM)	16" X 6.5" (40.6 X 16.5 CM)
WARRANTY	90 DAY COMMERCIAL	 1 YEAR COMMERCIAL	1 YEAR COMMERCIAL

 ENHANCED OR STEP-UP FEATURE


WITH A SINGLE BRUSH, IT'LL LOOK LIKE WINTER NEVER HAPPENED.

Sweep your driveway clean. The Ariens® Power Brush clears slush, sleet, snow, leaves, sand and more all the way down to the pavement. The 40 degree pivoting brush head pushes debris 20 degrees each way to clear the path in either direction.

ACCESSORIES

PERFECT THE PERFORMANCE.

Enhance your Ariens® Sno-Thro® performance and overall ownership experience with a collection of genuine OEM parts and accessories that make it easy to keep your property in peak condition for years to come.

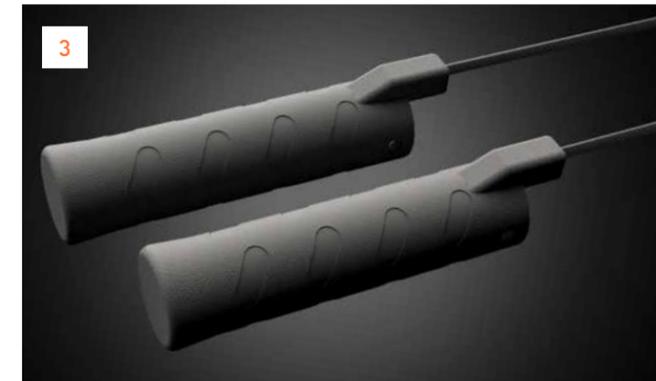

1 SNOW CAB

Protect yourself from the elements with a spacious, rugged, steel-frame.

2 NON-ABRASIVE SKID SHOES

Solid polymer skid shoes improve handling and help protect delicate clearing surfaces like brick or pavers.

3 HEATED HANDLEBARS


Dash-controlled hand warmers keep your mitts cozy and comfortable at the helm.

4 APPAREL

Brave the elements in toasty warm comfort with our full line of Ariens apparel.

5 TIRE CHAINS

Superior two-link spaced cross chains power over hills, ice and hard-packed snow.

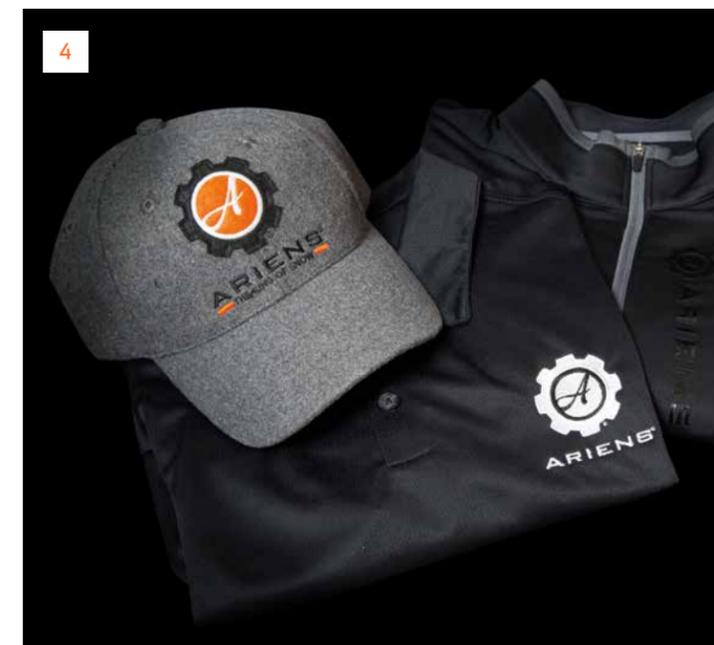

SPECIFICATIONS

DESIGNATION	PROFESSIONAL 36 HYDRO EFI	PROFESSIONAL 32	PRO 32 HYDRO RAPIDTRAK	PROFESSIONAL 28 HYDRO EFI	PROFESSIONAL 28	PRO 28 HYDRO RAPIDTRAK	PLATINUM 30 SHO
MODEL #	926070	926076	926079	926068	926077	926078	921051
STAGE TYPE	Two Stage	Two Stage	Two Stage	Two Stage	Two Stage	Two Stage	Two Stage
ENGINE POWER	420cc (21 ft/lbs)	420cc (21 ft/lbs)	420cc (21 ft/lbs)	420cc (21 ft/lbs)	420cc (21 ft/lbs)	420cc (21 ft/lbs)	414cc Gen 3 (20 ft/lbs)
ENGINE BRAND	Ariens AX EZ-Launch EFI E-Gov	Ariens AX	Ariens AX	Ariens AX EZ-Launch EFI E-Gov	Ariens AX	Ariens AX	Ariens AX
STARTING SYSTEM	120V/Recoil	120V/Recoil	120V/Recoil	120V/Recoil	120V/Recoil	120V/Recoil	120V/Recoil
CLEARING WIDTH	36 in (91.4 cm)	32 in (81.3 cm)	32 in (81.28 cm)	28 in (71.2 cm)	28 in (71.2 cm)	28 in (71.2 cm)	30 in (76.2 cm)
HOUSING HEIGHT	23.5 in (59.7 cm)	23.5 in (59.7 cm)	23.5 in (59.7 cm)	23.5 in (59.7 cm)	23.5 in (59.7 cm)	23.5 in (59.7 cm)	21 in (53.3 cm)
THROWING DISTANCE	3 ft - 60 ft (9-18.2 m)	3 ft - 60 ft (9-18.2 m)	3ft - 60ft (9 - 18.2M)	3 ft - 60 ft (9-18.2 m)	3 ft - 60 ft (9-18.2 m)	3 ft - 60 ft (9-18.2 m)	3 ft - 55 ft (9-16.7 m)
CHUTE TURNING RADIUS	200°	200°	200°	200°	200°	200°	200°
CHUTE ROTATION	Quick Turn	Quick Turn	Quick Turn	Quick Turn	Quick Turn	Quick Turn	Quick Turn
DEFLECTOR CONTROL	Remote	Remote	Remote	Remote	Remote	Remote	Remote
TIRE SIZE	16 in x 6.5 in (40.6 x 16.5 cm)	16 in x 6.5 in (40.6 x 16.5 cm)	5.5 in W (14 cm)	16 in x 4.8 in (40.6 x 12.2 cm)	16 in x 4.8 in (40.6 x 12.2 cm)	5.5 in W (14 cm)	16 in x 4.8 in (40.6 x 12.2 cm)
TIRE TYPE	Directional Snow Tread	Directional Snow Tread	Directional Snow Tread Track	Directional Snow Tread	Directional Snow Tread	Directional Snow Tread Track	Directional Snow Tread
STEERING	Auto-Turn	Auto-Turn	Auto-Turn	Auto-Turn	Auto-Turn	Auto-Turn	Auto-Turn
DRIVE TYPE	Hydrostatic	Disc-O-Matic	Hydrostatic	Hydrostatic	Disc-O-Matic	Hydrostatic	Disc-O-Matic
SPEEDS	Variable	6 Forward / 2 Reverse	Variable	Variable	6 Forward / 2 Reverse	Variable	6 Forward/ 2 Reverse
GEAR CASE	Cast Iron	Cast Iron	Cast Iron	Cast Iron	Cast Iron	Cast Iron	Cast Iron
GEAR CASE WARRANTY	5yr Cons, 5yr Comm	5yr Cons, 5yr Comm	5 yr Cons, 5yr Comm	5yr Cons, 5yr Comm	5yr Cons, 5yr Comm	5yr Cons, 5yr Comm	5yr Cons, 1yr Comm
IMPELLER PROFILE	Steel 3 Blade	Steel 3 Blade	Steel 3 Blade	Steel 3 Blade	Steel 3 Blade	Steel 3 Blade	High Speed Steel 3 Blade
IMPELLER DIAMETER	14 in (35.6 cm)	14 in (35.6 cm)	14 in (35.6 cm)	14 in (35.6 cm)	14 in (35.6 cm)	14 in (35.6 cm)	14 in (35.6 cm)
AUGER DIAMETER	16 in (40.6 cm)	16 in (40.6 cm)	16 in (40.6 cm)	16 in (40.6 cm)	16 in (40.6 cm)	16 in (40.6 cm)	14 in (35.6 cm)
AUGER TYPE	Steel Serrated	Steel Serrated	Steel Serrated	Steel Serrated	Steel Serrated	Steel Serrated	Steel Serrated
SKID SHOES	Comm Skids	Comm Skids	Comm Skids	Comm Skids	Comm Skids	Comm Skids	Steel Reversible
SCRAPER BAR	Steel Adjustable	Steel Adjustable	Steel Adjustable	Steel Adjustable	Steel Adjustable	Steel Adjustable	Steel Adjustable
PRODUCT WARRANTY	3yr Cons, 1yr Comm	3yr Cons, 1yr Comm	3yr Cons, 1yr Comm	3yr Cons, 1yr Comm	3yr Cons, 1yr Comm	3yr Cons, 1yr Comm	3yr Cons, 90 day Comm
LENGTH	60.3 in (153.2 cm)	60.3 in (153.2 cm)	60.3 in (153.2 cm)	60.3 in (153.2 cm)	60.3 in (153.2 cm)	60.3 in (153.2 cm)	58.3 in (148.1 cm)
WIDTH	38.2 in (98 cm)	34.2 in (86.9 cm)	34.2 in (86.9 cm)	30.2 in (118.4 cm)	30.2 in (76.7 cm)	30.2 in (76.7 cm)	32.4 in (82.3 cm)
HEIGHT	46.6 in (118.4 cm)	46.6 in (118.4 cm)	46.6 in (118.4 cm)	46.6 in (118.4 cm)	46.6 in (118.4 cm)	46.6 in (118.4 cm)	45.9 in (116.6 cm)
WEIGHT	353 lb (160.1 kg)	333.6 lbs (151.3 kg)	338.6 lbs (153.6 kg)	352 lb (159.7 kg)	339.1 lbs (153.8 kg)	336.1 lbs (152.5 kg)	294 lbs (133.3 kg)
FEATURES AT A GLANCE	Halogen Headlight, Handwarmers, Remote Deflector, Electric Start, Drift Cutters, One Hand Interlock, EFI Engine	Halogen Headlight, Handwarmers, Remote Deflector, Electric Start, Drift Cutters, One Hand Interlock	Halogen Headlight, Handwarmers, Remote Deflector, Electric Start, Drift Cutters, One hand Interlock, RapidTrak System	Halogen Headlight, Handwarmers, Remote Deflector, Electric Start, Drift Cutters, One Hand Interlock, EFI Engine	Halogen Headlight, Handwarmers, Remote Deflector, Electric Start, Drift Cutters, One Hand Interlock	Halogen Headlight, Handwarmers, Remote Deflector, Electric Start, Drift Cutters, One hand Interlock, RapidTrak System	Halogen Headlight, Handwarmers, Remote Deflector, Electric Start, One Hand Interlock

DESIGNATION	PLATINUM 28 SHO RAPIDTRAK	PLATINUM 24 SHO	PLATINUM 24 SHO EFI	DELUXE 30	DELUXE 30 EFI	DELUXE 28 SHO	DELUXE 28
MODEL #	921057	921050	921053	921047	921049	921048	921046
STAGE TYPE	Two Stage	Two Stage	Two Stage	Two Stage	Two Stage	Two Stage	Two Stage
ENGINE POWER	369cc (17 ft/lbs)	369cc Gen 3 (17 ft/lbs)	369cc EFI/E-Gov (17 ft/lbs)	306cc Gen 3 (15 ft/lbs)	306cc EFI/E-Gov (15 ft/lbs)	306cc Gen 3 (15 ft/lbs)	254cc (12.5 ft/lbs)
ENGINE BRAND	Ariens AX	Ariens AX	Ariens AX EZ-Launch EFI	Ariens AX	Ariens AX EZ-Launch EFI	Ariens AX	Ariens AX
STARTING SYSTEM	120V/Recoil	120V/Recoil	120V/Recoil	120V/Recoil	120V/Recoil	120V/Recoil	120V/Recoil
CLEARING WIDTH	28 in (71.2 cm)	24 in (60.1 cm)	24 in (60.1 cm)	30 in (76.2 cm)	30 in (76.2 cm)	28 in (71.2 cm)	28 in (71.2 cm)
HOUSING HEIGHT	21 in (53.3 cm)	21 in (53.3 cm)	21 in (53.3 cm)	21 in (53.3 cm)	21 in (53.3 cm)	21 in (53.3 cm)	21 in (53.3 cm)
THROWING DISTANCE	3 ft - 55 ft (9-16.7 m)	3 ft - 55 ft (9-16.7 m)	3 ft - 55 ft (9-16.7 m)	3 ft - 50 ft (9 - 15.2 m)	3 ft - 50 ft (9 - 15.2 m)	3 ft - 55 ft (9-16.7 m)	3 ft - 50 ft (9 - 15.2 m)
CHUTE TURNING RADIUS	200°	200°	200°	200°	200°	200°	200°
CHUTE ROTATION	Quick Turn	Quick Turn	Quick Turn	2.5x Ice Drill	2.5x Ice Drill	2.5x Ice Drill	2.5x Ice Drill
DEFLECTOR CONTROL	Remote	Remote	Remote	Remote	Remote	Remote	Remote
TIRE SIZE	5.5 in W (14 cm)	16 in x 4.8 in (40.6 x 12.2 cm)	16 in x 4.8 in (40.6 x 12.2 cm)	16 in x 4.8 in (40.6 x 12.2 cm)	16 in x 4.8 in (40.6 x 12.2 cm)	16 in x 4.8 in (40.6 x 12.2 cm)	16 in x 4.8 in (40.6 x 12.2 cm)
TIRE TYPE	Directional Snow Tread Track	Directional Snow Tread	Directional Snow Tread	Directional Snow Tread	Directional Snow Tread	Directional Snow Tread	Directional Snow Tread
STEERING	Auto-Turn	Auto-Turn	Auto-Turn	Auto-Turn	Auto-Turn	Auto-Turn	Auto-Turn
DRIVE TYPE	Disc-O-Matic	Disc-O-Matic	Disc-O-Matic	Disc-O-Matic	Disc-O-Matic	Disc-O-Matic	Disc-O-Matic
SPEEDS	6 Forward/ 2 Reverse	6 Forward/ 2 Reverse	6 Forward / 2 Reverse	6 Forward / 2 Reverse	6 Forward / 2 Reverse	6 Forward / 2 Reverse	6 Forward / 2 Reverse
GEAR CASE	Cast Iron	Cast Iron	Cast Iron	Cast Iron	Cast Iron	Cast Iron	Cast Iron
GEAR CASE WARRANTY	5yr Cons, 1yr Comm	5yr Cons, 1yr Comm	5yr Cons, 1yr Comm	5yr Cons, 1yr Comm	5yr Cons, 1yr Comm	5yr Cons, 1yr Comm	5yr Cons, 1yr Comm
IMPELLER PROFILE	High Speed Steel 3 Blade	High Speed Steel 3 Blade	High Speed Steel 3 Blade	Steel 3 Blade	Steel 3 Blade	High Speed Steel 3 Blade	Steel 3 Blade
IMPELLER DIAMETER	14 in (35.6 cm)	14 in (35.6 cm)	14 in (35.6 cm)	14 in (35.6 cm)	14 in (35.6 cm)	14 in (35.6 cm)	14 in (35.6 cm)
AUGER DIAMETER	14 in (35.6 cm)	14 in (35.6 cm)	14 in (35.6 cm)	14 in (35.6 cm)	14 in (35.6 cm)	14 in (35.6 cm)	14 in (35.6 cm)
AUGER TYPE	Steel Serrated	Steel Serrated	Steel Serrated	Steel Serrated	Steel Serrated	Steel Serrated	Steel Serrated
SKID SHOES	Steel Reversible	Steel Reversible	Steel Reversible	Steel Reversible	Steel Reversible	Steel Reversible	Steel Reversible
SCRAPER BAR	Steel Adjustable	Steel Adjustable	Steel Adjustable	Steel Adjustable	Steel Adjustable	Steel Adjustable	Steel Adjustable
PRODUCT WARRANTY	3yr Cons, 90 day Comm	3yr Cons, 90 day Comm	3yr Cons, 90 day Comm	3yr Cons, 90 day Comm	3yr Cons, 90 day Comm	3yr Cons, 90 day Comm	3yr Cons, 90 day Comm
LENGTH	58.5 in (148.6 cm)	58.3 in (148.1 cm)	58.3 in (148.1 cm)	58.3 in (148.1 cm)	58.3 in (148.1 cm)	58.6 in (148.8 cm)	58.6 in (148.8 cm)
WIDTH	29.9 in (75.9 cm)	26.4 in (67.1 cm)	26.4 in (67.1 cm)	32.4 in (82.3 cm)	32.4 in (82.3 cm)	29.9 in (115.1 cm)	29.9 in (75.9 cm)
HEIGHT	45.3 in (115.1 cm)	45.9 in (116.6 cm)	45.9 in (116.6 cm)	45.5 in (115.6 cm)	45.5 in (115.6 cm)	45.3 in (115.6 cm)	45.3 in (115.1 cm)
WEIGHT	306.3 lbs (138.9 kg)	286.0 lbs (129.7 kg)	286.0 lbs (129.7 kg)	275.6 lbs (125.0 kg)	275.6 lbs (125.0 kg)	267.5 lb (121.3 kg)	249.8 lbs (113.3 kg)
FEATURES AT A GLANCE	Halogen Headlight, Handwarmers, Remote Deflector, Electric Start, One hand interlock, RapidTrak System, Super High Output	Halogen Headlight, Handwarmers, Remote Deflector, Electric Start, One Hand Interlock	Halogen Headlight, Handwarmers, Remote Deflector, Electric Start, One Hand Interlock, EFI Engine	Halogen Headlight, Handwarmers, Remote Deflector, Electric Start, One Hand Interlock	Halogen Headlight, Handwarmers, Remote Deflector, Electric Start, One Hand Interlock, EFI Engine	Halogen Headlight, Remote Deflector, Electric Start, One Hand Interlock, Super High Output	Halogen Headlight, Remote Deflector, Electric Start, One Hand Interlock

SPECIFICATIONS

DESIGNATION	<i>DELUXE 24</i>	<i>COMPACT 24</i>	<i>COMPACT 24 TRACK</i>	<i>COMPACT 20</i>	<i>CLASSIC 24</i>	<i>PROFESSIONAL 21 SSR</i>	<i>PROFESSIONAL 21 SSRC</i>
MODEL #	921045	920027	920028	920026	920025	938024	938025
STAGE TYPE	Two Stage	Two Stage	Two Stage	Two Stage	Two Stage	Single-Stage	Single-Stage
ENGINE POWER	254cc (12.5 ft/lbs)	223cc (10 ft/lbs)	223cc (10 ft/lbs)	223cc (10 ft/lbs)	208cc (9.5 ft/lbs)	208cc (9.5 ft/lbs)	208cc (9.5 ft/lbs)
ENGINE BRAND	Ariens AX	Ariens AX	Ariens AX	Ariens AX	Ariens AX	Ariens AX	Ariens AX
STARTING SYSTEM	120V/Recoil	120V/Recoil	120V/Recoil	120V/Recoil	120V/Recoil	Recoil	Recoil
CLEARING WIDTH	24 in (60.1 cm)	24 in (60.1 cm)	24 in (60.1 cm)	20 in (50.8 cm)	24 in (60.1 cm)	21 in (53.3 cm)	21 in (53.3 cm)
HOUSING HEIGHT	21 in (53.3 cm)	20 in (50.8 cm)	20 in (50.8 cm)	20 in (50.8 cm)	20 in (50.8 cm)	12.1 in (30.7 cm)	12.1 in (30.7 cm)
THROWING DISTANCE	3 ft - 50 ft (9 - 15.2 m)	3 ft - 40 ft (9-12.2 m)	3 ft - 40 ft (9-12.2 m)	3 ft - 40 ft (9-12.2 m)	3 ft - 40 ft (9-12.2 m)	3ft - 35ft (9 - 10.7M)	3ft - 35ft (9 - 10.7M)
CHUTE TURNING RADIUS	200°	205°	205°	205°	205°	210°	210°
CHUTE ROTATION	2.5x Ice Drill	2.5x Quick Turn	2.5x Quick Turn	2.5x Quick Turn	2.5x Quick Turn	Manual	Remote
DEFLECTOR CONTROL	Remote	Remote	Remote	Remote	Remote	Manual	Manual
TIRE SIZE	16 in x 4.8 in (40.6 x 12.2 cm)	15 in x 5 in (38.1 x 12.7 cm)	5.5 in W (14 cm)	15 in x 5 in (38.1 x 12.7 cm)	13 in x 4 in (33 x 10.2 cm)	7.5 in x 2 in (19.1 cm x 5.1 cm)	7.5 in x 2 in (19.1 cm x 5.1 cm)
TIRE TYPE	Directional Snow Tread	Directional Snow Tread	Directional Snow Tread Track	Directional Snow Tread	Directional Snow Tread	N/A	N/A
STEERING	Auto-Turn	Pin Lock	Solid Locked	Pin Lock	Pin Lock	Solid Unlocked	Solid Unlocked
DRIVE TYPE	Disc-O-Matic	Disc-O-Matic	Disc-O-Matic	Disc-O-Matic	Disc-O-Matic	Auger Propelled	Auger Propelled
SPEEDS	6 Forward / 2 Reverse	6 Forward / 2 Reverse	6 Forward / 2 Reverse	6 Forward / 2 Reverse	6 Forward / 2 Reverse	1 Forward	1 Forward
GEAR CASE	Cast Iron	Cast Iron	Cast Iron	Cast Iron	Aluminum	N/A	N/A
GEAR CASE WARRANTY	5yr Cons, 1yr Comm	5yr Cons, 1yr Comm	5yr Cons, 1yr Comm	5yr Cons, 1yr Comm	3yr Cons, 90 day Comm	N/A	N/A
IMPELLER PROFILE	Steel 3 Blade	Steel 3 Blade	Steel 3 Blade	Steel 3 Blade	Steel 3 Blade	N/A	N/A
IMPELLER DIAMETER	14 in (35.6 cm)	12 in (30.5 cm)	12 in (30.5 cm)	12 in (30.5 cm)	12 in (30.5 cm)	N/A	N/A
AUGER DIAMETER	14 in (35.6 cm)	11 in (27.9 cm)	11 in (27.9 cm)	11 in (27.9 cm)	11 in (27.9 cm)	8.375 in (21.3 cm)	8.375 in (21.3 cm)
AUGER TYPE	Steel Serrated	Steel Serrated	Steel Serrated	Steel Serrated	Steel Serrated	Reinforced Rubber	Reinforced Rubber
SKID SHOES	Steel Reversible	Steel Reversible	Steel Reversible	Steel Reversible	Steel Reversible	N/A	N/A
SCRAPER BAR	Steel Adjustable	Steel Adjustable	Steel Adjustable	Steel Adjustable	Steel Adjustable	Polymer Self-Adjusting	Polymer Self-Adjusting
PRODUCT WARRANTY	3yr Cons, 90 day Comm	3yr Cons, 90 day Comm	3yr Cons, 90 day Comm	3yr Cons, 90 day Comm	3yr Cons, 90 day Comm	3yr Cons, 1 yr Comm	3yr Cons, 1 yr Comm
LENGTH	58.6 in (148.8 cm)	53.8 in (135.4 cm)	53.3 in (135.4 cm)	53.3 in (135.4 cm)	54.4 in (138.2 cm)	50.8 in (128.9 cm)	50.8 in (128.9 cm)
WIDTH	26.4 in (67.1 cm)	26.4 in (67.1 cm)	26.4 in (67.1 cm)	22.4 in (56.9 cm)	26.4 in (67.1 cm)	21.2 in (53.8 cm)	21.2 in (53.8 cm)
HEIGHT	45.3 (115.1 cm)	44 in (111.8 cm)	43.4 in (110.2 cm)	44 in (111.8 cm)	42.9 in (109 cm)	41.7 in (105.9 cm)	41.7 in (105.9 cm)
WEIGHT	245.5 lbs (114.4 kg)	187 lbs (84.8 kg)	220 lbs (99.8 kg)	183 lbs (83 kg)	180 lb (81.6 kg)	87 lb (39.46 kg)	89 lb (40.37 kg)
FEATURES AT A GLANCE	Halogen Headlight, Remote Deflector, Electric Start, One Hand Interlock	Halogen Headlight, Remote Deflector, Electric Start, One Hand Interlock	Halogen Headlight, Remote Deflector, Electric Start, Track Drive, One Hand Interlock	Halogen Headlight, Remote Deflector, Electric Start, One Hand Interlock	Remote Deflector, Electric Start, One Hand Interlock	Smart Lift handlebar system, Hour Meter	Smart Lift Handlebar system, Hour Meter, Remote chute rotation

DESIGNATION	<i>PATH-PRO 208E</i>	<i>PATH-PRO 208EC</i>	<i>POWER BRUSH 36 HYDRO</i>	<i>POWER BRUSH 36</i>	<i>POWER BRUSH 28</i>
MODEL #	938032	938033	926075	926074	921056
STAGE TYPE	Single-Stage	Single-Stage	N/A	N/A	N/A
ENGINE POWER	208cc (9.5 ft/lbs)	208cc (9.5 ft/lbs)	277cc	277cc	177cc
ENGINE BRAND	Ariens AX	Ariens AX	Kohler CH395	Kohler CH395	Kohler CH255
STARTING SYSTEM	120V/Recoil	120V/Recoil	12V Key Start	120V/Recoil	120V/Recoil
CLEARING WIDTH	21 in (53.3 cm)	21 in (53.3 cm)	36 in (91.4 cm)	36 in (91.4 cm)	28 in (71.2 cm)
HOUSING HEIGHT	12.2 in (31 cm)	12.2 in (31 cm)	N/A	N/A	N/A
THROWING DISTANCE	3ft - 35ft (9 - 10.7M)	3ft - 35ft (9 - 10.7M)	N/A	N/A	N/A
CHUTE TURNING RADIUS	210°	210°	N/A	N/A	N/A
CHUTE ROTATION	Manual	Remote	N/A	N/A	N/A
DEFLECTOR CONTROL	Manual	Manual	N/A	N/A	N/A
TIRE SIZE	7.5 in x 1.75 in (19.1 x 4.4 cm)	7.5 in x 1.75 in (19.1 x 4.4 cm)	16 in x 6.5 in (40.6 x 16.5 cm)	16 in x 6.5 in (40.6 x 16.5 cm)	16 in x 4.8 in (40.6 x 12.2 cm)
TIRE TYPE	Semi-Pneumatic	Semi-Pneumatic	Directional Snow Tread	Directional Snow Tread	Polar Trac
STEERING	Solid Unlocked	Solid Unlocked	Auto-Turn	Auto-Turn	Auto-Turn
DRIVE TYPE	Auger Propelled	Auger Propelled	Hydrostatic	Disc-O-Matic	Disc-O-Matic
SPEEDS	1 Forward	1 Forward	Variable	6 Forward / 2 Reverse	6 Forward / 2 Reverse
GEAR CASE	N/A	N/A	Cast Aluminum	Cast Aluminum	N/A
GEAR CASE WARRANTY	N/A	N/A	N/A	N/A	N/A
IMPELLER PROFILE	N/A	N/A	N/A	N/A	N/A
IMPELLER DIAMETER	N/A	N/A	N/A	N/A	N/A
AUGER DIAMETER	8.375 in (21.3 cm)	8.375 in (21.3 cm)	25 in (63.5 cm) Brush	25 in (63.5 cm) Brush	18 in (45.7 cm) Brush
AUGER TYPE	Reinforced Rubber	Reinforced Rubber	Brush	Brush	Brush
SKID SHOES	N/A	N/A	N/A	N/A	N/A
SCRAPER BAR	Polymer Adjustable	Polymer Adjustable	N/A	N/A	N/A
PRODUCT WARRANTY	3yr Cons, 90 day Comm	3yr Cons, 90 day Comm	3yr Cons, 1yr Comm	3yr Cons, 1yr Comm	3yr Cons, 90 day Comm
LENGTH	54.3 in (137.9 cm)	54.3 in (137.9 cm)	72 in (183 cm)	72 in (183 cm)	65 in (165.1 cm)
WIDTH	21.6 in (54.9 cm)	21.6 in (54.9 cm)	44 in (111.8 cm)	44 in (111.8 cm)	33 in (83.8 cm)
HEIGHT	40.9 in (103.9 cm)	40.9 in (103.9 cm)	43 in (109.2 cm)	43 in (109.2 cm)	44 in (111.8 cm)
WEIGHT	95 lbs (43.1 kg)	97 lb (43.9 kg)	403 lbs (182.8 kg)	373 lbs (169.2 kg)	238 lbs (108 kg)
FEATURES AT A GLANCE	Electric Start, One Hand Interlock	Electric Start, One Hand Interlock	Halogen Headlight, Handwarmers, Electric Start, One Hand Interlock	Halogen Headlight, Electric Start, One Hand Interlock	Electric Start, One Hand Interlock



BUILT FOR BULLSEYES

ARIENS® BECOMES MAJOR SPONSOR OF U.S. BIATHLON TEAM.

The unmistakable Ariens orange is now an icon across Europe and the USA as the U.S. Biathlon Team challenges the world's top competitors. The biathlon combines skiing with elite marksmanship and has long been an Olympic fan favorite. With the sport's Nordic roots, the Ariens brand feels right at home, sharing our drive to outperform the competition in winter's toughest environments.

Photo credit: Nordic Focus





ARIENS®



VISIT US ONLINE AT: [ARIENS.COM](https://www.ariens.com)

FOR PRODUCT INFORMATION, CUSTOMER REVIEWS, PRODUCT VIDEOS,
DEALER LOCATOR AND CUSTOMER SUPPORT.

Registered trademark and ™ trademark of AriensCo. Kohler®, Kawasaki®, Subaru® and Hydro-Gear® are registered trademarks of their respective companies. The engine horsepower information is provided by the engine manufacturer to be used for comparison purposes only. Actual operating horsepower will be less. Visit www.ariens.com for a complete listing of engine manufacturer power rating information. Product features and specifications subject to change without notice. Photos are a representation of the product; actual product may vary.