

HUSKY

DISAPPEARING STAIRWAY

Selected materials, good workmanship and careful inspection all combine to give you a quality stairway.



Spacer & Runner Construction on Door to Prevent Warp


Moulded Stair Parts (No Sharp Edges)



Heavy Gauge Spring Arm

Adjustable Spring Tension Feature

Full Width Piano Hinge Mounted Internally for Easy Installation of Trim



Easy "1st Step Out of Attic" Feature

Stringer Reinforcement Bracket

Selected Moulded Stair Parts of Southern Yellow Pine

No Welded Hardware



Heavier Gauge Section Hinge Than Most Competition

Replacement Parts Available

3/16" Ladder Rod Under Each Tread with Ladder Washer



MODEL 444
8'5" - 10'

★
STRENGTH

★
VALUE

★
RELIABILITY

★
MORE STAIR FOR THE MONEY

Count the Treads. We have 11 or 13 depending on height, compared to others with 9 or 11. More treads means easier access.

MODEL 655
8'5" - 10'8"

Insist on Husky Disappearing Stairway



American Stairways, Inc.

3807 Lamar Ave. • Memphis, TN 38118
901-795-9200 • FAX 901-795-1253
www.americanstairways.com

THE SUCCESS OF OUR COMPANY STANDS ON THE QUALITY OF EVERY STAIRWAY WE MAKE.

- ★ Pre-drilled Installation Holes
- ★ Easy First Step Down From Attic for Personal Safety

- ★ 9½" Tread Rise on All Husky Stairs
- ★ More Treads for Easier Access

Every HUSKY Features:

Full Width Heavy Duty Piano Hinge

That means far more strength and rigidity than any other type of stairway hinge now in use. Cuts out air leakage at head of stair, and does not interfere with trim carpenter.

3/16" Steel Ladder Rod Under Each Tread

Including large washers that keep HUSKY stairs rigid and prevent bending or separation under heavier loads.

Selected Kiln Dried Southern Pine Lumber

All wood parts selected for density and load bearing capacity.

Moulded Stringers, Handrail, and Treads

Eased edges practically eliminate splinters and enhance Finished Millwork Appearance.

Re-inforced Door Panel

Safety Locknut to Secure Spring Arm to Ladder Section

Adjustable Spring Tension

Nuts, Bolts, and Hardware Plated or Painted to Prevent Rust

Completely Assembled, Ready to Install with Instructions Supplied

Optional Features

R-6 Insulation Panel

Fire Resistant Door & Well Sides

Class A - Flame spread not over 25" in 30 minutes by UL

Double Section Hinges (Model 655 only)

Increases weight capacity to 350 lbs.

Weather Stripping


There's A Husky That's Right For You. Three Great Models To Choose From!

MODEL 444: 1x4 Treads, 1x4 Stringer, 1x4 Frame Rated 250 lbs.

MODEL 544: 1x5 Treads, 1x4 Stringer, 1x4 Frame Rated 250 lbs.

MODEL 655: 1x6 Treads, 1x5 Stringer, 1x5 Frame Rated 300 lbs.

(Rated 350 lbs. with double section hinges)

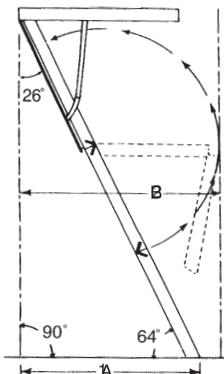

Designed for residential use only.

Rough Opening	Ceiling Height	# of Treads ¹	A Landing Space ²	B Projection	Available in Models and lbs. per Unit			R-6 Insulation Panel	Fire Resistant Door & Well Sides	Double Section Hinges ³	Weather Stripping
					444	544	655				
22" X 48"	8'5"	10	56"	60"	54	56	64	Opt.	Opt.	Opt.	Opt.
22" X 54"	8'9"	11	58"	66"	58	60	67	Opt.	Opt.	Opt.	Opt.
22" X 54"	10'	13	65"	79"	63	65	70	Opt.	Opt.	Opt.	Opt.
22" X 60"	9'3"	11	61"	72"	N/A	N/A	70	Opt.	Opt.	Std.	Opt.
22" X 60"	10'8"	13	70"	80"	N/A	N/A	75	Opt.	Opt.	Std.	Opt.
25½" X 48"	8'5"	10	56"	60"	55	60	68	Opt.	Opt.	Opt.	Opt.
25½" X 54"	8'9"	11	58"	66"	62	65	70	Opt.	Opt.	Opt.	Opt.
25½" X 54"	10'	13	65"	79"	66	68	84	Opt.	Opt.	Opt.	Opt.
25½" X 60"	9'3"	11	61"	72"	N/A	N/A	79	Opt.	Opt.	Std.	Opt.
25½" X 60"	10'8"	13	70"	80"	N/A	N/A	84	Opt.	Opt.	Std.	Opt.
30" X 54"	8'9"	11	58"	66"	N/A	N/A	84	Opt.	Opt.	Opt.	Opt.
30" X 54"	10'	13	65"	79"	N/A	N/A	92	Opt.	Opt.	Opt.	Opt.
30" X 60"	8'9"	11	58"	66"	N/A	N/A	94	Opt.	Opt.	Opt.	Opt.
30" X 60"	9'3"	11	61"	72"	N/A	N/A	91	Opt.	Opt.	Std.	Opt.
30" X 60"	10'	13	65"	79"	N/A	N/A	96	Opt.	Opt.	Opt.	Opt.
30" X 60"	10'8"	13	70"	80"	N/A	N/A	96	Opt.	Opt.	Std.	Opt.

1 - Most of the competition has 1 or 2 treads less.

2 - It is recommended adding 18" to the landing space dimensions for safe ascent or descent of the stairway.

3 - Model 655 only, Double section hinges increases the capacity from 300# to 350#.

JOB TESTED IN OVER A MILLION INSTALLATIONS THROUGHOUT THE NATION AND SEVERAL FOREIGN COUNTRIES.



3807 Lamar Ave. • Memphis, TN 38118
 901-795-9200 • FAX 901-795-1253
 www.americanstairways.com