


PIG CREEP FEEDER

Come Out Of The Corner And Save Pigs, Save Time, Save Feed

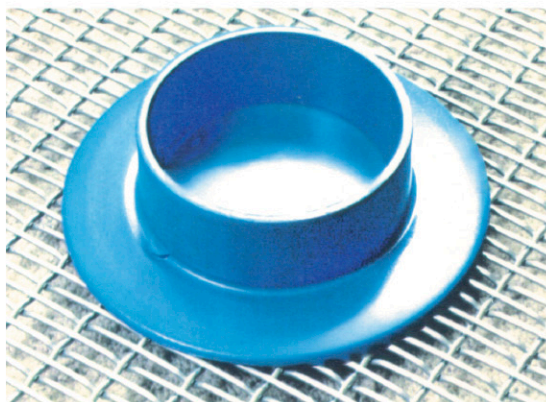

SAVE PIGS - Our creep feeder is readily cleaned with no feed slides or crevices to hide pathogens.

Polypropylene body, stainless steel pegs - no corrosion.



Selected number one among 14 competitive creep feeders in on-farm trial, as reported in SUCCESSFUL FARMING magazine (September 1995). Article had the following to say:
* RATINGS (5 BEING THE BEST)

SAVE PIGS - Our design allows our creep feeder to be placed in the center of your creep area. The feeder is more noticeable than those mounted in a corner giving all piglets a faster start.

SAVE PIGS - Because our creep feeder allows all pigs to eat. Feeders mounted along a partition or in the corner discourage poor doers from fighting for their place at the trough. Our feeder has up to 3 times the linear trough space compared with rectangular, hide in the corner feeders.



SAVE TIME - Our feeder is easy to fill with up to twice the square inches of fill openings of competing units.

SAVE TIME - No springs, wing nuts, or moving parts. Nothing to maintain.

SAVE TIME - Hit with a high pressure washer and invert. There's no contending with mounting brackets.

SAVE TIME - Move feeder from creep area to your pre-nursery on use in a comfort stall setup.

SAVE FEED - The combination of the 2.5 inch (6.4 cm) lip and 2 stainless steel pegs practically eliminates our feeder being tipped over by piglets.

SAVE FEED - Our 3 inch (7.6 cm) high wall keeps feed in the bowl and inhibits rooting activity.

FEEDER INSTALLATION	5
ACCESSIBILITY OF FEED TO PIG	5
FEED WASTE	4
DURABILITY OF FEEDER	5
CLEANUP	5

Discussion: "Feeder easy to place in crate. Pigs went right to this feeder. Two steel pins screw into the bottom to keep the feeder where you put it. Very little feed waste. High sides let pigs in, but feed can't be rooted out. Pigs need to root around in the feed before they learn they can eat it. My favorite feeder, and I would purchase more of these."

CREEP FEEDER SPECIFICATIONS						
Model Number	Capacity	Overall Diameter	Bowl Diameter	Eating Height	Overall Height	Shipping Weight
FPCR1	2.2 lbs. (1 kg)	14" (35.6 cm)	8" (20.3 cm)	3" (7.6 cm)	3.5" (8.9 cm)	33 lbs. (15 kg) per 8 pack

The only assembly required is to insert 2 stainless steel pegs into threaded inserts molded into the body. Shippable via UPS.


USA Patent Numbers
D382377 and 5,758,598

SUPPLEMENT FEEDERS

Great For Small Groups Of Hogs, 4H And FFA Projects

All Brower supplement feeders are constructed of heavy 20 gauge galvanized steel for years of service. They have an adjustable feed gate at trough with fast feed flow, and a 1" (2.54 cm) wide feed saver lip. The 11H and 22H feeders handle 4 week-old pigs to sows. Top covers raise from back for easy filling without disturbing the hogs. Heavy weathertight trough lids keep out moisture and pests. The 1HF and 2HF feeders are ideal for confinement uses and have keyhole slots for hanging.

Brower's 2G Gro-Fast feeder is sturdily built to withstand the weather and severe abuse from the largest hogs. Large, free-acting, 16-gauge doors close automatically...designed wide enough to allow large hogs to eat comfortably. Each side has a feed slide adjustable from the outside. "Swing Type" hinges allow cover to drop down flush with side of feeder. End pieces are angle iron reinforced steel.

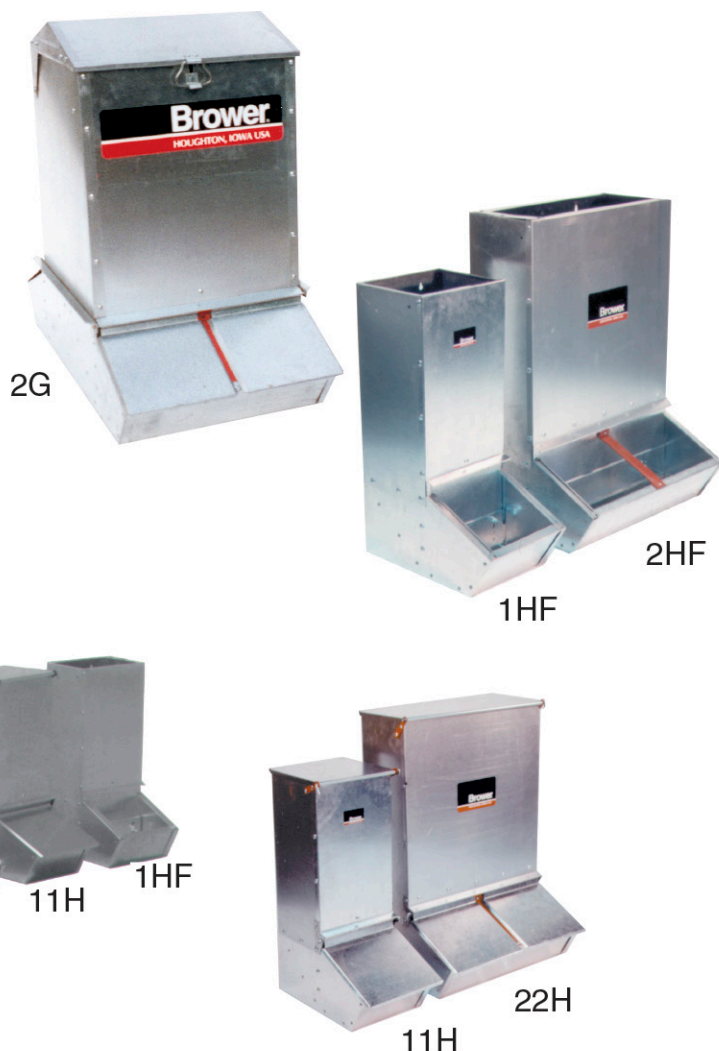

HOG FEEDER SPECIFICATIONS

Model No.	Description	Approx. Capacity			Openings	Overall Size Inches (cm)			K.D.	Shipping	
		Feed	Hogs			W	L	H		Lbs.	(kg)
11H	Single Door Feeder	1.5 bu. (34 kg)	4	1		12 (30.5)	20 (50.8)	29 1/2 (74.9)	Yes	23	(10.5)
22H	Two-Door Feeder	3.7 bu. (84 kg)	8	2		23 (58.4)	20 (50.8)	36 (91.4)	Yes	43	(19.5)
1HF	Dry Lot Feeder	1.5 bu. (34 kg)	4	1		12 (30.5)	20 (50.8)	29 1/2 (74.0)	Yes	18	(8.2)
2HF	Dry Lot Feeder	3.7 bu. (84 kg)	8	2		23 (58.4)	20 (50.8)	36 (91.4)	Yes	33	(15.0)
2G	Gro-Fast™ Hog Feeder	7.0 bu. (153 kg)	20	4		42 (106.7)	25 1/2 (64.8)	40 (101.6)	Yes	98+	(44.5)

* All capacities are approximate. + Truck only.

CREEP FEEDERS AND WATERERS

Model 18CF Creep Feeder is perfect for starter and prestarter pellets. Made of durable galvanized steel...easy to fill and to clean. Feed adjustment. Feed saver flange on trough.

Model 1CF Creep Feeder takes care of one litter comfortably; just hang on wall and fill. Top cover keeps feed fresh.

Model 6160 Utility Pan one-piece galvanized steel; no seams to leak; perfect for hundreds of uses.

Model WN3 Nipple Waterer. Stainless steel body; plunger and spring. Brass base with 7/8" hex head and 1/2" thread. Three (3) position adjustable orifice to handle most water pressures. Easily removed domed screen.



1CF



18CF



WN3



6160

CREEP FEEDER & HOG WATERER SPECIFICATIONS

Model No.	Description	Approx. Capacity		Types of Construction	Overall Size/Inches cm			Shipping Weight
		Contents	Pigs		W	L	H	
18CF	Creep Feeder	25 lbs.	24	Galv. Steel	8 3/4	18	16	21.0 lbs./2 pack
1CF	Creep Feeder	16 lbs.	12	Galv. Steel	6	12	14	8.0 lbs./2 pack
6160	Utility Pan	2.9 gal./(11 lt.) 9 lbs./(4.1 kg)		Galv. Steel	16 3/4 dia. x 3 3/8" H			2.2 lbs.
WN3	Nipple Waterer		25	Stainless/Brass	2 7/8 Long			4 oz.

UTILITY DRINKER

Water Any Poultry, Pigs Or Other Small Animals With Brower's 20 Gallon (75.7 Liter) Utility Drinker

Precise Medicating

Gallon markers (from 12 to 20 gallons in 1 gallon increments). Water level easy to read through translucent tank. Markers allow for water in the trough to be at 1 inch (2.54 cm) below flood stage.

5.5 inch (14 cm) fill opening

Lift off tank provides for easy cleaning (No bolts). Also affords easy float access. Uses one model B78P valve. Adjustable.

Fourteen inches (35.6 cm) of vertical headroom easily accommodates pigs up to 40 pounds (18.2 kg).



Six 4.5 inch (11.4 cm) openings.

3/4 inch (1.9 cm) plug for complete clean out and drainage.

Mount to creep dividers or wall
or
Position in the center of the pen.



SPECIFICATIONS

Model Number	Capacity	Width	Length	Drink Height	Overall Height	Shipping Weight
MPD20	20 gal (75.7 liters)	14" (35.6 cm)	26" (66.0 cm)	3" (7.6 cm)	22.5" (57.2 cm)	25 lbs. (11.4 kg)

Minimal assembly. Shippable via UPS.