



**Builder's Best, Inc.**  
 201 Broiles Drive  
 Jacksonville, TX 75766  
 888-368-7233  
 fax: 800-259-8368  
 www.BuildersBest.com

# SILVERDUCT™



## DESCRIPTION

Silverduct™ UL® 2158A clothes dryer transition duct provides flame resistance. It crushes easily behind the dryer and is held together with layers of aluminum foil and polyester plastic  
 Clothes dryer manufacturers may limit the use of plastics in venting. Check the dryer warranty and installation instructions as well as your local building codes for appropriate use

## PART NUMBERS

| Diameter                       | Length | Part # | Pkg         | Qty         |    |
|--------------------------------|--------|--------|-------------|-------------|----|
| 4"                             | 5'     | 110504 | Bulk        | 12          |    |
|                                | 5'     | 010507 | Bulk        | 72          |    |
|                                | 5'     | 110676 | Display Box | 6           |    |
|                                | 8'     | 110505 | Bulk        | 12          |    |
|                                | 8'     | 010508 | Bulk        | 54          |    |
|                                | 8'     | 110677 | Display Box | 6           |    |
| With Two Spring Tension Clamps | 8'     | 010793 | Display Box | 20          |    |
|                                | 4"     | 5'     | 110670      | Bag         | 12 |
|                                | 8"     | 110671 | Bag         | 12          |    |
| With Two Plastic Screw Clamps: | 4"     | 5'     | 110672      | Display Box | 12 |
|                                | 8"     | 110673 | Display Box | 12          |    |

## PRODUCT SPECIFICATIONS


- UL® listed and labeled as foil dryer transition duct
- Steel wire support, multi-ply design of aluminum and polyester

## PERFORMANCE DATA

- Recommended Operating Pressure: 6" w.g. positive
- Recommended velocity: 5,000 FPM
- Operating Temp. Range: 0°F to +200°F  
Maximum 250°

INSTALLATION: Connections shall be made per installation instructions outlined by the appliance manufacturer

Air Friction Chart

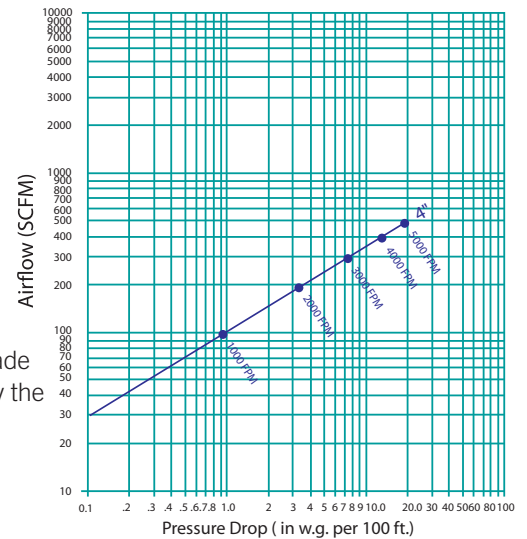

Friction loss is computed in inches of water gauge per 100 feet of straight duct.

## APPROVAL

- UL® 2158A Transition Duct for clothes dryers for installations of 8 feet or less only.
- The Steel wire and foil provide some flame resistance, however, all wire helix designs are held together with layers of aluminum foil and polyester plastic. Clothes dryer manufacturers may limit the use of plastics in venting. Check the dryer warranty and installation instructions as well as your local building codes for appropriate use.

## LABELS



## WARRANTY

Manufacturer assumes no responsibility for failure due to improper installation. All specifications and designs are subject to change without notice and without incurring liability.

WARRANTY EXCLUSION AND DISCLAIMER Seller specifically excludes, and hereby disclaims any express representation or express warranty of any kind with respect to the goods ordered hereunder. All implied warranties, including without limitation merchantability or fitness for a particular purpose or arising from a course of dealing or usage or trade shall expire and cease 45 days after date of delivery. Seller shall not be liable to buyer or any third party for any special, secondary, incidental, or consequential damages however arising. Nothing in this provision shall invalidate or restrict any right or remedy otherwise available under state or federal law. Materials and specifications subject to change without notice.