

Hexagon Mosaic Sizes




**White - W**  
DECLEC11W  
1"x1" Hexagon White Mosaic - Matte  
(11"x12" Sheet)




**White - W**  
DECLEC22W  
2"x2" Hexagon White Mosaic - Matte  
(11"x12 3/4" Sheet)



**White - W**  
DECLEC22WG  
2"x2" Hexagon White Mosaic - Gloss  
(11"x12 3/4" Sheet)

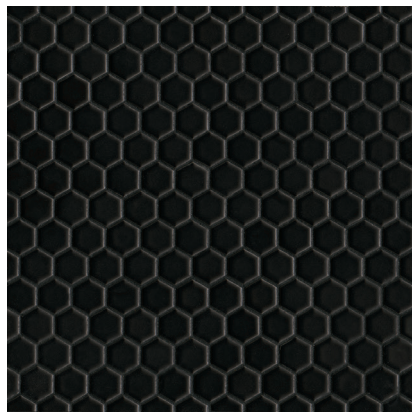


**Black - B**  
DECLEC11B  
1"x1" Hexagon Mosaic - Matte  
(11"x12" Sheet)

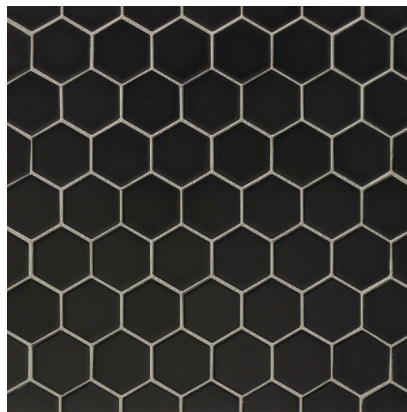

**Black - B**  
DECLEC22B  
2"x2" Hexagon Mosaic - Matte  
(11"x12 3/4" Sheet)

1"x1" Mosaic Design Decos - Matte

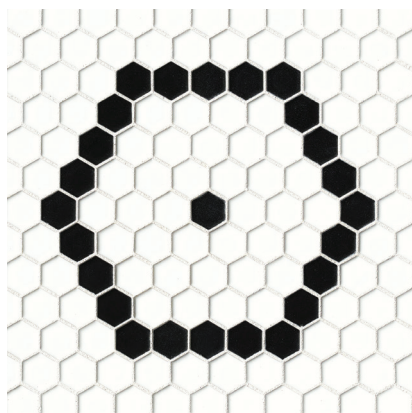

**Design 1 - D1**  
DECLEC11D1  
1"x1" Mosaic Deco Design 1  
(11 1/8"x12 5/8" Sheet)



**Design 2 - D2**  
DECLEC11D2  
1"x1" Mosaic Deco Design 2  
(11 3/4"x10 1/8" Sheet)



# Le Café

Decorative (Glazed Porcelain)


Photo Features 2"x2" Hexagon White Mosaic - Gloss.

## SIZING & PACKAGING

Type	Shape	Item Code	Size	Description	Pcs / Ctn	Sf / Ctn
Mosaic		DECLEC11•	11"x12" Sheet	1"x1" Hexagon Mosaic - Matte	22	19.44
		DECLEC22•	11"x12 3/4" Sheet	2"x2" Hexagon Mosaic - Matte	22	22.17
		DECLEC22WG	11"x12 3/4" Sheet	2"x2" Hexagon White Mosaic - Gloss	22	22.17
		DECLEC11D1	11 1/8"x12 5/8" Sheet	1"x1" Mosaic Deco Design 1 - Matte	22	22.28
		DECLEC11D2	11 3/4"x10 1/8" Sheet	1"x1" Mosaic Deco Design 2 - Matte	22	19.44

## ANSI TECHNICAL SPECIFICATIONS

	DCOF Acutest	PEI Rating ASTM# C1027	Frost Resistant ASTM# C1026	Scratch Resistance MOHS	Breaking Strength ASTM# C648	Water Absorption ASTM# C373	Chemical Resistance ASTM# C650
Results	N/A	N/A	N/A	N/A	N/A	N/A	N/A



## APPLICATIONS

	Floors	Walls	Countertops	Shower Floors	Shower Walls	Pools/Spas
Residential	•	◻	◻		◻	
Commercial		◻			◻	



## LEGEND

- ◻ Product rated for Interior & Exterior use
- Product rated for Interior use only
- † May be suitable for Exterior Floors
- ∅ Applications & ANSI Technical Specifications do not apply
- \* Special Order only



Merchandising materials and samples are for general reference only and representative of a product's potential characteristics. Tile is subject to variation in color/shade, size, texture, and finish. Field, mosaic and trim tile may not match exactly. Blend tiles from different boxes to achieve consistent shade distribution. Installer and end user must conduct a dry mock layout under proper lighting conditions to inspect the product. Installation constitutes acceptance of the product. Reference the TCNA, ANSI, Manufacturer's specifications, and Bedrosians Care & Maintenance Guide. Improper installation, application, use, care and maintenance voids warranty. We reserve the right to make product changes without notice. Please visit [bedrosians.com](http://bedrosians.com) for current product information.

