




Hardwood Installation Products

**ADHESIVES, MOISTURE CONTROL, SOUND ABATEMENT,
SURFACE PREPARATION AND ACCESSORIES**



Complete Hardwood Installation Systems

- | | |
|----------------------------------|------------------------------|
| 1 Concrete Slab | 4 Self-Leveling Underlayment |
| 2 Moisture Vapor Barrier Coating | 5 & 6 Flooring Adhesives |
| 3 Primer Coating | 7 Hardwood Flooring |

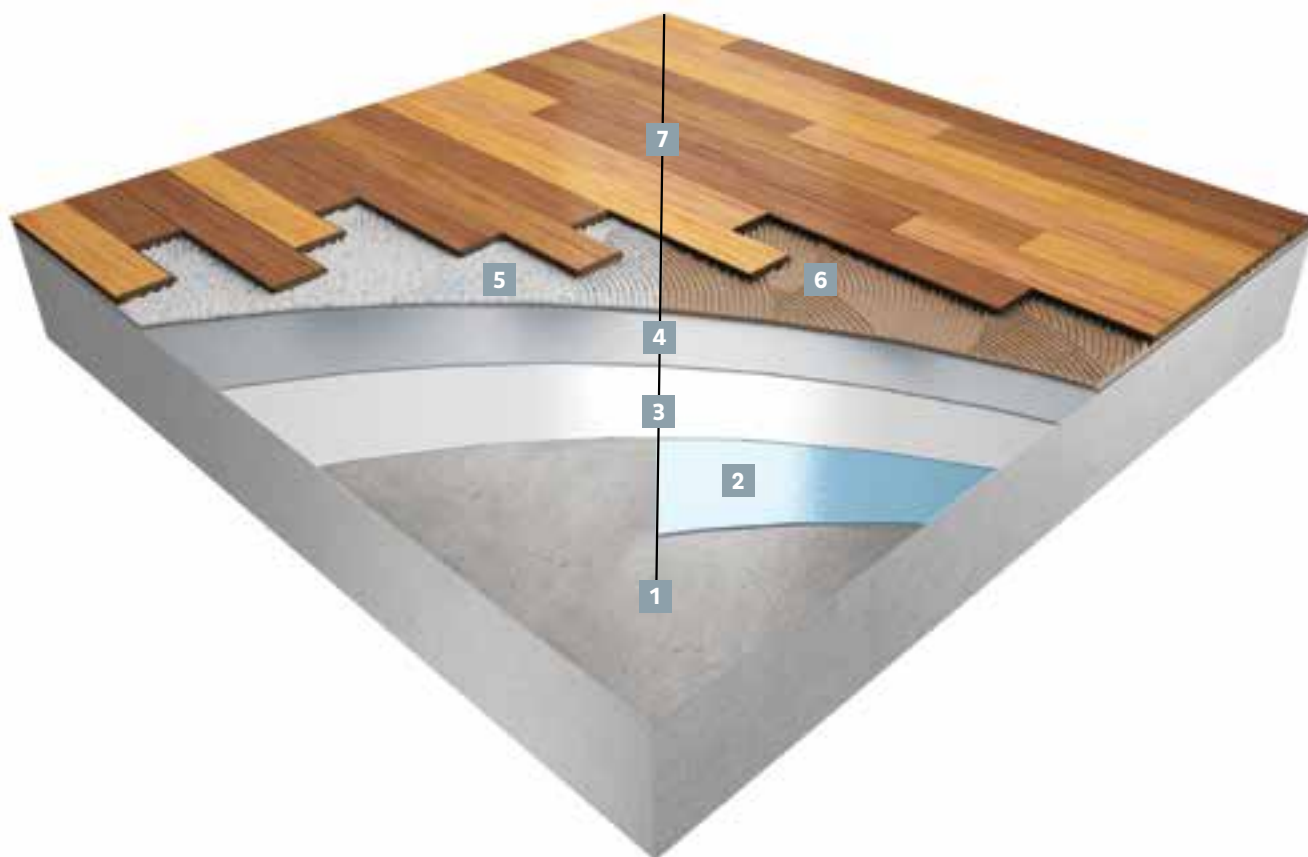



Contents

Inside Our Technology

NWFA Award Winning Floors	4
Hardwood Reference Guide	5

Axios® Tri-Linking™ Products

Tech Feature: Thickness Control™ Spacers	6
ULTRA-SET® SINGLESTEP2™	7
GREENFORCE™	9

Hardwood Adhesives & Moisture Protection

Vapor-Lock™	10
Bostik's BEST®	10
Tech Feature: SoundGuard™	11
EFA+™	13
BST™	13
Ultimate™ Adhesive Remover	13

Moisture Vapor Barriers

MVP4™	15
Ultra-Set® Advanced	15

Product Selector Tool

Selector Tool Overview	17
------------------------	----

Self-Leveling Underlayments

SL-200™	18
SL-175™	19
SL-150™	19
SL-Gyp™	19
SL-100™	19

Repair Patches

UltraFinish™ Pro	20
UltraRamp™	20
Webpatch® D-9001	20
Webcrete® 98	21
Webcrete® 95	21

Primers, Vapor Barriers & Mat

Universal Primer™ Pro	22
Slab-Cote™	22
D-250™	22
BostiMat™	22

Surface Prep Equipment

Collomix Mixers	23
Self Leveling Tool Kit	23
Leveling Pins	23

Cartridge Products

915FS™	24
HeavyDuty™	24
955-SL™	24
Climb™	25

Accessories

Simple-Fix™	26
Cartridge Guns	26

Product Comparison

Product Comparison Charts	27
---------------------------	----



NWFA Award Winners

CHOOSE BOSTIK ADHESIVES ON THEIR PROJECTS

101 Winners USE BOSTIK.

Since 1999, Bostik has been used on 101 of the NWFA's Floors-of-the-Year, over 65% of all award-winning, glue-down floors.

In the 30 years of the NWFA, the industry has evolved. In 1989, Bostik introduced Bostik's BEST®, the first moisture-curing polyurethane hardwood flooring adhesive. In 2010, Bostik revolutionized hardwood flooring installation by offering the first adhesive & moisture barrier so effective that it did not require moisture testing of the concrete slab - Ultra-Set® SingleStep™.

Bostik's industry-changing innovation continued in 2014 with the introduction of **AXIOS™ Tri-Linking™** polymer technology. Found in GreenForce™ and Ultra-Set® SingleStep2™. AXIOS™ products offer a **Lifetime Warranty for UNLIMITED moisture vapor protection** (no slab moisture testing required) and are easy to clean off of prefinished flooring, even after cure. Combine this with Bostik's Thickness Control™ Spacer Technology in Ultra-Set® SingleStep2™, and you have the highest feature set available from the biggest and most trusted name in hardwood flooring adhesives.



Adhesives used for award-winning floors



Full details published on Hardwood Floors Magazine blog at: http://bit.ly/NWFA_FOTY



NWFA 2015 Floor-of-the-Year: Best Commercial
Design: Ourada Designs | Adhesive: Bostik GreenForce™

HARDWOOD


Reference Guide

	Ultra-Set® SingleStep2™	Vapor-Lock™	GreenForce™	Bostik's BEST®	BST™	EFA+™
Product Trait						
Axios™ Tri-Linking™ Technology	✓	--	✓	--	--	--
Moisture limits (Max MVER)	Unlimited	15 lb	Unlimited	12 lb	6 lb	6 lb
Moisture warranty	Lifetime	Lifetime	Lifetime	10 years	5 years	5 years
Warranty without moisture vapor testing	✓	--	✓	--	--	--
Sound abatement (IIC/STC)	70/67	69/66	--	--	--	--
Thickness Control™ Spacer Technology	✓	✓	--	--	--	--
Easy clean after cure	✓	--	✓	--	--	--
Workability	Excellent	Moderate	Excellent	Moderate	Moderate+	Easy
Green grab	Strong	Strong	Good	Good	Strong	Moderate
Unit size	4 gallon, 12 x 28 oz	4 gallon, 12 x 28 oz	4 gallon, 12 x 28 oz	5 gallon, 12 x 28 oz, 24 x 10.1 oz, 12 x 10.1 oz	4 gallon	5 gallon, 12 x 28 oz

TECH FEATURE

Reduce Risk, Improve Installations


Focus on Bostik's Thickness Control™ Spacer Technology



At Bostik, innovation comes in many forms, not just chemistry. Bostik's patent-pending Thickness Control™ Spacer Technology is a proprietary feature that helps ensure proper membrane thickness is maintained between the hardwood flooring and substrate. Installers can use mallets to engage the tongue and groove or even walk on their work during the installation process without significant reduction in the film thickness that could compromise moisture protection or sound control.

The key is in the rubber crumbs mixed in with the adhesive. The particles are made of recycled, ground up car tires. The size of the particles creates the optimal membrane thickness for superior performance as a moisture reduction and sound control membrane. If you stand on a board installed over any adhesive using Thickness Control™ Spacers, the rubber particles prevent the fluid adhesive from squeezing out underneath the boards and the desired membrane thickness is maintained.

Bostik's Thickness Control™ Spacer Technology not only reduces your risk of failing to achieve proper membrane thickness that could result in flooring failures from moisture, it also makes installation easier. You won't need a special trowel or a clip-on component that wears out quickly. You can use common trowels and be confident that you've got the moisture control and sound reduction performance you expect.

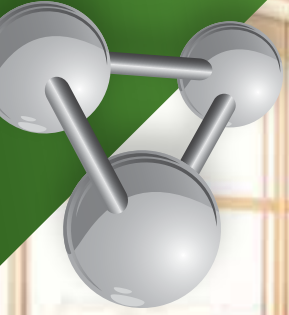

**EASY CLEAN BEFORE &
AFTER CURE**

**UNLIMITED MOISTURE
VAPOR PROTECTION**

**SUPERIOR SOUND
REDUCTION PERFORMANCE**



ULTRA-SET® SINGLESTEP2™



ADVANCED TRI-LINKING™ ADHESIVE, MOISTURE CONTROL & SOUND REDUCTION MEMBRANE

Ultra-Set® SingleStep2™ is a high performance adhesive, moisture control, and sound reduction membrane all in one. Bostik's breakthrough AXIOS™ Tri-Linking™ Polymer Technology used in this formulation maintains the superior long term durability, moisture control and sound abatement properties of high end urethane adhesives. However, it is easier to spread and clean off of prefinished flooring before and after cure. This adhesive contains 1% recycled rubber material, has zero VOC's (as calculated per SCAQMD Rule 1168) and does NOT contain any water.



Thickness Control™ Spacers



ULTRA-SET® SINGLESTEP2™

Item No.	Size	Units/pallet	Pail/Case UPC Code	Cartridge UPC Code
G69850-4GL	4 gallon	36 pails	747224700001	--
G69850-B10	12 x 28 oz cartridge	60 cases	10747224700091	747224700094



Bostik's smart app is now available!

THROUGH ITUNES AND GOOGLE PLAY



**EASY CLEAN BEFORE &
 AFTER CURE**

**UNLIMITED MOISTURE
 VAPOR PROTECTION**

**SUPERIOR BOND STRENGTH
 & GREEN GRAB**



GREENFORCE™

ADVANCED TRI-LINKING™ ADHESIVE & MOISTURE CONTROL MEMBRANE

GreenForce™ is a high performance adhesive and moisture control membrane all in one. Bostik's breakthrough AXIOS™ Tri-Linking™ Polymer Technology used in this formulation maintains the superior long term durability and moisture protection properties of high end urethane adhesives. However, it is easier to spread and clean off of prefinished flooring before and after cure. This adhesive has zero VOC's (as calculated per SCAQMD Rule 1168) and does NOT contain any water.



Superb workability & ridge retention



GREENFORCE™

Item No.	Size	Units/pallet	Pail/Case UPC Code	Cartridge UPC Code
G68250-4GL	4 gallon	36 pails	747224700018	--
G68250-B14	12 x 28 oz cartridge	60 cases	10747224700107	747224700100

Vapor-Lock™

HARDWOOD ADHESIVE, MOISTURE VAPOR RETARDER & SOUND REDUCTION MEMBRANE

Bostik's Vapor-Lock™ is a high performance adhesive, moisture control, and sound reduction membrane all in one. Its superior properties provide a tough, flexible, tenacious bond to a variety of surfaces, and it is not adversely affected by exposure to moisture, water or alkalinity. Vapor-Lock™ exhibits exceptional green grab or high tack immediately after troweling, making installation easier and more secure. This adhesive contains 1% recycled rubber material, has zero VOC's (as calculated per SCAQMD Rule 1168) and does NOT contain any water. Vapor-Lock™ contains Bostik's BLOCKADE™ antimicrobial protection, which inhibits the growth of bacteria, mold, or mildew on the surface of the dried adhesive.



THICKNESS CONTROL™
SPACER TECHNOLOGY

MOISTURE VAPOR
PROTECTION

SUPERIOR SOUND
DAMPENING PERFORMANCE



Bostik's BEST®

WOOD FLOORING URETHANE ADHESIVE AND MOISTURE VAPOR CONTROL

Bostik's BEST® is a high performance adhesive and moisture control membrane. Its superior properties provide a tough, flexible, tenacious bond to a variety of surfaces. Bostik's BEST® high tacking formula exhibits exceptional green grab immediately after troweling, making installation easier and more secure. This adhesive has low VOC's (as calculated per SCAQMD Rule 1168) and does NOT contain any water. Bostik's BEST® contains Bostik's BLOCKADE™ antimicrobial protection, which inhibits the growth of bacteria, mold, or mildew on the surface of the dried adhesive.



OVER 25 YEARS OF INDUSTRY-
LEADING PERFORMANCE

MOISTURE VAPOR
PROTECTION

BOSTIK'S BLOCKADE®
ANTI-MICROBIAL PROTECTION



VAPOR-LOCK™				
Item No.	Size	Units/pallet	Pail/Case UPC Code	Cartridge UPC Code
G69931-BVL	4 gallon	36 pails	747224699312	--
G69931-B16	12 x 28 oz cartridge	60 cases	10747224700114	747224700117

BOSTIK'S BEST®				
Item No.	Size	Units/pallet	Pail/Case UPC Code	Mfr Location
G64130-BU	5 gallon	36 pails	747224389053	Temecula
G64140-DZ	5 gallon	36 pails	747224389053	Conyers
Item No.	Size	Units/pallet	Pail/Case UPC Code	Cartridge UPC Code
A38921	12 x 28 oz cartridge	60 cases	10747224700121	747224700124
A39000	12 x 10.1 oz cartridge	96 cases	10747224700084	747224389107
A38910	24 x 10.1 oz cartridge	105 cases	10747224700060	747224389107

Tech Feature

Increase comfort and ease tensions... with adhesive?



Nobody wants to be disturbed by their neighbors. Whether it's the home theater system from your neighbors below, or the high heeled shoes of the neighbor above, acoustics play an essential role in the comfort of a home. Most local building codes have standardized on two methods of measuring noise. STC (Sound Transmission Coefficient) measures the airborne sound moving through a floor, and IIC (Impact Isolation Class) measures sound from impact on the floor. The International Building Code (IBC) requires a minimum of 50 dB for both IIC and STC.

Bostik offers several products specifically designed to improve acoustics and outperform typical 1/4" cork underlayments. Independent laboratory testing results are summarized on the table below.

Test*	Ceiling Type	Vapor-Lock™	Ultra-Set® SingleStep2™	MVP4™ + Adhesive**
IIC	5/8" Suspended Gypsum	69 dB	70 dB	62 dB
	No Suspended Ceiling	49 dB	50 dB	49 dB
Δ IIC	No Suspended Ceiling	21 dB	21 dB	21 dB
STC	5/8" Suspended Gypsum	66 dB	67 dB	61 dB
	No Suspended Ceiling	50 dB	51 dB	52 dB

* Tests were performed using 3/8" engineered hardwood bonded to 6" thick concrete

** Test performed with 9/16" thick engineered hardwood and Bostik's Best®.

Bostik installation systems are superior to most mats or underlayments used under floating floors, which may reduce sound between floors, but do not significantly reduce the sound of footsteps within the room. When there is an impact on a floating hardwood floor, the boards vibrate. Downward motion is absorbed, but the upward rebound is not. This results in a hollow sound in the flooring. Adhesives with sound abatement characteristics work to reduce the vibration of the boards in both directions resulting in a quieter floor, dramatically increasing the comfort of the space and virtually eliminating one of the most common complaints of multi-family living.



EFA+™

ELASTOMERIC FLOORING ADHESIVE & MOISTURE VAPOR RETARDER

Bostik's EFA+™ is an easy-to-trowel urethane adhesive and moisture control membrane. It provides a tough, flexible, tenacious bond to a variety of surfaces. Bostik's EFA+™ elastomeric characteristics allow the adhesive to move with the wood as it expands and contracts over the life of the floor. Bostik's EFA+™ exhibits a long open time, making installation easier and faster. This adhesive has low VOC's (as calculated per SCAQMD Rule 1168) and does NOT contain any water.



BST™

WOOD FLOORING ADHESIVE & MOISTURE VAPOR RETARDER

Bostik's BST™ is a urethane adhesive and moisture control membrane. Its superior properties provide a tough, flexible, tenacious bond to a variety of surfaces. Bostik's BST™ elastomeric characteristics allow the adhesive to move with the wood as it expands and contracts over the life of the floor. Bostik's BST™ exhibits exceptional green grab making installation easier as it minimizes slipping of the flooring. This adhesive has low VOC's (as calculated per SCAQMD Rule 1168) and does NOT contain any water.



Ultimate™


ADHESIVE REMOVER

Use Bostik's Ultimate™ Adhesive Remover to remove wet and cured urethane adhesive from the surface of pre-finished (non-wax) wood flooring. Ultimate Adhesive Remover is a readily biodegradable, low-odor, water-rinsable solution. Bostik's Ultimate™ is available in two formulations: liquid and pre-soaked, ready-to-use towels.



EFA+™				
Item No.	Size	Units/pallet	Pail/Case UPC Code	Cartridge UPC Code
G62640-BEF	5 gallon	36 pails	747224626455	--
G62620	12 x 28 oz cartridge	60 cases	10747224700077	747224700070
BST™				
Item No.	Size	Units/pallet	Pail/Case UPC Code	Cartridge UPC Code
G62130-B4T	4 gallon	36 pails	747224700278	--

ULTIMATE™ ADHESIVE REMOVER			
Item No.	Size	Units/pallet	Pail/Case UPC Code
G65641(Liquid)	1 quart - 12/case	48 cases	747224656018
G65639(Towels)	1 canister - 6/case	120 cases	747224656094

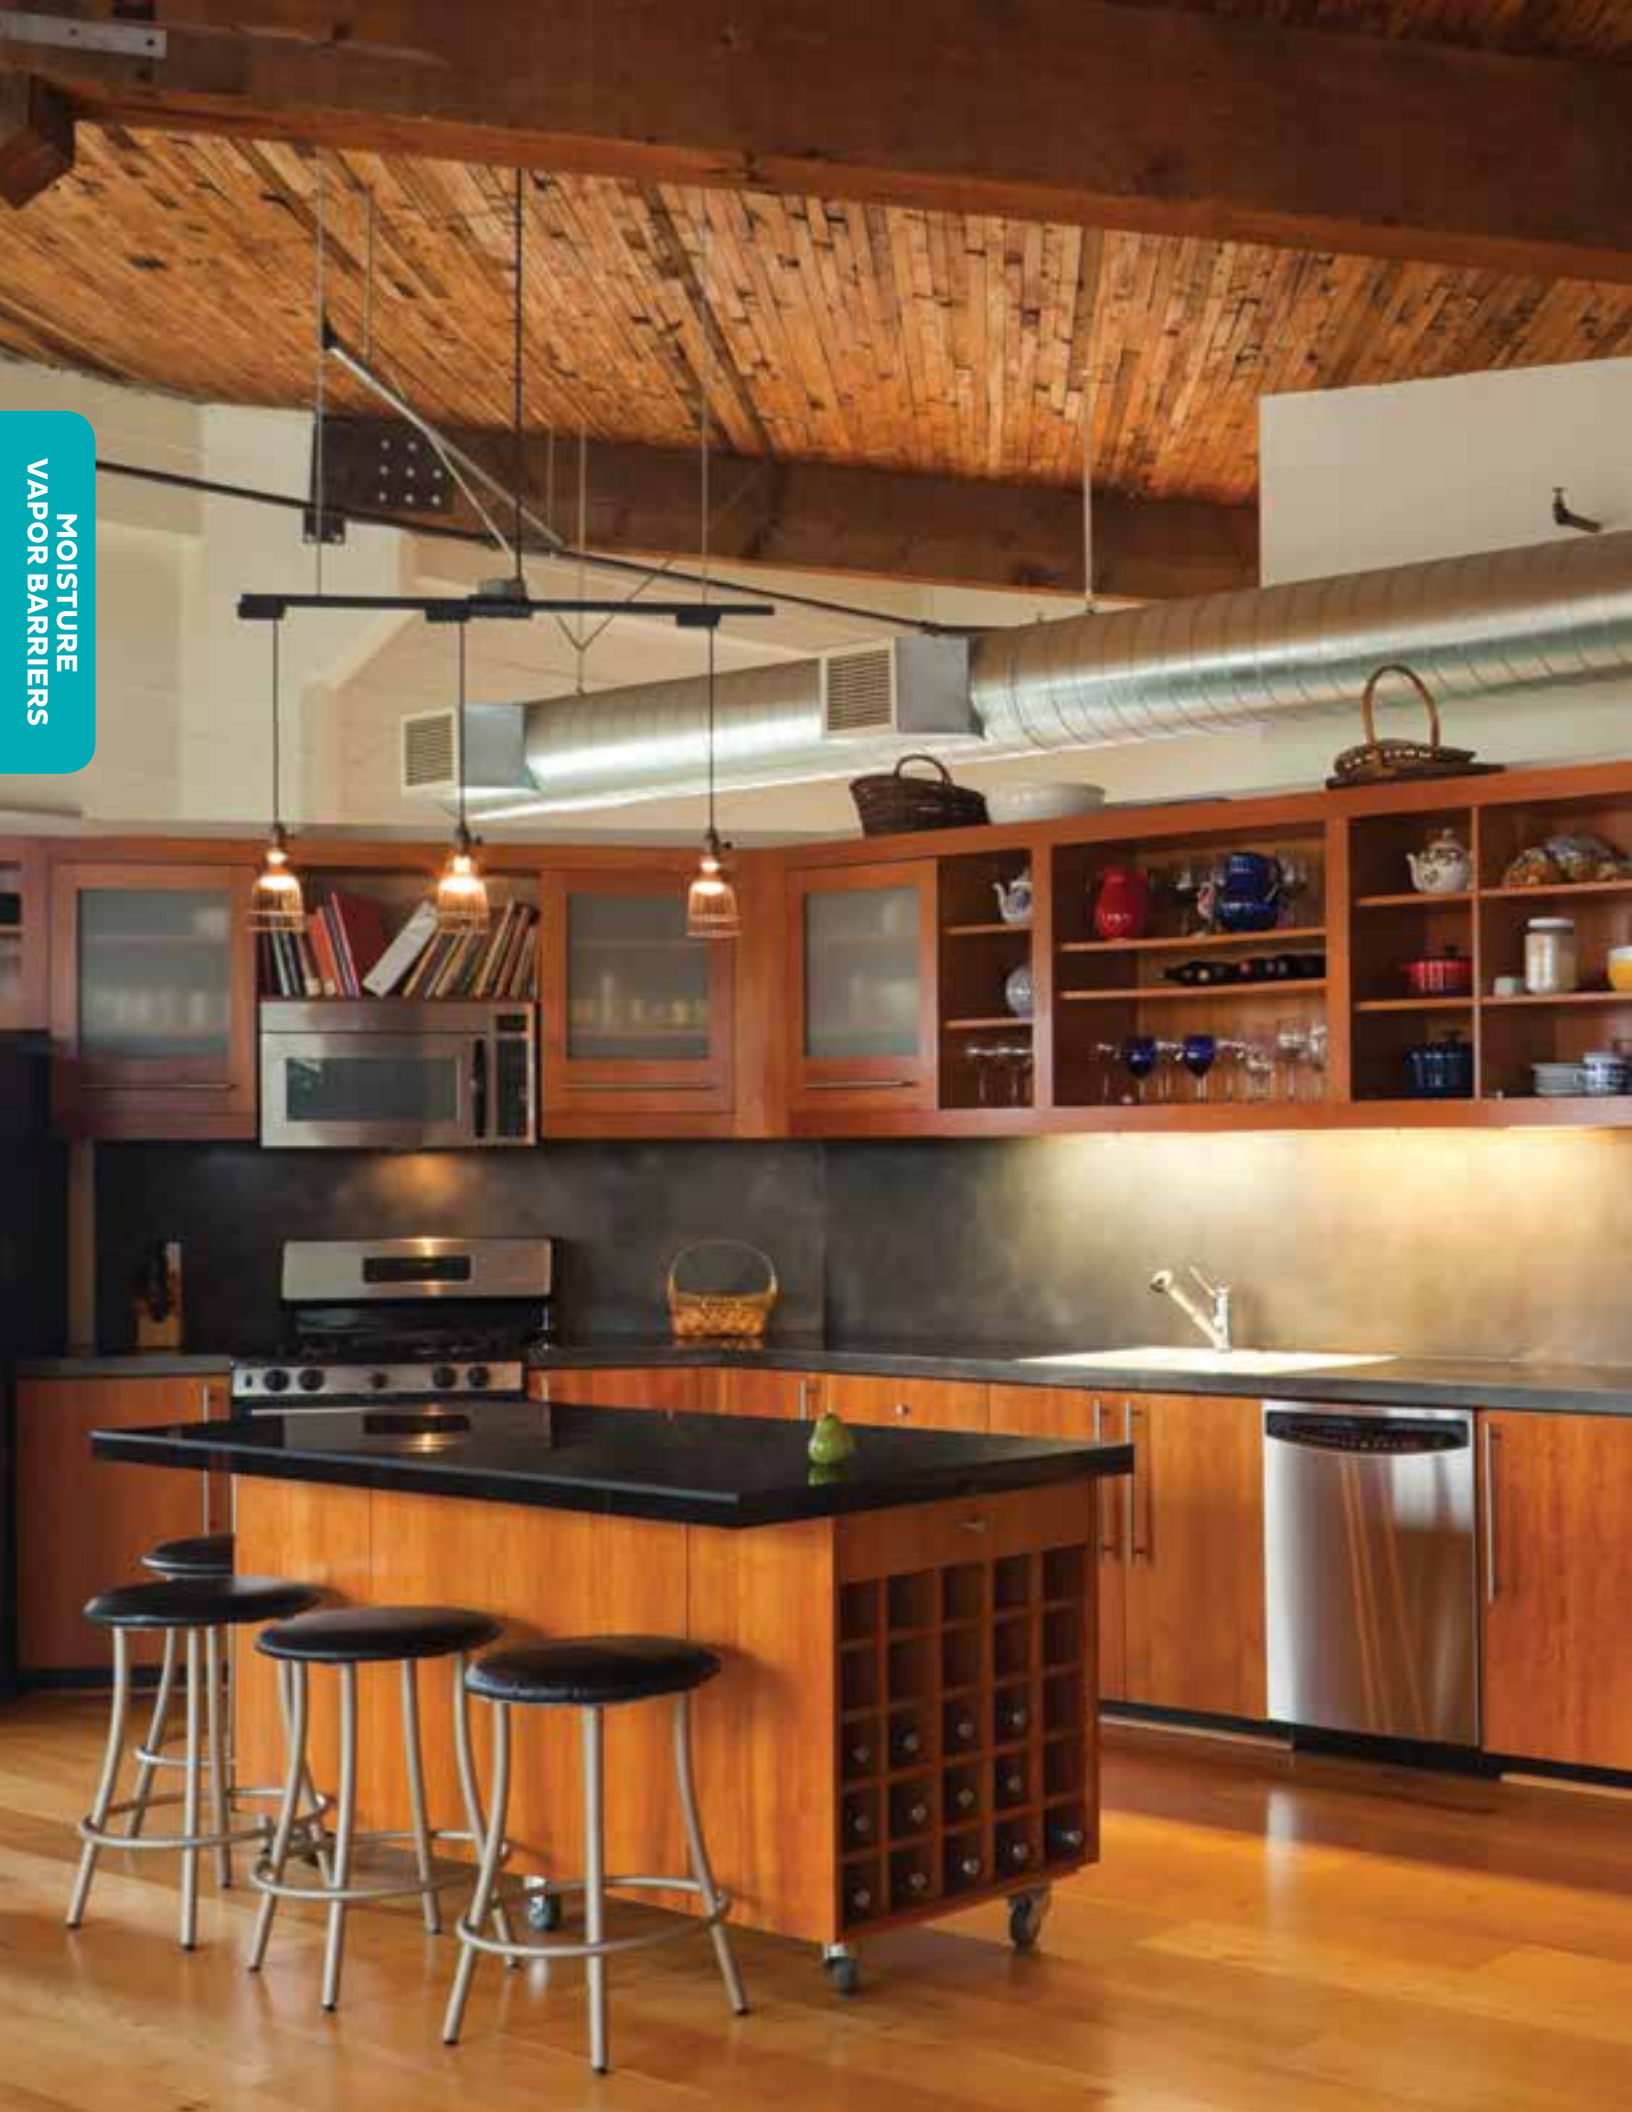

MOISTURE
VAPOR BARRIERS

MVP4™

MOISTURE VAPOR PROTECTION, ANTI-FRACTURE AND NOISE REDUCTION MEMBRANE

Bostik MVP4® Moisture Vapor Protection is a one-part, trowel applied, elastomeric, moisture cure urethane membrane designed to be used beneath glue-down installations of engineered, solid and bamboo hardwood flooring with Bostik's Best®, BST™, EFA+™, or Vapor-Lock™ adhesives. Bostik MVP4® is designed to reduce moisture vapor transmission from the subfloor, create a noise reduction barrier over the substrate, and establish an anti-fracture membrane, which can bridge cracks that can occur in the substrate prior to or after installation (up to 1/8").



PREVENTS DAMAGE CAUSED BY SUBFLOOR MOISTURE

BELOW, ON AND ABOVE GRADE INSTALLATIONS

EXCEEDS IRC REQUIREMENTS FOR VAPOR RETARDERS

MOISTURE VAPOR BARRIERS

Ultra-Set® Advanced

WATERPROOFING, SOUND REDUCTION AND CRACK ISOLATION

Bostik's Ultra-Set® Advanced is a one-part, trowel applied, elastomeric waterproofing, crack isolation, and sound reduction membrane. Ultra-Set® Advanced is approved as a waterproofing membrane in wet areas (bathrooms and kitchens) prior to the installation of ceramic or stone tile, or hardwood. Bostik hardwood adhesives may be used directly over the cured Ultra-Set® Advanced membrane. It may be applied over properly prepared concrete, structurally-sound exterior grade plywood, cementitious backer board, well-bonded vinyl/VCT or ceramic tile, or some gypsum based underlayments. Ultra-Set® Advanced is to be used as a waterproofing membrane (positive pressure), but is not intended to reduce subfloor moisture or moisture vapor transmission. For subfloor moisture vapor protection, use MVP4™, Slab-Cote™, D-250™, or one of Bostik's adhesives with moisture protection



HIGH PERFORMANCE URETHANE FORMULA

BRIDGES CRACKS UP TO 1/8"

BOSTIK'S BLOKADE® ANTIMICROBIAL PROTECTION

MVP4™			
Item No.	Size	Units/pallet	UPC Code
G66900-MVF	5 gallon	36 pails	747224669001


ULTRA-SET® ADVANCED			
Item No.	Size	Units/pallet	UPC Code
A60820	12 x 20 oz/case	90 cases	747224602312
G60800-UA2	2 gallon	64 pails	747224608024
G60800-5G	5 gallon	36 pails	747224608055





Bostik's Smart System Selector™ Tool

Education, Recommendations, and Jobsite Calculations

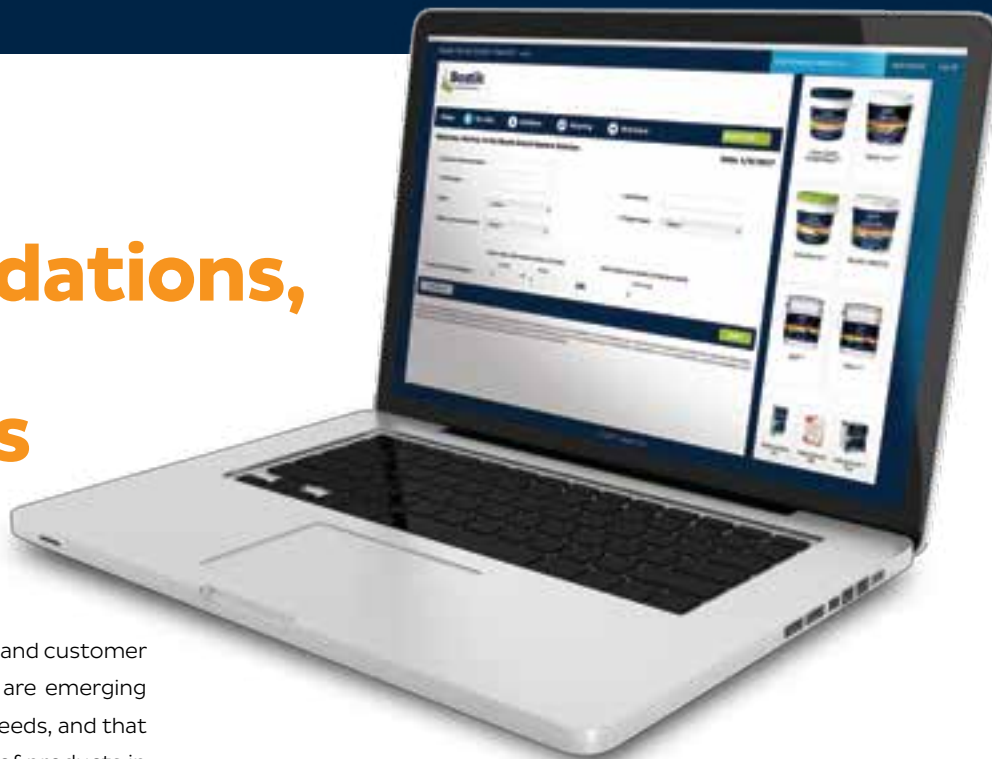

At Bostik, we understand that every jobsite and customer is different. New, innovative technologies are emerging that can be leveraged to address specific needs, and that is why we have developed a vast portfolio of products in surface preparation, moisture mitigation, and bonding solutions. But which products are most appropriate for a job? How do you avoid some of the most common causes of flooring failures?

Bostik's Smart System Selector™ Tool is a state-of-the-art tool to help educate distributor sales reps, contractors and customers, not only about National Wood Flooring Association recommendations for specific applications, but also about Bostik products and system capabilities.

The Smart System Selector™ Tool asks a series of questions about a specific job or application and recommends the most appropriate system of products,

which trowels to use, and how much of each product you'll need.

The Smart System Selector™ Tool recommends a "Good, Better, Best" range of products and tells you exactly what benefits you receive from upgrading to our highest-performing products, allowing you to easily sell that value to your customer. It also clearly shows which products are not suitable for a specific job, and helps avoid the most common causes of flooring failures. Talk to your local Bostik distributor or Bostik Territory Manager for more information to start using this latest innovation from Bostik. Work smart!

SELF-LEVELING UNDERLAYMENTS

Reference Guide

SL-200™

SL-175™

SL-150™

SL-100™

SL-Gyp™

Application Characteristics					
Thickness	1/8" - 1"	1/8" - 2"	1/4" - 1"	1/4" - 3"	1/4" - 2"
Extended Depth with Aggregate	No	5"	No	5"	No
Walkable	2-3 hours	1-2 hours	1-2 hours	2-3 hours	3-4 hours
Healing Time	45 minutes	20 minutes	15 minutes	20 minutes	20 minutes
Flow Cup (After 10 minutes)	16.3 cm	14.5 cm	13 cm	13.5 cm	13.8 cm
Install Hardwood Floor Coverings	16 hours	16 hours	16 hours	1-2 days	Minimum of 48 hours
Install Tile & Stone Floor Coverings	6 hours	6 hours	4 hours	1-2 days	Minimum of 48 hours
Install Resilient Floor Coverings	16 hours	12 hours	12 hours	1-2 days	Minimum of 48 hours
Wear Layer	No	Yes	No	No	No
Stainable	No	Yes	No	No	No
BostiMat™ Compatible	Yes	Yes	No	Yes	No
Moisture Limit	No Limit	No Limit	No Limit	No Limit	3 lbs / 75%RH
Pumpable	Yes	Yes	No	Yes	Yes
Strength Ratings					
Compressive Strength (28 days-ASTM C109)	5,500 psi	5,500 psi	5,500 psi	5,000 psi	5,000 psi
Flexural Strength (ASTM C348)	1,000 psi	1,100 psi	1,100 psi	1,000 psi	1,500 psi
Properties					
Chemistry	Cement	Cement	Cement	Cement	Gypsum / Cement Hybrid
Mold & Mildew Resistant	Yes	Yes	Yes	Yes	N/A
Exterior Use	No	No	No	No	No
Recycled Content	21%	21%	No	21%	No

*Walkable, installation and healing times may vary due to depth of lift, temperature, humidity and other jobsite conditions

SL-200™

ULTRA-FLUID SELF-SMOOTHING UNDERLAYMENT

SL-200™ is an ultra fluid, self-smoothing underlayment used in preparation of finished floor coverings. SL-200™ can be installed at 1/8" using a gauge rake and smoothing tool. The ultra fluid, single lift application increases production over multi-coat patching methods and leaves a smoother surface. SL-200™ can also be installed as a self-leveling underlayment up to 1" when a flat or level subfloor is desired. This breakthrough formulation can be easily installed by one person, working alone, due to its long open time and superior flow rate.



INSTALL FROM 1/8"
TO 1" NEAT

WALKABLE IN 2 TO 3 HOURS

INSTALL FLOOR COVERING
IN 6-16 HOURS



SL-175™

PREMIUM SELF-LEVELING UNDERLAYMENT & WEAR LAYER

SL-175™ is a premium, cement-based, self-leveling underlayment that can be used to create a smooth, flat or level surface prior to the installation of floor coverings. Its long working time, low shrinkage and superior leveling properties make it the ideal product for demanding applications on, above or below grade.

INSTALL FROM 1/8" TO 2" NEAT

WALKABLE IN 1 TO 2 HOURS

INSTALL FLOOR COVERING IN 6-16 HOURS



SL-150™

FAST SETTING SELF-LEVELING UNDERLAYMENT

SL-150™ is a fast setting, self-leveling underlayment that can be used to create a smooth, flat or level surface prior to the installation of floor coverings. Its working time, low shrinkage and superior leveling properties make it the ideal product for demanding applications on, above or below grade.

INSTALL FROM 1/4" TO 1" NEAT

WALKABLE IN 1 TO 2 HOURS

INSTALL FLOOR COVERING IN 4 TO 16 HOURS



SL-Gyp™

HYBRID GYPSUM-BASED SELF-LEVELING UNDERLAYMENT

SL-Gyp™ is a premium, hybrid gypsum / cement-based, self-leveling underlayment that can be installed from 1/4" up to 2" thickness without extension. It is designed for use over distressed gypsum subfloors, light weight concrete, mud beds, structurally sound wood, adhesive residue and it is ideal for use on radiant or in-floor heating systems.

INSTALL FROM 1/4" TO 2" NEAT

WALKABLE IN 3 TO 4 HOURS

INSTALL FLOOR COVERING IN 2 DAYS



SL-100™

SELF-LEVELING UNDERLAYMENT

SL-100™ is a cement-based, self-leveling underlayment that can be used to create a smooth, flat or level surface prior to the installation of floor coverings. Its extended working time, low shrinkage and superior leveling properties make it the ideal product for renovation and new construction projects where next day flooring installations are not critical.

INSTALL FROM 1/4" TO 3" NEAT

WALKABLE IN 2 TO 3 HOURS

INSTALL FLOOR COVERING IN 1 TO 2 DAYS



SELF-LEVELING UNDERLAYMENTS

Item No.	Size	Barcode	Case Code	
SL-200™				
K102200	50 lbs	747224602435	--	
SL-175™				
K102175	50 lbs	747224602428	--	
K102175SS	2200 lb super sack	747224603166		
SL-150™				
G00270-F8	50 lbs	747224002709	--	
Product	Size	Weight/Unit	Units/Pallet	Weight/Pallet
SL-200™	50 lb bags	50 lbs	48 bags	2,400lbs
SL-175™	50 lb bags	50 lbs	48 bags	2,400lbs
SL-150™	50 lb bags	50 lbs	40 bags	2,000lbs

SELF-LEVELING UNDERLAYMENTS

Item No.	Size	Barcode	Case Code	
SL-Gyp™				
K102125	50 lbs	747224602404	--	
K102125SS	2200 lb super sack	747224603180	--	
SL-100™				
K102100	50 lbs	747224602411	--	
K102100SS	2200 lb super sack	747224603173	--	
Product	Size	Weight/Unit	Units/Pallet	Weight/Pallet
SL-Gyp™	50 lb bags	50 lbs	48 bags	2,400lbs
SL-100™	50 lb bags	50 lbs	48 bags	2,400lbs

UltraFinish™ Pro

PREMIUM PORTLAND CEMENT REPAIR PATCH

UltraFinish™ Pro is a cement-based, rapid drying, trowelable repair patch and skimcoat that is used to smooth subfloors prior to the installation of finished floor coverings.

UltraFinish™ Pro allows for the installation of many floor coverings in as little as 15 minutes. It can be applied over properly prepared concrete, wood, cement-based terrazzo, VCT, ceramic, quarry tile, cutback and non-water soluble adhesive residue.



APPLIES FROM A SKIM COAT TO 1/2"

INSTALL FLOORING IN 15 MINUTES

EXCELLENT FOR SKIM COATING OR PATCHING



UltraRamp™

PREMIUM PORTLAND CEMENT RAMPING PATCH

UltraRamp™ is a rapid setting, cement-based, ramping patch with excellent workability that makes screeding, ramping or patching fast and easy. UltraRamp™ can be used over concrete, terrazzo, ceramic or quarry tile, epoxy coatings, non-water soluble adhesive residue and approved wood subfloors.



APPLIES FROM A SKIMCOAT TO 2" NEAT, 5" PROPERLY EXTENDED

INSTALL FLOORING IN AS LITTLE AS ONE HOUR

IDEAL FOR SCREEDING, RAMPING, PATCHING & HEAVY SKIMCOATING



Webpatch® D-9001

FAST SETTING POLYMER-MODIFIED GYPSUM PATCH

Bostik Webpatch® D-9001 is a fast-setting, polymer-modified gypsum based material designed for interior installation and may be used to patch floors, walls, and other surfaces. Webpatch® D-9001 may be used to fill up to 1/2" deep over properly prepared concrete, masonry, cementitious backer board, and structurally sound exterior grade plywood (interior/dry use only). When used properly, this product provides a fast-setting surface that will not check, crack or break up.



REPAIRS MINOR IMPERFECTIONS IN FLOORS

HIGH STRENGTH AND CRACK RESISTANT

APPLY UP TO 1/2" DEPTH IN ONE APPLICATION



Webcrete® 98

PREMIUM, FAST-SETTING, POLYMER-MODIFIED,
PORTLAND CEMENT PATCH


Bostik Webcrete® 98 is a premium, fast-setting, specially formulated, polymer-modified, Portland cement patch that is to be mixed with water only. Bostik Webcrete® 98 is designed for interior use on floors and walls. It can be used to skim-coat or featheredge up to 1/2" deep in one application. Floor covering can be installed after just one hour from application. When used as an embossing floor leveler, there is no need to mix Bostik Webcrete® 98 with a latex additive.



EXCELLENT SKIM-COATING,
PATCHING & LEVELING

FEATHEREDGE FINISH

HIGH STRENGTH
EMBOSS LEVELER

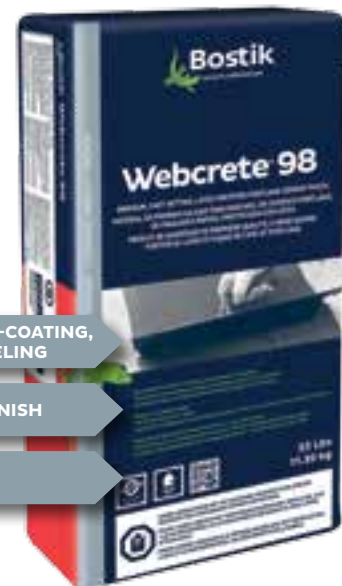

Webcrete® 95

A FAST-SETTING, HIGH STRENGTH CEMENT PATCH

Bostik Webcrete® 95 is a fast-setting, polymer-modified, Portland cement patch for interior use on floors and walls. This product may be used to skim-coat or featheredge finish up to 1/2" deep in one application. Floor covering can be installed after just one hour from application. When mixed with Bostik 425™ Multi-purpose Acrylic Latex Admixture instead of water, not only is the performance and flexibility improved, but Bostik Webcrete 95® can also be used as an embossing leveler.



EXCELLENT SKIM-COATING,
PATCHING & LEVELING

FEATHEREDGE FINISH

APPLY UP TO 1/2" DEPTH
IN ONE APPLICATION



REPAIR PATCHES

CHARACTERISTICS

Product	UltraFinish™ Pro		UltraRamp™		WebCrete® 98		Webcrete® 95		WebPatch® D-9001	
Thickness min/max	Skim	Max 1/2"	Skim	Max 2"-5"*	Skim	Max 1/2"	Skim	Max 1/2"	Skim	Max 1/2"
Final set	15 min	30 min	30 min	30 min	55 min	65 min	25 min	35 min	25 min	35 min
Install hardwood	30 min	16 hrs	16 hrs	16 hrs	4 hrs	8 hrs	4 hrs	8 hrs	N/A	
Install Tile & Stone	15 min	30 min	1 hrs	1 hrs	2 hrs	4 hrs	2 hrs	4 hrs	N/A	
Install Resilient	15 min	30 min	1 hrs	1 hrs	4 hrs	8 hrs	4 hrs	8 hrs	2 hrs	4 hrs
Use as a wear layer	No		Yes		No		No		No	
Moisture limit	8 lbs / 80% RH		8 lbs / 80% RH		No Limit		No Limit		3 lbs / 75% RH	
Chemistry	Cement		Cement		Cement		Cement		Gypsum	
Mold & Mildew Resistant	Yes		Yes		Yes		Yes		Yes	
Recycled Content	22%		21%		None		None		None	

*2" neat, 5" with aggregate

REPAIR PATCHES

Product	Item No.	Size	Barcode
UltraFinish™ Pro	K102300	10 lb bags, 4/case	747224602459
UltraRamp™	K102400	50 lb bag	747224602442
Webpatch® D-9001		25 lb bag	747224630209

REPAIR PATCHES

Product	Item No.	Size	Barcode
Webcrete® 98	D63158-98R/982	25 lb bag	747224631589
Webcrete® 95	D63168-952	25 lb bag	747224631688

Universal Primer™ Pro

DEEP PENETRATING PRIMER

Universal Primer™ Pro is a premium, one component, interior acrylic primer designed for use with Bostik's line of underlayments and patches. Universal Primer™ Pro's deep penetrating formulation can be used on a wide variety of substrates including concrete, wood, well bonded VCT, epoxy, tile, gypsum underlayment, cutback and other adhesive residues not affected by water. Universal Primer™ Pro is rapid drying and will adhere to both porous and non-porous substrates.

ENABLES ADHESION OF SELF-LEVELING UNDERLAYMENTS

LOW VOC, WATER-BASED FORMULATION

RAPID DRYING



D-250™

MOISTURE VAPOR BARRIER COATING

Bostik D-250™ is a high performance, rapid drying, water-based, penetrating epoxy formulated to dramatically reduce moisture vapor transmission and surface alkalinity from substrates. D-250™ is a low odor, non-flammable, 2-part system. It is pigmented green for visual indication of coverage and film thickness during the installation process. D-250™ is a one or two coat solution depending on conditions.

TWO-COMPONENT, WATER-BASED EPOXY

BOSTIK'S BLOCKADE® ANTIMICROBIAL PROTECTION

REDUCES MOISTURE VAPOR TRANSMISSION



Slab-Cote™

EXTREME MOISTURE VAPOR BARRIER COATING

Bostik Slab-Cote™ Extreme Moisture Vapor Barrier Coating is a single coat, two-component, 100% solids epoxy formulated to dramatically reduce moisture vapor transmission and surface alkalinity from substrates. Slab-Cote™ passes ASTM F 3010-13, moisture mitigation system for use under resilient flooring. It has 0 VOCs (as calculated per SCAQMD Rule 1168), low odor and is solvent-free. Slab-Cote's™ unique formulation displays a gel-like end of pot life indicator. Material left to cure in the pail will get hot, but will not smoke excessively.

SINGLE COAT, RAPID CURE, 100% SOLIDS EPOXY FORMULATION

FOR USE ON PROPERLY PREPARED CONCRETE - EVEN GREEN

DRAMATICALLY REDUCES MOISTURE VAPOR TRANSMISSION & PH LEVELS FROM SUBSTRATES



BostiMat™

FIBER REINFORCEMENT MATRIX SHEET

BostiMat™ creates a super strong web of fiber reinforcement throughout the self-leveling underlayment. BostiMat™ imparts a tremendous increase in tensile and flexural strength within the self leveling underlayments.

INCREASES TENSILE AND FLEXURAL STRENGTH

ALKALI RESISTANT, NON-FLAMMABLE FIBERS

BRIDGES CRACKS UP TO 1/8"



PRIMERS			
Item No.	Size	Barcode	Case Code
Universal Primer™ Pro			
K102500	4 x 1 gal/case*	747224603194	10747224603194
K102550	5 gallon pail	747224603203	--
BOSTIMAT™			
Item No.	Size	Barcode	Case Code
K102450	800 sf roll	747224603210	--

MOISTURE VAPOR BARRIER COATINGS			
Item No.	Size	Barcode	Case Code
Slab-Cote™			
D64125	1 gallon kit	747224603227	--
D-250™			
D64010	1 gallon kit	747224640109	--

Collomix Mixers

LEV MIX 65 MOBILE MIXER AND XO4 DRILL

The LevMix 65 mobile mixer and Xo4 drill make the blending of self-leveling underlayments fast, easy and accurate. The LevMix 65 has been engineered to combine and simplify the three installation steps of mixing, transporting and pouring into one mobile, mixing unit. The user will also save time by mixing up to three, 50lb bags at once.

The Xo4 drill is powerful and comes with a special mixing paddle designed specifically for self-levelers.

Both drills help to ensure your mixtures are lump and residue-free and properly mixed without excessive air entrainment.



Self Leveling Tool Kit

TOOLS FOR SELF LEVELING APPLICATIONS

Simplify your installation with the proper tools. The self leveling tool installation kit includes the following items:

- Mixing barrel
- Mixing paddle
- Measuring pitcher
- 3 piece aluminum handle
- 24" gauge rake head
- Finishing smoother
- Spiked sandals



LEV MIX 65 MOBILE MIXER			
Item No.	Size	Barcode	Case Code
K321900	32" x 24" x 56" box, 150 lbs	--	--
XO4 DRILL & PADDLE			
Item No.	Size	Barcode	Case Code
K351950	24" x 14" x 8" box	--	--

Leveling Pins

PINS FOR SELF LEVELING APPLICATIONS

Bostik leveling pins help to ensure consistency and accuracy of your pour depths. One side is graduated in inches from 3/16" to 2-1/2", while the flip side is graduated in millimeters from 5mm to 65 mm.

- Self-adhering
- Provides visual guide
- Sold in packs of 50
- Cut to desired height and apply to substrate



SELF LEVELING TOOLKIT			
Item No.	Size	Barcode	Case Code
K351925	18.5 lb unit	747224604453	--
LEVELING PINS			
Item No.	Size	Barcode	Case Code
K351930	2.5" (65mm) pins, 50/bag	743153822890	--



915FS™

FAST SETTING POLYURETHANE SEALANT

A one-component, architectural grade, polyurethane sealant capable of dynamic joint movement totaling 50% of original joint geometry ($\pm 25\%$). It cures to a tough, flexible rubber when exposed to moisture present in the atmosphere. With its fast-setting, high strength, elastomeric properties and convenient packaging, 915FS™ is ideal for medallions, stair treads, borders, starter rows and trim. Its physical properties will remain relatively stable over time and in varying weather conditions and are relatively unchanged over a wide temperature range, -40°F to 150°F (-40°C to 66°C).



955-SL™

SELF LEVELING POLYURETHANE SEALANT

A one-component, self-leveling, polyurethane sealant capable of dynamic joint movement totaling 70% of original joint geometry ($\pm 35\%$). The sealant cures to a tough, flexible rubber when exposed to moisture present in the atmosphere. 955-SL has a pourable consistency. Its physical and mechanical properties remain consistent across a broad temperature range, from -40°F to 150°F (-40°C to 66°C).



Heavy Duty™

CONSTRUCTION ADHESIVE

A one-component, moisture cure polyurethane adhesive exhibiting high strength and is suitable for both interior and exterior installations. HDCA typically does not require priming to achieve a watertight seal on common construction materials such as stone, concrete, masonry, cedar, wood, anodized aluminum, galvanized steel, vinyl, fiber-cement board, etc. HDCA can bond to wet, frozen or treated lumber.

FAST SET, PERFECT FOR STARTER ROWS, STAIR TREADS & MEDALLIONS

NON-SAG, GREAT FOR TRIM & FLOOR REPAIR

BEST IN CLASS WARRANTY



SELF LEVELING FORMULATION, NO TOOLING REQUIRED

CARB, OTC, SCAQMD COMPLIANT

SEALS CRACKS $>1/8"$ FOR MOISTURE PROTECTION



REDUCES SQUEAKS IN SUB-FLOORS

95% SOLIDS AND FASTER CURE THAN TYPICAL SOLVENT-BASED SYSTEMS

ADHERES TO WET AND FROZEN LUMBER





EXTREMELY STRONG,
DURABLE BOND

EASY TO CLEAN,
EVEN AFTER CURE

HELPS ELIMINATE SQUEAKING
& REDUCES SOUND

Climb™

HARDWOOD WALL PLANK AND TREAD CAP ADHESIVE

Bostik Climb™ is a one-component, easy gunning, non-sag adhesive that is specifically formulated for hardwood flooring planks or blocks on interior, above-grade walls and installation of stair tread caps. The Climb™ formula has superior green grab (grab strength while wet) and cures quickly to form a tenacious bond. Once cured, Climb™ remains tough yet flexible for extreme durability, helps reduce stair squeaking, and reduces the sound of footsteps on the stairs. This specialty formulation is also easy to clean off of hardwood wall planks, prefinished tread caps and risers even after cure. Climb™ has 0% solvents and low odor.

CAULKS, SEALANTS & ADHESIVES

Item No.	Size	Color	Barcode	Case Code
915FS™				
A77800	24 x 10.1oz /case*	White	747224900012	10747224900019
955-SL™				
A71010	12 x 28 oz /case*	Limestone	747224710109	10747224710106
Package Size	Weight/Unit	Units/Pallet	Weight/Pallet	
24 x 10.1 oz cartridge	24 lbs/case	80	1,950 lbs	
12 x 20 oz sausage	24 lbs/case	100	2,430 lbs	
12 x 28 oz cartridge*	26 lbs/case	60	1,610 lbs	

*Sold in full cases only

HEAVY DUTY™ CONSTRUCTION ADHESIVE

Item No.	Color	Size	Barcode	Case Code
A69910	Natural	12 x 10.1 oz /case*	747224699107	10747224699104
A69920	Natural	12 x 28 oz /case*	747224699206	10747224699203
Package Size	Weight/Unit	Units/Pallet	Weight/Pallet	
10.1 oz cartridge	15 lbs/case	96	1,490 lbs	
28 oz cartridge	26 lbs/case	60	1,610 lbs	

*Sold in full cases only

CLIMB™

Item No.	Color	Size	Barcode	Case Code
G78500-CLM	White	12 x 10.1 oz /case*	747224700292	10747224700299
Package Size	Weight/Unit	Units/Pallet	Weight/Pallet	
10.1 oz cartridge	13.3 lbs/case	96	1,325 lbs	

*Sold in full cases only



**FLows EAsily And Fills
Hollow Spots**

**Bonds To Wood
And Concrete**

**Low Odor, Zero
VOC Formula**

**STANDARD 7:1 DRIVE FOR
LOWER VISCOSITY PRODUCTS**

**DELUXE 26:1 DRIVE FOR
VERY VISCOUS PRODUCTS**

10.1 OZ AND 28 OZ SIZES



Simple-Fix™

HARDWOOD FLOORING EPOXY REPAIR

Bostik Simple-Fix™ is a versatile, low viscosity, two component, epoxy adhesive used to repair hollow spots, replace floor boards and to install thresholds, moldings and medallions.

This adhesive is designed for use with engineered wood, parquet, solid wood and bamboo flooring designed and recommended in writing by the flooring manufacturer for glue-down applications.

Bostik Simple-Fix™ has extremely high bond strength, making it the perfect solution for bonding wood to wood, or wood to concrete. Bostik Simple-Fix™ is specifically formulated to be a simple repair solution that is easily dispensed with an off-the-shelf caulking gun.

This high performance formulation is water resistant, low odor and contains 0% VOCs.

Cartridge Guns

CARTRIDGE DISPENSING GUNS

Bostik high quality cartridge guns are designed to last and to make your job easier. Our standard 7:1 drive is perfect for lower viscosity products like Simple-Fix™, while our deluxe 26:1 drive is perfect for the higher viscosity hardwood adhesives and construction sealants.

SIMPLE-FIX™		
Item No.	UPC Code	Size
K351802	747224351807	6 x 250 mL

CARTRIDGE GUNS		
Item No.	Size	Drive
K520001	Manual 10 oz	Standard 7:1 Drive
K520026	Manual 10 oz	Deluxe 26:1 Drive
K521026	Manual 28 oz	Deluxe 26:1 Drive

Hardwood Product Comparison

	Ultra-Set® SingleStep2™	Vapor-Lock™	GreenForce™	Bostik's BEST™	BST™	EFA+™
Warranty						
Duration of Bond Warranty	Lifetime	Lifetime	Lifetime	Lifetime	Lifetime	Lifetime
Moisture Warranty Duration	Lifetime	Lifetime	Lifetime	10 Years	5 Years	5 Years
Flooring Types Under Moisture Protection Warranty	Solid, Bamboo, Engineered	Solid, Bamboo, Engineered	Solid, Bamboo, Engineered	Engineered	Engineered	Engineered
Cured Physical Properties						
Concrete Moisture Vapor Limits	None, Dry to the Touch	≤ 15 lb or 85% RH	None, Dry to the Touch	≤ 12 lb or 82% RH	≤ 6 lb or 80% RH	≤ 6 lb or 80% RH
Contains Bostik's Blockade®	Yes	Yes	Yes	Yes	No	No
Sound Reduction Performance						
ASTM E2179 Increased Impact Insulation	21 dB	21 dB	--	--	--	--
ASTM E492-04 IIC - 6" Slab With 5/8" Gypsum Ceiling	70	69	--	--	--	--
ASTM E90-09 STC - 6" Slab With 5/8" Gypsum Ceiling	67	66	--	--	--	--
Application Properties						
Ease of Troweling	Excellent	Good	Excellent	Good	Moderate	Easy
Color	Beige w/ Black Specs	Brown w/ Black Specs	Beige	Tan	Brown	White
Density (lbs/gallon)	14.25	14.7	14.25	12.66	12.66	13.7
Chemical Properties						
Chemistry Type	AXIOS™ Tri-Linking™	Urethane	AXIOS™ Tri-Linking™	Urethane	Urethane	Urethane
VOC Compliant (calculated per SCAQMD Rule 116B)	Yes (0 g/L)	Yes (0 g/L)	Yes (0 g/L)	Yes (20 g/L)*	Yes (22 g/L)*	Yes (25 g/L)*
LEED® Point Contributions						
EQ 4.1: Low-Emitting Materials—Adhesives & Sealants	Yes	Yes	Yes	Yes	Yes	Yes
MR 4.2: Recycled Content	Yes, 1% by Weight	Yes, 1% by Weight	No	No	No	No

*Tested per EPA Method 24.

Surface Preparation Repair Patch Comparison

	Webcrete® 95	Webcrete® 98	UltraFinish™ Pro	WebPatch® D-9001
Substrates				
Concrete	Yes	Yes	Yes	Yes
Plywood	Yes	Yes	Yes	Yes
Application Properties				
Working Time	5-15 minutes	20-35 minutes	20 minutes	20-30 minutes
Final Set	25-35 minutes	55-65 minutes	15-30 minutes	25-35 minutes
Minimum Thickness	Skim Coat	Skim Coat	Skim Coat	Skim Coat
Maximum Thickness per Application	1/2"	1/2"	1/2"	1/2"
Chemical Properties				
Chemistry Type	Polymer Fortified Portland Cement Patch	Polymer Fortified Portland Cement Patch	Portland Cement Patch	Polymer Fortified Gypsum Patch

*Double layer plywood floors greater than or equal to 1-1/8" thick, lath is not required.

Quick Links:

bit.ly/BostikUSAYoutube

bit.ly/AxiosTechnology

bit.ly/DimensionGrout

bit.ly/GroutCalculator

bit.ly/BostikBinders

bit.ly/BostikMSDS



**Smart help:
1-800-726-7845**

Bostik, Inc.

11320 W. Watertown Plank Road

Wauwatosa, WI 53226

www.bostik.com/us

