



Pneumatic & Cordless Construction Range

World class knowledge & experience in construction



Since 1895, Bostitch has been designing and manufacturing tools and fasteners for a wide variety of applications and industries.

Over the years, we have become the leaders in developing innovative products that have set the standard for others to follow. For example, we launched the world's first coil nailer as far back as 1965.

With over 500 million fasteners made every day, Bostitch is one of the largest manufacturers of nailing & stapling tools and fasteners in the world.

We are dedicated to delivering the highest standards of products and support to the construction industry. To achieve this, we make sure that we listen to our customers' needs and design and manufacture the finest products for today's building materials and applications.

To make sure our tools match our reputation, we go to extremes to ensure that every tool bearing our name is more than capable of withstanding the challenge, so that it will provide years of safe, reliable and trouble free service.

Our team of over 100 highly trained and experienced engineers and testing staff design and test every tool with safety, reliability and durability in mind and no detail is overlooked.

Choosing the right tool for the job

The construction range now includes both **gas cordless** and **pneumatic tools**, but how do you decide which is right for you? Here are the main benefits to consider:

Pneumatic

KEY BENEFITS

- Rugged & dependable in hostile environments - tested down to -40°C
- Can be used in poorly ventilated areas
- Lower running costs
- Quick and easy to maintain and service

Gas Cordless

KEY BENEFITS

- Can be used anywhere
- No external power supply needed
- Quick and easy to get started
- Fast 1 hour battery recharging





Make sure you also consider where the tool will be used. If you work on-site and need portability, cordless may be a better choice. Pneumatic tools on the other hand are perfect for workshops and for where ventilation is a concern.

Wherever you are working, we have the tool to suit. If you need help making your selection, visit our website or give us a call on **0870 1 630 630** and a trained member of staff will be happy to help.

Fasteners

The nails and staples in this catalogue represent only a small part of our range.

Fasteners are available in a wide selection of finishes and formats suited to a vast range of construction applications, and also include various types of collation depending upon your requirements.

To view the complete range or for more information about choosing the most appropriate fastener for your needs, visit our website or contact Customer Services.







- FramingRoof trussesSub flooringStud work
- Panelling Architraves Skirting Flooring ...and more

From framing and studwork to finish and trim, the **Bostitch** tool and fastener range is designed to deliver, whatever the task.

Our advanced tool designs are the result of dedicated research with feedback from real users, making them firm favourites with tradesmen. Innovative features like fastener lockouts and selectable triggers give versatility, increased productivity and a professional finish - every time.

Our range includes both pneumatic and gas cordless models for ultimate choice and flexibility and also includes specialist tools for flooring installations, detailed woodworking and high-volume joist hanger installations.

For more help finding the ideal tool for your application, visit www.bostitch.co.uk.

Contents

212 2222122	Page
GAS CORDLESS GF9033-E	4
	4
Papertape Nails & Fuel Cells	
GFN1664K-E	5 6
GBT1850K-E	7
16 & 18 Gauge Nails	,
& Fuel Cells	8
C I del Cells	U
FIRST FIX	
F28WW-E	9
F21PL-E	10
F33PTSM-E / F33PT-E	11
MCN150-E Strapshot	12
N66C-2-E	13
SECOND FIX	
N62FNB-E	14
FN1664-E	15
SB-HC50FN	16
BT1855-E	17
BRADDER/STAPLER	
SB-2IN1	18
3D-2HV1	10
STAPLERS & PINNERS	
SX1838-E	19
21684B-E	20
TU-216-2330K-E	21
H30-6-E	22
PC8000 / T6-KIT	22
FLOORING	
MFN-201	23
MIIIFN / MIIIFS	24
	27
COMPRESSORS	25-28
COMBOS	29
ACCESSORIES	30-31

Gas Cordless Nailer

Framing Nailer GF9033-E

FEATURES



Over-moulded grip for comfort and control



Comes complete with 2 Ni-MH batteries for long lasting performance



Precision balanced design with in-line battery



Aluminium magazine for improved durability



Dial-A-Depth for adjusting the depth of drive quickly and easily





Paper-Tape & Wire-Weld Stick Nails:





APPLICATIONS

- Roof framing & trusses
- Decking & fencing
- Sub floors
- Joist hangers & beams
- Stud walling





High performance framing and construction

- The new GF9033-E cordless framing nailer from Bostitch is the first choice for portable nailing of heavy duty applications. Featuring an over-moulded grip and with an in-line battery for improved balance and comfort, the tool allows easy access to jobs on-site without the need for a compressor.
- Fully compatible with both Paper-Tape and Wire-Weld framing nails for ultimate flexibility.
- Nails and fuel cells are available in a wide variety of packs and finishes see overleaf for full listings and compatibility.
- Tool comes complete with carry case, 2 batteries & charger.

TOOL SPECIFICATION

Model	GF9033-
Weight	3.42 K
Trip	Sec
Noise L _{PA} / K _{PA}	94.5 dB(A) / 1.5 dE
Noise L _{wa} / K _{wa}	96.4 dB(A) / 1.5 dE
Vibration a,	3.4 m/s

Mag Capacity	60
Working Ambient Temperature	0-40°C
Charging Time	120 minutes
Charging Voltage	7.2V
Battery Type	Ni-MH 6V
Fuel Cell	FC80ML(HP)(B)

FASTENER RANGE









- Paper-Tape and Wire-Weld fasteners are available in a wide range of finishes from 50mm to 90mm length.
- Packs are available with or without fuel cells.
- Fuel cells can be purchased in twin or bulk packs (x12).

Product Code	Description	
FC80MLHP	2 x 80ml High Pressure Fuel Cells	FCBOML
FC80MLHPB	1 x box of 12 80ml High Pressure Fu	el Cells

For full fastener and fuel cell range and compatibility, see page 5.



Nails & Fuel Cells

Nail Finishes

Bright Nails


Economy and bright nails meet the Eurocode 5 requirements for applications in service class 1 (indoor). Specification – No coating

Galvanised (G12)

Meet the Eurocode 5 requirements for applications in service class 1 and 2 (indoor and covered outdoor). Specification – Zn / Al alloy approx 12µm

Fuel cell compatibility

Bostitch fuel cells are manufactured to the highest industry standards and meet all current health & safety regulations. They are also compatible with most major tool brands - please see the table below:

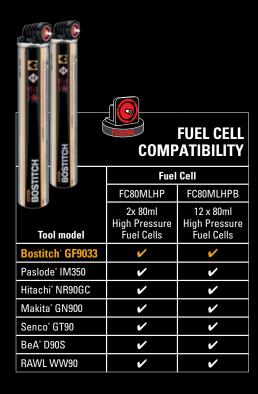

PAPER-TAPE NAIL & FUEL CELL PACKS



Compatibility

						ch G	le l	Ä	3 GN	GT.	908	≶
P	roduct Code	Length mm	Description	Nail Oty	Fuel Cells	Bostitch G	Paslode II	Hitachi NF	Makita GN	Senco GT	BeA D90S	RAWL WV
	PT28R50FC	50	Plain Ring Shank 2.8 x 50mm Nails & Fuel Cells	2200	2	~	•	•	•	•	•	•
	PT2863FC	63	Plain Smooth Shank 2.8 x 63mm Nails & Fuel Cells	2200	2	~	~	~	~	~	~	~
	PT28R63FC	63	Plain Ring Shank 2.8 x 63mm Nails & Fuel Cells	2200	2	~	~	~	~	~	~	~
	PT2870FC	70	Plain Smooth Shank 2.8 x 70mm Nails & Fuel Cells	2200	2	~	~	r	~	V	~	~
	PT28R75FC	75	Plain Ring Shank 2.8 x 75mm Nails & Fuel Cells	2200	2	~	~	~	~	~	~	~
	PT31R70FC	70	Plain Ring Shank 3.1 x 70mm Nails & Fuel Cells	2200	2	~	~	~	~	~	~	~
	PT3180FC	80	Plain Smooth Shank 3.1 x 80mm Nails & Fuel Cells	2200	2	~	~	~	~	~	~	~
	PT3190FC	90	Plain Smooth Shank 3.1 x 90mm Nails & Fuel Cells	2200	2	~	~	~	~	V	~	~
	PT28R50G12FC	50	Galvanised Ring Shank 2.8 x 50mm Nails & Fuel Cells	2200	2	~	~	~	~	~	~	~
	PT28R63G12FC	63	Galvanised Ring Shank 2.8 x 63mm Nails & Fuel Cells	2200	2	~	~	r	~	~	V	~
	PT28R70G12FC	70	Galvanised Ring Shank 2.8 x 70mm Nails & Fuel Cells	2200	2	~	~	~	~	~	~	~
	PT28R75G12FC	75	Galvanised Ring Shank 2.8 x 75mm Nails & Fuel Cells	2200	2	~	~	~	~	V	V	~
	PT3190G12FC	90	Galvanised Smooth Shank 3.1 x 90mm Nails & Fuel Cells	2200	2	~	~	~	~	~	~	~
	PT31R90G12FC	90	Galvanised Ring Shank 3.1 x 90mm Nails & Fuel Cells	2200	2	~	~	r	~	~	v	~
	FC80MLHP	-	80ml High Pressure Fuel Cell Twin Pack	-	2	~	~	~	~	~	~	~
	FC80MLHPB	-	80ml High Pressure Fuel Cell Multi Pack	-	12	~	~	~	~	~	V	r

PAPER-TAPE NAIL PACKS WITHOUT FUEL CELLS SEED SHOWN SH

				Bostitch	Paslode	Hitachi	Makita	9	00 \	7
Product Code	Length mm	Description	Nail Oty	Bos	Pas	Hita	Ma	Senco (BeA D9	₽
PT28R50	50	Plain Ring Shank 2.8 x 50mm Nails	2200	•	~	~	•	•	•	•
PT2863	63	Plain Smooth Shank 2.8 x 63mm Nails	2200	•	~	~	~	~	~	~
PT28R63	63	Plain Ring Shank 2.8 x 63mm Nails	2200	•	~	•	•	•	•	•
PT2870	70	Plain Smooth Shank 2.8 x 70mm Nails	2200	•	~	~	~	~	~	~
PT28R75	75	Plain Ring Shank 2.8 x 75mm Nails	2200	•	~	•	•	•	•	•
PT31R70	70	Plain Ring Shank 3.1 x 70mm Nails	2200	•	~	~	~	•	~	~
PT31R75	75	Plain Ring Shank 3.1 x 75mm Nails	2200	•	~	•	•	•	•	•
PT3180	80	Plain Smooth Shank 3.1 x 80mm Nails	2200	•	~	~	~	~	~	~
PT3190	90	Plain Smooth Shank 3.1 x 90mm Nails	2200	•	~	•	•	•	•	•
PT28R50G12	50	Galvanised Ring Shank 2.8 x 50mm Nails	2200	~	~	~	~	~	~	~
PT28R63G12	63	Galvanised Ring Shank 2.8 x 63mm Nails	2200	•	~	•	•	•	•	•
PT28R70G12	70	Galvanised Ring Shank 2.8 x 70mm Nails	2200	•	~	~	~	~	~	~
PT3190G12	90	Galvanised Smooth Shank 3.1 x 90mm Nails	2200	~	~	~	~	~	~	~
PT31R90G12	90	Galvanised Ring Shank 3.1 x 90mm Nails	2200	~	~	~	~	~	~	•

roduct Code	Length mm	Description	Nail Qty	Bostitch (Paslode I	Hitachi N	Makita G	Senco GT	BeA D90S	RAWI WA
WW2850	50	Plain Smooth Shank 2.8 x 50mm Nails	2200	~	~	~	~	~	~	,
WW28R50	50	Plain Ring Shank 2.8 x 50mm Nails	2200	r	~	~	V	V	r	V
WW2863	63	Plain Smooth Shank 2.8 x 63mm Nails	2200	~	~	~	~	~	~	,
WW28R63	63	Plain Ring Shank 2.8 x 63mm Nails	2200	r	~	~	V	V	r	v
WW28R75	75	Plain Ring Shank 2.8 x 75mm Nails	2200	~	~	~	~	v	~	٠
WW2890	90	Plain Smooth Shank 2.8 x 90mm Nails	2200	r	~	~	V	V	r	·
WW3190	90	Plain Ring Shank 3.1 x 90mm Nails	2200	~	~	~	~	~	~	
WW31R90	90	Plain Ring Shank 3.1 x 90mm Nails	2200	r	~	~	V	V	r	
WW28R50G12	50	Galvanised Ring Shank 2.8 x 50mm Nails	2200	~	~	~	~	~	~	•
WW28R63G12	63	Galvanised Ring Shank 2.8 x 63mm Nails	2200	~	~	~	~	v	~	
WW28R75G12	75	Galvanised Ring Shank 2.8 x 75mm Nails	2200	~	~	~	~	~	~	•
WW28R90G12	90	Galvanised Ring Shank 2.8 x 90mm Nails	2200	r	~	~	V	V	r	
WW3190G12	90	Galvanised Smooth Shank 3.1 x 90mm Nails	2200	~	~	~	~	V	~	
WW31R90G12	90	Galvanised Ring Shank 3.1 x 90mm Nails	2200	•	•	•	•	•	•	,

Gas Cordless Nailer

16 Gauge Straight Finish Nailer **GFN1664K-E**

FEATURES



Fully over-moulded grip for comfort and control



Comes complete with 2 Li-lon batteries for long lasting performance



Fast 1 hour recharge minimises downtime



Precision balanced design with in-line battery



Dial-A-Depth for adjusting the depth of drive quickly and easily

FASTENERS (SB16)



16 Gauge Finish Nails:

APPLICATIONS

- Tongue & groove
- **Panelling**
- Cabinet work
- Door & window sets
- Skirting & dado rails
- Staircases & rails



Fast, flexible finish nailing

- Designed with an in-line battery for improved ergonomics and balance, the GFN1664K-E finish nailer allows easy access to jobs on-site without the need for a compressor and is nearly 20% lighter than its leading competitor.
- Nails and fuel cells are available in a wide variety of packs and finishes see page 8 for more details.
- Tool comes complete with carry case, 2 batteries & charger.

TOOL SPECIFICATION

Model	GFN1664K-I
Weight	1.68kg
Trip	Sec
Noise (LPA 1sd)	96
Noise (LWA 1sd)	103
Vibration m/s2	2.

Mag Capacity	100
Working Ambient Temperature	0-40°C
Charging Time	60 minutes
Charging Voltage	3.6V
Battery Type	Li-ion 3.6V
Fuel Cell	FC30ML

KEY FASTENERS & FUEL CELLS (SB16)



- 16 Gauge finish nails are available in a wide range of finishes from 25mm to 65mm length.
- Packs are available with or without fuel cells.

• Fuel cells can be purchased in twin or bulk packs (x12).

Product Code	Description	
FC30MLHP	2 x 30ml High Pressure Fuel Cells	
FC30MLHPB	12 x 30ml High Pressure Fuel Cells	EC30MI

For full fastener and fuel cell range and compatibility, see page 8.



ACCESSORIES

Product Code	Description
9B12070R-EU	1 x 3.6v Li-ion Battery
9B12071R-U	Replacement 1Hr Fast Charger with in-car adaptor
SB-TC1	Gas Tool Cleaner
SB-20CL	Oil











Gas Cordless Nailer

18 Gauge Brad Nailer **GBT1850K-E**

FEATURES



Fully over-moulded grip for comfort and control



Comes complete with 2 Li-lon batteries for long lasting performance



Fast 1 hour recharge minimises downtime



Precision balanced design with in-line battery



Dial-A-Depth for adjusting the depth of drive quickly and easily

FASTENERS BT13



18 Gauge Brad Nails:



APPLICATIONS

- Beading & trim
- Panelling
- Tongue & groove
- Cabinet work





Fast, flexible finish nailing

- Designed with lightness and balance in mind, the GBT1850K-E cordless brad nailer is significantly lighter than its leading competitor. With an in-line battery for ergonomics and balance, the tool allows easy access to jobs on-site without the need for a compressor.
- Nails and fuel cells are available in a wide variety of packs and finishes see page 8 for more details.
- Tool comes complete with carry case, 2 batteries & charger.

TOOL SPECIFICATION

Model	GBT1850K-E
Weight	1.8kg
Trip	Sec
Noise (LPA 1sd)	96
Noise (LWA 1sd)	103
Vibration m/s2	2.1

Mag Capacity	100
Working Ambient Temperature	0-40°C
Charging Time	60 minutes
Charging Voltage	3.6V
Battery Type	Li-ion 3.6V
Fuel Cell	FC30ML

KEY FASTENERS & FUEL CELLS (BT13)



- BT13 Brad nails are available in a wide range of finishes from 15mm to 50mm length.
- Packs are available with or without fuel cells.
- Fuel cells can be purchased in twin or bulk packs (x12).

Product Code	Description	
FC30MLHP	2 x 30ml High Pressure Fuel Cells	
FC30MLHPB	12 x 30ml High Pressure Fuel Cells	FC30ML

For full fastener and fuel cell range and compatibility, see page 8.



ACCESSORIES

Product Code	Description
9B12070R-EU	1 x 3.6v Li-ion Battery
9B12071R-U	Replacement 1Hr Fast Charger with in-car adaptor
SB-TC1	Gas Tool Cleaner
SB-20CL	Oil









Nails & Fuel Cells


Nail Finishes

Bright Nails

Economy and bright nails meet the Eurocode 5 requirements for applications in service class 1 (indoor). Specification - No coating.

Fuel cell compatibility

Bostitch fuel cells are manufactured to the highest industry standards and meet all current health & safety regulations. They are also compatible with all major tool brands please see the table below:

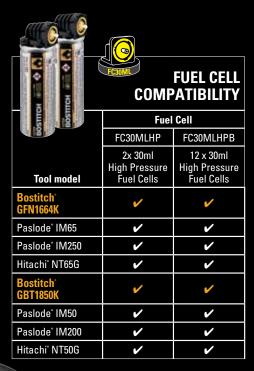



16 GAUGE FINISH NAIL & FUEL CELL PACKS

Galvanised 25mm 16 Gauge Straight Finish Nail & Fuel Cells

Galvanised 32mm 16 Gauge Straight Finish Nail & Fuel Cells

Galvanised 38mm 16 Gauge Straight Finish Nail & Fuel Cells

Galvanised 45mm 16 Gauge Straight Finish Nail & Fuel Cells

Galvanised 50mm 16 Gauge Straight Finish Nail & Fuel Cells

Galvanised 57mm 16 Gauge Straight Finish Nail & Fuel Cells

Galvanised 64mm 16 Gauge Straight Finish Nail & Fuel Cells

Length mm Description

25

32

38

45

50

57

64

Product Code

16G25FC

16G32FC

16G38FC

16G45FC

16G50FC

16G57FC

16G64FC

FC30MLHP

FC30MLHPB

Produc



2000

2000

2000

2000

2000

2000

2000

J	FC30ML	Bostitch GFN1	Paslode IM65	Paslode IM25	Paslode IM25	
ty	Fuel Cells	Bost	Pasl	Pasl	Pasl	
	2	•	•	•	•	
	2	•	•	•	•	
	2	•	•	•	•	
	2	•	•	•	•	
	2	•	•	•	•	
	2	•	•	•	•	
	2	•	•	•	•	

titch GFN1664K

slode IM65

16 GAUGE FINISH NAIL WITHOUT FUEL CELLS

30ml High Pressure Fuel Cell Twin Pack

30ml High Pressure Fuel Cell Multi Pack

I	Product Code	Length mm	Description	Nail Qty	Bos	Pas	Pas	Pas
	SB16-1.25E	32	Galvanised 32mm 16 Gauge Straight Finish Nail	1000	~	•	•	~
	SB16-1.50E	38	Galvanised 38mm 16 Gauge Straight Finish Nail	1000	~	•	•	~
	SB16-1.75E	45	Galvanised 45mm 16 Gauge Straight Finish Nail	1000	~	•	•	~
	SB16-2.0E	50	Galvanised 50mm 16 Gauge Straight Finish Nail	1000	~	V	V	~
	SB16-2.5E	65	Galvanised 65mm 16 Gauge Straight Finish Nail	1000	~	•	•	~
	SB16-1.25	32	Galvanised 32mm 16 Gauge Straight Finish Nail	2500	~	•	•	~
	SB16-1.50	38	Galvanised 38mm 16 Gauge Straight Finish Nail	2500	~	•	•	~
	SB16-1.75	45	Galvanised 45mm 16 Gauge Straight Finish Nail	2500	~	V	V	~
	SB16-2.00	50	Galvanised 50mm 16 Gauge Straight Finish Nail	2500	~	•	•	~
	SB16-2.25	57	Galvanised 57mm 16 Gauge Straight Finish Nail	2500	~	~	~	~
	SB16-2.50	65	Galvanised 65mm 16 Gauge Straight Finish Nail	2500	~	~	~	~

18 GAUGE BRAD NAIL & FUEL CELL PACKS



					Bostite	Paslode	Paslode	Hitachi
Product Code	Length mm	Description	Nail Oty	Fuel Cells	Bos	Pas	Pas	Ξŧ
18G15FC	15	Galvanised 15mm 18 Gauge Brad Nail & Fuel Cells	2000	2	~	~	•	•
18G20FC	20	Galvanised 20mm 18 Gauge Brad Nail & Fuel Cells	2000	2	•	~	~	~
18G25FC	25	Galvanised 25mm 18 Gauge Brad Nail & Fuel Cells	2000	2	•	•	•	~
18G32FC	32	Galvanised 32mm 18 Gauge Brad Nail & Fuel Cells	2000	2	•	~	~	~
18G38FC	38	Galvanised 38mm 18 Gauge Brad Nail & Fuel Cells	2000	2	•	~	•	~
18G45FC	45	Galvanised 45mm 18 Gauge Brad Nail & Fuel Cells	2000	2	•	~	~	~
18G50FC	50	Galvanised 50mm 18 Gauge Brad Nail & Fuel Cells	2000	2	•	~	•	~
FC30MLHP	-	30ml High Pressure Fuel Cell Twin Pack	-	2	•	•	~	V
FC30MLHPB	-	30ml High Pressure Fuel Cell Multi Pack	-	12	~	~	V	~

18 GAUGE BRAD NAIL WITHOUT FUEL CELLS

L	Product Code	Length mm	Description	Nail Qty	ĕ	E.	ď	王
	BT1300B-1M	15	Galvanised 15mm 18 Gauge Brown Brad Nail	1000	~	•	•	•
	BT1303B-1M	19	Galvanised 19mm 18 Gauge Brown Brad Nail	1000	~	~	•	•
	BT1309B-1M	25	Galvanised 25mm 18 Gauge Brown Brad Nail	1000	~	~	•	•
	BT1314B-1M	30	Galvanised 30mm 18 Gauge Brown Brad Nail	1000	~	~	V	~
	BT1332B-1M	32	Galvanised 32mm 18 Gauge Brown Brad Nail	1000	~	~	~	~
	BT1335B-1M	35	Galvanised 35mm 18 Gauge Brown Brad Nail	1000	~	~	~	~
	BT1340B-1M	40	Galvanised 40mm 18 Gauge Brown Brad Nail	1000	~	~	•	•
	BT1345B-1M	45	Galvanised 45mm 18 Gauge Brown Brad Nail	1000	~	~	V	~
	BT1350B-1M	50	Galvanised 50mm 18 Gauge Brown Brad Nail	1000	~	~	~	~
	BULK BRADS							
	BT1310GA	10	Minibrads 10 GALVA 5m	5000	~	~	~	~
	BT1315GA	15	Minibrads 15 GALVA 5m	5000	~	~	V	~
	BT1320GA	20	Minibrads 20 GALVA 5m	5000	~	~	•	•
	BT1325GA	25	Minibrads 25 GALVA 5m	5000	~	~	•	•
	BT1330GA	30	Minibrads 30 GALVA 5m	5000	~	~	•	•
	BT1335GA	35	Minibrads 35 GALVA 5m	5000	~	~	V	V
	BT1338GA	38	Minibrads 38 GALVA 5m	5000	~	~	~	~
	BT1340GA	40	Minibrads 40 GALVA 5m	5000	~	~	•	•
	BT1345GA	45	Minibrads 45-GALVA 5m	5000	~	~	~	~
	BT1350GA	50	Minibrads 50 GALVA 5m	5000	~	~	V	V

FIRST FIX NAILER

Wire-Weld Framing Nailer F28WW-E

FEATURES



CE compliant sequential trip for safer working on-site



Adjustable exhaust to direct air away from workpiece and operator



Push button depth control for quick and easy adjustments to the depth of drive



Magnesium housing for lightness and durability




Comes complete with carry case

FASTENERS WW



Wire-Weld Stick Nails:





APPLICATIONS

- Roof framing & trusses
- Decking & flooring
- Sub floors
- Joist hangers & beams
- Stud walling





The robust workhorse...

- Using wire collated nails, the F28WW-E is ideal for heavy-duty construction framing and flooring applications. The wire collated nails are available in either a smooth or ring shank, and the range also includes both electro galvanised and unplated nails.
- Wire-weld zinc electro coated nails are plated to 8 microns and give protection from the elements. Most importantly they also represent outstanding value for money.

TOOL SPECIFICATION

Model	F28WW-E
Weight	3.5kg
Trip Type	Seq
Magazine Capacity	75-90
Vibration (m/s2)	3.61

Noise (dB)	LPA 1S, d	96.3
	LWA 1S, d	100.1
	LPA 1S, 1m	87.1
Operating Pressure	(PSI)	70-120
	(BAR)	4.8-8.3

FASTENER RANGE





LENGTH MM	PIN	DESCRIPTION	PACK TYPE	PACK QTY	
50	S28050	STICK NAIL SMOOTH	BOX	2000	
50	S280R50	STICK NAIL RING	BOX	2000	
50	S28050G8	STICK NAIL SMOOTH GALV	BOX	2000	
65	S28065	STICK NAIL SMOOTH	BOX	2000	≥
65	S280R65	STICK NAIL RING	BOX	2000	≥
65	S28065G8	STICK NAIL SMOOTH GALV	BOX	2000	N88W
65	S280R65G8	STICK NAIL RING GALV	BOX	2000	
75	S28075	STICK NAIL SMOOTH	BOX	2000	N80SB,
75	S280R75	STICK NAIL RING	BOX	2000	ž
75	S280R75G8	STICK NAIL RING GALV	BOX	2000	*N79,
90	S31090	STICK NAIL SMOOTH	BOX	2000	*
90	S310R90	STICK NAIL RING	BOX	2000	
90	S31090G8	STICK NAIL SMOOTH GALV	BOX	2000	
90	S310R90G8	STICK NAIL RING GALV	BOX	2000	

^{*}ALSO FITS TOOL MODEL

ACCESSORIES

Code Product Otv 121072 No-Mar Tip 1 x Pack of 1



FIRST FIX NAILER

Full Roundhead Nailer F21PL-E

FEATURES



CE compliant sequential trip for safer working on-site



Adjustable exhaust to direct air away from workpiece and operator



Push button depth control for quick and easy adjustments to the depth of drive



Simple switch-over from standard nailing to MCN mode for connecting brackets



Comes complete with carry case

FASTENERS PL



MCN Nails:



Full Roundhead Framing Nails:



APPLICATIONS

- Roof framing & trusses
- Sub floors
- Joist hangers & beams
- Decking & flooring







Dual purpose first fix nailer...

- This dual purpose framing nailer has improved features and even more power.
- Converts in seconds from a standard framing nailer to a positive placement tool. Ideal for roof trusses, joist hangers and metal connecting plates.
- Drives plastic collated roundhead nails, with bright and G13 galvanisation to 50 microns for a long life. Metal connector nails are galvanised to 15 microns.

TOOL SPECIFICATION

Model	F21PL-E
Weight	3.67kg
Trip Type	Seq
Magazine Capacity	25-75
Vibration (m/s2)	3.31

Noise (dB)	LPA 1S, d	96.7
	LWA 1S, d	100.1
	LPA 1S, 1m	87.1
Operating Pressure	(PSI)	70-120
	(BAR)	4.8-8.3

FASTENER RANGE



x Pack of 1



LENGTH MM	PIN	DESCRIPTION	PACK TYPE	PACK QTY	
38	MCN400R38GAL	ANCHOR STICK 4.00-38 RING GAL	BOX	2000	
40	MCN400R40GAL	ANCHOR STICK 4.00-40 RING GAL	BOX	2000	اجا
45	MCN400R45GAL	ANCHOR STICK 4.00-45 RING GAL	BOX	2000	≅
50	MCN400R50GAL	ANCHOR STICK 4.00-50 RING GAL	BOX	2000	*N88RH-2MCN
55	MCN400R55GAL	ANCHOR STICK 4.00-55 RING GAL	BOX	2000	8
60	MCN400R60GAL	ANCHOR STICK 4.00-60 RING GAL	BOX	2000	*
65	MCN400R65GAL	ANCHOR STICK 4.00-65 RING GAL	BOX	2000	
FULL ROUND	IEAD NAILS ONLY FOR U	SE WITH FRAMING TIP			
45	RH25R45G50	2.5MM RING GALV	BOX	2000	
50	RH25R50G50	2.5MM RING GALV	BOX	2000	
50	RH28R50G50	2.8MM RING GALV	BOX	2000	공
55	RH25R55G50	2.5MM RING GALV	BOX	2000	N88RH-2MCN
60	RH2860G50	2.8MM SMOOTH GALV	BOX	2000	差
65	RH28R65G50	2.8MM RING GALV	BOX	2000	8
70	RH28R70G50	2.8MM RING GALV	BOX	2000	
75	RH28R75G50	2.8MM RING GALV	BOX	2000	*N79RH,
80	RH31R80G50	3.1MM RING GALV	BOX	2000	*
90	RH3190G50	3.1MM SMOOTH GALV	BOX	2000	
90	RH31R90G50	3.1MM RING GALV	BOX	2000	\Box

*ALSO FITS TOOL MODEL

ACCESSORIES

Code	Product	
121072	No-Mar Tip	1



FIRST FIX NAILER

Paper-Tape & Wire-Weld Stick Nailer F33PT-E / F33PTSM-E

FEATURES



CE compliant sequential trip for safer working on-site



Adjustable exhaust to direct air away from workpiece and operator



Push button depth control for quick and easy adjustments to the depth of drive




Compact magazine, for easy access between joists



Comes complete with carry case







APPLICATIONS

- Roof framing & trusses
- Decking & flooring
- Sub floors
- Joist hangers & beams
- Stud walling





Ideal for framing and stud walling

- The first Bostitch nailer to drive both Paper-Tape and Wire-Weld nails has been specifically designed for ease of use in tight situations.
- The powerful engine drives up to 90mm nails, whilst the lightweight magnesium body makes it comfortable to use all day long.

TOOL SPECIFICATION

Model	F33PT-E / F33PTSM-E	Noise (dB)
Weight	3.6kg / 3.5kg	
Trip Type	Seq / Seq	
Magazine Capacity	75 / 50	Operating P
Vibration (m/s2)	3.62 / 3.026	

LPA 1S, d	83.9 / 90.8
LWA 1S, d	90.7 / 99.7
LPA 1S, 1m	77.7 / 86.7
(PSI)	70-120 / 70-120
(BAR)	4.8-8.3 / 4.8-8.3
	LWA 1S, d LPA 1S, 1m (PSI)









LENGTH MM	PIN	DESCRIPTION	PACK TYPE	PACK QTY
PAPER-TAPE				
50	PT28R50	PLAIN RING SHANK 2.8 X 50MM NAILS	BOX	2200
63	PT2863	PLAIN SMOOTH SHANK 2.8 X 63MM NAILS	BOX	2200
63	PT28R63	PLAIN RING SHANK 2.8 X 63MM NAILS	BOX	2200
70	PT2870	PLAIN SMOOTH SHANK 2.8 X 70MM NAILS	BOX	2200
75	PT28R75	PLAIN RING SHANK 2.8 X 75MM NAILS	BOX	2200
70	PT31R70	PLAIN RING SHANK 3.1 X 70MM NAILS	BOX	2200
75	PT31R75	PLAIN RING SHANK 3.1 X 75MM NAILS	BOX	2200
80	PT3180	PLAIN SMOOTH SHANK 3.1 X 80MM NAILS	BOX	2200
90	PT3190	PLAIN SMOOTH SHANK 3.1 X 90MM NAILS	BOX	2200
50	PT28R50G12	GALVANISED RING SHANK 2.8 X 50MM NAILS	BOX	2200
63	PT28R63G12	GALVANISED RING SHANK 2.8 X 63MM NAILS	BOX	2200
70	PT28R70G12	GALVANISED RING SHANK 2.8 X 70MM NAILS	BOX	2200
90	PT3190G12	GALVANISED SMOOTH SHANK 3.1 X 90MM NAILS	BOX	2200
90	PT31R90G12	GALVANISED RING SHANK 3.1 X 90MM NAILS	BOX	2200
WIRE-WELD				
50	WW2850	PLAIN SMOOTH SHANK 2.8 X 50MM NAILS	BOX	2200
50	WW28R50	PLAIN RING SHANK 2.8 X 50MM NAILS	BOX	2200
63	WW2863	PLAIN SMOOTH SHANK 2.8 X 63MM NAILS	BOX	2200
63	WW28R63	PLAIN RING SHANK 2.8 X 63MM NAILS	BOX	2200
75	WW28R75	PLAIN RING SHANK 2.8 X 75MM NAILS	BOX	2200
90	WW2890	PLAIN SMOOTH SHANK 2.8 X 90MM NAILS	BOX	2200
90	WW3190	PLAIN RING SHANK 3.1 X 90MM NAILS	BOX	2200
90	WW31R90	PLAIN RING SHANK 3.1 X 90MM NAILS	BOX	2200
50	WW28R50G12	GALVANISED RING SHANK 2.8 X 50MM NAILS	BOX	2200
63	WW28R63G12	GALVANISED RING SHANK 2.8 X 63MM NAILS	BOX	2200
75	WW28R75G12	GALVANISED RING SHANK 2.8 X 75MM NAILS	BOX	2200
90	WW28R90G12	GALVANISED RING SHANK 2.8 X 90MM NAILS	BOX	2200
90	WW3190G12	GALVANISED SMOOTH SHANK 3.1 X 90MM NAILS	BOX	2200
90	WW31R90G12	GALVANISED RING SHANK 3.1 X 90MM NAILS	BOX	2200

Positive Placement Nailer



MCN150-E

FEATURES



Exposed nail tip for easy nail placement and accurate fitting of joist hangers



Adjustable exhaust to direct air away from workpiece and operator



Nail lockout to prevent dry firing



Compact magazine, for easy access between joists



Comes complete with carry case



Metal Connecting Nails:



APPLICATIONS

- Joist hangers
- Strapping
- Timber support brackets





Exposed nail tip for easy placement



STRAPSthe specialist metal connector nailer

- The award winning StrapShot™ MCN150-E is the most advanced pneumatic positive placement nailer on the market. The compact $StrapShot^{TM}$ is designed to work where other nailers can't, allowing access to even the tightest corners, and the innovative exposed-tip design positions the fastener directly into the connector plate's holes for faster and more accurate positioning than ever before.
- As well as being compact, the tool is also incredibly lightweight and simple to use and maintain.

TOOL SPECIFICATION

Model	MCN150-E	N
Weight	1.95kg	
Trip Type	Seq	
Magazine Capacity	29	(
Vibration (m/s2)	5.11	

Noise (dB)	LPA 1S, d	92.7
	LWA 1S, d	101.4
	LPA 1S, 1m	88.4
Operating Pressure	(PSI)	70-120
	(BAR)	4.8-8.4



LENGTH MM	PIN	DESCRIPTION	PACK TYPE	PACK QTY
38	PT-MC375SP38G1M	SPIRAL TWIST NAIL GALV	BOX	1000
38	PT-MC375SP38G	SPIRAL TWIST NAIL GALV	BOX	4000

Coil Nailer

Coil Nailer N66C-2-E

FEATURES



Dial-A-Depth for adjusting the depth of drive quickly and easily



Adjustable exhaust to direct air away from workpiece and operator



Lightweight yet strong housing



Includes utility hook for convenient storage on site



Comes complete with carry case

FASTENERS



Wire Weld Collated Coil Nails:



Plastic Collated Coil Nails:



APPLICATIONS

- Sidings
- Roofing
- Sheet flooring
- Tile battens





Flexible & durable coil nailing...

- The high capacity N66C-2-E coil nailer is designed with a tough, resilient housing but uses light weight materials, making this tool ideal for prolonged use.
- The fastener depth adjustment gives ultimate control, and the tool is also compatible with both plastic and wire collated nails for maximum flexibility.

TOOL SPECIFICATION

Model	N66C-2-E
Weight	1.99kg
Trip Type	Seq
Magazine Capacity	225
Vibration (m/s2)	3.26

Noise (dB)	LPA 1S, d	91.5
	LWA 1S, d	97.3
	LPA 1S, 1m	84.3
Operating Pressure	(PSI)	70-120
	(BAR)	4.8-8.3



LENGTH MM	PIN	DESCRIPTION	PACK TYPE	PACK QTY
35	N203R35Q	COIL NAIL 2.03-35 RING 21M	BOX	21000
40	N203R40Q	COIL NAIL 2.03-40 RING 17.5M	BOX	17500
45	N203R45Q	COIL NAIL 2.03-45 RING 17.5M	BOX	17500
50	N203R50Q	COIL NAIL 2.30-50 RING 13.2M	BOX	13200
55	N230R55Q	COIL NAIL 2.30-55 RING 9.9M	BOX	9900
35	N203R35G8Q	COIL NAIL 2.03-35 RING GAL8 21M	BOX	21000
40	N203R40G8Q	COIL NAIL 2.03-40 RING GAL8 17.5M	BOX	17500
45	N203R45G8Q	COIL NAIL 2.03-45 RING GAL8 17.5M	BOX	17500
50	N203R50G8Q	COIL NAIL 2.30-50 RING GAL8 13.2M	BOX	13200
55	N230R55G8Q	COIL NAIL 2.30-55 RING GAL8 9.9M	BOX	9900

15 Gauge Angled Finish Nailer N62FNB-E

FEATURES



Oil free engine ensures low maintenance and eliminates oil stains on the workpiece



LED light allows for accurate placement even when working in enclosed or poorly lit areas



Integrated air blower allows users to quickly and easily clear away debris



Selectable trigger system switches between sequential and contact trip instantly



Rear exhaust directs air away from work area

FASTENERS FN15



15 Gauge Angled Finish Nails:





APPLICATIONS

- Shop & bar-fitting
 - Light framing
- Architrave
- Staircases
- Boxing





Designed with the user in mind...

- With its selectable trigger system, LED light and integrated air blower, the N62FNB-E finish nailer makes light work of even the most demanding of applications.
- Driving popular 15 gauge angled finish nails from 32-64mm, the oil-free tool design requires only minimal maintenance and eliminates the risk of oil stains on the workpiece.
- Comes complete with carry case.

TOOL SPECIFICATION

Model	N62FNB-E
Weight	1.8kg
Trip Type	Seq / Con
Magazine Capacity	129
Vibration (m/s2)	3.27

Noise (dB)	LPA 1S, d	72.0
	LWA 1S, d	80.7
	LPA 1S, 1m	67.7
Operating Pressure	(PSI)	71-122
	(BAR)	4.9-8.4

FASTENER RANGE



LENGTH MM	PIN	DESCRIPTION	PACK TYPE	PACK QTY	
32	FN1520	15 GAUGE ANGLED FINISH NAIL GALV	BOX	3655	
38	FN1524	15 GAUGE ANGLED FINISH NAIL GALV	BOX	3655	N59FNK
44	FN1528	15 GAUGE ANGLED FINISH NAIL GALV	BOX	3655	豎
50	FN1532	15 GAUGE ANGLED FINISH NAIL GALV	BOX	3655	N60FN,
57	FN1536	15 GAUGE ANGLED FINISH NAIL GALV	BOX	3655	9
64	FN1540	15 GAUGE ANGLED FINISH NAIL GALV	BOX	3655	Ĺ
38	FN1524SS	15 GAUGE ANGLED FINISH NAIL (SS)	BOX	3655	
50	FN1532SS	15 GAUGE ANGLED FINISH NAIL (SS)	BOX	3655	
64	FN1540SS	15 GAUGE ANGLED FINISH NAIL (SS)	BOX	3655	

*ALSO FITS TOOL MODEL

Finish Nailer FN1664-E

FEATURES



Selectable trigger system switches between sequential and contact trip instantly



Fastener lockout system prevents dry firing &



Oil free engine ensures low maintenance and eliminates oil stains on the workpiece



Dial-A-Depth for adjusting the depth of drive quickly and easily



Comes complete with carry case

FASTENERS (SB16)



16 Gauge Finish Nails:



APPLICATIONS

- Tongue & groove
- **Panelling**
- Cabinet work
- Door & window sets
- Skirting & dado rails
- Staircases & rails





Advanced features, powerful performance...

- The 16 gauge FN1664-E finish nailer represents great value for money with a design incorporating class leading features.
- The FN1664-E has a lightweight magnesium body, no-nail lockout, rear exhaust and selectable trigger without compromising the high durability and build quality that has made Bostitch the market leader in performance pneumatic tools for construction.
- The tool comes complete with 1000 fasteners and heavy duty carry case.

TOOL SPECIFICATION

Model	FN1664-E
Weight	1.7kg
Trip Type	Seq / Con
Magazine Capacity	110
Vibration (m/s2)	3.1

Noise (dB)	LPA 1S, d	85.1
	LWA 1S, d	89.2
	LPA 1S, 1m	76.2
Operating Pressure	(PSI)	70-120
	(BAR)	4.8-8.3

FASTENER RANGE



LENGTH MM	PIN	DESCRIPTION	PACK TYPE	PACK QTY	
32	SB16-1.25E	16 GAUGE STRAIGHT FINISH NAIL GALV	CLAM	1000	
38	SB16-1.50E	16 GAUGE STRAIGHT FINISH NAIL GALV	CLAM	1000	
45	SB16-1.75E	16 GAUGE STRAIGHT FINISH NAIL GALV	CLAM	1000	
50	SB16-2.0E	16 GAUGE STRAIGHT FINISH NAIL GALV	CLAM	1000	
57	SB16-2.25E	16 GAUGE STRAIGHT FINISH NAIL GALV	CLAM	1000	щ
64	SB16-2.5E	16 GAUGE STRAIGHT FINISH NAIL GALV	CLAM	1000	-7
BULK FINISH N	AILS				*FN16250K-2-E
25	SB16-1.00	16 GAUGE STRAIGHT FINISH NAIL GALV	BOX	5000	29
32	SB16-1.25	16 GAUGE STRAIGHT FINISH NAIL GALV	BOX	2500	È
38	SB16-1.50	16 GAUGE STRAIGHT FINISH NAIL GALV	BOX	2500	*
44	SB16-1.75	16 GAUGE STRAIGHT FINISH NAIL GALV	BOX	2500	
50	SB16-2.00	16 GAUGE STRAIGHT FINISH NAIL GALV	BOX	2500	
56	SB16-2.25	16 GAUGE STRAIGHT FINISH NAIL GALV	BOX	2500	
64	SB16-2.50	16 GAUGE STRAIGHT FINISH NAIL GALV	BOX	2500	

^{*}ALSO FITS TOOL MODEL

ACCESSORIES

Code	Product	Qty
107545	No-Mar Tip	1 x Pack of 1



Concrete Block Finish Nailer SB-HC50FN

FEATURES



No-mar tip to prevent wood bruising



Lightweight yet strong aluminium housing



CE compliant sequential trip for safer working on-site



Adjustable exhaust to direct air away from workpiece and operator



Comes complete with carry case

FASTENERS HCFN



Hardened Finish Nails:



APPLICATIONS

- Skirting
- Door lining
- Gripper rods
- Trim & panelling





Drives nails into concrete block...

- Designed to drive tungsten hardened nails into almost all forms of concrete block, the SB-HC50FN can fix door liners into block and gripper rods into floor screeds.
- It is not recommended that this tool is used to drive nails into any form of strengthened concrete or engineered and glazed bricks.

TOOL SPECIFICATION

Model	SB-HC50FN	
Weight	1.98kg	
Trip Type	Seq	
Magazine Capacity	100	
Vibration (m/s2)	2.13	

Noise (dB)	LPA 1S, d	96.8
	LWA 1S, d	100.3
	LPA 1S, 1m	87.3
Operating Pressure	(PSI)	72-100
	(BAR)	5-7



LENGTH MM	PIN	DESCRIPTION	PACK TYPE	PACK QTY
15	HCFN-15	HIGH CARBON ZINC DICHROMATE NAIL	BOX	1500
20	HCFN-20	HIGH CARBON ZINC DICHROMATE NAIL	BOX	1500
25	HCFN-25	HIGH CARBON ZINC DICHROMATE NAIL	BOX	1500
30	HCFN-30	HIGH CARBON ZINC DICHROMATE NAIL	BOX	1500
35	HCFN-35	HIGH CARBON ZINC DICHROMATE NAIL	BOX	1500
40	HCFN-40	HIGH CARBON ZINC DICHROMATE NAIL	BOX	1500
50	HCFN-50	HIGH CARBON ZINC DICHROMATE NAIL	BOX	1500

Brad Nailer BT1855-E

FEATURES



Selectable trigger system switches between sequential and contact trip instantly



Fastener lockout system prevents dry firing &



Oil free engine ensures low maintenance and eliminates oil stains on the workpiece



Dial-A-Depth for adjusting the depth of drive quickly and easily



Comes complete with carry case

FASTENERS BT13



18 Gauge Brad Nails:



APPLICATIONS

- Beading & trim
- Panelling
- Tongue & groove
- Cabinet work





High performance brad nailing...

- The BT1855-E tool is the most feature-packed brad nailer on the market and comes complete with a host of features to meet the demands of today's construction users.
- This tool includes everything from a selectable trigger system and oil free engine to a moulded handle design to give maximum performance with improved durability and tool balance, all in a compact body design.
- Comes complete with 1000 fasteners and heavy duty carry case.

TOOL SPECIFICATION

Model	BT1855-E
Weight	1.23kg
Trip Type	Seq / Con
Magazine Capacity	100
Vibration (m/s2)	2.8

Noise (dB)	LPA 1S, d	83.2
	LWA 1S, d	88.5
	LPA 1S, 1m	75.5
Operating Pressure	(PSI)	70-120
	(BAR)	4.8-8.3

FASTENER RANGE



LENGTH	PIN	DESCRIPTION	PACK	PACK	I
MM	FIN	DESCRIPTION	TYPE	QTY	<u> </u>
15	BT1300B-1M	GALVANISED BRAD BROWN	CLAM	1000	
19	BT1303B-1M	GALVANISED BRAD BROWN	CLAM	1000	
25	BT1309B-1M	GALVANISED BRAD BROWN	CLAM	1000	z
30	BT1314B-1M	GALVANISED BRAD BROWN	CLAM	1000	삃
32	BT1332B-1M	GALVANISED BRAD BROWN	CLAM	1000	뺼
35	BT1335B-1M	GALVANISED BRAD BROWN	CLAM	1000	SB-1850BN
40	BT1340B-1M	GALVANISED BRAD BROWN	CLAM	1000	*
45	BT1345B-1M	GALVANISED BRAD BROWN	CLAM	1000	
50	BT1350B-1M	GALVANISED BRAD BROWN	CLAM	1000	
BULK BRADS					
15	BT1315GA	GALVANISED BRAD	BOX	5000	
20	BT1320GA	GALVANISED BRAD	BOX	5000	
25	BT1325GA	GALVANISED BRAD	BOX	5000	z
30	BT1330GA	GALVANISED BRAD	BOX	5000	SB-1850BN
35	BT1335GA	GALVANISED BRAD	BOX	5000	麗
38	BT1338GA	GALVANISED BRAD	BOX	5000	افرا
40	BT1340GA	GALVANISED BRAD	BOX	5000	*
45	BT1345GA	GALVANISED BRAD	BOX	5000	
50	BT1350GA	GALVANISED BRAD	BOX	5000	\perp

*ALSO FITS TOOL MODEL

2 IN 1 T00L

Stapler & Brad Nailer SB-2IN1

FEATURES



Dial-A-Depth for adjusting the depth of drive quickly and easily



CE compliant sequential trip for safer working on-site





Adjustable exhaust to direct air away from workpiece and operator



Easy View Magazine



Comes complete with carry case

FASTENERS BT13













APPLICATIONS

- Wood panelling
- Cabinet construction
- Fencing
- Wire mesh fitting
- Trellis work
- Furniture & trim





The perfect combination tool...

- The SB-2IN1 is one of the most adaptable tools you can buy. This versatile bradder and stapler is perfect for the home enthusiast or light user who needs both a stapling and nailing tool.
- Drives brads from 15 to 40mm and staples from 15 to 35mm without the need to change the tool in any way - the ultimate in flexibility.
- Complete with 1000 brads and 800 staples.

TOOL SPECIFICATION

Model	SB-2IN1
Weight	1.1kg
Trip Type	Seq
Magazine Capacity	100
Vibration (m/s2)	<2.5

Noise (dB)	LPA 1S, d	86.6
	LWA 1S, d	93.3
	LPA 1S, 1m	80.3
Operating Pressure	(PSI)	75-100
	(BAR)	5-7

FASTENER RANGE





LENGTH MM	PIN	DESCRIPTION	PACK TYPE	PACK QTY
BT BRADS				
15	BT1300B-1M	GALVANISED BRAD BROWN	CLAM	1000
19	BT1303B-1M	GALVANISED BRAD BROWN	CLAM	1000
25	BT1309B-1M	GALVANISED BRAD BROWN	CLAM	1000
30	BT1314B-1M	GALVANISED BRAD BROWN	CLAM	1000
32	BT1332B-1M	GALVANISED BRAD BROWN	CLAM	1000
35	BT1335B-1M	GALVANISED BRAD BROWN	CLAM	1000
40	BT1340B-1M	GALVANISED BRAD BROWN	CLAM	1000
SX STAPLES				
15	SX503515CS	GALVANISED SX STAPLE	CLAM	800
20	SX503520CS	GALVANISED SX STAPLE	CLAM	800
25	SX503525CS	GALVANISED SX STAPLE	CLAM	800
30	SX503530CS	GALVANISED SX STAPLE	CLAM	800
35	SX503535CS	GALVANISED SX STAPLE	CLAM	800

Also fully compatible with BT13 brads listed on page 17 and SX staples listed on page 19.

ACCESSORIES

Code	Product	Qty
JV5102E1	No-Mar Tip	1 x Pack of 1



STAPLER

Stapler SX1838-E

FEATURES



Selectable trigger system switches between sequential and contact trip instantly



Fastener lockout system prevents dry firing & reworking



Oil free engine ensures low maintenance and eliminates oil stains on the workpiece



Dial-A-Depth for adjusting the depth of drive quickly and easily



Comes complete with carry case

FASTENERS



SX Staples:



APPLICATIONS

- Fence & trellis assembly
- Animal runs & enclosures
- Boat building
- Furniture & case back assembly





Effortless stapling for construction...

- With user-friendly features such as Dial-A-Depth for quick countersinking adjustments and a selectable trigger system, the SX1838-E stapler will make light work of construction stapling applications.
- This rugged tool drives staples from 12 to 38mm length and offers extreme reliability and durability, yet with low maintenance due to the oil free design.
- Comes complete with 1000 fasteners and carry case.

TOOL SPECIFICATION

Model	SX1838-E
Weight	1.36kg
Trip Type	Seq / Con
Magazine Capacity	100
Vibration (m/s2)	3.1

Noise (dB)	LPA 1S, d	81.3
	LWA 1S, d	87.5
	LPA 1S, 1m	75.5
Operating Pressure	(PSI)	70-120
	(BAR)	4.8-8.3



LENGTH MM	PIN	DESCRIPTION	PACK TYPE	PACK QTY	
15	SX503515CS	SX STAPLE GALV	CLAM	800	
20	SX503520CS	SX STAPLE GALV	CLAM	800	_
25	SX503525CS	SX STAPLE GALV	CLAM	800	50K-1
30	SX503530CS	SX STAPLE GALV	CLAM	800	12
35	SX503535CS	SX STAPLE GALV	CLAM	800	SX
BULK STAPLES					×
15	SX503515Z	SX STAPLE GALV	BOX	5000	50SX
19	SX503519Z	SX STAPLE GALV	BOX	5000	ᆵ
22	SX503522Z	SX STAPLE GALV	BOX	5000	*SB-1
25	SX503525Z	SX STAPLE GALV	BOX	5000	1
30	SX503530Z	SX STAPLE GALV	вох	3000	\Box

STAPLER

Wide Crown Stapler 21684B-E

FEATURES



Variable power control for precise adjustments in the depth of drive



Secondary safety trigger allows staples to be driven without touching the wood



Rear exhaust directs air away from work area and the user




Small, compact design for access into small or restricted areas



Comes complete with carry case

FASTENERS 84 84 Series Staples:



APPLICATIONS

- Vapour barriers
- Sheeting
- Shingle roofing
- Furniture
- Carpet & underlay





The tool for production applications...

- The 21684B-E is the ideal tool where access is an issue, but its compact design hasn't prevented it being built with the heavy user in mind.
- Featuring a magazine capacity of 125 staples yet weighing only 0.8kg, this stapler has an adjustable depth control and rear exhaust to ensure perfect results.

TOOL SPECIFICATION

Model	21684B-E
Weight	0.8kg
Trip Type	Trig
Magazine Capacity	125
Vibration (m/s2)	<2.5

Noise (dB)	LPA 1S, d	64.4
	LWA 1S, d	74.0
	LPA 1S, 1m	61.0
Operating Pressure	(PSI)	80-120
	(BAR)	4.9-8.4



LENGTH MM	PIN	DESCRIPTION	PACK TYPE	PACK QTY	
4	1840400Z	84 SERIES STAPLE STANDARD	BOX	10000	
6	1840600Z	84 SERIES STAPLE STANDARD	BOX	10000	1
8	1840800Z	84 SERIES STAPLE STANDARD	BOX	10000	8
10	1841000Z	84 SERIES STAPLE STANDARD	BOX	10000	7
12	1841200Z	84 SERIES STAPLE STANDARD	BOX	10000	₽
14	1841400Z	84 SERIES STAPLE STANDARD	BOX	10000	ш
1-1	10414002	04 OLINEO OTAL LE OTANDAND	ВОХ	10000	_

PINNER

Mini Pinner TU-216-2330K-E

FEATURES



Variable power control for precise adjustments in the depth of drive



Secondary safety trigger allows staples to be driven without touching the wood



Rear exhaust directs air away from work area and the user



Small, compact design for access into small or restricted areas



Comes complete with carry case

FASTENERS



Headless Pins:



APPLICATIONS

- Fine Mouldings
- Furniture
- Fretwork
- Beading





The ideal tool for tight spaces...

- The TU-216-2330K-E is a lightweight small gauge pinner and is perfect for fine mouldings (avoiding marking of the job), beading or even for tacking work in place while the glue dries.
- Featuring a magazine capacity of 200 pins yet weighing less than 1kg, this pinner also includes an adjustable depth control, auto adjusting magazine and rear exhaust.

TOOL SPECIFICATION

Model	TU-216-2330K-E
Weight	0.984kg
Trip Type	Trig
Magazine Capacity	200
Vibration (m/s2)	<2.5

N	loise (dB)	LPA 1S, d	68.1
		LWA 1S, d	81.1
		LPA 1S, 1m	78.9
0	perating Pressure	(PSI)	70-100
		(BAR)	5-7



LENGTH MM	PIN	DESCRIPTION	PACK TYPE	PACK QTY
12	1061200Z	23 GAUGE GALV MINI PIN	BOX	20000
15	1061500Z	23 GAUGE GALV MINI PIN	BOX	20000
18	1061800Z	23 GAUGE GALV MINI PIN	BOX	20000
25	1062500Z	23 GAUGE GALV MINI PIN	BOX	10000
30	1063000Z	23 GAUGE GALV MINI PIN	вох	10000

HAMMER TACKER

Hammer Tacker H30-8D6-E

FEATURES


- Long handle design for reach & safety
- Anti slip comfort grip for secure hold in all weather conditions
- Lightweight yet durable design to minimise fatigue without compromising performance



FASTENERS



Power Crown STCR5019 Staples:



APPLICATIONS

- Stair carpet underlay
- Plastic sheeting
- Packing
- Case lining

Roofing

- Insulation materials

HAND TACKER

Hand Tacker PC8000 / T6-KIT


FEATURES

- Easy-grip handle with locking mechanism
- Precision engineered block
- Anti-jam magazine
- Steel nose plate
- Comes complete with carry-case & 3000 staples

FASTENERS



Power Crown STCR5019 Staples:



APPLICATIONS

- Roofing
- Insulation materials
- Stair carpet underlay

Balanced Reliability

- Productivity and reliability are maximised thanks to the quickload magazine and tool-free jam clearing.
- Ideal for insulation, plastic sheeting, roofing paper and moisture wrap, the H30-8D6-E is a great value hammer tacker.
- Comes complete with staples and ballistic nylon holster.

Model	H30-8D6-E
Weight	0.99kg
Magazine	168
Capacity	100

FASTENER RANGE





LENGTH MM	PIN	DESCRIPTION	PACK TYPE	PACK QTY
6	STCR501906AL	ALUMINIUM POWERCROWN STAPLE	BOX	5000
6	STCR501906Z	GALVANISED POWERCROWN STAPLE	BOX	5000
6	STCR50191/4-1M	GALVANISED POWERCROWN STAPLE	BOX	1000
8	STCR501908Z	GALVANISED POWERCROWN STAPLE	BOX	5000
10	STCR501910Z	GALVANISED POWERCROWN STAPLE	BOX	5000
10	STCR50193/8-1M	GALVANISED POWERCROWN STAPLE	BOX	1000



Powerful design

- The T6 hand tacker is precision engineered with an easy-grip handle, steel nose plate and rugged construction to make this tool powerful yet simple to use.
- Designed with an anti jam magazine for easy maintenance, the tool comes complete with carry case and 3000 staples.

Model	PC8000/T6-KIT
Weight	845g
Magazine	84
Capacity	04





LENGTH MM	PIN	DESCRIPTION	PACK TYPE	PACK QTY
6	STCR501906AL	STCR5019 STAPLE 6MM ALU 5M	BOX	5000
6	STCR501906Z	STCR5019 STAPLE 6MM GALV 5M	BOX	5000
8	STCR501908Z	STCR5019 STAPLE 8MM GALV 5M	BOX	5000
10	STCR501910Z	STCR5019 STAPLE10MM GALV 5M	BOX	5000
12	STCR501912Z	STCR5019 STAPLE 12MM GALV 5M	BOX	5000
14	STCR501914Z	STCR5019 STAPLE 14MM GALV 5M	BOX	5000

FLOOR NAILER

Manual Flooring Nailer MFN-201

FEATURES

- Manual tool gives increased portability
- Selectable ratchet mechanism for multiple driving
- Complete with graphite mallet
- Comes complete with carry case



FASTENERS FLN



L Floor Cleat Nails:



APPLICATIONS

Hardwood flooring



Dual-mode manual flooring nailer...

- The MFN-201 manual flooring nailer features a ratchet drive mode that allows the user to strike the driver multiple times in case the cleat is not set flush with the first blow. The ratchet mode can also be disengaged for single blow operation.
- The tool features rubber bumpers on the side and front to minimise any damage to expensive flooring and comes complete with a graphite anti-vibration mallet.

TOOL SPECIFICATION

Model	MFN-201	Noise (dB)	LPA 1S, d
Weight	3.9kg		LWA 1S, d
Trip Type	Hammer		LPA 1S, 1m
Magazine Capacity	120	Operating Pressure	(PSI)
Vibration (m/s2)	-		(BAR)



LENGTH	PIN	DESCRIPTION	PACK TYPE	PACK QTY
38	FLN-150	FLOORING CLEAT NAIL	BOX	1000
50	FLN-200	FLOORING CLEAT NAIL	BOX	1000

FLOOR NAILER

Pneumatic Flooring Nailer / Stapler MIIIFN / MIIIFS

FEATURES

- Enables increased productivity and reduction in fatigue over the manual version
- Hammer trigger release snugs the boards tight and releases the nails at the optimum moment for perfect fastening
- Complete with graphite mallet


FASTENERS





L Floor Cleat Nails:







APPLICATIONS

Hardwood flooring





Fast and efficient flooring installation...

- Built to drive either cleats or staples accurately and quickly, these pneumatic flooring tools are perfect for where large areas of flooring need to be laid.
- The tools feature a contoured foot to fit snugly on to the boards, positioning the tool perfectly for an
 extremely accurate and neat result.
- Two models available: MIIIFN (drives floor cleats) and MIIIFS (drives S4 staples).

TOOL SPECIFICATION

Model	MIIIFN / MIIIFS
Weight	5.1kg
Trip Type	Hammer
Magazine Capacity	120 / 92
Vibration (m/s2)	3.05

Noise (dB)	LPA 1S, d	90.6
	LWA 1S, d	99.3
	LPA 1S, 1m	86.3
Operating Pressure	(PSI)	70-90
	(BAR)	4.9-6.3

KEY FASTENERS



LENGTH MM	PIN	DESCRIPTION	PACK TYPE	PACK QTY
MIIIFN				
38	FLN-150	FLOORING CLEAT NAIL	BOX	1000
50	FLN-200	FLOORING CLEAT NAIL	BOX	1000

KEY FASTENERS



LENGTH MM	PIN	DESCRIPTION	PACK TYPE	PACK QTY
MIIIFS				
38	BCS1514	FLOORING STAPLE	BOX	7728

Compressors

Selection Guide



environment or on site.

To make sure you have the correct compressor for your application, follow this simple 4 step guide.

VOLTAGE WEIGHT PUMP 10 240 110 25kg 25kg Oil for contract or contr				
240 2513		VOLTAGE	WEIGHT	PUMP
240 2513		X		
	10			

Recommended Tool Capacity

Displayed with each compressor is a guide to the number of tools of a specific size that can be used with that model. Each colour represents a different tool size:

___ Small:

- S BT1855-E, SB-2IN1, SX1838-E, 21684B-E, TU-216-2330K-E
- M Medium: N66C-2-E, N62FNB-E, FN1664-E, SB-HC50FN
- Large:
 F28WW-E, F21PL-E, F33PT-E,
 F33PTSM-E, MCN150-E,
 MIIIFN, MIIIFS

The number of tools suggested is for guidance only. It is applicable only to that tool size and does not account for a mixture of different tool sizes being used at the same time.

STEP 1

Where will it be used?

Make sure that you choose the correct voltage. If you are using the compressor on-site, the 110v version is most appropriate.

STEP 2

Which tank size is most appropriate?

When choosing your tank size, just remember that the size of tank doesn't affect the volume of air delivery of the compressor but it WILL affect the amount the motor has to run to keep the tank full.



If you are planning on using more than one tool from a compressor or you want to keep motor running noise to a minimum, choose a larger tank.

Just remember that what you gain in tank size, you may lose with portability.

STEP 3

What extra features would be useful?

The Bostitch range of compressors vary not just in size and output but also in features. If you need extras such as twin air outlets or a built-in tool & fastener tray make sure you choose the correct model.



OOO STEP 4

How many tools will be used at once?

Calculating exactly how many tools a compressor will power at once involves a lot of variable factors such as the hardness of the wood, the type of fastener and, more fundamentally, what type of tool is being used.

For a quick reference guide to find the most appropriate compressor for your tool, please refer to the 'Recommended Tool Capacity' details (on the left of this page).

If you would like more details on which compressor to choose please visit our website, www.bostitch.co.uk or contact our Customer Services team.

IMPORTANT

PLEASE NOTE: All compressors should be operated close to the main electrical power source. Where this is not possible we recommend that a long air hose is used as a drop in line voltage may occur if run off an extension lead.

However, if you must operate the compressor away from the main power source, using an extension cable, we recommend:

- 240v compressors a 13amp 240v heavy duty cable is used
- 110v compressors a 16amp (min) 110v heavy duty cable is used

Please ensure that you use a minimum 3.3 Kva single outlet transformer when using a 110v compressor.

Compressors

MRC6-U

- 6 litre tank with high-output oil-free motor and fast tank charge, ready to go in just 96 seconds!
- Superb power to weight ratio weighs just 10.5kg but can power up to 30 brad nailer shots per minute
- LED On/Off switch to eliminate misfires
- Integrated carry handle, tool and hose storage
- Anti-slip feet to reduce floor creep
- Complete with 5 metre hose



Compact & powerful design.

Extremely portable compressor delivering high performance in a lightweight and compact design.






Model		MRC6-U	HP (Max / Running)		1.5 / 1.5
Voltage		230	Free Air Delivery	L/Min	75
Tank Size		6 Ltrs	@ 7 Bar	C.F.M	2.65
Weight		10.5 kg	Air Displacement	L/Min	170
Pump Type		Oil-Free		C.F.M	6.0
Noise @ 4m	Lwa dB(A)	96 dB	Operating	(BAR)	0-8
	Lp dB(A)	75 dB	Pressure	(PSI)	0-116

C24-U110



- 24 litre tank and powerful 2.2hp motor, gives over 230 litres per minute air displacement
- Oil lubricated pump for long term durability and performance
- Ball style drain valve designed for easy access and better durability
- Oversized twin output gauges and easy to use regulator makes setting correct air pressure quick and easy
- Complete with 10 metre hose



Long-lasting high performance.


With a 24 litre tank and a host of features selected for long term performance, including ball style drain valves and a lubricated pump, this unit is the perfect entry level compressor, and is available in both 240v or 110v versions.



Model		C24-U	C24-U110	HP (Max / Running)		2.5 / 2.2	2.5 / 2.2
Voltage		230	110	Free Air Delivery	L/Min	108	100
Tank Size		24 Ltrs	24 Ltrs	@ 7 Bar	C.F.M	3.8	3.5
Weight		25 kg	25 kg	Air Displacement	L/Min	233	233
Pump Type		Lubricated	Lubricated		C.F.M	8.2	8.2
Noise @ 4m	Lwa dB(A)	94 dB	94 dB	Operating	(BAR)	0-10	0-10
	Lp dB(A)	72 dB	72 dB	Pressure	(PSI)	0-145	0-145

C50-U

- 50 litre tank and powerful 2.2hp motor, gives over 230 litres per minute air displacement
- Oil lubricated pump for long term durability and performance
- Ball style drain valve designed for easy access and better durability
- Oversized Twin output gauges and easy to use regulator makes setting correct air pressure quick and easy
- Complete with 10 metre hose




RC-10-U RC-10-U110







- 10 litre tank and 1.85hp easy start motor
- Oil-free motor and easy access drain valve minimises maintenance and allows for vertical or horizontal storage
- Steel rollcage protects from all sides
- Twin output gauges and easy to use regulator makes setting correct air pressure quick and easy
- Balanced design can be carried in one hand for easy portability
- Complete with 10 metre hose





Powerful with large tank capacity

Featuring a tank with over double the capacity of the 24 litre version, this compressor is ideal for situations where minimal motor running is required.

The design includes ball style drain valves and a lubricated pump for maximum durability.



Model		C50-U	HP (Max / Running)		2.5 / 2.2
Voltage		230	Free Air Delivery	L/Min	108
Tank Size		50 Ltrs	@ 7 Bar	C.F.M	3.8
Weight		36 kg	Air Displacement	L/Min	233
Pump Type		Lubricated		C.F.M	8.2
Noise @ 4m	Lwa dB(A)	94 dB	Operating	(BAR)	0-10
	Lp dB(A)	71.2 dB	Pressure	(PSI)	0-145

Portable & rugged for use on-site.

Compact and balanced on-site compressor featuring an all-over rollcage for tough environments and long lasting performance without compromising on







Model		RC-10-U	RC-10-U110	HP (Max / Running)		2.0 / 1.85	2.0 / 1.85
Voltage		230	110	Free Air Delivery	L/Min	82	82
Tank Size		10 Ltrs	10 Ltrs	@ 7 Bar	C.F.M	2.9	2.9
Weight		18 kg	18 kg	Air Displacement	L/Min	216	216
Pump Type		Oil-Free	Oil-Free		C.F.M	7.6	7.6
Noise @ 4m	Lwa dB(A)	97 dB	97 dB	Operating	(BAR)	0-10	0-10
	Lp dB(A)	75.5 dB	75.5 dB	Pressure	(PSI)	0-145	0-145

PS20-U PS20-U110



- Powerful 2.5hp motor gives 240 litres per minute air displacement for use with multiple framing nailers
- Twin air outlets for easy multiple tool use
- Twin output gauges and easy to use regulator makes setting correct air pressure quick and easy
- Integrated rollcage with folding handle for easy portability and storage
- High impact tyres for on-site durability
- Complete with 10 metre hose



*For guidance only. See page 25 for more details.



The ultimate on-site compressor...





Engineered for rugged on-site performance & packed with features, the **PowerStation** is the first choice for construction sites.



Model		PS20-U	PS20-U110	HP (Max / Running)		2.5 / 2.3	22.5 / 2.30
Voltage		230	110	Free Air Delivery	L/Min	138	100
Tank Size		20 Ltrs	20 Ltrs	@ 7 Bar	C.F.M	4.9	3.5
Weight		35kg	35kg	Air Displacement	L/Min	240	196
Pump Type		Lubricated	Lubricated		C.F.M	8.5	6.9
Noise @ 4m	Lwa dB(A)	96 dB	96 dB	Operating	(BAR)	0-10	0-10
	Lp dB(A)	74.8 dB	74.8 dB	Pressure	(PSI)	0-145	0-145



Сомво Кітѕ

Complete Kits & Great value- the ideal start to fastening.....

Our Combo Kits are the perfect way to get started, in one easy package. Featuring the latest MRC6 compressor and all the attachments you need, each combo features one of our key fastening tools with a tough moulded carry case, air line lubricant and fasteners - ready to go.

MRC6/SX-U

Includes

- SX1838-E Stapler
- Rugged 6 Ltr Rollcage compressor
- All air connectors & 5m air hose
- Oil, carry-case & fasteners
- Includes 1000 x staples



MRC6/BT-U

Includes

- BT1855-E Bradder
- Rugged 6 Ltr Rollcage compressor
- All air connectors & 5m air hose
- Oil, carry-case & fasteners
- Includes 1000 x brad nails



MRC6/2IN1-U

Includes

- SB-2IN1 Bradder & Stapler
- Rugged 6 Ltr Rollcage compressor
- All air connectors & 5m air hose
- Oil, carry-case & fasteners
- Includes 1000 x brad nails & 800 x staples



Accessories

Airlines & Air Accessories



FEATURES


- Available in both 15m and 30m
- Lightweight construction for minimal dragging
- Rugged reinforced polyeurathane material resists kinking, tangling or splitting
- Hose comes complete with couplings compatible with all Bostitch pneumatic tools and compressors
- Built in snap-fit strain relief fittings on each end
- 200 PSI maximum working pressure

PROZHOZE

Premium Quality Air Hose

Durable & lightweight- with no tangles and no snagging. Advanced design & material provides trouble free use in any situation.

The ultimate jobsite air hose with technology built in...

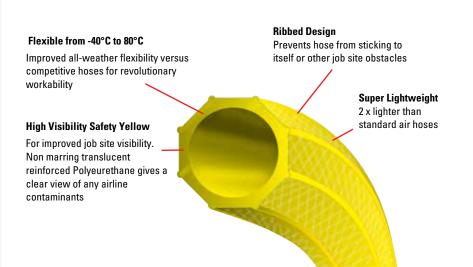

PROZHOZE

PIN	DESCRIPTION
PRO-1450-25	6MM DIAMETER X 15M PREMIUM POLYEURETHANE AIR HOSE WITH #25 COUPLINGS
PRO-38100-25	10MM DIAMETER X 30M PREMIUM POLYEURETHANE AIR HOSE WITH #25 COUPLINGS

REPAIR KITS

PIN DESCRIPTION

PRO-14REPAIR INCLUDES 1 MENDER AND 1 THREADED END FITTING FOR THE 6MM DIAMETER PROZHOZE

PRO-38REPAIR INCLUDES 1 MENDER AND 1 THREADED END FITTING FOR THE 10MM DIAMETER PROZHOZE





Accessories

Airlines & Air Accessories

CPACK15

15m Air Line Combo Pack Complete with:

- Blower Gun
- Air Fittings
- Oil for pneumatic tools



CPACK30

30m Air Line Combo Pack

- 30m hose with connectors
- 360⁰ turntable
- Rollcage design



AIR TREATMENTS

Pressure Gauges					
	Range	Fitting		Dia	
MTRA1640	0-16 bar	1/8"	Back	40	
MTRA1663	0-16 bar	1/4"	Back	63	

Pressure Regulators (Excelon)

R73G-2GK-RMN 1/4" fitting / 0,3-10bar / 50 dm 3/s R07-200-RNKG 1/4" fitting / 0,3-10bar / 7 dm 3/s



F64G-3GN-MD3 Filter/ water separator / 3/8" fitting / manual tap







ACCESSORIES

PIN	Description
SB32	Oil (1 litre) for pneumatic tools
ISOVG100	SAE30 compressor oil
SB-BG1	Blowing gun





QUICK DISCONNECT NIPPLES/ AIR COUPLINGS MALE AND FEMALE

CEJN Type Euro / 25 Series				
PIN	Description			
10.320.5152	CEJN Euro Nipple - 1/4" Male			
10.320.5155	CEJN Euro Nipple - 3/8" Male			
10.320.5202	CEJN Euro Nipple - 1/4" Female			
10.320.5204	CEJN Euro Nipple - 3/8" Female			
10.320.1152	CEJN Euro Coupler - 1/4" Male			
10.320.1154	CEJN Euro Coupler - 3/8" Male			



0.320.1202	CEJN Euro Coupler - 1/4" Female
10.320.1204	CEJN Euro Coupler - 3/8" Female
PCL Type / 19 Serie	es
19PM	PCL 19 Series Nipple - 1/4" Male
Y Piece Connector	s
19.900.5916	Y Piece Connector 3 x 1/4" Female
19.900.5912	Y Piece Connector 3 x 3/8" Female







Bostitch Österreich

Stanley Black & Decker Austria GmbH Oberlaaer Strasse 248, 1230 Wien ÖSTERREICH T: +43 1 66 11 66 33 bostitch.de@sbdinc.com

www.bostitch.at



Bostitch Benelux

Stanley Black & Decker Belgium BVBA p/a Egide Walschaertsstraat nr. 16 2800 Mechelen BELGIË

Tel: +32 15 47 38 00

bostitch.benelux@sbdinc.com www.stanley-bostitch.be www.stanley-bostitch.nl



Bostitch Schweiz

Stanley Works (Europe) GmbH Sitz: Dübendorf In der Luberzen 42, 8902 Urdorf **SCHWEIZ**

Tel: +41 (0)44 755 60 70 www.bostitch.ch





Stanley Black & Decker Czech Republic s.r.o.

Türkova 5b, 149 00 Praha 4 - Chodov ČESKÁ REPUBLIKA Tel. +420 602 745440 petr.popovsky@sbdinc.com www.bostitch.cz



Bostitch Deutschland

Stanley Black & Decker Deutschland GmbH Black-&-Decker Str. 40 65510 Idstein **DEUTSCHLAND** Tel: +49 (0) 6126 21-2985 bostitch.de@sbdinc.com www.stanley-bostitch.de





Stanley Black & Decker Ibérica SLU

Parque de Negocios "Mas Blau" Edificio Muntadas C/ Bergueda n. 1 Of. A6 08820 El Prat de Llobregat Barcelona, **ESPAÑA** Tel: +34 93 217 65 02

iberia.bostitch@sbdinc.com www.bostitch.es



Bostitch France

Stanley Black & Decker France SAS BP No. 90, 112 Avenue Charles de Gaulle 91423 Morangis Cedex **FRANCE**

Tel: +33 0 (1) 69 10 80 41 ou 40 ou 08 adv-bostitch@sbdinc.com www.bostitch.fr



Bostitch UK

210 Bath Road Slough SL13YD **ENGLAND**

Tel: +44 (0)870 1 630 630 bostitchuksales@sbdinc.com www.bostitch.co.uk



Stanley Black & Decker Italia S.r.l.

Via Energy Park 6 20871 Vimercate (MB) ITALIA Tel: +39 039 9590.205


Fax: +39 039 9590.312 bostitchitaly@stanleyworks.com www.bostitch.it



Stanley Black & Decker Polska Sp. z o.o.

UI. Postępu 21D 02-676 Warszawa **POLSKA**

Tel: +48 22 464 2735 sales.bostitch@sbdinc.com www.bostitch.pl



BOSTITCH WARRANTY TERMS & CONDITIONS

1 YEAR LIMITED WARRANTY

Bostitch pneumatic tools are fully cycled and tested prior to despatch.

Bostitch warrants this product to the original purchaser for one year from the date of purchase against any defect in material or workmanship, and agrees to repair or replace, at Bostitch's option any defect of that material or workmanship

This warranty is not transferable. It only covers damage resulting from defects in material and workmanship, and it does not cover conditions or malfunctions resulting from normal wear, neglect, abuse, accident or repairs made by other than our regional repair centre or authorised warranty service centres.

Driver blades, bumpers, and O rings are considered normally wearing parts.

We are not liable for any indirect, consequential or incidental loss or damage of any kind (including loss of profits, revenue or contracts) or for any damage to or destruction of any property.

To obtain warranty service, return the product at your expense together with proof of purchase to our regional repair centre, or an authorised warranty centre.

All tool data shown is for comparative purposes only. Full Health & Safety technical data is available on request.