

Table of Contents

| | |
|--|---------|
| Rigid Nonmetallic Conduit | 12 |
| Schedule 40 Elbows | 13 |
| PVC Conduit Repair System | 14–15 |
| Fittings and Accessories | 16–19 |
| Conduit Bodies | 110 |
| Junction Boxes | 111 |
| Conduit Sleeve Couplings | 112–113 |
| Switch Boxes | 114–116 |
| Covers | 117 |
| Support Straps | 118 |
| Clamps | 119 |
| General Information | 120–122 |
| DB/2 PVC Conduit | 123 |
| DB/2 Duct Fittings | 124 |
| DB/2 Sweeps | 125 |
| PVC Trenchless Raceway – Bore-Gard® | 126 |
| PVC Boreable Conduit – Multi-Gard® | 127 |
| Split Duct | 128–129 |
| Split Kits | 130–131 |
| Snap-Loc™ Spacers | 132–133 |
| Snap-N-Stac® Combo Spacers | 134–137 |
| Carflex® Liquidtight Flexible conduit | 138 |
| Carflex® X-Flex™ Liquidtight Flexible Tubing | 139 |
| Carflex® Liquidtight Fittings | 140–141 |
| Carflex® One-Piece Liquidtight Fittings | 142–143 |
| Plenum-Gard® | 144–145 |
| Riser-Gard™ | 146–148 |
| Hal-Free Riser-Gard™ | 149 |
| Resi-Gard™ | 150–151 |
| Micro-Gard™ | 152–153 |
| Flex-Plus® Blue™ ENT | 154 |
| Stub Downs | 155 |
| ENT Accessories | 156–157 |
| Mud Box Assemblies | 158–159 |
| Mounting Brackets and ENT Bridge | 160 |
| ENT Technical Information | 161 |
| Low Voltage Brackets and Kits | 162 |
| Low Voltage Brackets | 163 |
| 3-Gang Recessed Plate | 164–165 |
| Cements | 166–167 |
| Primers | 168 |
| Sealers | 169 |
| Installation Instructions / Cement Joints | 170 |
| Conduit Cutters | 171 |
| EZ BEND™ Conduit Bending Equipment | 172 |
| PV-Mold® | 173–176 |

Rigid Nonmetallic Conduit

Carlton® Schedule 40 PVC Rigid

Nonmetallic Conduit (Heavy Wall EPC)

Certified for underground applications encased in concrete or direct burial. Also for use in exposed or concealed above ground applications.

- Sunlight resistant
- Rated for use with 75°C conductors
- Superior weathering characteristics
- Meets CSA Standard C22.2 No. 211.2
- 3/4 in. – 4 in. are FT-4 Rated



Schedule 40 Heavy Wall



| Cat. No. | | Trade Size (in.) | Std. Crate Qty. | | Std. Bundle Qty. | | Wt. Per 100 ft. | Dimensions (in.) | | Wall (in.) |
|-------------|-------------|------------------|-----------------|--------|------------------|--------|-----------------|------------------|-------|------------|
| 10 ft. | 20 ft. | | 10 ft. | 20 ft. | 10 ft. | 20 ft. | | O.D. | I.D. | |
| 49005CC-010 | - | 1/2 | 6000 | 12000 | 100 | 200 | 17 | 0.840 | 0.622 | 0.109 |
| 49007CC-010 | 49007CC-020 | 3/4 | 4400 | 8800 | 100 | 200 | 23 | 1.050 | 0.824 | 1.113 |
| 49008CC-010 | 49008CC-020 | 1 | 3600 | 7200 | 100 | 200 | 34 | 1.315 | 1.049 | 0.133 |
| 49009CC-010 | 49009CC-020 | 1-1/4 | 3300 | 6600 | 50 | 100 | 46 | 1.660 | 1.380 | 0.140 |
| 49010CC-010 | 49010CC-020 | 1-1/2 | 1800 | 3600 | 50 | 100 | 55 | 1.900 | 1.610 | 0.145 |
| 49011CC-010 | 49011CC-020 | 2 | 1400 | 2800 | 50 | 100 | 73 | 2.375 | 2.067 | 0.154 |
| 49012CC-010 | 49012CC-020 | 2-1/2 | 930 | 1860 | 10 | 20 | 124 | 2.875 | 2.469 | 0.203 |
| 49013CC-010 | 49013CC-020 | 3 | 880 | 1760 | 10 | 20 | 163 | 3.500 | 3.068 | 0.216 |
| 49014CC-010 | - | 3-1/2 | 630 | - | 10 | 20 | 196 | 4.000 | 3.548 | 0.226 |
| 49015CC-010 | 49015CC-020 | 4 | 570 | 1140 | 10 | 20 | 232 | 4.500 | 4.026 | 0.237 |
| 49016CC-010 | - | 5 | 380 | 760 | 10 | 20 | 315 | 5.563 | 5.047 | 0.258 |
| 49017CC-010 | 49017CC-020 | 6 | 260 | 520 | 10 | 20 | 409 | 6.625 | 6.065 | 0.280 |

Acceptable Dimension in Inches of CSA Listed Integral Bell



| Trade Size of Conduit (in.) | A | | B | | C | |
|-----------------------------|-------------------|---------|-----------------|---------|--------------------|---------|
| | At Entrance (in.) | | At Bottom (in.) | | Socket Depth (in.) | |
| | Maximum | Minimum | Maximum | Minimum | Maximum | Minimum |
| 1/2 | 0.860 | 0.844 | 0.844 | 0.828 | 1.500 | 0.652 |
| 3/4 | 1.074 | 1.054 | 1.056 | 1.036 | 1.500 | 0.719 |
| 1 | 1.340 | 1.320 | 1.320 | 1.300 | 1.875 | 0.875 |
| 1-1/4 | 1.689 | 1.665 | 1.667 | 1.643 | 2.000 | 0.938 |
| 1-1/2 | 1.930 | 1.906 | 1.906 | 1.882 | 2.000 | 1.062 |
| 2 | 2.405 | 2.381 | 2.381 | 2.357 | 2.000 | 1.125 |
| 2-1/2 | 2.905 | 2.875 | 2.883 | 2.853 | 3.000 | 1.469 |
| 3 | 3.530 | 3.500 | 3.507 | 3.477 | 3.125 | 1.594 |
| 3-1/2 | 4.065 | 3.965 | 4.007 | 3.977 | 3.250 | 1.687 |
| 4 | 4.565 | 4.465 | 4.506 | 4.476 | 3.375 | 1.750 |
| 5 | 5.653 | 5.543 | 5.583 | 5.523 | 3.625 | 1.937 |
| 6 | 6.708 | 6.608 | 6.644 | 6.584 | 3.750 | 2.125 |

Schedule 40 Elbows

Schedule 40 Elbows

Integral Belled End for Use With Nonmetallic Solvent Weld Fittings

90° Elbow



| Item | Belled End Cat. No. | Trade Size (in.) | Std. Ctn. Qty. |
|------|---------------------|------------------|----------------|
| | UA9ADCB-CTN | 1/2 | 40 |
| | UA9AECB-CTN | 3/4 | 25 |
| | UA9AFCB-CTN | 1 | 25 |
| | UA9AGCB-UPC | 1-1/4 | 20 |
| | UA9AHCB-UPC | 1-1/2 | 25 |
| | UA9AJCB-UPC | 2 | 20 |
| | UA9AKCB-CTN | 2-1/2 | 10 |
| | UA9ALCB-UPC | 3 | 25 |
| | UA9AMCB | 3-1/2 | 1 |
| | UA9ANCB | 4 | 1 |
| | UA9APCB | 5 | 1 |
| | UA9ARCB | 6 | 1 |

Custom elbows available on request.
Plain end elbows also available.

45° Elbow



| Item | Belled End Cat. No. | Trade Size (in.) | Std. Ctn. Qty. |
|------|---------------------|------------------|----------------|
| | UA7ADCB-CTN | 1/2 | 25 |
| | UA7AECB-CTN | 3/4 | 20 |
| | UA7AFCB-CTN | 1 | 14 |
| | UA7AGCB | 1-1/4 | 20 |
| | UA7AHCB | 1-1/2 | 20 |
| | UA7AJCB | 2 | 20 |
| | UA7ALCB | 3 | 5 |
| | UA7AMCB | 3-1/2 | 1 |
| | UA7ANCB | 4 | 1 |
| | UA7APCB | 5 | 1 |
| | UA7ARCB | 6 | 1 |

30° Elbow




| Item | Belled End Cat. No. | Trade Size (in.) | Std. Ctn. Qty. |
|------|---------------------|------------------|----------------|
| | UA6ADB | 1/2 | 50 |
| | UA6AEB | 3/4 | 25 |
| | UA6AFB | 1 | 8 |
| | UA6AGB | 1-1/4 | 20 |
| | UA6AHB | 1-1/2 | 1 |

Flexible Elbows




| Item | Belled End Cat. No. | Trade Size (in.) | Std. Ctn. Qty. |
|------|---------------------|------------------|----------------|
| | UAFAD | 1/2 | 8 |
| | UFAFE | 3/4 | 6 |
| | UFAF | 1 | 6 |



Integral Belled End Dimensions


| Trade Size of Conduit (in.) | A | | B | | C | |
|-----------------------------|-------------------|---------|-----------------|---------|--------------------|---------|
| | At Entrance (in.) | | At Bottom (in.) | | Socket Depth (in.) | |
| | Maximum | Minimum | Maximum | Minimum | Maximum | Minimum |
| 1/2 | 0.860 | 0.844 | 0.844 | 0.828 | 1.500 | 0.652 |
| 3/4 | 1.074 | 1.054 | 1.056 | 1.036 | 1.500 | 0.719 |
| 1 | 1.340 | 1.320 | 1.320 | 1.300 | 1.875 | 0.875 |
| 1-1/4 | 1.689 | 1.665 | 1.667 | 1.643 | 2.000 | 0.938 |
| 1-1/2 | 1.930 | 1.906 | 1.906 | 1.882 | 2.000 | 1.062 |
| 2 | 2.405 | 2.381 | 2.381 | 2.357 | 2.000 | 1.125 |
| 2-1/2 | 2.905 | 2.875 | 2.883 | 2.853 | 3.000 | 1.469 |
| 3 | 3.530 | 3.500 | 3.507 | 3.477 | 3.125 | 1.594 |
| 3-1/2 | 4.065 | 3.965 | 4.007 | 3.977 | 3.250 | 1.687 |
| 4 | 4.565 | 4.465 | 4.506 | 4.476 | 3.375 | 1.750 |
| 5 | 5.653 | 5.543 | 5.583 | 5.523 | 3.625 | 1.937 |
| 6 | 6.708 | 6.608 | 6.644 | 6.584 | 3.750 | 2.125 |

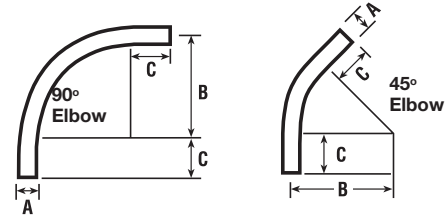

Standard Radius Elbow Dimensions

| Trade Size (in.) | A (in.) | B (in.) | C (in.) |
|------------------|---------|------------------|---------|
| | | Minimum (Radius) | |
| 1/2 | 0.840 | 4 | 1-1/2 |
| 3/4 | 1.050 | 4-1/2 | 1-1/2 |
| 1 | 1.315 | 5-3/4 | 1-7/8 |
| 1-1/4 | 1.660 | 7-1/4 | 2 |
| 1-1/2 | 1.900 | 8-1/4 | 2 |
| 2 | 2.375 | 9-1/2 | 2 |
| 2-1/2 | 2.875 | 10-1/2 | 3 |
| 3 | 3.500 | 13 | 3-1/8 |
| 3-1/2 | 4.000 | 15 | 3-1/4 |
| 4 | 4.500 | 16 | 3-3/8 |
| 5 | 5.563 | 24 | 3-5/8 |
| 6 | 6.625 | 30 | 3-3/4 |

PVC Conduit Repair System



The new, revolutionary, Carlton PVC Conduit Repair System significantly reduces the time and money associated with repairing broken PVC conduits “stub-ups” in concrete slabs.

The system is a line of couplings, adapters, reamers and plugs designed to allow contractors to quickly and easily repair broken PVC conduits without having to chip away and repour concrete, while still maintaining the inside diameter of the conduit. Simply cut off the broken conduit; ream the I.D. of the conduit; and insert a coupling or adapter, it's that easy.

Features

- cULus Listed
- Nonmetallic couplings, adapters and plugs won't rust or corrode
- Available in sizes 1/2 in. through 2 in.

Benefits

- Saves time and money
- Maintains inside diameter of conduit
- Metallic Reamers for extra strength, durability and longer life
- Quickly and easily repair broken PVC conduit

Couplings



| Cat. No. | Trade Size (in.) | Std. Ctn. Qty. |
|----------|------------------|----------------|
| E910D | 1/2 | 25 |
| E910E | 3/4 | 25 |
| E910F | 1 | 15 |
| E910G | 1-1/4 | 10 |
| E910H | 1-1/2 | 10 |
| E910J | 2 | 10 |



Male Threaded Adapters



| Cat. No. | Trade Size (in.) | Std. Ctn. Qty. |
|----------|------------------|----------------|
| E920D | 1/2 | 25 |
| E920E | 3/4 | 25 |
| E920F | 1 | 15 |
| E920G | 1-1/4 | 10 |
| E920H | 1-1/2 | 10 |
| E920J | 2 | 10 |



Reamers



| Cat. No. | Size (in.) | Std. Ctn. Qty. |
|-------------|---|----------------|
| E910REAMD | 1/2 | 12 |
| E910REAME | 3/4 | 12 |
| E910REAMF | 1 | 10 |
| E910REAMG | 1-1/4 | 10 |
| E910REAMH | 1-1/2 | 10 |
| E910REAMJ | 2 | 10 |
| E910REAMKIT | All sizes – 1/2, 3/4, 1, 1-1/4, 1-1/2 and 2 | 5 |



Schedule 40 Plugs



| Cat. No. | Size (in.) | Std. Ctn. Qty. |
|----------|------------|----------------|
| HL-6X* | 1/2 | 1 bag of 50 |
| HL-10* | 3/4 | |
| HL-13A* | 1 | |
| HL-16* | 1-1/4 | |
| HL-18* | 1-1/2 | |
| HL-21* | 2 | |



* = Suffixe (R: Red, B: Blue, Y: Yellow)


PVC Conduit Repair System



Coupling
E910 Series



Male Threaded Adapter
E920 Series



Broken conduit on jobsite

Instructions



1. Cut broken conduit off flush.



2. Insert plug to keep conduit clean/dry through balance of rough-in. Once rough-in is complete, remove plug and continue with step 3.

Alternative to Conduit Repairs

Prior to concrete pour, measure and saw cut all conduit stub-ups to the thickness of the concrete pour. Insert plugs. Pour concrete flush to the conduit. When pour is complete, remove plugs and proceed with step 3. This alternative method saves time/money by eliminating the need for transitions or use of metal elbows.



3. With reamer tool and standard 1/2 in. drill, ream I.D. of conduit. It is recommended to use a variable speed drill. Use slower speed to avoid overheating the conduit.



4. The guide will direct the cutter; the stop will touch when completed.

Cementing Instructions

- A. Clean socket I.D. and spigot O.D. of dirt and moisture.
- B. Apply a uniform coat of cement to spigot end and push onto socket bottom, rotating 1/4 turn.
- C. Allow time to set before disturbing. This will depend upon temperature.

5. Insert the coupling and cement into place using the cement manufacturer's instructions.



Apply a uniform coat of cement.



Insert fitting.



Rotate 1/4 turn.




Fittings and Accessories

Expansion Fittings*

E945 Series expansion fittings are designed to compensate for length changes due to temperature variations in exposed conduit runs.

- Exclusive Molded in Mid-point indicator on the piston
- Exclusive 2 in. Expansion Fitting with an 8 in. travel distance
- Two-piece molded design with lubricated seals for easier movement for the life of the product
- Ridges on the fitting for easier installation (Sizes 2 in. through 6 in. only)
- Male terminal Adapter End design (1/2 in. – 2 in. NPT Threads and 2-1/2 in. – 6 in. NPSC Threads)
- Two O-Rings to prevent leakage
- Can be installed vertically or horizontally

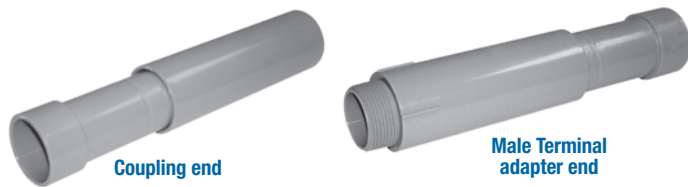

| Coupling End Cat. No. | Male Terminal Adapter End Cat. No. | Size (in.) | Std. Ctn. Qty. | Travel Length (in.) |
|-----------------------|------------------------------------|------------|----------------|---------------------|
| E945D | E945DX | 1/2 | 20 | 4 |
| E945E | E945EX | 3/4 | 15 | 4 |
| E945F | E945FX | 1 | 10 | 4 |
| E945G | E945GX | 1-1/4 | 5 | 4 |
| E945H | E945HX | 1-1/2 | 5 | 4 |
| E945J | E945JX | 2 | 15 | 8 |
| E945K | E945KX | 2-1/2 | 10 | 8 |
| E945L | E945LX | 3 | 10 | 8 |
| E945M | E945MX | 3-1/2 | 5 | 8 |
| E945N | E945NX | 4 | 5 | 8 |
| E945P | E945PX | 5 | 1 | 8 |
| E945R | E945RX | 6 | 1 | 8 |


* Please refer to page I21 for additional information.

Standard Couplings

All socket fittings should be attached using Carlton solvent cement. Using Carlton fittings with Carlton nonmetallic conduit insures system integrity.



Socket type for joining nonmetallic conduit.



| Cat. No. | Size (in.) | Std. Ctn. Qty. | A | | I.D. (in.) | O.D. (in.) | C | L |
|-------------|------------|----------------|---------------|-------|------------|------------|---------|---------|
| | | | Typical (in.) | | | | | |
| CE940DR-CTN | 1/2 | 75 | 0.852 | 0.836 | 0.728 | 1-7/64 | 11-16 | 1-1/2 |
| CE940ER-CTN | 3/4 | 45 | 1.064 | 1.046 | 0.840 | 1-5/16 | 3/4 | 1-5/8 |
| CE940F-UPC | 1 | 50 | 1.330 | 1.310 | 1.210 | 1-5/8 | 15/16 | 2 |
| E940G | 1-1/4 | 30 | 1.677 | 1.655 | 1.535 | 1-63/64 | 1 | 2-1/8 |
| E940H | 1-1/2 | 25 | 1.918 | 1.894 | 1.755 | 2-15/64 | 1-1/8 | 2-3/8 |
| E940J | 2 | 30 | 2.393 | 2.369 | 2.190 | 2-47/64 | 1-3/16 | 2-1/2 |
| E940K | 2-1/2 | 20 | 2.890 | 2.868 | 2.688 | 3-5/16 | 1-33/64 | 3-3/16 |
| E940L | 3 | 25 | 3.515 | 3.492 | 3.375 | 3-31/32 | 1-3/4 | 3-13/32 |
| E940M | 3-1/2 | 20 | 4.015 | 3.992 | 3.780 | 4-9/16 | 1-3/4 | 3-5/8 |
| E940N | 4 | 15 | 4.515 | 4.491 | 4.265 | 5-3/32 | 1-25/32 | 3-3/4 |
| E940P | 5 | 8 | 5.593 | 5.553 | 5.097 | 6-1/4 | 1-5/16 | 4-1/16 |
| E940R | 6 | 5 | 6.658 | 6.614 | 6.115 | 7-1/2 | 2-3/16 | 4-5/8 |

Short Expansion Couplings*

(Expands to a maximum of 2 in.)



| Cat. No. | Size (in.) | Std. Ctn. Qty. |
|----------|------------|----------------|
| E955D | 1/2 | 40 |
| E955E | 3/4 | 40 |
| E955F | 1 | 25 |
| E955G | 1-1/4 | 15 |
| E955H | 1-1/2 | 10 |
| E955J | 2 | 6 |


* Please refer to page I21 for additional information.

Fittings and Accessories

Female Adapters



For adapting nonmetallic conduits to threaded fittings, metallic systems. Female threads on one end, socket end on other.




| Cat. No. | Size (in.) | Std. Ctn. Qty. | A | B | Min. I.D. (in.) | Max. O.D. (in.) | C | T | L |
|----------|------------|----------------|---------------|-------|-----------------|-----------------|---------|--------|---------|
| | | | Typical (in.) | | | | | | |
| E942D | 1/2 | 150 | 0.852 | 0.836 | 0.620 | 1-7/64 | 11/16 | 3/4 | 1-9/16 |
| E942E | 3/4 | 100 | 1.064 | 1.046 | 0.822 | 1-5/16 | 13/16 | 3/4 | 1-5/8 |
| E942F | 1 | 50 | 1.330 | 1.310 | 1.046 | 1-5/8 | 15/16 | 7/8 | 1-15/16 |
| E942G | 1-1/4 | 30 | 1.677 | 1.655 | 1.377 | 1-63/64 | 1 | 7/8 | 2 |
| E942H | 1-1/2 | 25 | 1.918 | 1.894 | 1.607 | 2-5/32 | 1-1/8 | 7/8 | 2-7/32 |
| E942J | 2 | 30 | 2.393 | 2.369 | 2.064 | 2-47/64 | 1-3/16 | 1 | 2-5/16 |
| E942K | 2-1/2 | 20 | 2.890 | 2.868 | 2.450 | 3-11/32 | 1-5/8 | 1-1/8 | 2-15/16 |
| E942L | 3 | 25 | 3.515 | 3.492 | 3.000 | 3-31/32 | 1-3/4 | 1-1/8 | 3-1/16 |
| E942M | 3-1/2 | 20 | 4.015 | 3.992 | 3.500 | 4-1/2 | 1-7/8 | 1-1/8 | 3-1/4 |
| E942N | 4 | 15 | 4.515 | 4.491 | 4.000 | 5-1/64 | 1-3/4 | 1-1/16 | 3-13/64 |
| E942P | 5 | 8 | 5.593 | 5.553 | 5.047 | 6-1/4 | 1-15/16 | 1-1/16 | 3-3/16 |
| E942R | 6 | 6 | 6.658 | 6.614 | 6.055 | 7-1/4 | 2-1/8 | 1-1/16 | 3-3/8 |

Male Terminal Adapters



For adapting nonmetallic conduits to boxes threaded fittings, metallic systems. Male threads on one end, socket end on other.




| Cat. No. | Size (in.) | Std. Ctn. Qty. | A | B | Min. D (in.) | Max. O.D. (in.) | C | S | L |
|----------|------------|----------------|---------------|-------|--------------|-----------------|-------|-------|-------|
| | | | Typical (in.) | | | | | | |
| E943D | 1/2 | 150 | 0.852 | 0.836 | 0.594 | 1.042 | 0.652 | 0.545 | 1.310 |
| E943E | 3/4 | 100 | 1.064 | 1.046 | 0.793 | 1.290 | 0.809 | 0.553 | 1.470 |
| E943F | 1 | 50 | 1.330 | 1.310 | 1.025 | 1.580 | 0.965 | 0.812 | 1.902 |
| E943G | 1-1/4 | 30 | 1.677 | 1.655 | 1.345 | 1.973 | 1.208 | 0.816 | 1.986 |
| E943H | 1-1/2 | 25 | 1.918 | 1.894 | 1.574 | 2.188 | 1.155 | 0.802 | 2.105 |
| E943J | 2 | 30 | 2.393 | 2.369 | 1.998 | 2.713 | 1.145 | 0.825 | 2.093 |
| E943K | 2-1/2 | 20 | 2.890 | 2.868 | 2.400 | 3.290 | 1.490 | 0.812 | 2.480 |
| E943L | 3 | 25 | 3.515 | 3.492 | 2.989 | 3.965 | 1.643 | 0.797 | 2.660 |
| E943M | 3-1/2 | 20 | 4.015 | 3.992 | 3.405 | 4.515 | 1.720 | 0.802 | 2.740 |
| E943N | 4 | 15 | 4.515 | 4.491 | 3.895 | 5.065 | 1.788 | 0.733 | 2.830 |
| E943P | 5 | 8 | 5.593 | 5.553 | 4.900 | 6.104 | 1.935 | 0.990 | 3.200 |
| E943R | 6 | 6 | 6.658 | 6.614 | 5.900 | 7.288 | 2.128 | 0.985 | 3.410 |

Reducer Bushings



For connecting different sizes of conduit. Bell x Spigot.




| Cat. No. | Size (in.) | Std. Ctn. Qty. | L | A | C |
|------------|---------------|----------------|---------------|-------|---------|
| | | | Typical (in.) | | |
| E950ED | 3/4 x 1/2 | 100 | 1-5/32 | 13/64 | 1-1/32 |
| E950FD-CAR | 1 x 1/2 | 25 | 1-11/32 | 3/16 | 57/64 |
| E950FE | 1 x 3/4 | 100 | 1-11/32 | 3/16 | 1-1/64 |
| E950GE-CAR | 1-1/4 x 3/4 | 10 | 1-15/32 | 3/16 | 1-1/64 |
| E950GF | 1-1/4 x 1 | 50 | 1-15/32 | 3/16 | 1-9/64 |
| E950HF-CAR | 1-1/2 x 1 | 10 | 1-19/32 | 3/16 | 1-9/64 |
| E950HG-CAR | 1-1/2 x 1-1/4 | 10 | 1-19/32 | 3/16 | 1-17/64 |
| E950JG-CAR | 2 x 1-1/4 | 10 | 1-3/4 | 7/32 | 1-17/64 |
| E950JH-CAR | 2 x 1-1/2 | 10 | 1-3/4 | 7/32 | 1-25/64 |
| E950KJ-CAR | 2-1/2 x 2 | 10 | 2-5/32 | 3/8 | 1-27/64 |
| E950LJ-CAR | 3 x 2 | 10 | 2-1/8 | 1/4 | 1-7/8 |
| E950LK | 3 x 2-1/2 | 25 | 1-15/16 | 1/4 | 1-11/16 |
| E950NL | 4 x 3 | 25 | 2-3/4 | 5/16 | 1-15/16 |

Box Adapters for Enclosures



Adapts nonmetallic conduit to all electrical enclosures by inserting adapter through knockout and cementing into Carlton couplings.



| Cat. No. | Size (in.) | Std. Ctn. Qty. | Min. D (in.) | O.D. Typical (in.) | Max. X (in.) | CM | L |
|----------|------------|----------------|--------------|--------------------|--------------|---------------|---------|
| | | | | | | Typical (in.) | |
| E996D | 1/2 | 100 | 0.662 | 0.840 | 1-7/64 | 23/32 | 27/32 |
| E996E | 3/4 | 100 | 0.824 | 1.050 | 1-21/64 | 25/32 | 29/32 |
| E996F | 1 | 100 | 1.049 | 1.315 | 1-5/8 | 61/64 | 1-3/32 |
| E996G | 1-1/4 | 50 | 1.380 | 1.660 | 1-31/32 | 1-1/16 | 1-1/4 |
| E996H | 1-1/2 | 50 | 1.610 | 1.900 | 2-13/64 | 1-3/16 | 1-3/8 |
| E996J | 2 | 25 | 2.067 | 2.375 | 2-29/32 | 1-1/4 | 1-7/16 |
| E996K | 2-1/2 | 15 | 2.469 | 2.875 | 3-7/16 | 1-7/8 | 1-15/16 |
| E996L | 3 | 20 | 3.068 | 3.500 | 4-1/8 | 2 | 2-1/16 |
| E996N | 4 | 10 | 4.026 | 4.500 | 5-1/8 | 2-1/2 | 2-1/4 |

Threaded Adapters



| Cat. No. | Size (in.) | Std. Ctn. Qty. |
|----------|------------|----------------|
| E9842D 1 | 1/2 | 25 |
| E9842E 2 | 3/4 | 25 |

1 Fits 3/4 in. sockets
2 Fits 1 in. sockets


Plugs with Pull Tabs (Polyethylene)



| Cat. No. | Size (in.) | Std. Ctn. Qty. | Std. Ctn. Wt. (lb.) |
|----------|------------|----------------|---------------------|
| P258JT | 2 | 60 | 3 |
| P258LT | 3 | 30 | 3 |
| P258NT | 4 | 48 | 8 |
| P258PT | 5 | 30 | 6 |
| P258RT | 6 | 30 | 9 |

Fittings and Accessories

Service Entrance Caps

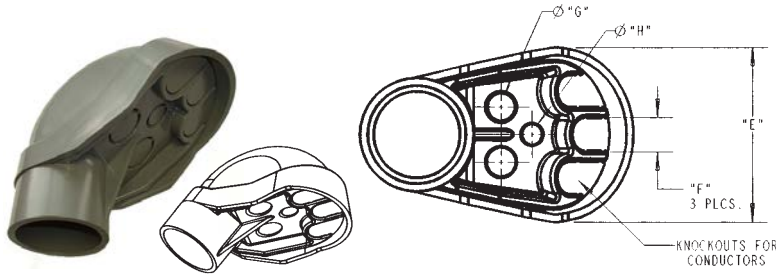

| Cat. No. | Size (in.) | Std. Ctn. Qty. | Dimensions (in.) | | | |
|-----------|------------|----------------|------------------|------|------|------|
| | | | E | F | G | H |
| E998D | 1/2 | 5 | 1.76 | 0.45 | 0.45 | — |
| E998E | 3/4 | 20 | 1.76 | 0.45 | 0.45 | — |
| E998F | 1 | 15 | 2.26 | 0.59 | 0.58 | — |
| E998G | 1-1/4 | 20 | 3.52 | 0.74 | 0.71 | 0.50 |
| E998H | 1-1/2 | 10 | 3.52 | 0.74 | 0.71 | 0.50 |
| E998J | 2 | 5 | 4.26 | 0.83 | 0.78 | 0.56 |
| E998K-UPC | 2-1/2 | 2 | 7.47 | 1.70 | 1.31 | 1.00 |
| E998L | 3 | 2 | 7.47 | 1.70 | 1.31 | 1.00 |
| E998N | 4 | 2 | 10.45 | 2.25 | 1.88 | 1.31 |

Meter Offset



| Cat. No. | Size (in.) | Std. Ctn. Qty. | Offset (in.) | A (in.) |
|----------|------------|----------------|--------------|---------|
| E995G | 1-1/4 | 15 | 0.758 | 4.230 |
| E995J | 2 | 8 | 0.684 | 4.270 |

Offset



| Cat. No. | Size (in.) | Std. Ctn. Qty. | Std. Ctn. Wt. (lb.) |
|----------|------------|----------------|---------------------|
| E994D | 1/2 | 25 | 3 |
| E994E | 3/4 | 25 | 3 |
| E994F | 1 | 50 | 12 |

End Caps



| Cat. No. | Size (in.) | Std. Ctn. Qty. | Std. Ctn. Wt. (lb.) |
|----------|------------|----------------|---------------------|
| E958D | 1/2 | 100 | 3 |
| E958E | 3/4 | 100 | 4 |
| E958F | 1 | 75 | 5 |
| E958G | 1-1/4 | 40 | 4 |
| E958H | 1-1/2 | 30 | 4 |
| E958J | 2 | 25 | 5 |
| E958K | 2-1/2 | 10 | 4 |
| E958L | 3 | 10 | 5 |
| E958N | 4 | 5 | 17 |
| E958P | 5 | 5 | 11 |
| E958R | 6 | 5 | 13 |

End Bells



| Cat. No. | Size (in.) | Std. Ctn. Qty. | Std. Ctn. Wt. (lb.) |
|----------|------------|----------------|---------------------|
| E997F | 1 | 50 | 2.6 |
| E997G | 1-1/4 | 35 | 2.5 |
| E997H | 1-1/2 | 30 | 2.5 |
| E997J | 2 | 40 | 5.0 |
| E997K | 2-1/2 | 30 | 2 |
| E997L | 3 | 50 | 10 |
| E997M | 3-1/2 | 40 | 11 |
| E997N | 4 | 30 | 16 |
| E997P | 5 | 15 | 8 |
| E997R | 6 | 10 | 7 |
| E997T | 8 | 3 | 15 |

Meter Hubs



| Cat. No. | Size (in.) | Std. Ctn. Qty. | Std. Ctn. Wt. (lb.) |
|-----------|------------|----------------|---------------------|
| E991G | 1-1/4 | 20 | 3.8 |
| E991G-UPC | 1-1/4 | 12 | 2.3 |
| E991H | 1-1/2 | 25 | 8.0 |
| E991J | 2 | 6 | 1.0 |
| E991J-UPC | 2 | 12 | 2.0 |

Fittings and Accessories


Flat Sealing Washer

Where a waterproof termination is required into any enclosure (metallic or nonmetallic), install the neoprene washer over the threads of a terminal adapter before inserting into the enclosure. Use a standard locknut or threaded bushing to secure the assembly.



| Cat. No. | Size (in.) | Std. Ctn. Qty. |
|----------|------------|----------------|
| E943DW | 1/2 | 125 |
| E943EW | 3/4 | 125 |
| E943FW | 1 | 100 |
| E943GW | 1-1/4 | 50 |
| E943HW | 1-1/2 | 50 |
| E943JW | 2 | 25 |

Access Pull Elbows




| Cat. No. | Size (in.) | Std. Ctn. Qty. | Typical (in.) | | | |
|------------|------------|----------------|---------------|-------|-------|-------|
| | | | A | B | C | D |
| E990D | 1/2 | 75 | 0.852 | 0.836 | 2.187 | 0.718 |
| E990DR-CAR | 1/2 | 25 | 0.852 | 0.836 | 2.187 | 0.718 |
| E990E | 3/4 | 50 | 1.064 | 1.046 | 2.531 | 0.781 |

Gasket included

Holform™ Concrete Sleeves


HOLFORM™ nonmetallic concrete sleeve forms are the easy way to form holes in concrete. They install in seconds with nails, screws or staples and are easily removed. Concrete will not adhere to them. HOLFORM™ are adjustable to any slab thickness. (Not CSA applicable)



| Cat. No. | Min. O.D. A (in.) | B (in.) | Std. Ctn. Qty. | Std. Ctn. Wt. (lb.) |
|----------|-------------------|---------|----------------|---------------------|
| E92CSH | 1-1/2 | 1-3/4 | 20 | 3 |
| E92CSJ | 2 | 2-13/32 | 25 | 6 |
| E92CSL | 3 | 3-13/32 | 25 | 8 |
| E92CSN | 4 | 4-13/32 | 18 | 8 |
| E92CSP | 5 | 5-13/32 | 15 | 8 |
| E92CSR | 6 | 6-13/32 | 12 | 8 |

Conduit Bodies Type X with Cover

Four knockout type socket openings, 90° spacing. Available with 1/2 in. or 3/4 in. socket outlets. Includes cover and gasket.

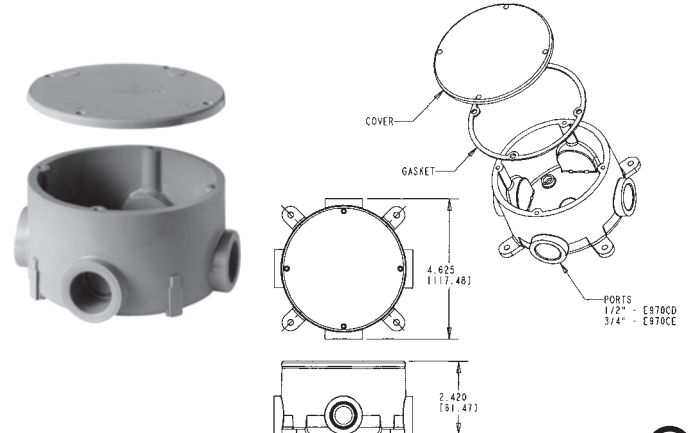

| Cat. No. | Size (in.) | Vol. Cu. (in.) | Std. Ctn. Qty. |
|----------|------------|----------------|----------------|
| CE970CDE | 1/2 | 15.16 | 15 |
| E970CE | 3/4 | 15.16 | 15 |


Supplied with 4 stainless steel cover screws. Diameter 4-1/8 in., Thickness 1/4 in. Not designed for use with wiring devices or light fixtures.

Conduit Bodies

Type LB



- Hubs are not threaded
- Textured lids
- Foam-in-place gasket




| Cat. No. | Size (in.) | Std. Ctn. Qty. | C Typical | Max. L1 (in.) | L2 | L3 | Max. (in.) | | | Vol. Cu. in. |
|----------|------------|----------------|-----------|---------------|---------------|----------|------------|---------|---------|--------------|
| | | | | | Typical (in.) | H | Q | W | | |
| E986D | 1/2 | 25 | 11/16 | 4-5/16 | 3-7/32 | 3-1/16 | 1-5/16 | 1-11/32 | 1-1/2 | 4.0 |
| E986E | 3/4 | 15 | 29/32 | 6-9/32 | 5-9/32 | 4-25/32 | 1-25/32 | 1-3/4 | 2-1/32 | 12.0 |
| E986F | 1 | 10 | 29/32 | 6-9/32 | 5-9/32 | 4-25/32 | 1-25/32 | 1-3/4 | 2-1/32 | 12.0 |
| E986G | 1-1/4 | 10 | 1-3/32 | 7-31/32 | 6-13/32 | 6 | 2-5/16 | 2-1/2 | 2-3/4 | 32.0 |
| E986H | 1-1/2 | 10 | 1-3/32 | 7-31/32 | 6-13/32 | 6 | 2-5/16 | 2-1/2 | 2-3/4 | 32.0 |
| E986J | 2 | 10 | 1-5/32 | 9-31/32 | 8-13/32 | 7-1/4 | 2-9/16 | 3-5/32 | 3-15/32 | 63.0 |
| E986K | 2-1/2 | 4 | 1-5/8 | 14-7/8 | 13-1/4 | 11-31/32 | 3-3/4 | 4-11/32 | 4-5/8 | 210.0 |
| E986L | 3 | 4 | 1-5/8 | 14-7/8 | 13-1/4 | 11-31/32 | 3-3/4 | 4-11/32 | 4-5/8 | 210.0 |
| E986M | 3-1/2 | 4 | 1-25/32 | 17-23/32 | 15-7/8 | 14-17/64 | 4-7/16 | 5-11/32 | 5-21/32 | 390.0 |
| E986N | 4 | 4 | 1-25/32 | 17-23/32 | 15-7/8 | 14-17/64 | 4-7/16 | 5-11/32 | 5-21/32 | 390.0 |

Type LR



- Hubs are not threaded
- Textured lids
- Foam-in-place gasket




| Cat. No. | Size (in.) | Std. Ctn. Qty. | C Typical | Max. L1 (in.) | L2 | L3 | Max. (in.) | | | Vol. Cu. in. |
|-----------|------------|----------------|-----------|---------------|---------------|---------|------------|---------|---------|--------------|
| | | | | | Typical (in.) | H | Q | W | | |
| E985D-CAR | 1/2 | 10 | 11/16 | 4-5/16 | 3-7/32 | 3-1/16 | 1-5/16 | 1-11/32 | 1-1/2 | 4.0 |
| E985E-CAR | 3/4 | 10 | 29/32 | 6-9/32 | 5-9/32 | 4-25/32 | 1-25/32 | 1-3/4 | 2-1/32 | 12.0 |
| E985F-CAR | 1 | 10 | 29/32 | 6-9/32 | 5-9/32 | 4-25/32 | 1-25/32 | 1-3/4 | 2-1/32 | 12.0 |
| E985G-CAR | 1-1/4 | 5 | 1-3/32 | 7-31/32 | 6-13/32 | 6 | 2-5/16 | 2-1/2 | 2-3/4 | 32.0 |
| E985H-CAR | 1-1/2 | 5 | 1-3/32 | 7-31/32 | 6-13/32 | 6 | 2-5/16 | 2-1/2 | 2-3/4 | 32.0 |
| E985J-CAR | 2 | 3 | 1-5/32 | 9-9/32 | 8-13/32 | 7-1/4 | 2-9/16 | 3-5/32 | 3-15/32 | 63.0 |

Type E



- Hubs are not threaded
- Textured lids
- Foam-in-place gasket




| Cat. No. | Size (in.) | Std. Ctn. Qty. | C (in.) | L1 (in.) | L2 (in.) | Q (in.) | W (in.) | Vol. Cu. in. |
|----------|------------|----------------|---------|----------|----------|---------|---------|--------------|
| E988D | 1/2 | 25 | 11/16 | 4-5/16 | 3-1/2 | 1-11/32 | 1-1/2 | 4.0 |
| E988E | 3/4 | 15 | 29/32 | 6-11/32 | 5-9/32 | 1-3/4 | 2-1/32 | 12.0 |
| E988F | 1 | 10 | 29/32 | 6-11/32 | 5-9/32 | 1-3/4 | 2-1/32 | 12.0 |
| E988G | 1-1/4 | 10 | 1-3/32 | 8 | 6-13/32 | 2-1/2 | 2-3/4 | 32.0 |
| E988H | 1-1/2 | 10 | 1-3/32 | 8 | 6-13/32 | 2-1/2 | 2-3/4 | 32.0 |
| E988J | 2 | 10 | 1-5/32 | 9-15/32 | 8-13/32 | 3-5/32 | 3-15/32 | 63.0 |

Type T



- Hubs are not threaded
- Textured lids
- Foam-in-place gasket




| Cat. No. | Size (in.) | Std. Ctn. Qty. | C Typical (in.) | Max. L1 (in.) | L2 | L3 | Max. (in.) | | | Vol. Cu. in. |
|-----------|------------|----------------|-----------------|---------------|---------------|---------|------------|---------|---------|--------------|
| | | | | | Typical (in.) | H | Q | W | | |
| E983D-CAR | 1/2 | 10 | 11/16 | 4-11/16 | 3-7/32 | 2-11/32 | 1-5/16 | 1-11/32 | 1-1/2 | 4.0 |
| E983E | 3/4 | 15 | 29/32 | 6-7/8 | 5-9/32 | 4-7/16 | 1-25/32 | 1-3/4 | 2-1/32 | 12.0 |
| E983F | 1 | 20 | 29/32 | 6-7/8 | 5-9/32 | 3-7/16 | 1-25/32 | 1-3/4 | 2-1/32 | 12.0 |
| E983G | 1-1/4 | 10 | 1-3/32 | 8-21/32 | 6-13/32 | 4-21/64 | 2-5/16 | 2-1/2 | 2-3/4 | 32.0 |
| E983H | 1-1/2 | 4 | 1-3/32 | 8-21/32 | 6-13/32 | 4-21/64 | 2-5/16 | 2-1/2 | 2-3/4 | 32.0 |
| E983J | 2 | 10 | 1-5/32 | 10-5/16 | 8-13/32 | 5-5/32 | 2-9/16 | 3-5/32 | 3-15/16 | 63.0 |

Type C



- Hubs are not threaded
- Textured lids
- Foam-in-place gasket




| Cat. No. | Size (in.) | Std. Ctn. Qty. | C Typical (in.) | Max. L1 (in.) | L2 | Max. (in.) | | Vol. Cu. in. |
|-----------|------------|----------------|-----------------|---------------|---------------|------------|---------|--------------|
| | | | | | Typical (in.) | Q | W | |
| E987D-CTN | 1/2 | 8 | 11/16 | 4-11/16 | 3-1/2 | 1-11/32 | 1-1/2 | 4.0 |
| E987E-CAR | 3/4 | 10 | 29/32 | 6-7/8 | 5-32/64 | 1-3/4 | 2-1/32 | 12.0 |
| E987F-CAR | 1 | 10 | 29/32 | 6-7/8 | 5-9/32 | 1-3/4 | 2-1/32 | 12.0 |
| E987G-CAR | 1-1/4 | 5 | 1-3/32 | 8-21/32 | 6-13/32 | 2-1/2 | 2-3/4 | 32.0 |
| E987H-CAR | 1-1/2 | 4 | 1-3/32 | 8-21/32 | 6-13/32 | 2-1/2 | 2-3/4 | 32.0 |
| E987J | 2 | 15 | 1-5/32 | 10-5/16 | 8-13/32 | 3-5/32 | 3-15/32 | 63.0 |

Type LL



- Hubs are not threaded
- Textured lids
- Foam-in-place gasket



| Cat. No. | Size (in.) | Std. Ctn. Qty. | C Typical (in.) | Max. L1 (in.) | L2 | L3 | Max. (in.) | | | Vol. Cu. in. |
|-----------|------------|----------------|-----------------|---------------|---------------|---------|------------|---------|---------|--------------|
| | | | | | Typical (in.) | H | Q | W | | |
| E984D-CAR | 1/2 | 10 | 11/16 | 4-5/16 | 3-7/32 | 3-1/16 | 1-5/16 | 1-11/32 | 1-1/2 | 4.0 |
| E984E | 3/4 | 20 | 29/32 | 6-9/32 | 5-9/32 | 4-25/32 | 1-25/32 | 1-3/4 | 2-1/32 | 12.0 |
| E984F-CAR | 1 | 10 | 29/32 | 6-9/32 | 5-9/32 | 4-25/32 | 1-25/32 | 1-3/4 | 2-1/32 | 12.0 |
| E984G | 1-1/4 | 10 | 1-3/32 | 7-31/32 | 6-13/32 | 6 | 2-5/16 | 2-1/2 | 2-3/4 | 32.0 |
| E984H | 1-1/2 | 10 | 1-3/32 | 7-31/32 | 6-13/32 | 6 | 2-5/16 | 2-1/2 | 2-3/4 | 32.0 |
| E984J | 2 | 10 | 1-5/32 | 9-9/32 | 8-13/32 | 7-1/4 | 2-9/16 | 3-5/32 | 3-15/32 | 63.0 |



Junction Boxes

Molded Nonmetallic Junction Boxes 6P Rated

Nonmetallic junction boxes are CSA Certified. Manufactured from PVC or PPO thermoplastic molding compound and featuring foam-in-place gasketed lids attached with stainless steel screws.

These rugged enclosures offer all the corrosion resistance and physical properties you need for direct burial applications.


These enclosures are Nema 4-4x-6P Rated.

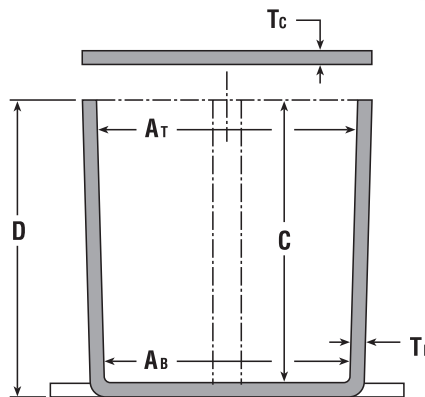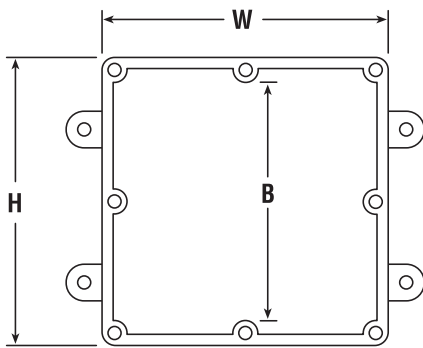

| Cat. No. | H x W x D (in.) | Std. Ctn. Qty. | Minimum (in.) | | | | Typical (in.) | | Material | | Std. Ctn. Wt. (lb.) |
|-------------|-----------------|----------------|----------------|----------------|---------|---|----------------|----------------|----------|---------------|---------------------|
| | | | A _T | A _B | B | C | T _B | T _C | PVC | Thermoplastic | |
| E989NNJ | 4 x 4 x 2 | 10 | 3-11/16 | 3-5/8 | — | 2 | 0.160 | 0.155 | X | | 3 |
| E989NNJ-CAR | 4 x 4 x 2 | 8 | 3-11/16 | 3-5/8 | — | 2 | 0.160 | 0.155 | X | | 3 |
| E987N-CAR | 4 x 4 x 4 | 10 | 3-11/16 | 3-1/2 | — | 4 | 0.160 | 0.155 | | X | 4 |
| E989PPJ | 5 x 5 x 2 | 10 | 4-11/16 | 4-1/2 | — | 2 | 0.110 | 0.150 | | X | 3 |
| E987R | 6 x 6 x 4 | 10 | 6 | 5-5/8 | — | 4 | 0.190 | 0.190 | | X | 3 |
| E989RRR-UPC | 6 x 6 x 6 | 8 | 5-5/8 | 5-3/8 | — | 6 | 0.160 | 0.150 | | X | 14 |
| E989N-CAR | 8 x 8 x 4 | 1 | 8 | 8 | — | 4 | 0.185 | 0.190 | | X | 2 |
| E989SSX-UPC | 8 x 8 x 7 | 2 | 7-21/32 | 7-5/16 | — | 7 | 0.160 | 0.150 | | X | 6 |
| E989UUN | 12 x 12 x 4 | 3 | 11-5/8 | 11-1/2 | 11-1/8 | 4 | 0.160 | 0.150 | | X | 12 |
| E989R-UPC | 12 x 12 x 6 | 2 | 11-15/16 | 11-7/8 | 11-7/16 | 6 | 0.265 | 0.185 | | X | 10 |

Conduit Sleeve Couplings

Pass-through for concrete walls, columns and posts

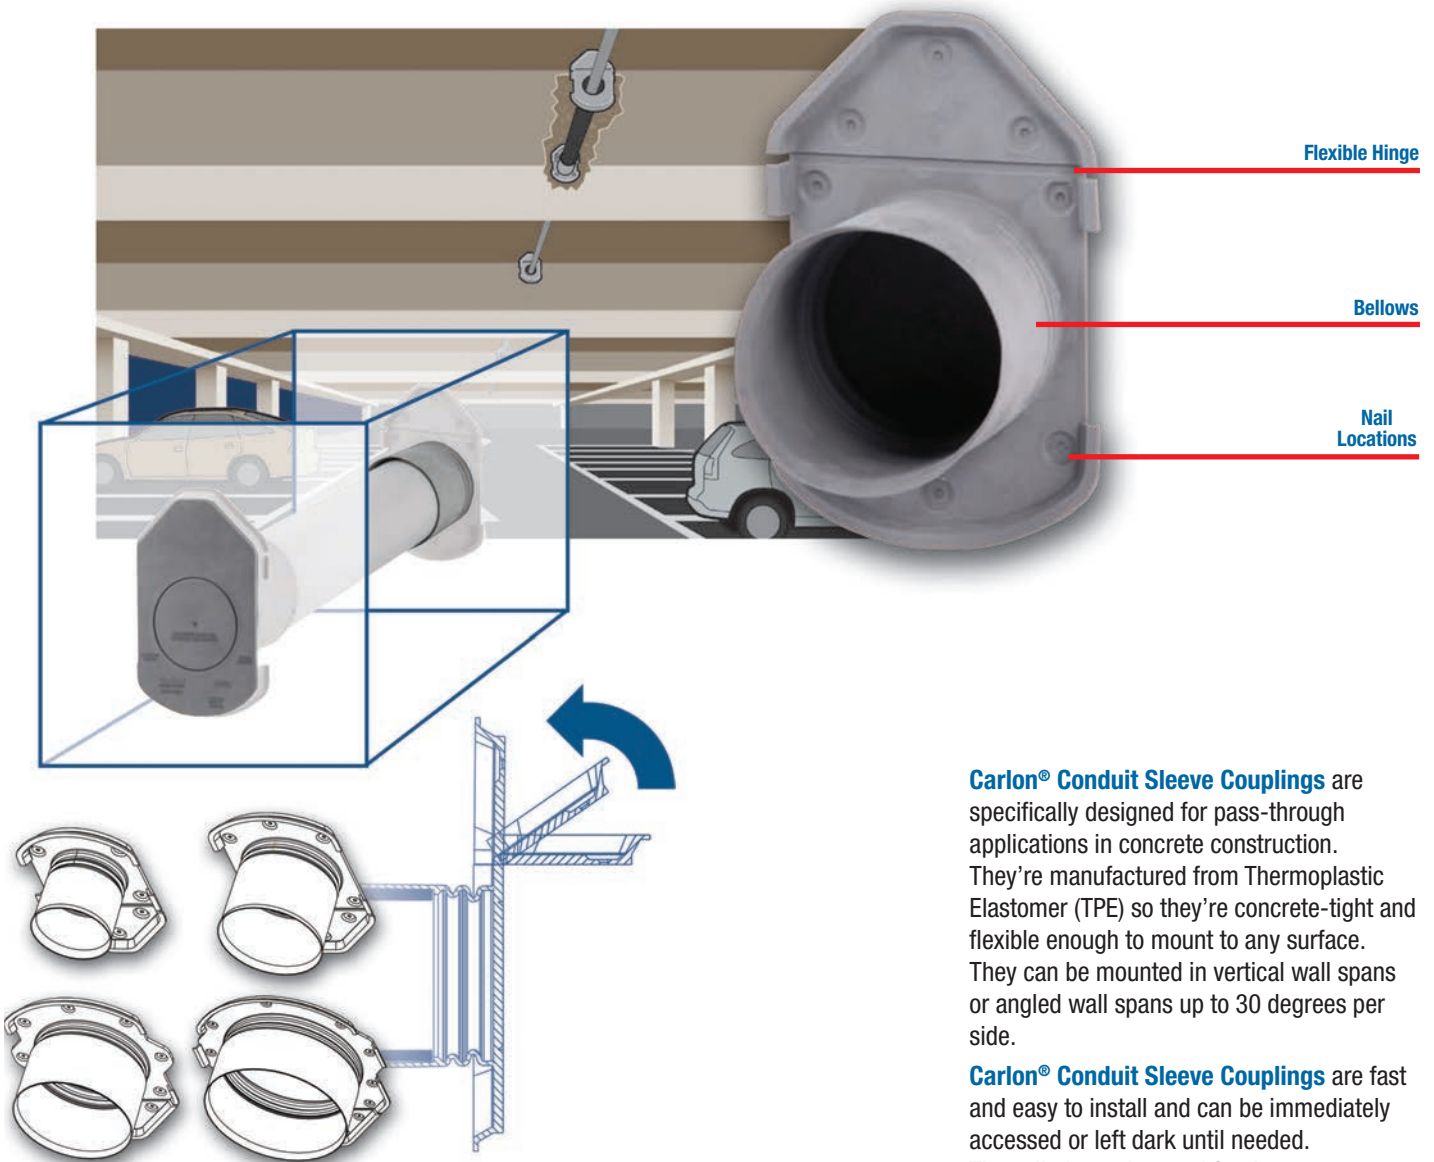

Carlton® Conduit Sleeve Couplings are specifically designed for pass-through applications in concrete construction. They're manufactured from Thermoplastic Elastomer (TPE) so they're concrete-tight and flexible enough to mount to any surface. They can be mounted in vertical wall spans or angled wall spans up to 30 degrees per side.

Carlton® Conduit Sleeve Couplings are fast and easy to install and can be immediately accessed or left dark until needed. They eliminate the need for duct tape, clamps and special mounting means while providing superior aesthetics by blending into the concrete.

Applications – Concrete walls, columns and posts.

Conduit Sleeve Couplings




Features


- EXCLUSIVE
- Manufactured from TPE, concrete-tight
- Flexible hinge provides alignment of pass-through with ceiling
- Bellows – mounts to vertical walls and angled walls up to 30°
- Quick and easy installation
- Eliminates the use of duct tape and clamps

- Manufactured to IPS dimensions for use with most conduit types
- Superior aesthetics (blends in to the concrete)
- Trade sizes: 2 in., 3 in., 4 in. and 6 in.
- Future-proofs the structure. Pass-through remains dark and protected until needed
- Note: Firestop (where needed) and conduit NOT INCLUDED


E992J

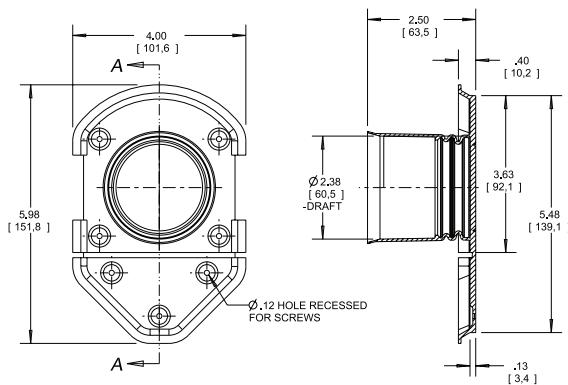


E992L

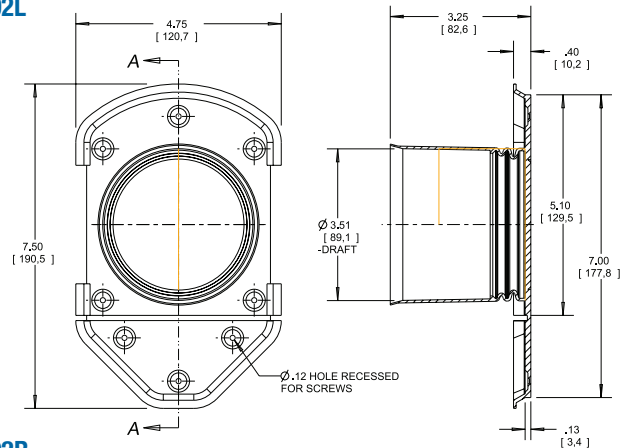

E992N

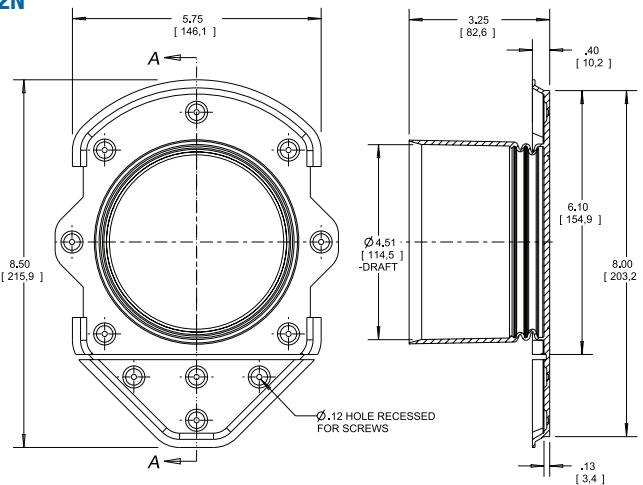

E992R

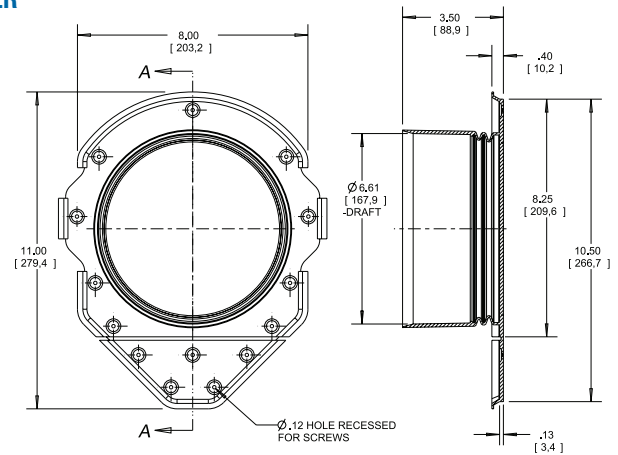

Specifications


| Cat. No. | Size (in.) | Std. Ctn. Qty. | Std. Ctn. Wt. (lb.) |
|----------|------------|----------------|---------------------|
| E992J | 2 | 84 | 13.0 |
| E992L | 3 | 30 | 8.3 |
| E992N | 4 | 22 | 8.6 |
| E992R | 6 | 18 | 13.0 |

Switch Boxes

Single Gang FS Boxes

All sizes take standard covers and accessories or devices. Integral mounting feet provide easy mounting. Grounding lugs included.

Type FSE

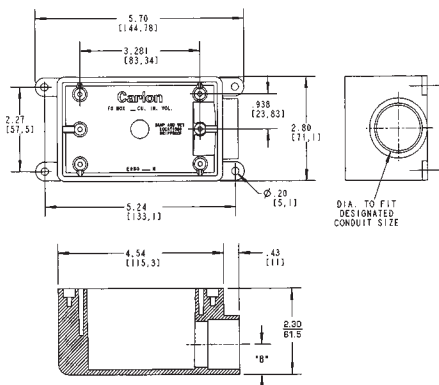


For dead-end terminations.



| Cat. No. | Size (in.) | Volume Cu. In. | Std. Ctn. Qty. |
|-------------|------------|----------------|----------------|
| C980DFN-CTN | 1/2 | 18 | 12 |
| C980EFN-CTN | 3/4 | | 12 |
| C980FFN-CTN | 1 | | 8 |

Type FSS

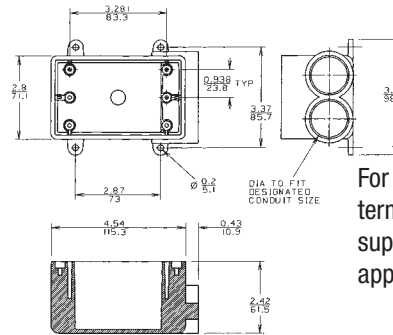


For multiple dead-end circuit terminations or where additional support is required in stub-up applications.



| Cat. No. | Size (in.) | Volume Cu. In. | Std. Ctn. Qty. |
|-------------|------------|----------------|----------------|
| C982DFN-CTN | 1/2 | 18 | 12 |
| C982EFN-CTN | 3/4 | | 12 |
| C982FFN-CTN | 1 | | 8 |

Type FSC

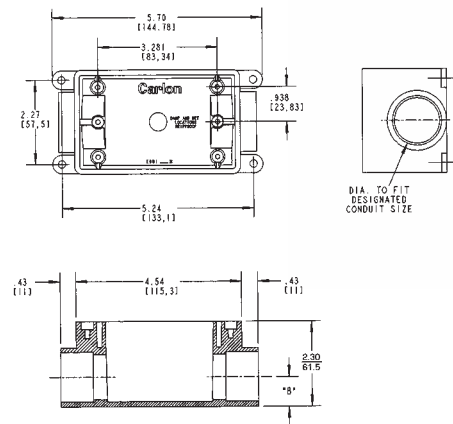


For through terminations.



| Cat. No. | Size (in.) | Volume Cu. In. | Std. Ctn. Qty. |
|-------------|------------|----------------|----------------|
| C981DFN-CTN | 1/2 | 18 | 12 |
| C981EFN-CTN | 3/4 | | 12 |
| C981FFN-CTN | 1 | | 8 |

Type FSCC

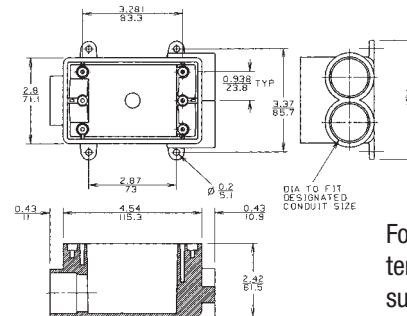

For multiple through circuit terminations or where additional support is required in stub-up applications.




| Cat. No. | Size (in.) | Volume Cu. In. | Std. Ctn. Qty. |
|----------|------------|----------------|----------------|
| C979DFN | 1/2 | 18 | 15 |
| C979EFN | 3/4 | | |
| C979FFN | 1 | | |

Switch Boxes

Single Gang FD Deep Device Boxes

All sizes take standard covers and accessories or devices. Integral mounting feet provide easy mounting. Grounding lugs included.

Type FD

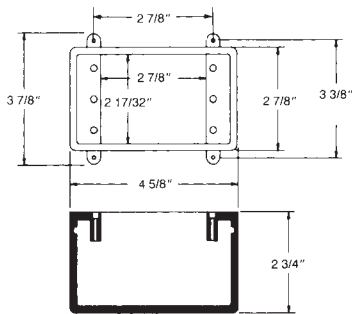


For terminations where hub requirements vary according to application – hubs easily made with flared wood bit or hole saw.



| Cat. No. | Volume Cu. In. | Std. Ctn. Qty. |
|-----------|----------------|----------------|
| C9801-UPC | 25 | 10 |

Type FDC


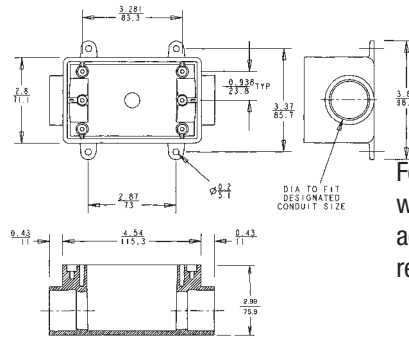


For through terminations where large devices or additional wiring capacity is required.



| Cat. No. | Size (in.) | Volume Cu. In. | Std. Ctn. Qty. |
|----------|------------|----------------|----------------|
| C9811EN | 3/4 | 25 | 10 |
| C9811FN | 1 | | |

Type FDE

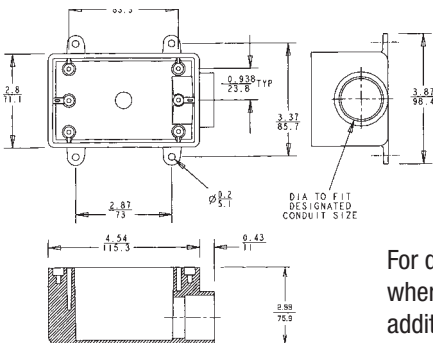

For dead-end terminations where large devices or additional wiring capacity is required.




| Cat. No. | Size (in.) | Volume Cu. In. | Std. Ctn. Qty. |
|----------|------------|----------------|----------------|
| C9801DN | 1/2 | 25 | 10 |
| C9801EN | 3/4 | | |
| C9801FN | 1 | | |

Switch Boxes

Two Gang FS Boxes

All sizes take standard covers and accessories or devices. Integral mounting feet provide easy mounting. Grounding screws are included.

Type 2FSC


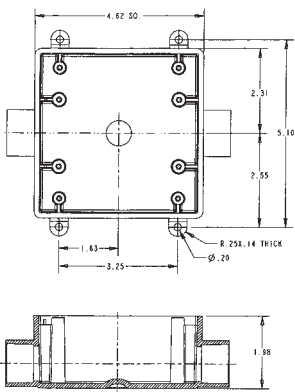


For through terminations where two devices or additional wiring capacity is required.



| Cat. No. | Size (in.) | Volume Cu. In. | Std. Ctn. Qty. |
|-------------|------------|----------------|----------------|
| CE9812DR | 1/2 | 32 | 4 |
| CE9812E-CTN | 3/4 | | 10 |
| CE9812FR | 1 | | 10 |

Type 2FSE


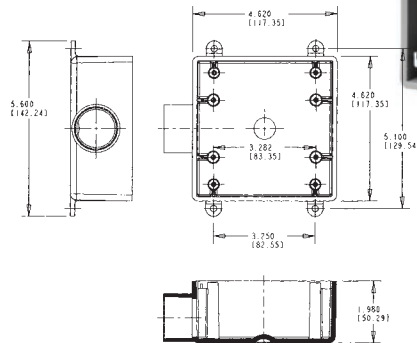


For dead-end terminations where two devices or additional wiring capacity is required.



| Cat. No. | Size (in.) | Volume Cu. In. | Std. Ctn. Qty. |
|-------------|------------|----------------|----------------|
| CE9802D-CTN | 1/2 | 32 | 10 |
| CE9802E-CTN | 3/4 | | 10 |
| CE9802FR | 1 | | 1 |

Type FS

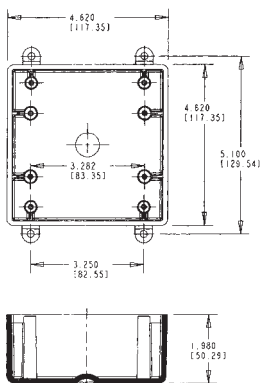

For terminations where hub requirements vary according to application - hubs easily made with flared wood bit or hole saw.



| Cat. No. | Size (in.) | Volume Cu. In. | Std. Ctn. Qty. |
|----------|------------|----------------|----------------|
| CE9802 | N/A | 32 | 10 |

Covers

Single Gang

Fits single gang FS boxes. Supplied with stainless steel mounting screws and gasket.



Two Gang

Fits two gang FS boxes, other nonmetallic and metallic FS boxes. Supplied with stainless steel mounting screws and gasket.



| Cat. No. | Colour | Std. Ctn. Qty. | Std. Ctn. Wt. (lb.) |
|------------|--------|----------------|---------------------|
| E980CN-CAR | Grey | 12 | 1.60 |
| E980CM-CAR | White | | |

| Cat. No. | Colour | Std. Ctn. Qty. | Std. Ctn. Wt. (lb.) |
|-------------|--------|----------------|---------------------|
| E9802CN-CAR | Grey | 10 | 2.17 |
| E9802CM-CAR | White | | |

FS Type Duplex Receptacle Covers



For indoor use only.
Gasket not included

FS Type Switch Covers



For indoor use only.
Gasket not included

| Cat. No. | Gang | Std. / Inner Qty. | Std. Ctn. Wt. (lb.) |
|----------|------|-------------------|---------------------|
| E98DGDR | 2 | 150 / 5 | 0.75 |
| E98SGDR | 1 | 200 / 5 | 0.45 |






| Cat. No. | Gang | Std. / Inner Qty. | Std. Ctn. Wt. (lb.) |
|----------|------|-------------------|---------------------|
| E98DTSCR | 2 | 150 / 5 | 0.90 |
| E98STSCR | 1 | 200 / 5 | 0.55 |

Support Straps

Snap Strap® Conduit – Support Straps

Carlton's Snap Strap® offers a unique support strap designed especially for the installation of PVC conduit. Also suitable for installations of rigid steel. This high strength, nonmetallic clamp allows conduit to expand and contract freely, eliminating the bowing commonly seen from the expansion and contraction of conduit caused by varying temperature changes. Finished installations have a neat, attractive appearance on exposed applications. To be used in accordance with conduit spacing requirements per Section 12-1114 of the CEC. This part is not supplied with screws.

- UV inhibited for use in direct sunlight

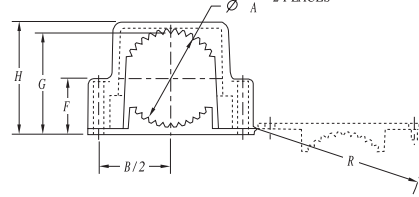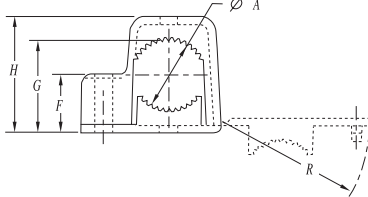

Single Mount

Double Mount

Single Mount

| Cat. No. | Size in. (mm) | Std. Ctn. Qty. | Std. Ctn. Wt. (lb.) | Dimensions in. (mm) | | | | | | | | |
|------------|---------------|----------------|---------------------|---------------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|
| | | | | A | B | C | D | F | G | H | J | R |
| E978DC-CAR | 1/2 (16) | 40 | 1 | 0.80 (20.3) | 0.75 (1.90) | 1.63 (41.4) | 0.75 (19.1) | 0.59 (14.9) | 0.99 (25.1) | 1.36 (34.5) | 0.21 (5.33) | 1.67 (42.4) |
| E978EC-CAR | 3/4 (21) | 40 | 3 | 1.00 (25.4) | 0.88 (22.4) | 1.92 (48.7) | 0.75 (19.1) | 0.70 (17.8) | 1.20 (30.4) | 1.57 (39.9) | 0.21 (5.33) | 1.96 (49.8) |
| E978FC-CAR | 1 (27) | 30 | 4 | 1.20 (30.5) | 1.02 (25.9) | 2.17 (55.1) | 0.75 (19.1) | 0.83 (21.1) | 1.43 (36.3) | 1.84 (46.7) | 0.21 (5.33) | 2.22 (56.3) |

Double Mount

| Cat. No. | Size in. (mm) | Std. Ctn. Qty. | Std. Ctn. Wt. (lb.) | Dimensions in. (mm) | | | | | | | | |
|------------|---------------|----------------|---------------------|---------------------|----------------|-----------------|----------------|----------------|----------------|-----------------|-----------------|-----------------|
| | | | | A | B | C | D | F | G | H | J | R |
| E978GC-CAR | 1-1/4 (35) | 15 | 4 | 1.66 (42.16) | 2.75 (69.9) | 3.23 (82.0) | 1.00 (25.4) | 0.95 (24.1) | 1.78 (45.2) | 2.15 (54.61) | 0.218 (5.54) | 3.28 (83.3) |
| E978HC-CAR | 1-1/2 (41) | 15 | 5 | 1.92 (48.77) | 3.05 (77.5) | 3.53 (89.7) | 1.00 (25.4) | 1.08 (27.4) | 2.04 (51.8) | 2.40 (60.96) | 0.218 (5.54) | 3.58 (90.9) |
| E978JC-CAR | 2 (53) | 10 | 5 | 2.34 (59.44) | 3.50 (88.9) | 4.00 (101.6) | 1.00 (25.4) | 1.31 (33.3) | 2.48 (63.0) | 2.86 (72.64) | 0.218 (5.54) | 4.06 (103.1) |

Clamps

2 Hole Nonmetallic Conduit Clamps


Nonmetallic clamps offer the same chemical resistance as Carlton nonmetallic conduits for a complete, corrosion resistant system.

To be used in accordance with conduit spacing requirements per Section 12-1114 of the CEC.

- UV inhibited for use in direct sunlight



Nylon Mansory Clamp

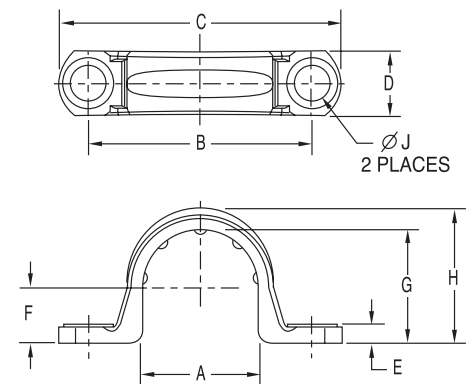

Conduit Clamps

| Cat. No. | Size in. (mm) | Std. Ctn. Qty. | Std. Ctn. Wt. (lb.) | Dimensions in. (mm) | | | | | | | | |
|---------------|---------------|----------------|---------------------|---------------------|-----------------|-----------------|-----------------|----------------|-----------------|-----------------|-----------------|----------------|
| | | | | A | B | C | D | E | F | G | H | J |
| E977DC | 1/2 (16) | 100 | 1.2 | 0.892 (22.6) | 1.71 (43.4) | 2.16 (54.8) | 0.50 (12.7) | 0.14 (3.5) | 0.42 (10.6) | 0.866 (21.9) | 1.04 (26.4) | 0.260 (6.6) |
| E977EC | 3/4 (21) | 100 | 1.4 | 1.102 (27.9) | 1.97 (50.0) | 2.40 (60.9) | 0.50 (12.7) | 0.14 (3.5) | 0.525 (13.3) | 1.076 (27.3) | 1.255 (31.8) | 0.260 (6.6) |
| E977FC | 1 (27) | 100 | 2 | 1.39 (35.3) | 2.25 (57.1) | 2.81 (71.3) | 0.594 (15.0) | 0.14 (3.5) | 0.658 (16.7) | 1.342 (34.0) | 1.574 (39.9) | 0.260 (6.6) |
| E977GC | 1-1/4 (35) | 50 | 5 | 1.714 (43.5) | 2.68 (68.0) | 3.28 (83.3) | 0.64 (16.2) | 0.15 (3.8) | 0.83 (21.0) | 1.687 (42.8) | 1.89 (48.0) | 0.320 (8.1) |
| E977HC | 1-1/2 (41) | 50 | 6 | 1.92 (48.7) | 2.82 (71.6) | 3.44 (87.3) | 0.70 (17.7) | 0.15 (3.8) | 0.97 (24.6) | 1.93 (49.0) | 2.12 (53.8) | 0.312 (7.9) |
| E977JC | 2 (53) | 25 | 4.5 | 2.54 (64.5) | 3.54 (89.9) | 4.18 (106.1) | 0.76 (19.3) | 0.16 (4.0) | 1.05 (26.6) | 2.29 (58.1) | 2.49 (63.2) | 0.315 (8.0) |
| E977K* | 2-1/2 (63) | 50 | 10 | 2.88 (73.0) | 4.88 (123.8) | 5.81 (147.7) | 1.00 (25.4) | 0.05 (1.3) | 1.44 (36.5) | 2.88 (73.0) | 3.00 (76.1) | 0.38 (9.5) |
| E977KC-CAR | 2-1/2 (63) | 25 | 1.4 | 2.86 (72.6) | 4.50 (114.3) | 5.46 (138.7) | 1.00 (25.4) | 0.20 (5.08) | 1.43 (36.3) | 2.86 (72.6) | 3.12 (79.2) | 0.36 (9.14) |
| E977L* | 3 (78) | 25 | 5.0 | 3.38 (85.7) | 5.72 (145.3) | 6.88 (174.6) | 1.00 (25.4) | 0.05 (1.3) | 1.66 (41.9) | 3.34 (84.9) | 3.47 (88.0) | 0.38 (9.5) |
| E977LC-CAR | 3 (78) | 20 | 1.4 | 3.47 (88.2) | 5.00 (127.0) | 6.00 (152.4) | 1.00 (25.4) | 0.20 (5.08) | 1.74 (44.3) | 3.48 (88.4) | 3.70 (94.0) | 0.36 (9.14) |
| E977N* | 4 (103) | 15 | 3.0 | 4.75 (120.7) | 7.52 (190.9) | 8.77 (222.7) | 1.25 (31.8) | 0.12 (3.1) | 1.94 (49.2) | 4.38 (111.1) | 4.50 (114.2) | 0.50 (12.7) |
| E977NC-CAR | 4 (103) | 15 | 12.2 | 4.366 (110.9) | 6.15 (156.2) | 7.20 (182.9) | 1.00 (25.4) | 0.20 (5.08) | 2.32 (58.8) | 4.50 (114.3) | 4.70 (119.4) | 0.36 (9.14) |
| E977NDC-CTN** | 1/2 (16) | 12 | 1.2 | - | - | - | - | - | - | - | - | - |
| E977NEC-CTN** | 3/4 (21) | 12 | 1.3 | - | - | - | - | - | - | - | - | - |

* PVC coated steel straps
** Nylon masonry clamp

General Information

Typical Properties of Conduit Raw Material Compound

| Thermal | ASTM Test | Typical Values |
|--|-----------|-------------------------|
| Coefficient of Thermal Expansion-inch/inch/°C (properties at 23°C) | D696 | 3.38 x 10 ⁻⁵ |
| Heat Distortion °C at 264 psi | D648 | 71°C |
| Thermal Conductivity BTU (hr.) (ft.) (°C/in.) | N/A | 1.3 |

| Electrical | ASTM Test | Typical Values |
|----------------------------------|-----------|----------------|
| Dielectrical Strength volts/mil | D149 | 1100 |
| Dielectric Constant 60 Hz @ 30°C | D150 | 4.00 |
| Power Factor 60 Hz @ 30°C | D150 | 1.93 |

| Mechanical | ASTM Test | Typical Values |
|----------------------------------|-----------|----------------|
| Specific Gravity | D792 | 1.43 – 1.6 |
| Tensile Strength (psi) @ 23°C | D638 | 5,000 – 6,500 |
| Izod Impact ft. lb./in. of notch | D256 | 0.65 – 1.5 |
| Flexural Strength (psi) | D790 | 12,500 |
| Compressive Strength (psi) | D695 | 9,000 |
| Hardness (Durometer D) | D2240 | 85 |

| Impedance | Ø3 90% P.F. | 80% P.F. | Ø1 90% P.F. | 80% P.F. |
|--------------------------------------|-------------|----------|-------------|----------|
| (Volts lost per ampere per 100 feet) | | | | |
| Steel Conduit | 0.0118 | 0.0123 | 0.0136 | 0.0142 |
| Schedule 40 | 0.0105 | 0.0106 | 0.0121 | 0.0122 |

Using 250 kcmil copper conductor comparable values for other conductor sizes.

Wire Fill

Maximum number of conductors in Schedule 40 PVC conduit (Based on Table 1, Chapter 9 of the NEC)

| Type Letters | Conductor Size AWG, kcmil | Conduit Trade Size | | | | | | | | | | | | | | | |
|--------------------|---------------------------|--------------------|-----|----|-------|-------|-----|-------|-----|-------|-----|-------|-----|-----|-----|--|--|
| | | 1/2 | 3/4 | 1 | 1-1/4 | 1-1/2 | 2 | 2-1/2 | 3 | 3-1/2 | 4 | 4-1/4 | 5 | 6 | 8 | | |
| THWN | 14 | 13 | 24 | 39 | 69 | 94 | 154 | | | | | | | | | | |
| | 12 | 10 | 18 | 29 | 51 | 79 | 114 | 164 | | | | | | | | | |
| | 10 | 6 | 11 | 18 | 32 | 44 | 73 | 194 | 160 | | | | | | | | |
| | 8 | 3 | 5 | 9 | 19 | 22 | 36 | 51 | 71 | 106 | 136 | | | | | | |
| FEP (14 thru 2) | 6 | 1 | 4 | 6 | 11 | 15 | 26 | 37 | 57 | 76 | 98 | 125 | 154 | | | | |
| | 4 | 1 | 2 | 4 | 7 | 9 | 16 | 22 | 35 | 47 | 60 | 75 | 94 | 137 | 236 | | |
| | 3 | 1 | 1 | 3 | 6 | 8 | 13 | 19 | 29 | 39 | 51 | 64 | 90 | 116 | 201 | | |
| FEPB (14 thru 4/0) | 2 | 1 | 1 | 3 | 5 | 7 | 11 | 16 | 25 | 33 | 43 | 54 | 67 | 97 | 169 | | |
| | 1 | 1 | 1 | 3 | 5 | 9 | 12 | 18 | 25 | 32 | 49 | 59 | 72 | 125 | | | |
| PFA (14 thru 8) | 1/0 | 1 | 1 | 3 | 4 | 7 | 10 | 15 | 21 | 27 | 33 | 42 | 61 | 105 | | | |
| | 2/0 | 1 | 1 | 2 | 3 | 6 | 8 | 13 | 17 | 22 | 29 | 35 | 51 | 88 | | | |
| | 3/0 | 1 | 1 | 1 | 3 | 5 | 7 | 11 | 14 | 18 | 23 | 29 | 42 | 73 | | | |
| | 4/050 | 1 | 1 | 1 | 2 | 4 | 6 | 9 | 12 | 15 | 19 | 24 | 35 | 61 | | | |
| PFAH (14 thru 4/0) | 250 | | | 1 | 1 | 1 | 3 | 4 | 7 | 10 | 12 | 16 | 20 | 28 | 49 | | |
| | 300 | | | 1 | 1 | 1 | 3 | 4 | 6 | 8 | 11 | 13 | 17 | 24 | 42 | | |
| | 350 | | | 1 | 1 | 1 | 2 | 3 | 5 | 7 | 9 | 12 | 15 | 21 | 37 | | |
| | 400 | | | 1 | 1 | 1 | 2 | 3 | 5 | 6 | 8 | 10 | 13 | 19 | 33 | | |
| Z (14 thru 4/0) | 500 | | | | 1 | 1 | 1 | 2 | 4 | 5 | 7 | 9 | 11 | 16 | 27 | | |
| | 600 | | | | 1 | 1 | 1 | 1 | 3 | 4 | 5 | 7 | 9 | 13 | 22 | | |
| | 700 | | | | 1 | 1 | 1 | 1 | 3 | 4 | 5 | 6 | 8 | 11 | 19 | | |
| | 750 | | | | 1 | 1 | 1 | 1 | 2 | 3 | 4 | 6 | 7 | 11 | 19 | | |
| XHHW (4 thru 500) | 6 | 1 | 3 | 5 | 9 | 13 | 21 | 30 | 47 | 63 | 81 | 102 | 128 | 185 | 320 | | |
| | 600 | | | | 1 | 1 | 1 | 1 | 3 | 4 | 5 | 7 | 9 | 13 | 22 | | |
| | 700 | | | | 1 | 1 | 1 | 1 | 3 | 4 | 5 | 6 | 7 | 11 | 19 | | |
| | 750 | | | | 1 | 1 | 1 | 1 | 2 | 3 | 4 | 6 | 7 | 10 | 18 | | |

Weight Comparison

Carlton Schedule 40 rigid nonmetallic conduit compared to other rigid conduit in pounds per 100 feet (approx.)

| Nom. Size | Carlton Schedule 40 Rigid Nonmetallic Conduit | Carlton Schedule 80 Rigid Nonmetallic Conduit | Aluminum | Electrical Metallic Tubing (EMT) | Intermediate Metal Conduit (IMC) | Rigid Metal Conduit (RMC) |
|-----------|---|---|----------|----------------------------------|----------------------------------|---------------------------|
| 1/2 | 18 | 22 | 27 | 30 | 57 | 79 |
| 3/4 | 23 | 29 | 36 | 46 | 78 | 105 |
| 1 | 35 | 43 | 43 | 66 | 112 | 153 |
| 1-1/4 | 48 | 60 | 70 | 96 | 114 | 201 |
| 1-1/2 | 57 | 72 | 86 | 112 | 176 | 246 |
| 2 | 76 | 100 | 116 | 142 | 230 | 334 |
| 2-1/2 | 125 | 153 | 183 | 230 | 393 | 527 |
| 3 | 164 | 212 | 239 | 270 | 483 | 690 |
| 3-1/2 | 198 | | 288 | 350 | 561 | 831 |
| 4 | 234 | 310 | 340 | 400 | 625 | 982 |
| 5 | 317 | 431 | 465 | Not Made | Not Made | 1344 |
| 6 | 412 | 592 | 612 | Not Made | Not Made | 1770 |

General Information

Expansion and Contraction

Temperature Considerations for Rigid Nonmetallic Conduit Compensation for Linear Expansion

Like all construction materials, PVC will expand or contract with variations in temperatures. The coefficient of linear expansion in PVC conduit is 3.38×10^{-5} in./in./°C as compared to 1.2×10^{-5} for aluminum and $0.6-5 \times 10^{-5}$ for steel. An expansion fitting is needed whenever the change in length due to temperature variation will be 1/4 in. or greater.


Add 1°C to the estimated temperature range when conduit is installed in direct sunlight to allow for radiant heating.

An expansion fitting consists of two sections, one telescoping inside another. When installing expansion fittings, alignment of piston and barrel is important. Be sure to mount expansion fitting level for best performance.

For a vertical run, the expansion fitting must be installed close to the top of the run with the barrel jointing down, in order that rain water does not run into the opening. The lower end of the conduit run must be secured at the bottom so that any length change due to temperature variation will result in an upward movement.

Expansion Characteristics of PVC Rigid Nonmetallic Conduit Coefficient of Thermal Expansion = 3.38×10^{-5} in./in./°C

| Temp. Change in Degrees F | Length Change in inches per 100 ft. of PVC Conduit | Temp. Change in Degrees C | Length Change in inches per 100 ft. of PVC Conduit | Temp. Change in Degrees C | Length Change in inches per 100 ft. of PVC Conduit | Temp. Change in Degrees C | Length Change in inches per 100 ft. of PVC Conduit |
|---------------------------|--|---------------------------|--|---------------------------|--|---------------------------|--|
| 5 | 0.2 | 12.8 | 2.2 | 40.5 | 4.2 | 68.3 | 6.3 |
| 10 | 0.4 | 15.6 | 2.4 | 43.3 | 4.5 | 71.1 | 6.5 |
| 15 | 0.6 | 18.3 | 2.6 | 46.0 | 4.7 | 73.9 | 6.7 |
| 20 | 0.8 | 21.1 | 2.8 | 48.9 | 4.9 | 76.7 | 6.9 |
| 25 | 1.0 | 23.9 | 3.0 | 51.6 | 5.1 | 79.4 | 7.1 |
| 30 | 1.2 | 26.7 | 3.2 | 54.4 | 5.3 | 82.2 | 7.3 |
| 35 | 1.4 | 29.4 | 3.4 | 57.2 | 5.5 | 85.0 | 7.5 |
| 40 | 1.6 | 32.2 | 3.6 | 60.0 | 5.7 | 87.8 | 7.7 |
| 45 | 1.8 | 35.0 | 3.8 | 62.7 | 5.9 | 90.6 | 7.9 |
| 50 | 2.0 | 37.8 | 4.1 | 65.5 | 6.1 | 93.3 | 8.1 |

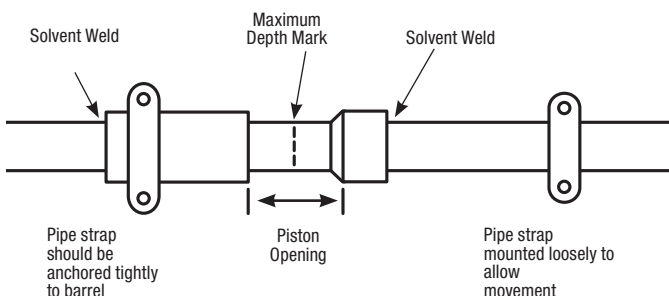

Determine the Piston Opening

The expansion joint must be installed to allow both expansion and contraction of the conduit run. The correct piston opening for any installation condition should use the following formula:

$$O = \left[\frac{T_{\text{max}} - T_{\text{installed}}}{\Delta T} \right] E$$

Where:

- O = Piston opening (in.)
- T max = Maximum anticipated temperature of conduit (°C)
- T inst. = Temperature of conduit at time of installation (°C)
- ΔT = Total change in temperature of conduit (°C)
- E = Expansion allowance built into each expansion fitting (in.)

Example

380 ft. of conduit is to be installed on the outside of a building exposed to the sun in a single straight run. It is expected that the conduit will vary in temperature from -17°C in the winter to 60°C in the summer (this includes the -1°C for radiant heating from the sun). The installation is to be made at a conduit temperature of 32°C. From the table, a 60°C temperature change will cause a 5.7 in. length change in 100 ft. of conduit. The total change for this example is 5.7 in. x 3.8 = 21.67 in. which should be rounded to 22 in. The number of expansion fittings will be 22 in. x fitting range (4 in. for Carlton trade sizes 1/2 in. through 1-1/2 in. and 8 in. for sizes 2 in. through 6 in.). If the E945D fitting is used, the number will be 22 in. x 4 = 5.50 which should be rounded to 6. The fitting should be placed at 62 ft. intervals (380 x 6). The proper piston setting at the time of installation is calculated as explained above.

$$O = \left[\frac{60^{\circ}\text{C} - 32^{\circ}\text{C}}{60^{\circ}\text{C}} \right] 4.0 = 1.4 \text{ in.}$$

Insert the piston into the barrel to the maximum depth. Place a mark on the piston at the end of the barrel. To properly set the piston, pull the piston out of the barrel to correspond to the 2.1 in. calculated above. See drawing at lower left.

Summary

1. Anticipate expansion and contraction of PVC conduit in above ground, exposed installation.
2. Use an expansion fitting when length change due to temperature variation will be 1/4 in. or greater.
3. PVC conduit expands 4.1 in. for each 100 feet of run and a 37.8°C temperature change.
4. Align expansion fitting with the conduit run to prevent binding.
5. Follow the instructions to set the piston opening.
6. Rigidly fix the outer barrel of the expansion fitting so it cannot move. Mount the conduit connected to the piston loosely enough to allow the conduit to move as the temperature changes.

General Information

Corrosion Resistance of Carlton Schedule 40 PVC Conduit and Fittings

Carlton Schedule 40 is generally acceptable for use in environments containing the chemicals below. These environmental resistance ratings are based upon tests where the specimens were placed in complete submergence in the reagent listed. Schedule 40 can be used in many process areas where chemicals not on this list are

manufactured or used because worker safety requirements dictate that any air presence or splashing be at a very low level.

If there are any questions for specific suitability in a given environment, prototype samples should be tested under actual conditions.

| | | | | |
|---------------------------------------|-----------------------------------|-------------------------------|-------------------------------|-------------------------------|
| Acetic Acid 0-20% | Butyl Alcohol | Fluorine Gas – Wet | Mercuric Cyanide | Silver Plating Solutions |
| Acetic Acid 20-30% | Butyl Phenol | Fluorine Gas – Dry | Mercurous Nitrate | Sodium Acetate |
| Acetic Acid 30-60% | Butylene | Fluoroboric Acid | Mercury | Sodium Arsenite |
| Acetic Acid 80% | Butyric Acid | Fluorosilicic Acid | Methyl Sulfate | Sodium Benzoate |
| Acetic Acid – Glacial | Calcium Bisulfite | Formaldehyde | Methylene Chloride | Sodium Bicarbonate |
| Acetic Acid Vapors | Calcium Carbonate | Formic Acid | Mineral Oils | Sodium Bisulfate |
| Acetylene | Calcium Chlorate | Fructose | Naphthalene | Sodium Bisulfite |
| Adipic Acid | Calcium Chloride | Gallic Acid | Nickel Chloride | Sodium Bromide |
| Alum | Calcium Hydroxide | Gas – Coke Oven | Nickel Nitrate | Sodium Chlorate |
| Aluminum Chloride | Calcium Hypochlorite | Gas – Natural (Dry) | Nitric Acid, Anhydrous | Sodium Chloride |
| Aluminum Fluoride | Calcium Nitrate | Gas – Natural (Wet) | Nitric Acid 20% | Sodium Cyanide |
| Aluminum Hydroxide | Calcium Sulfate | Gasoline – Sour | Nitric Acid 40% | Sodium Dichromate |
| Aluminum Oxychloride | Carbonic Acid | Gasoline – Refined | Nitric Acid 60% | Sodium Ferricyanide |
| Aluminum Nitrate | Carbon Dioxide Gas – Wet | Glucose | Nitrobenzene | Sodium Ferrocyanide |
| Aluminum Sulfate | Carbon Dioxide – Aqueous Solution | Glycerin (Glycerol) | Nitrous Oxide | Sodium Fluoride |
| Ammonia-Dry Gas | Carbon Monoxide | Glycol | Oils and Fats | Sodium Hydroxide |
| Ammonium Bifluoride | Caustic Potash | Glycolic Acid | Oils – Petroleum – (See Type) | Sodium Hypochlorite |
| Ammonium Carbonate | Caustic Soda | Green Liquor (Paper Industry) | Oleic Acid | Sodium Nitrate |
| Ammonium Chloride | Chloroacetic Acid | Heptane | Oxalic Acid | Sodium Nitrite |
| Ammonium Hydroxide 28% | Chloral Hydrate | Hexanol, Tertiary | Palmitic Acid 10% | Sodium Sulfate |
| Ammonium Metaphosphate | Chlorine Gas (Dry) | Hydrobromic Acid 20% | Perchloric Acid 10% | Sodium Sulfide |
| Ammonium Nitrate | Chlorine Gas (Moist) | Hydrochloric Acid 0% - 25% | Phenylhydrazine Hydrochloride | Sodium Sulfite |
| Ammonium Persulfate | Chlorine Water | Hydrochloric Acid 25% - 40% | Phosgene, Gas | Sodium Thiosulfate (Hypo) |
| Ammonium Phosphate – Neutral | Chlorosulfonic Acid | Hydrocyanic Acid or | Phosphoric Acid – 0-25% | Stannic Chloride |
| Ammonium Sulfate | Chrome Alum | Hydrogen Cyanide | Phosphoric Acid – 25-50% | Stannous Chloride |
| Ammonium Sulfide | Chromic Acid 10% | Hydrofluoric Acid 10% | Phosphoric Acid – 50-85% | Stearic Acid |
| Ammonium Thiocyanate | Chromic Acid 30% | Hydrofluorosilicic Acid | Photographic Chemicals | Sulfur |
| Amyl Alcohol | Chromic Acid 40% | Hydrogen Phosphide | Plating Solutions | Sulfur Dioxide – Gas Dry |
| Anthraquinone | Chromic Acid 50% | Hydrogen Sulfide – Dry | Potassium Bicarbonate | Sulfur Trioxide |
| Anthraquinonesulfonic Acid | Citric Acid | Hydrogen Sulfide – | Potassium Bichromate | Sulfuric Acid – 0-10% |
| Antimony Trichloride | Copper Chloride | Aqueous Solution | Potassium Borate | Sulfuric Acid – 10-75% |
| Aqua Regia | Copper Cyanide | Hydroquinone | Potassium Bromide | Sulfuric Acid – 75-90% |
| Arsenic Acid 80% | Copper Fluoride | Hydroxylamine Sulfate | Potassium Carbonate | Sulfurous Acid |
| Arylsulfonic Acid | Copper Nitrate | Iodine | Potassium Chloride | Tannic Acid |
| Barium Carbonate | Copper Sulfate | Kerosene | Potassium Chromate | Tanning Liquors |
| Barium Chloride | Cottonseed Oil | Lactic Acid 28% | Potassium Cyanide | Tartaric Acid |
| Barium Hydroxide | Cresylic Acid 50% | Lauric Acid | Potassium Dichromate | Titanium Tetrachloride |
| Barium Sulfate | Crude Oil – Sour | Lauryl Chloride | Potassium Ferricyanide | Triethanolamine |
| Barium Sulfide | Crude Oil – Sweet | Lauryl Sulfate | Potassium Ferrocyanide | Trimethyl Propane |
| Beet – Sugar Liquor | Demineralized Water | Lead Acetate | Potassium Fluoride | Trisodium Phosphate |
| Benzine Sulfonic Acid 10% | Dextrin | Lime Sulfur | Potassium Hydroxide | Turpentine |
| Benzoic Acid | Dextrose | Linoleic Acid | Potassium Nitrate | Urea |
| Bismuth Carbonate | Diglycolic Acid | Linseed Oil | Potassium Perborate | Vinegar |
| Black Liquor (Paper Industry) | Disodium Phosphate | Lubricating Oils | Potassium Perchlorite | Whiskey |
| Bleach – 12.5% Active CL ₂ | Ethyl Alcohol | Magnesium Carbonate | Potassium Permanganate 10% | White Liquor (Paper Industry) |
| Borax | Ethylene Glycol | Magnesium Chloride | Potassium Persulfate | Wines |
| Boric Acid | Fatty Acids | Magnesium Hydroxide | Potassium Sulfate | Zinc Chloride |
| Brine | Ferric Chloride | Magnesium Nitrate | Propane | Zinc Chromate |
| Bromic Acid | Ferric Nitrate | Magnesium Sulfate | Propyl Alcohol | Zinc Cyanide |
| Bromine – Water | Ferric Sulfate | Maleic Acid | Silicic Acid | Zinc Nitrate |
| Butadiene | Ferrous Chloride | Malic Acid | Silver Cyanide | Zinc Sulfate |
| Butane | Ferrous Sulfate | Mercuric Chloride | Silver Nitrate | |

DB/2 PVC Conduit

Rigid Type DB/2 PVC Conduit

Physical Properties by ASTM Test Methods

Carlton® Type DB/2 PVC Conduit is designed for use in concrete encased or masonry and direct burial applications. Type DB/2 PVC is CSA Certified, tested to CSA Standard C22.2 No. 211.1

| Properties | ASTM No. | Typical Values Type DB/2 Conduit |
|--|----------|----------------------------------|
| Tensile Strength, psi | D638 | 4,800 |
| Modulus of Elasticity in tension, psi | D638 | 500,000 |
| Flexural Strength, psi | D790 | 11,000 |
| Deflection Temp under load at 265 psi deg. C | D648 | 720C |
| Coefficient of Thermal Expansion in./in./°C | D696 | 3.30 X 10-5 |
| Maximum Coefficient of Static Friction | | 0.20 |

Performance Properties of Type DB/2 Conduit

as Indicated Under CSA Standard C22.2 No. 211.1

| Pipe Stiffness kPA | | |
|--------------------|---|--|
| Conduit Series | Minimum Pipe Stiffness (FΔy), all sizes | |
| DB/2 | 200 | |

| Minimum Impact Resistance (J) | | |
|-------------------------------|-------|------|
| Conduit Series | -18°C | 23°C |
| DB/2 | 34 | 61 |



| Cat. No. 10' | Cat. No. 20' | Nom. Size | Std. Crate Only | | Approx. Wt. per 100 ft. | | Average Outside Diameter | | Average Wall Thickness | |
|------------------------------|------------------------------|-----------|-----------------|--------|-------------------------|------|--------------------------|--------|------------------------|------|
| | | | 10 ft. | 20 ft. | (lb.) | (kg) | (in.) | (mm) | (in.) | (mm) |
| 48811CPD-010 | 48811CPD-020 | 2 | 2460 | 4920 | 35 | 15.9 | 2.25 | 57.15 | 0.070 | 1.78 |
| 48813CPD-010 | 48813CPD-020 | 3 | 1120 | 2240 | 58 | 26.3 | 3.25 | 82.55 | 0.080 | 2.03 |
| 48815CPD-010 | 48815CPD-020 | 4 | 630 | 1260 | 100 | 45.4 | 4.22 | 107.08 | 0.106 | 2.69 |
| 48816CPD-010 | 48816CPD-020 | 5 | 430 | 860 | 180 | 81.6 | 5.30 | 134.60 | 0.150 | 3.81 |
| 48817CPD-010 | 48817CPD-020 | 6 | 280 | 560 | 220 | 99.8 | 6.27 | 159.38 | 0.155 | 3.94 |

Also available in orange, add OG after CPD to the cat. no.



DB/2 Duct Fittings

PE Coupling – Push Fit



| Cat. No. | Size (in.) | Std. Ctn. Qty. |
|----------|------------|----------------|
| CE242J | 2 | 24 |
| CE242L | 3 | 100 |
| CE242N | 4 | 25 |
| CE242P | 5 | 12 |
| CE242R | 6 | 6 |

PVC 5° Coupling BxB – Solvent Weld



| Cat. No. | Size (in.) | Std. Ctn. Qty. |
|----------|------------|----------------|
| CE245J | 2 | 30 |
| CE245L | 3 | 15 |
| CE245N | 4 | 15 |
| CE245P | 5 | 20 |
| CE245R | 6 | 1 |

PVC Coupling – Solvent Weld



| Cat. No. | Size (in.) | Std. Ctn. Qty. |
|----------|------------|----------------|
| CE240J | 2 | 50 |
| CE240L | 3 | 20 |
| CE240N | 4 | 25 |
| CE240P | 5 | 20 |
| CE240R | 6 | 6 |

PVC 5° Coupling – Push Fit



| Cat. No. | Size (in.) | Std. Ctn. Qty. |
|----------|------------|----------------|
| CE2440L | 3 | 100 |
| CE2440N | 4 | 100 |
| CE2440P | 5 | 45 |

PVC Female Adapter – I.P.S. Solvent Weld Duct



| Cat. No. | Size (in.) | Std. Ctn. Qty. |
|----------|------------|----------------|
| CE942DJ | 2 | 25 |
| CE942DL | 3 | 30 |
| CE942DN | 4 | 50 |
| CE942DP | 5 | 15 |
| CE942DR | 6 | 6 |

Plugs with Pull Tab



| Cat. No. | Size (in.) | Std. Ctn. Qty. |
|----------|------------|----------------|
| P258JT | 2 | 60 |
| P258LT | 3 | 30 |
| P258NT | 4 | 48 |
| P258PT | 5 | 30 |
| P258RT | 6 | 30 |

PVC Conduit to DB/2 Duct Adapter



| Cat. No. | Size (in.) | Std. Ctn. Qty. |
|----------|------------|----------------|
| CE942RJ | 2 | 100 |
| CE942RL | 3 | 30 |
| CE942RN | 4 | 20 |
| CE942RP | 5 | 20 |

End Bells (For use with DB/2 Duct Only)




| Cat. No. | Size (in.) | Std. Ctn. Qty. |
|----------|------------|----------------|
| CE297J | 2 | 40 |
| CE297L | 3 | 30 |
| CE297N | 4 | 20 |
| CE297P | 5 | 15 |
| CE297R | 6 | 1 |

Cap – Solvent Weld




| Cat. No. | Size (in.) | Std. Ctn. Qty. |
|----------|------------|----------------|
| CE935J | 2 | 25 |
| CE935L | 3 | 25 |
| CE935N | 4 | 50 |
| CE935P | 5 | 25 |
| CE935R | 6 | 25 |

DB/2 Sweeps




90° Sweep

| Item | Cat. No. | Size (in.) | Radius (in.) | Std. Ctn. Qty. |
|------|------------|------------|--------------|----------------|
| | CPF9DJ-PD | 2 | 24 | 1 |
| | CPF9DL-PD | 3 | 24 | |
| | CPF9DN-PD | 4 | 24 | |
| | CPF9DP-PD | 5 | 24 | |
| | CPF9FJ-PD | 2 | 36 | |
| | CPF9FL-PD | 3 | 36 | |
| | CPF9FN-PD | 4 | 36 | |
| | CPF9FP-PD | 5 | 36 | |
| | CPF9FR-PD | 6 | 36 | |
| | CPF9GP-PD | 5 | 42 | |
| | CPF9IJ-PD | 2 | 60 | |
| | CPF9IL-PD | 3 | 60 | |
| | CPF9IN-PD | 4 | 60 | |
| | CPF9IP-PD | 5 | 60 | |
| | CPF9IR-PD | 6 | 60 | |
| | CPF9BJO-PD | 2 | 12 | |
| | CPF9FJO-PD | 2 | 36 | |
| | CPF9FLO-PD | 3 | 36 | |
| | CPF9FNO-PD | 4 | 36 | |

45° Sweep

| Item | Cat. No. | Size (in.) | Radius (in.) | Std. Ctn. Qty. |
|------|-----------|------------|--------------|----------------|
| | CPF7DJ-PD | 2 | 24 | 1 |
| | CPF7DL-PD | 3 | 24 | |
| | CPF7DN-PD | 4 | 24 | |
| | CPF7FJ-PD | 2 | 36 | |
| | CPF7FL-PD | 3 | 36 | |
| | CPF7FN-PD | 4 | 36 | |
| | CPF7FR-PD | 6 | 36 | |
| | CPF7GP-PD | 5 | 42 | |
| | CPF7IN-PD | 4 | 60 | |
| | CPF7IP-PD | 5 | 60 | |
| | CPF7IR-PD | 6 | 60 | |



22-1/2° Sweep

| Item | Cat. No. | Size (in.) | Radius (in.) | Std. Ctn. Qty. |
|------|-----------|------------|--------------|----------------|
| | CPF5DJ-PD | 2 | 24 | 1 |
| | CPF5DL-PD | 3 | 24 | |
| | CPF5DN-PD | 4 | 24 | |
| | CPF5FL-PD | 3 | 36 | |
| | CPF5FN-PD | 4 | 36 | |
| | CPF5GP-PD | 5 | 42 | |
| | CPF5IN-PD | 4 | 60 | |



Bore-Gard®

PVC Trenchless Raceway

The unique design incorporates a proprietary water-tight seal and locking ring that enables fast, cement-free assembly, strong enough for 1000 foot bores.

Benefits

- Lower overall installed cost – simpler handling, faster assembly, lower labour cost
- Lower freight cost
- Greater internal fill capacity – Bore-Gard® does not distort into an oval during spooling
- No wasted product
- Easier to transport, especially over rough terrain – one length of Bore-Gard® can be carried by one person
- Strong and flexible for direction drilling application
- Use standard PVC fittings – Bore-Gard® is made using standard schelude 40 dimensions – can be cemented
- No reel handling equipment required – Bore-Gard® can be unloaded by hand
- No fusion splicing equipment required to join two pipe sections – Bore-Gard® is joined together by one person
- No costly reels to return – with Bore-Gard®, there are no reels to handle

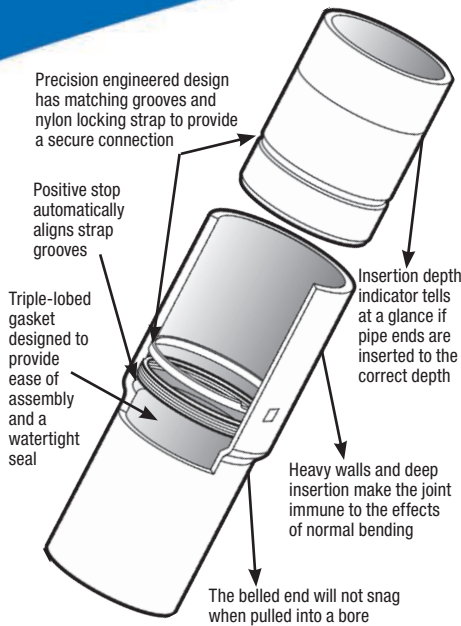

Minimum Bend Radius: Turns in a bore path should be made gradually. Bore-Gard® and Boreable Multi-Gard® have a minimum bend radius of 65'. Bending more than this recommended limit will stress the joint. The drawing on the left illustrates the 65' bend radius. To obtain a 90° turn you will require 65' of forward distance in any directional plane.



Assembly

1. Position Bore-Gard® with the print line facing up.
2. Remove plastic locking strap and set it aside.
3. Remove end caps. On first stick only, trim spigot end of Bore-Gard at the groove before attaching the pulling eye/gripping attachment.
4. Insert pulling eye into spigot end of Bore-Gard®.
5. Tighten pulling eye so that it expands against the interior of the conduit. Use of sleeve over O.D. of conduit is recommended.
6. The installer should use appropriate instrumentation to insure that maximum pull rating is not exceeded.
7. Take next piece of Bore-Gard® (10' or 20') and insert spigot end into belled end of the first piece until the insertion line is no longer visible.
8. Slide the plastic locking strap into slot on the side of the bell. Push the strap in completely. It is not necessary to remove or cover the handle on the strap.
9. Repeat with remaining sections as space allows.
10. Bore-Gard® is now ready for installation.

Technical Information

| | |
|---------------------------------|--|
| Axiale Tensile Rating | 3 in. – 7,000 pull-apart rating 4 in. – 8,700 pull-apart rating 5 in. – 11,300 pull-apart rating 6 in. – 14,000 pull-apart rating |
| Minimum Ben Radius | 65 feet – Assembly force 20 lb. |
| Seal Pressure Rating | 75 psi |
| Stiffness Rating | 600 lb./in. @ 5% defl. |
| Lengths | 10 ft. and 20 ft. |
| Restrained joint in bell | Locking ring/ groove design |

| Cat. No. | Description | Overall Length (ft.) | Lay Length | O.D. (in.) | I.D. (in.) | Pkg. Qty (ft./bundle) | Bundles per Truckload | Feet per Truckload | Wt. per 100 ft. (lb.) | Min. Bend Radius (ft.) | Insertion Force (lb.) | Seal Pressure Rating (P.S.I.) | Joint Pull Rating (lb.) | Typical Crush (lb) (@ 30% deflection) | NEMA TC2 Min. Crush (lb) |
|-------------|---------------|----------------------|------------|------------|------------|-----------------------|-----------------------|--------------------|-----------------------|------------------------|-----------------------|-------------------------------|-------------------------|---------------------------------------|--------------------------|
| BG340SP-010 | 3 in. Sch. 40 | 10 | 9'6" | 3.50 | 3.0 | 350 | 56 | 19,600 | 164 | 65 | 20 | 75 | 7,000 | 1,225 | 1,000 |
| BG340SP-020 | 3 in. Sch. 40 | 20 | 19'6" | 3.50 | 3.0 | 700 | 28 | 19,600 | 164 | 65 | 20 | 75 | 7,000 | 1,225 | 1,000 |
| BG440SP-010 | 4 in. Sch. 40 | 10 | 9'6" | 4.50 | 4.0 | 260 | 56 | 14,560 | 234 | 65 | 40 | 75 | 8,700 | 1,075 | 900 |
| BG440SP-020 | 4 in. Sch. 40 | 20 | 19'6" | 4.50 | 4.0 | 520 | 28 | 14,560 | 234 | 65 | 40 | 75 | 8,700 | 1,075 | 900 |
| BG540SP-010 | 5 in. Sch. 40 | 10 | 9'6" | 5.56 | 5.0 | 230 | 40 | 9,200 | 317 | 65 | 60 | 75 | 11,300 | 950 | 900 |
| BG540SP-020 | 5 in. Sch. 40 | 20 | 19'6" | 5.56 | 5.0 | 460 | 20 | 9,200 | 317 | 65 | 60 | 75 | 11,300 | 950 | 900 |
| BG640SP-010 | 6 in. Sch. 40 | 10 | 9'6" | 6.625 | 6.0 | 200 | 40 | 8,000 | 418 | 65 | 80 | 75 | 14,000 | 950 | 900 |
| BG640SP-020 | 6 in. Sch. 40 | 20 | 19'6" | 6.625 | 6.0 | 400 | 20 | 8,000 | 418 | 65 | 80 | 75 | 14,000 | 950 | 900 |

Multi-Gard®

PVC Boreable conduit

Benefits

- Withstands pulling and bending forces of directional drilling
- Fast assembly
- Eliminates labor related to gluing and screwing joints together
- For bores up to 500 feet
- Innerducts: 3-way or 4-way
- Easy to handle 20 foot lengths
- Type: Type 40 PVC outerduct
- Size: 4 in.
- Prelubricated innerducts
- Strong water-tight joints without cement
- Fits standard Schedule 40 fittings
- Compatible with Multi-Gard® Type 40 PVC Products



| Cat. No. | Description | Length (ft.) | O.D. (in.) | Innerduct I.D. (in.) | Pkg. Qty (ft./bundle) | Bundles per Truckload | Feet per Truckload | Wt. per 100 ft. (lb.) | Min. Bend Radius (ft.) | Seal Pressure Rating (P.S.I.) | Maximum Pull Rating (lb.) |
|------------|----------------------------|--------------|------------|----------------------|-----------------------|-----------------------|--------------------|-----------------------|------------------------|-------------------------------|---------------------------|
| MFSS3B-020 | 3-way Boreable Multi-Gard® | 20 | 4.50 | 1.50 | 520 | 28 | 14,560 | 561 | 65 | 75 | 5,000 |
| MFSS4B-020 | 4-way Boreable Multi-Gard® | 20 | 4.50 | 1.19 | 520 | 28 | 14,560 | 565 | 65 | 75 | 5,000 |

Split Duct

Product Overview

Split Duct is the fast and easy way to repair broken ductwork without the costly cutting and resplicing of your conductors.

Our unique tongue-and-groove design leads the industry in providing a strong, rigid solution for duct repair situations.

The interlocking design allows the split duct sections to be staggered and butted together. Joints may be sealed with tape and reinforced with plastic or metallic straps to produce a rigid, stable unit.

Manufactured from a compound designed specifically for power and telecommunications applications, Split Duct exhibits superior impact strength.

Available in 2 in. through 6 in. diameters, this product line also contains couplings and sweeps necessary to complete the system.


Verify with local inspection authorities before using.



The fast and easy method of installing duct around existing cable for repair and temporary installations.

Recommended Installation Procedure

1. Place one 10-foot Split Duct section under cable.
2. Order to stagger joints, saw another section in half (about 5 feet long).
3. Place 5-foot section over cable and snap the two sections together.
4. Place strap about one foot from the end and another strap about a foot from the joint where the ends of the top sections will butt.
5. Place another 10-foot Split Duct section over the open half of the bottom section, butt the ends tightly together and snap the sections together.
6. Place a length of tape around both sections of the Split Duct to cover the butted joint.
7. Place a strap about one foot beyond the taped joint.
8. Lay another length of Split Duct underneath cable, butt together, tape the butted joint and strap one foot on each side of the joint.
9. Repeat procedure.

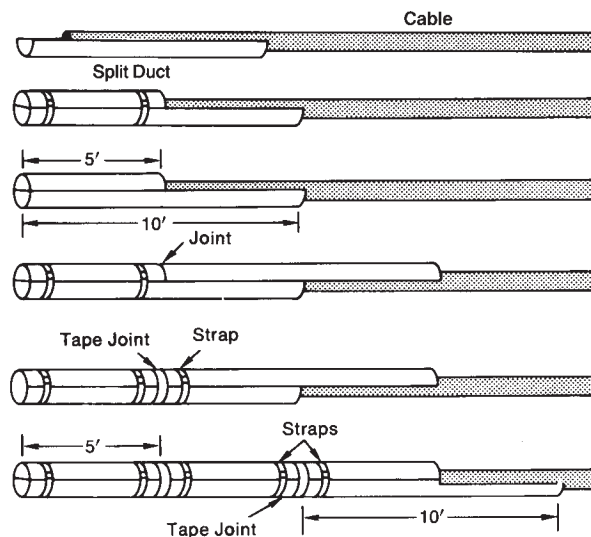

Split Duct



| Cat. No. | Description | Std. Ctn. Qty. | Std. Ctn. Wt. (lb.) | O.D. (in.) |
|--------------------|----------------------------------|----------------|---------------------|------------|
| Schedule 40 | | | | |
| 49011SD-010 | 2 in. Schedule 40 Split Duct | 700 | 523 | 2.375 |
| 49012SD-010 | 2-1/2 in. Schedule 40 Split Duct | 460 | 562 | 2.875 |
| 49013SD-010 | 3 in. Schedule 40 Split Duct | 500 | 802 | 3.500 |
| 49014SD-010 | 3-1/2 in. Schedule 40 Split Duct | 290 | 560 | 4.000 |
| 49015SD-010 | 4 in. Schedule 40 Split Duct | 290 | 662 | 4.500 |
| 49016SD-010 | 5 in. Schedule 40 Split Duct | 130 | 718 | 5.563 |
| 49017SD-010 | 6 in. Schedule 40 Split Duct | 130 | 523 | 6.625 |
| Schedule 80 | | | | |
| 49411SD-010 | 2 in. Schedule 80 Split Duct | 700 | 702 | 2.375 |
| 49415SD-010 | 4 in. Schedule 80 Split Duct | 290 | 890 | 4.500 |
| C Duct | | | | |
| 68515SD-010 | 4 in. C Duct Split Duct | 320 | 614 | 4.350 |

Split Sleeve Coupling



| Cat. No. | Size (in.) | Description | Length (in.) | Split | Std. Ctn. Qty. | Std. Ctn. Wt. (lb.) |
|---------------------------|------------|-----------------------|--------------|-------|----------------|---------------------|
| Schedule 40 and 80 | | | | | | |
| E200JS6 | 2 | Split Coupling | 6 | 1 | 25 | 6.1 |
| E200KS7 | 2-1/2 | | 7 | | 25 | 21 |
| E200LS7 | 3 | | 7 | | 25 | 15.5 |
| E200LSS | 3 | | 6-1/2 | | 25 | 10 |
| E200MS8 | 3-1/2 | | 8 | | 25 | 41.2 |
| E200NS8 | 4 | | 8 | | 15 | 16 |
| E200NSS | 4 | | 6 | | 25 | 17 |
| E200PS8 | 5 | | 8 | | 15 | 25 |
| E200PS9 | 5 | | 9 | | 8 | 16.4 |
| E200RS1 | 6 | | 10 | | 6 | 24.2 |
| C Duct | | | | | | |
| E900NS8 (white) | 4 | C Duct Split Coupling | 8 | 1 | 15 | 19 |
| E900NSW (white) | 4 | | 6 | | 25 | 22 |

Split Sleeve Sweeps



| Item | Cat. No. | Nom. Size (in.) | Radius (in.) | Std. Ctn. Qty. | Std. Ctn. Wt. (lb.) |
|---------------|---------------|-----------------|--------------|----------------|---------------------|
| 45° Sweep | UA7DJSD | 2 | 24 | 1 | 1.4 |
| | UA7FJSD | 2 | 36 | | 2.1 |
| | UA7FLSD | 3 | 36 | | 4.7 |
| | UA7HJSD | 2 | 48 | | 2.7 |
| | UA7HLSD | 3 | 48 | | 6.1 |
| | UA7IJS | 2 | 60 | | 3.2 |
| | UA7ILSD | 3 | 60 | | 7.2 |
| | UA7INS | 4 | 60 | | 10.2 |
| | 22-1/2° Sweep | UA5INS | 4 | | 60 |
| 11-1/4° Sweep | UA3JSD | 2 | 60 | 1.0 | |
| | UA3ILSD | 3 | 60 | 3.6 | |
| | UA3INS | 4 | 60 | 5.1 | |

Two 45° Elbows may be segmented for 90°.

Split Kits

Product Overview

Split Kits are specifically designed to make Schedule-40 and Type-C conduit repairs faster and easier! Damaged conduit can be repaired without disturbing the installed wire/cable system. Split Kits come in handy 2 foot lengths with 7 inch split couplings on each end. UV-resistant for outdoor use, Split Kits feature the same durable tongue-and-groove design as our Split Duct product.

Split Kits are manufactured from extra rugged PVC material. The unique design maintains the same physical performance and dimensional characteristics as the PVC pipe it is repairing! No other repair product can make this offer!


The reason is in the interlocking/tongue-and-groove design that holds the true dimensions of the product, both I.D. and O.D., while maintaining the pipe's physical performance characteristics too.

Verify with local inspection authorities before using.



Split Kits...

Conduit Repairs made Faster and Easier.

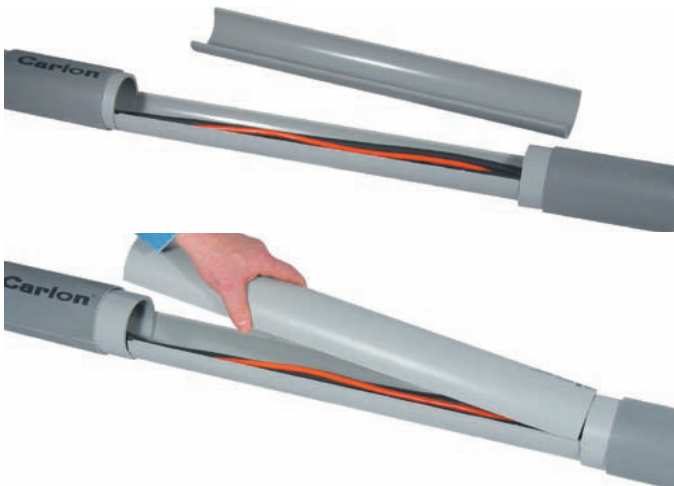

Features


- Interlocking/tongue-and-groove design to assure dimensional pipe characteristics
- Convenient and handy for easy handling, transport and storage
- 2 ft. lengths for fast/easy conduits repairs. Eliminates the need of cutting standard 10 ft. lengths to size. Get off the jobsite FASTER!
- Two 7 in. split couplings for a secure fit. Allows the product to be coupled together for longer repairs. Solvent cementable = water-resistant
- Available in two wall types – Schedule 40 (Sizes 2 in. through 6 in.), and Type-C (4 in.)
- Manufactured from extra rugged PVC – lightweight, solvent cementable and compatible with all standard pipe fittings

Split Kits



Specifications

| Cat. No. | Size (in.) | Wall Type | Std. Ctn. Qty. | Std. Ctn. Wt. (lb.) |
|----------|------------|-------------|----------------|---------------------|
| SK4020 | 2 | Schedule 40 | 10 | 24.3 |
| SK4025 | 2-1/2 | | 10 | 49.2 |
| SK4030 | 3 | | 8 | 43.6 |
| SK4040 | 4 | | 5 | 40.5 |
| SK4050 | 5 | | 3 | 34.6 |
| SK4060 | 6 | | 2 | 36.4 |
| SKC40 | 4 | Type C | 5 | 36.2 |

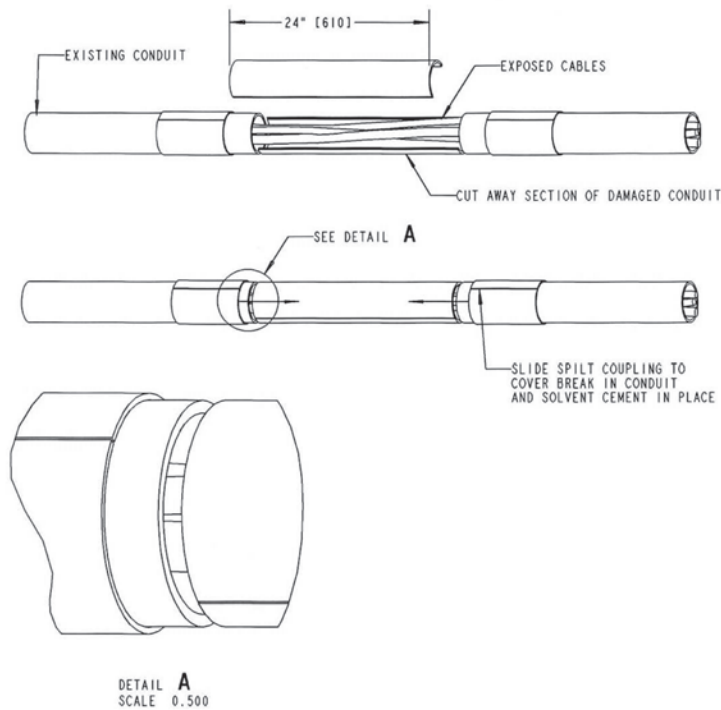

Snap-Loc™ Spacers

Product Overview


Carlton Snap-Loc™ duct spacers provide stability, consistent separation and relieve direct stress for duct materials encased in concrete and direct burial applications.

Carlton Snap-Loc™ Spacers provide:

- A side dovetail rail and groove design allowing for side-by-side interchangeability of conduit spacer sizes while maintaining horizontal stability
- Locking key ways incorporated into intermediate spacers eliminate the need for costly top spacers in each size. The locking key ways provide for the use of a beaded strap that secures the top section of conduit.
- 1 in. and 2 in. Snap-Loc™ Reducers allow fixturing of 1 in. or 2 in. conduit inside larger spacers
- The Snap-Loc™ Rebar Holder provides stabilization on large banks of spacers



Nonmetallic Snap-Loc™ Spacers are designed specifically for use with nonmetallic duct, with maximum O.D. dimensions as specified in NEMA TC-2, TC-6 & 8, TC-10 and ASTM F512. The innovative vertical and horizontal interlocking Snap-Loc™ design has tapered joining slots with maximum tolerances for easy job site assembly.

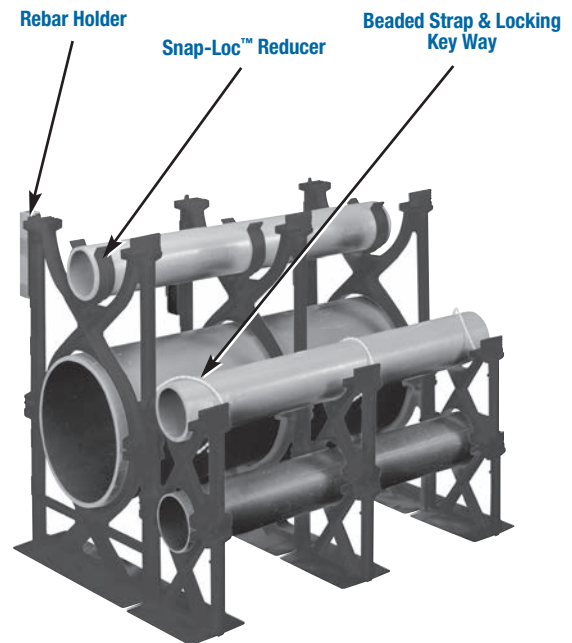

Important

1. The use of duct spacers for direct burial may result in excessive point deflections unless proper design engineering is applied, such as the proper compaction of the appropriate backfill material.
2. Thomas & Betts is not responsible for Snap-Loc™ Spacers used in direct burial applications, design engineers and contractors are responsible for the design of the installation.

Snap-Loc™ Spacers

Dimensions – Base Spacers

| Cat. No. | Size* (in.) | A (in.) | C (in.) | D (Dia.) (in.) | Std. Ctn. Qty. |
|----------|-------------|---------|---------|----------------|----------------|
| S288JHN | 2 X 1-1/2 | 4.25 | 4.12 | 2.50 | 100 |
| S288JJN | 2 x 2 | 4.25 | 4.62 | 2.50 | 100 |
| S288JLN | 2 x 3 | 4.25 | 5.62 | 2.50 | 100 |
| S288LHN | 3 x 1-1/2 | 4.81 | 5.25 | 3.63 | 90 |
| S288LJN | 3 x 2 | 4.81 | 5.75 | 3.63 | 80 |
| S288LLN | 3 x 3 | 4.81 | 6.75 | 4.63 | 60 |
| S288NFN | 4 x 1 | 4.50 | 6.75 | 4.63 | 70 |
| S288NHN | 4 x 1-1/2 | 5.31 | 6.25 | 4.63 | 50 |
| S288NJN | 4 x 2 | 5.31 | 6.75 | 4.63 | 50 |
| S288NLN | 4 x 3 | 5.31 | 7.75 | 5.69 | 60 |
| S288PHN | 5 x 1-1/2 | 5.84 | 7.31 | 5.69 | 50 |
| S288PJN | 5 x 2 | 5.84 | 7.81 | 5.69 | 60 |
| S288PLN | 5 x 3 | 5.84 | 8.81 | 6.75 | 50 |
| S288RHN | 6 x 1-1/2 | 6.38 | 8.38 | 6.75 | 50 |
| S288RJN | 6 x 2 | 6.38 | 8.88 | 6.75 | 50 |
| S288RLN | 6 x 3 | 6.38 | 9.88 | 6.75 | 40 |
| S288SHN | 8 x 1-1/2 | 7.38 | 10.30 | 8.75 | 30 |
| S288SJN | 8 x 2 | 7.38 | 10.76 | 8.75 | 30 |

*First number indicates trade size of duct, second number indicates separation between conduits or ducts.

Dimensions – Intermediate Spacers


| Cat. No. | Size* (in.) | A (in.) | C (in.) | D (Dia.) (in.) | Std. Ctn. Qty. |
|----------|-------------|---------|---------|----------------|----------------|
| S289JHN | 2 X 1-1/2 | 3.88 | 4.12 | 2.50 | 100 |
| S289JJN | 2 x 2 | 4.38 | 4.62 | 2.50 | 100 |
| S289JLN | 2 x 3 | 5.38 | 5.62 | 2.50 | 100 |
| S289LHN | 3 x 1-1/2 | 5.01 | 5.25 | 3.63 | 90 |
| S289LJN | 3 x 2 | 5.51 | 5.75 | 3.63 | 80 |
| S289LLN | 3 x 3 | 6.51 | 6.75 | 4.63 | 60 |
| S289NFN | 4 x 1 | 5.51 | 6.75 | 4.63 | 70 |
| S289NHN | 4 x 1-1/2 | 6.01 | 6.25 | 4.63 | 50 |
| S289NJN | 4 x 2 | 6.51 | 6.75 | 4.63 | 50 |
| S289NLN | 4 x 3 | 7.51 | 7.75 | 5.69 | 60 |
| S289PHN | 5 x 1-1/2 | 7.07 | 7.31 | 5.69 | 50 |
| S289PJN | 5 x 2 | 7.57 | 7.81 | 5.69 | 60 |
| S289PLN | 5 x 3 | 8.57 | 8.81 | 6.75 | 50 |
| S289RHN | 6 x 1-1/2 | 8.14 | 8.38 | 6.75 | 50 |
| S289RJN | 6 x 2 | 8.64 | 8.88 | 6.75 | 50 |
| S289RLN | 6 x 3 | 9.64 | 9.88 | 6.75 | 40 |
| S289SHN | 8 x 1-1/2 | 10.14 | 10.30 | 8.75 | 30 |
| S289SJN | 8 x 2 | 10.64 | 10.76 | 8.75 | 30 |

Accessories



Snap-Loc™ Reducer


| Cat. No. | Size (in.) | Std. Ctn. Qty. |
|----------|------------|----------------|
| S287F | 1 | 100 |
| S287J | 2 | 100 |



Hole Dia. 0.688 min. and 0.750 max

Rebar Holder

| Cat. No. | Std. Ctn. Qty. |
|----------|----------------|
| S258RH | 100 |




15 in. in length

Beaded Strap

| Cat. No. | Std. Ctn. Qty. |
|----------|----------------|
| S28612 | 1 Bag of 250 |

Specifications

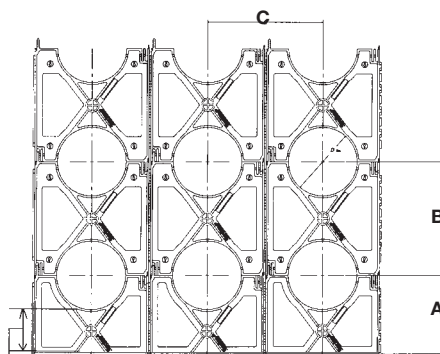

3 in. Standard for all Base Spacers (with the exception of the 4X1-S288NFN)

Suggested Specification

(Duct) (Conduit) bank shall be encased in concrete with at least three inches of concrete at the top and bottom and two inches on each side. A horizontal and vertical separation between the ducts of * inches shall be maintained by installing Carlton high impact spacers with horizontal and vertical locking intervals of **feet.

*Standard Separations of 1 in., 1-1/2 in., 2 in. and 3 in. are available

**Preferred interval between spacer assemblies is 8 to 10 feet

Installation Note

The spacers and rebar holder are designed with a dovetail tongue and groove feature for easy installation. If required to permanently fix the position of a group of spacers and/or rebar holder, the following are recommended procedures:

1. Use Carlton Quick-set Cement glue during assembly or spot glue after assembly to secure.
2. During assembly, deform the edge of the tongue or groove portion of the dovetail slide with a pair of pliers or similar tool. This deformation will create an interference, restricting movement.
3. An assembled system may be wired together for additional support.

IMPORTANT

1. The use of duct spacers for direct burial may result in excessive point deflections unless proper design engineering is applied, such as the proper compaction of the appropriate backfill material.
2. Thomas & Betts is not responsible for Snap-Loc™ Spacers used in direct burial application, design engineers and contractors are responsible for the design of the installation.

Snap-N-Stac® Combo Spacers

Product Overview

Carlton® Snap-N-Stac® Combo Duct Spacers are specifically designed to replace the two-piece base and intermediate spacer system, by combining the conventional base and intermediate spacer into a single unit!

Manufactured out of highly engineered thermoplastic material, Snap-N-Stac® Spacers are strong, durable and able to withstand the rigors of concrete construction. They feature an innovative horizontal and EXCLUSIVE vertical locking system and can be used as either a base or intermediate spacer.

Snap-N-Stac® Spacers are available in one-way, two-way and three-way configurations (one-way and three-way only available in sizes 2 in. and 4 in.). They accept 2 in., 3 in., 4 in., 5 in., and 6 in. pipe and can be installed horizontally, vertically or turned upright for unique duct bank configurations.

This NEW one-piece design makes underground duct bank installations faster and easier than the conventional two-piece system— saving material and labor costs.

Carlton® Snap-N-Stac® Combo Spacers...The ideal Solution for Underground Duct Bank Installations.



One-Way

Three-Way

Features

- Conventional base and intermediate spacer in a single unit!
- Less inventory required
- EXCLUSIVE vertical locking system
- Horizontal locking system
- Installs horizontally or turned upright
- Molded-in rebar holder on two-way and three-way
- One-, two- and three-way configurations (one-way and three-way only available in sizes 2 in. and 4 in.)
- 5 sizes: 2 in., 3 in., 4 in., 5 in. and 6 in.
- Reducer to accommodate smaller duct sizes
- Can be used as either an intermediate or base spacer
- Spacers interlock horizontally regardless of size
- Nonmetallic, non-corrosive, non-conductive
- Strong and durable
- Easy to handle
- Fast installation

Installations



Horizontal Locking



Vertical Interlocking



With Reducer


Snap-N-Stac® Combo Spacers

Installation Instructions



IMPORTANT

1. Snap-N-Stac® Spacers are recommended for concrete encased applications only.
2. The use of duct spacers for direct burial may result in excessive point deflections unless proper design engineering is applied, such as the proper compaction of the appropriate backfill material.
3. Thomas & Betts is NOT responsible for Snap-N-Stac® Spacers used in direct burial applications, design engineers and contractors are responsible for the design of the installation.

Vertical Interlocking Slide spacers together “Feet Facing Feet.”

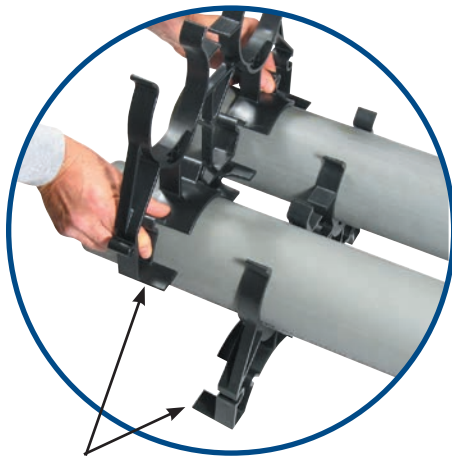

Feet Facing

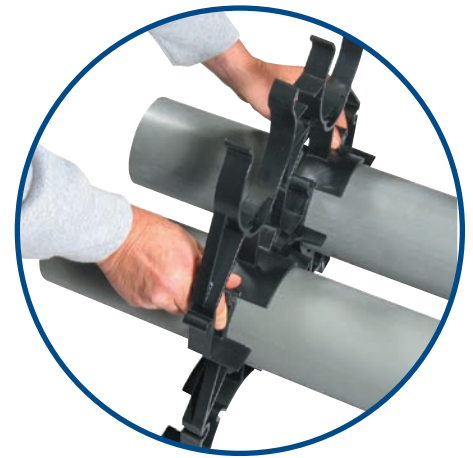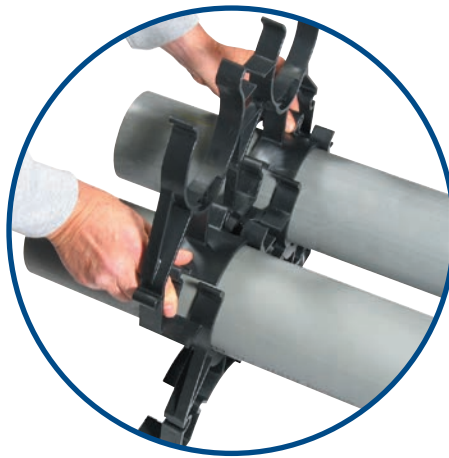

Feet Opposite



Molded-In Rebar Holder




Snap-N-Stac® Combo Spacers

Installation Instructions (cont'd)



Vertical Free Standing

If spacers are installed using free standing method, it is recommended to install the spacer on the upper row mid-way between the two spacers on the bottom row.

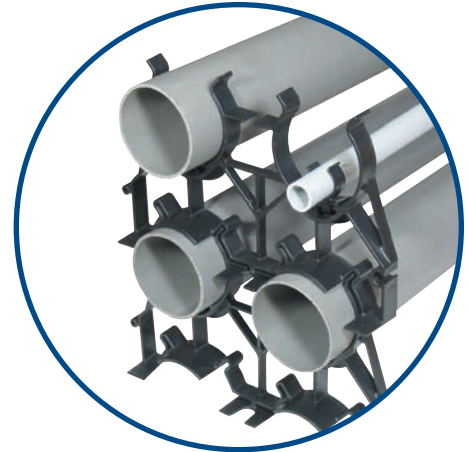

Reducer

1 in. & 2 in. Snap-Loc™ Reducers allow fixturing of 1 in. and 2 in. conduit inside of larger spacers.

Transition To Various Duct Sizes


Install spacers side-by-side by inserting the male adapter into the female adapter.

Note: All Snap-N-Stac® spacers re designed to interlock horizontally, regardless of size.



Odd Number of Ducts

Two-way spacers, size 2 in. and 4 in. only, can easily be cut apart to produce two one-way spacers. Create three-way and five-way spacers using the one-way spacer. Install spacers side-by-side by inserting the male adapter into the female adapter.



Snap-N-Stack® Combo Spacers

Specifications

| Cat. No. | Description | Size (in.) | Separation (in.) | Std. Ctn. Qty. | Std. Ctn. Wt. (lb.) |
|-----------|---------------|---------------|------------------|----------------|---------------------|
| SP2W20-1 | 1-Way Spacers | 2 | 2 | 56 | 15.0 |
| SP2W30-1 | | 2 | 3 | 40 | 13.0 |
| SP4W15-1 | | 4 | 1-1/2 | 26 | 9.6 |
| SP4W20-1 | | 4 | 2 | 20 | 10.0 |
| SP4W30-1 | | 4 | 3 | 20 | 9.4 |
| SP2W20-2 | | 2-Way Spacers | 2 | 2 | 56 |
| SP2W30-2 | 2 | | 3 | 40 | 23.8 |
| SP3W20-2 | 3 | | 2 | 40 | 24.0 |
| SP3W30-2 | 3 | | 3 | 24 | 17.9 |
| SP4W15-2* | 4 | | 1-1/2 | 26 | 18.3 |
| SP4W20-2* | 4 | | 2 | 24 | 18.8 |
| SP4W30-2* | 4 | | 3 | 20 | 17.6 |
| SP5W20-2* | 5 | | 2 | 20 | 17.2 |
| SP5W30-2* | 5 | | 3 | 14 | 15.5 |
| SP6W20-2* | 6 | | 2 | 12 | 12.8 |
| SP6W30-2* | 6 | | 3 | 12 | 14.1 |
| SP2W20-3 | 3-Way Spacers | | 2 | 2 | 36 |
| SP2W30-3 | | 2 | 3 | 18 | 17.8 |
| SP4W15-3 | | 4 | 1-1/2 | 18 | 19.4 |
| SP4W20-3 | | 4 | 2 | 16 | 19.3 |
| SP4W30-3 | 4 | 3 | 14 | 19.1 | |

*Can be cut apart to make (2) one-way spacers

How to Interpret the Catalogue Number

| Position 1 | Position 2 | Position 3 | Position 4 |
|---------------------|--|---|--|
| Product Type | Duct Size | Duct-to-Duct Spacing Horizontal and Vertical | Horizontal Duct Positions |
| SP = Spacer | 2W = 2 in. Width 3W = 3 in. Width 4W = 4 in. Width 5W = 5 in. Width 6W = 6 in. Width | 15 = 1-1/2 in. 20 = 2 in. 30 = 3 in. | -1 = One-Way -2 = Two-Way -3 = Three-Way |

Accessories


Snap-Loc™ Reducer

| Cat. No. | Size (in.) | Std. Ctn. Qty. |
|----------|------------|----------------|
| S287F | 1 | 100 |
| S287J | 2 | 100 |



Beaded Strap

| Cat. No. | Std. Ctn. Qty. |
|----------|----------------|
| S28612 | 1 Bag of 250 |



Technical Information

| Cat. No. | Duct Size (in.) | Duct O.D. (in.) | Horizontal Duct Positions | Duct-to-Duct Spacing | | Center-to-Center Spacing | | Bottom of Trench to Bottom of Duct (in.) | Bottom of Trench to Center of Bottom Duct (in.) | Overall Length (in.) |
|----------|-----------------|-----------------|---------------------------|----------------------|------------------|--------------------------|------------------|--|---|----------------------|
| | | | | Vertical (in.) | Horizontal (in.) | Vertical (in.) | Horizontal (in.) | | | |
| SP2W20-1 | 2 | 2.375 | 1 | 2 | 2 | 2.19 | 2.19 | 3.13 | 4.25 | 4.38 |
| SP2W30-1 | 2 | 2.375 | 1 | 3 | 3 | 2.69 | 2.69 | 4.13 | 5.25 | 5.38 |
| SP4W15-1 | 4 | 4.500 | 1 | 1.5 | 1.5 | 3.00 | 3.00 | 3.38 | 5.56 | 6.00 |
| SP4W20-1 | 4 | 4.500 | 1 | 2 | 2 | 3.25 | 3.25 | 3.88 | 6.06 | 6.50 |
| SP4W30-1 | 4 | 4.500 | 1 | 3 | 3 | 3.75 | 3.75 | 4.88 | 7.06 | 7.50 |
| SP2W20-2 | 2 | 2.375 | 2 | 2 | 2 | 4.38 | 4.38 | 3.13 | 4.25 | 8.75 |
| SP2W30-2 | 2 | 2.375 | 2 | 3 | 3 | 5.38 | 5.38 | 4.13 | 5.25 | 10.75 |
| SP3W20-2 | 3 | 3.500 | 2 | 2 | 2 | 5.50 | 5.50 | 3.63 | 5.38 | 11.00 |
| SP3W30-2 | 3 | 3.500 | 2 | 3 | 3 | 6.50 | 6.50 | 4.63 | 6.38 | 13.00 |
| SP4W15-2 | 4 | 4.500 | 2 | 1.5 | 1.5 | 6.00 | 6.00 | 3.38 | 5.56 | 12.00 |
| SP4W20-2 | 4 | 4.500 | 2 | 2 | 2 | 6.50 | 6.50 | 3.88 | 6.06 | 13.00 |
| SP4W30-2 | 4 | 4.500 | 2 | 3 | 3 | 7.50 | 7.50 | 4.88 | 7.06 | 15.00 |
| SP5W20-2 | 5 | 5.500 | 2 | 2 | 2 | 7.56 | 7.56 | 4.38 | 7.25 | 15.12 |
| SP5W30-2 | 5 | 5.500 | 2 | 3 | 3 | 8.56 | 8.56 | 5.38 | 8.25 | 17.14 |
| SP6W20-2 | 6 | 6.625 | 2 | 2 | 2 | 8.62 | 8.62 | 4.13 | 7.38 | 17.25 |
| SP6W30-2 | 6 | 6.625 | 2 | 3 | 3 | 9.62 | 9.62 | 5.13 | 8.38 | 19.25 |
| SP2W20-3 | 2 | 2.375 | 3 | 2 | 2 | 6.57 | 6.57 | 3.13 | 4.25 | 13.13 |
| SP2W30-3 | 2 | 2.375 | 3 | 3 | 3 | 8.07 | 8.07 | 4.13 | 5.25 | 16.13 |
| SP4W15-3 | 4 | 4.500 | 3 | 1.5 | 1.5 | 9.00 | 9.00 | 3.38 | 5.56 | 18.00 |
| SP4W20-3 | 4 | 4.500 | 3 | 2 | 2 | 9.75 | 9.75 | 3.88 | 6.06 | 19.50 |
| SP4W30-3 | 4 | 4.500 | 3 | 3 | 3 | 11.25 | 11.25 | 4.88 | 7.06 | 22.50 |

Carflex® Liquidtight Flexible Conduit

Product Overview

Liquidtight Flexible Nonmetallic Conduit provides superior wire protection in harsh, damp environments. Carflex® Conduit is non-conductive, non-corrosive and resistant to oil, acid, ozone and alkaline. Carflex® Conduit is strong and lightweight and because it weighs 50% less than metallic systems, it's easy to handle, transport and install. Carflex® is ideal for industrial, air conditioning, heating and outdoor lighting applications.

Features

- Non-conductive and non-corrosive
- Lightweight for easy handling, transportation and installation
- Crush, abrasion and strain resistant
- Provides superior wire protection
- Smooth interior ideal for pulling cable
- No jagged edges
- Maintains internal I.D. even in tight radius bends
- Type LFNC-B
- Resistant to oil, acid, ozone and alkaline
- CSA Certified as per Section 12-1300 of the Canadian Electrical Code, Part 1
- Sequentially marked footage
- Suitable for use at conduit temperatures of 80°C dry, 60°C wet and 60°C oil

Note: Liquidtight flexible conduits, metallic and nonmetallic, in contrast to rigid PVC conduit and electrical nonmetallic tubing, do not have wire temperature limitations. Any temperature rated wire (for example, 90° wire) can be used as long as the temperature conditions marked on the conduit are not exceeded.



Applications

- Control and motor
- Air conditioning and heating
- Computer power distribution
- Machine tools
- Console wiring
- Transformer connections
- Outdoor lighting

Coils



| Cat. No. | Nom. Size (in.) | Avg. O.D. (in.) | Avg. I.D. (in.) | Length Coil (ft.) | Std. Coil Wt. (lb.) |
|------------|-----------------|-----------------|-----------------|-------------------|---------------------|
| 15004-100 | 3/8 | 0.700 | 0.4890 | 100 | 11.70 |
| 15005C-025 | 1/2 | 0.830 | 0.6270 | 25 | 3.25 |
| 15007-100 | 3/4 | 1.040 | 0.8250 | 100 | 18.00 |
| 15007C-025 | 3/4 | 1.040 | 0.8250 | 25 | 4.25 |
| 15008-100 | 1 | 1.302 | 1.046 | 100 | 28.00 |
| 15009-100 | 1-1/4 | 1.645 | 1.385 | 100 | 37.60 |
| 15010-050 | 1-1/2 | 1.882 | 1.580 | 50 | 22.55 |
| 15010-100 | 1-1/2 | 1.882 | 1.580 | 100 | 47.80 |
| 15011-050 | 2 | 2.357 | 2.025 | 50 | 34.10 |

Standard colour Grey

Reels



| Cat. No. | Nom. Size (in.) | Avg. O.D. (in.) | Avg. I.D. (in.) | Length Reels (ft.) | Std. Reel Wt. (lb.) |
|-----------|-----------------|-----------------|-----------------|--------------------|---------------------|
| 15004-001 | 3/8 | 0.700 | 0.4890 | 1000 | 145.0 |
| 15005-001 | 1/2 | 0.830 | 0.6270 | 1000 | 157.0 |
| 15007-001 | 3/4 | 1.040 | 0.8250 | 1000 | 212.0 |
| 15008-500 | 1 | 1.302 | 1.046 | 500 | 155.0 |
| 15009-200 | 1-1/4 | 1.645 | 1.385 | 200 | 100.0 |
| 15010-150 | 1-1/2 | 1.882 | 1.580 | 150 | 95.7 |
| 15011-100 | 2 | 2.357 | 2.025 | 100 | 94.6 |

Carflex® X-Flex™ Liquidtight Flexible Tubing

Product Overview

Extra Flexible Nonmetallic Mechanical Protection Tubing is ideal for applications requiring extra strength and flexibility such as robotics and repetitive flexing arms. Carflex® X-Flex™ is non-conductive, non-corrosive and resistant to oil, acid, ozone and alkaline. It's designed for use with standard Carflex® fittings providing a complete nonmetallic system. Carflex® X-Flex™ is lightweight for easier handling, transportation and installation.

Features

- Extra strong and flexible to withstand repetitive motions
- Non-conductive and non-corrosive
- Resistant to oil, acid, ozone and alkaline
- Lightweight for easy handling, transportation and installation
- Crush, abrasion and strain resistant
- Provides superior wire protection
- Smooth interior ideal for pulling cable
- No jagged edges
- Rated for continuous use at 60°C ambient
- Type NMPT-B



Applications

- Repetitive Flexing Arms
- Robotics
- Machine Tools
- Automatic/Moving Machinery
- Control and motor

Specifications

Coils (Available in Black only) Where noted by ♦



| Cat. No. | Nom. Size (in.) | Avg. O.D. (in.) | Avg. I.D. (in.) | Length Coils (ft.) | Std. Coil Wt. (lb.) |
|-------------|-----------------|-----------------|-----------------|--------------------|---------------------|
| ♦ 15104-100 | 3/8 | 0.700 | 0.489 | 100 | 9.09 |
| ♦ 15105-100 | 1/2 | 0.830 | 0.627 | 100 | 10.01 |
| ♦ 15107-100 | 3/4 | 1.040 | 0.825 | 100 | 13.91 |
| 15108-100 | 1 | 1.302 | 1.046 | 100 | 18.25 |
| 15109-100 | 1-1/4 | 1.645 | 1.385 | 100 | 27.65 |
| 15110-100 | 1-1/2 | 1.882 | 1.580 | 100 | 38.00 |
| 15111-050 | 2 | 2.357 | 2.025 | 50 | 24.22 |

Carflex® Liquidtight Fittings

Straight Fittings

- For Use with Carflex® conduit and Carflex® X-Flex™ conduit

Image 1



Assembly

Image 2


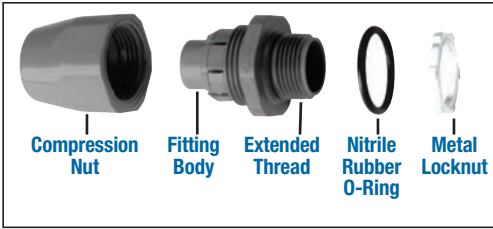


Image 3




Assembly

Image 4

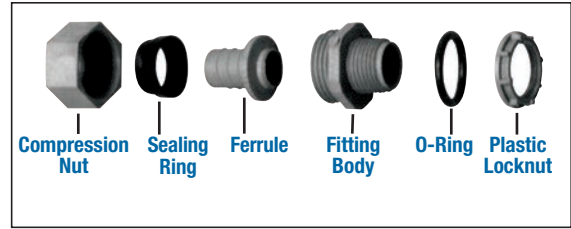


Features


- Non-conductive and non-corrosive
- Easy to install
- Resistant to oil, acid, ozone and alkaline
- Approved for indoor and outdoor locations
- Listed for "Wet locations"
- Nitrile rubber "O" ring for a liquidtight termination
- Temperatures up to 107°C

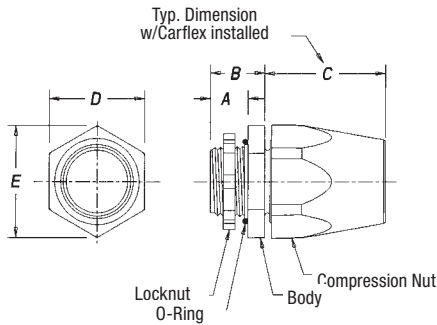

LT43C-CAR, LT43D-NEW, LT43E-NEW, LT43F

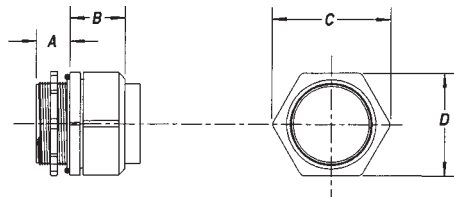

LT43G, LT43H

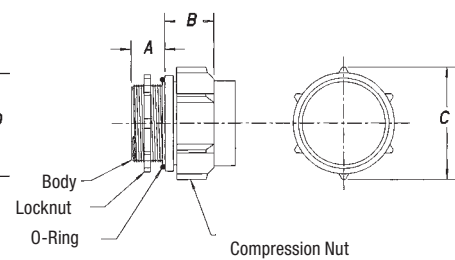

LT43J

Specifications




| Cat. No. | Size (in.) | Std. Ctn. Qty. | Std. Ctn. Wt. (lb.) | Dimensions (in.) | | | | | Refer to Image |
|-----------|------------|----------------|---------------------|------------------|------|------|------|------|----------------|
| | | | | A | B | C | D | E | |
| LT43C | 3/8 | 50 | 3.6 | 0.55 | 0.75 | 1.60 | 1.30 | 1.40 | 1-2 |
| LT43D-NEW | 1/2 | 50 | 4.2 | 0.56 | 0.91 | 1.62 | 1.30 | 1.40 | 1-2 |
| LT43E-NEW | 3/4 | 50 | 6.6 | 0.56 | 0.91 | 1.88 | 1.61 | 1.71 | 1-2 |
| LT43F-NEW | 1 | 25 | 5.5 | 0.70 | 1.00 | 2.20 | 1.90 | 2.04 | 1-2 |
| LT43G | 1-1/4 | 5 | 1.5 | 0.71 | 1.16 | 2.50 | 2.17 | - | 3-4 |
| LT43H | 1-1/2 | 5 | 2.0 | 0.75 | 1.36 | 2.78 | 2.43 | - | 3-4 |
| LT43J | 2 | 5 | 2.5 | 1.00 | 1.45 | 3.33 | - | - | 3-4 |

Carflex® Liquidtight Fittings


90° Fittings

- For Use with Carflex® conduit and Carflex® X-Flex™ conduit

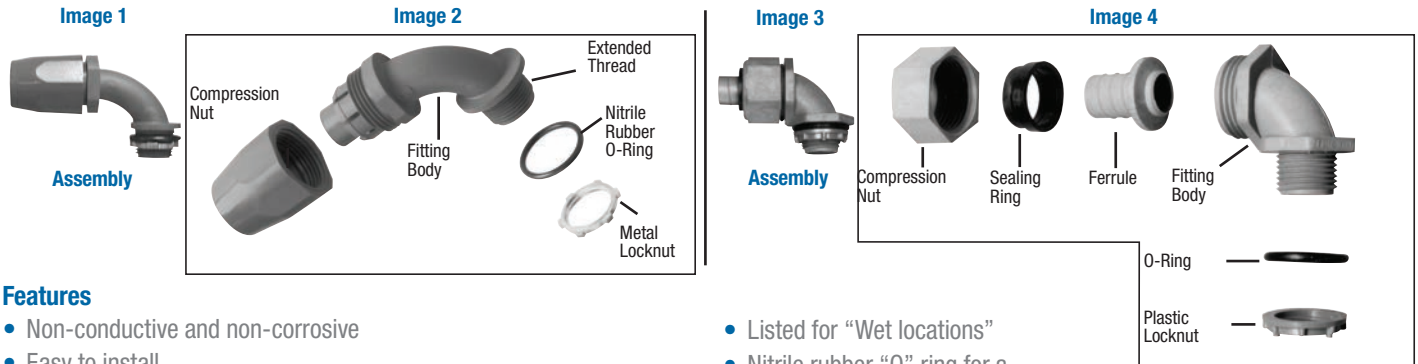


Features


- Non-conductive and non-corrosive
- Easy to install
- Resistant to oil, acid, ozone and alkaline
- Approved for indoor and outdoor locations
- Listed for “Wet locations”
- Nitrile rubber “O” ring for a liquidtight termination
- Temperatures up to 107°C

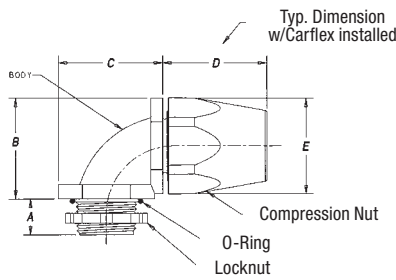

LT20C-CAR, LT20F-NEW

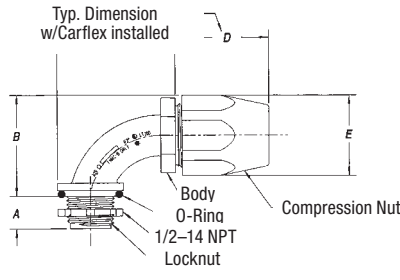

LT20D-NEW, LT20E-NEW

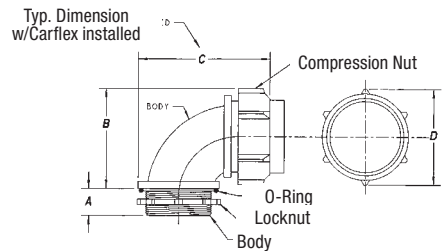

LT20G, LT20H, LT20J

Specifications



| Cat. No. | Size (in.) | Std. Ctn. Qty. | Std. Ctn. Wt. (lb.) | Dimensions (in.) | | | | | | | Refer to Image |
|-----------|------------|----------------|---------------------|------------------|------|------|------|------|------|------|----------------|
| | | | | A | B | C | D | E | F | G | |
| LT20C | 3/8 | 50 | 3.6 | 0.56 | 1.44 | 1.44 | 1.56 | 1.39 | 1.26 | - | 1-2 |
| LT20D-NEW | 1/2 | 50 | 4.2 | 0.56 | 1.76 | 2.05 | 1.62 | 1.40 | 1.30 | 1.15 | 1-2 |
| LT20E-NEW | 3/4 | 50 | 6.6 | 0.56 | 2.04 | 2.35 | 1.88 | 1.71 | 1.61 | 1.50 | 1-2 |
| LT20F-NEW | 1 | 25 | 5.5 | 0.70 | 2.01 | 2.01 | 2.26 | 2.04 | 1.90 | - | 1-2 |
| LT20G | 1-1/4 | 5 | 1.5 | 0.75 | 2.50 | 3.55 | 2.48 | - | - | - | 3-4 |
| LT20H | 1-1/2 | 5 | 2.0 | 0.75 | 2.80 | 3.98 | 2.77 | - | - | - | 3-4 |
| LT20J | 2 | 5 | 2.5 | 0.94 | 3.48 | 4.56 | 3.33 | - | - | - | 3-4 |

Carflex® One-Piece Liquidtight Fittings

Product Overview

Unique Design

The simple, one-piece body design of the Carflex® One-Piece Liquidtight Nonmetallic Fitting requires no disassembly of components for installation. The system is so strong that there is no need for a compression nut.

PVC Construction


PVC construction of the fitting and locknut provides unparalleled protection from water, oil and dust. Totally nonmetallic, the system is non-conductive and will not corrode or rust. Temperatures up to 60°C

Features

- Approved for indoor and outdoor locations
- Listed for "Wet Locations"




Straight Fittings

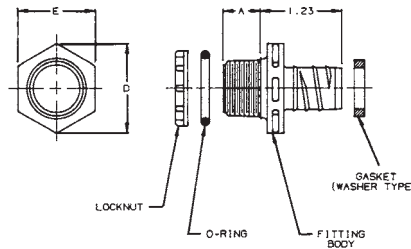

| Cat. No. | Trade Size (in.) | Std. Ctn. Qty. | Std. Ctn. Wt. (lb.) | Thread Size | Dimensions (in.) | | |
|----------|------------------|----------------|---------------------|-------------|------------------|------|------|
| | | | | | A | D | E |
| LN43DA | 1/2 | 100 | 2.8 | 14 NPT | 0.56 | 1.34 | 1.19 |
| LN43EA | 3/4 | 50 | 2.2 | 14 NPT | 0.56 | 1.63 | 1.44 |
| LN43FA | 1 | 25 | 3 | 11-1/2 NPT | 0.69 | 1.99 | 1.75 |

90° Fittings

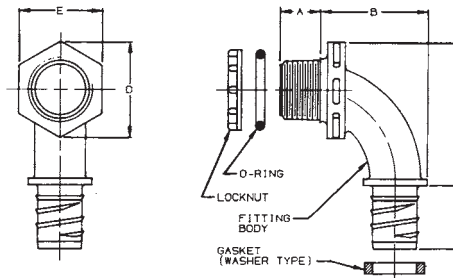

| Cat. No. | Trade Size (in.) | Std. Ctn. Qty. | Std. Ctn. Wt. (lb.) | Thread Size | Dimensions (in.) | | | | |
|----------|------------------|----------------|---------------------|-------------|------------------|------|------|------|------|
| | | | | | A | B | C | D | E |
| LN20DA | 1/2 | 100 | 4.3 | 14 NPT | 0.56 | 1.50 | 1.99 | 1.34 | 1.19 |
| LN20EA | 3/4 | 50 | 3.1 | 14 NPT | 0.56 | 1.73 | 2.25 | 1.63 | 1.44 |
| LN20FA | 1 | 25 | 3.2 | 11-1/2 NPT | 0.69 | 1.86 | 2.58 | 1.99 | 1.75 |

Carflex® One-Piece Liquidtight Fittings

Fittings Installation Instructions

LT43C-CAR, LT43F thru J, LT20C-CAR, LT20F thru J

1. Cut the end of the Carflex conduit or Carflex® X-Flex™ tubing square.
2. Install compression nut and sealing gland ring over the end of the conduit or tubing.
3. Insert the ferrule end of the fitting into the conduit using a clockwise twisting action.
4. Screw fitting body into compression nut.
5. When installation is completed, use a wrench, tighten compression nut one-quarter (1/4) turn past hand-tight. Do not over tighten fitting.

To prevent damage to conductors, conduit and fittings, do not twist Carflex during installation.

LT43D-New, LT43E-New, LT20D-New, LT20E-New

1. Cut the end of the Carflex conduit or Carflex® X-Flex™ tubing square.
2. Install compression nut over the end of the conduit or tubing.
3. Insert the ferrule end of the fitting into the conduit using a clockwise twisting action. (Be sure conduit is fully inserted to the bottom of the fitting shoulder).
4. Screw compression nut onto fitting body.
5. Use a wrench, and tighten compression nut one (1) full turn past hand-tight. Do not over tighten fitting.

To prevent damage to conductors, conduit and fittings, do not twist Carflex during installation.

Liquidtight Conduit Technical Information

1. There shall be no more than the equivalent of four (4) quarter (90°) bends (360° total) between pull points, conduit bodies, and boxes.
2. The radius of the curve of the center of the conduit or tubing shall not be less than that shown in the table below:

| Size of Conduit or Tubing | | Radius to Center of Conduit or Tubing | |
|---------------------------|----|---------------------------------------|-------|
| Inches | mm | Inches | mm |
| 3/8 | 14 | 4 | 101.6 |
| 1/2 | 16 | 4 | 101.6 |
| 3/4 | 21 | 4-1/2 | 114.3 |
| 1 | 27 | 5-3/4 | 146.0 |
| 1-1/4 | 35 | 7-1/4 | 184.1 |
| 1-1/2 | 41 | 8-1/4 | 209.5 |
| 2 | 53 | 9-1/2 | 241.3 |

Plenum-Gard®

Product Overview

Plenum-Gard® is a nonmetallic corrugated flexible conduit for use in Plenum, Riser and General Purpose applications.

Plenum-Gard® is manufactured from PVDF resin, which is extremely durable and resistant to abrasion and mechanical damage before/after installation.

Plenum-Gard® is listed for Plenum, Riser, General Purpose and other cabling optical fiber/telecommunication applications.

Important:

Installed cables must be plenum rated.



Applications: Plenum, Riser and General Purpose.

Technical Information

| UL Standard 2024 | Value |
|------------------------------------|-------|
| Maximum Flame Propagation | 5 ft. |
| Max. Peak Optical Smoke Density | 0.5 |
| Max. Average Optical Smoke Density | 0.15 |

- Storage: -20°C to 70°C (-4°F to 158°F)
- Handling: -20°C to 40°C (-4°F to 104°F)
- No UV protection (not suitable for outdoor use)
- Do NOT store outside



Standard Stock - Reels

| Cat. No. | Size (in.) | Colour | Pull Tape | Reel Size (F x W) (in.) | Reel Type | Length (ft.) | Reel Wt. (lb.) | Product Wt. per 100 ft. (lb.) | | |
|-------------|------------|---------|-----------|-------------------------|-----------|--------------|----------------|-------------------------------|----|----|
| CD4X1C-1500 | 1/2 | Orange | 200 lb. | 34 x 23 | Wood | 1500 | 30 | 7 | | |
| CE4X1-1000 | 3/4 | Orange | Empty | 34 x 23 | Wood | 1000 | 30 | 8 | | |
| CE4X1-1000S | | | Empty | 34 x 23 | Wood | 1000 | 30 | 8 | | |
| CF4X1C-500 | 1 | Orange | 900 lb. | 34 x 23 | Wood | 500 | 30 | 10 | | |
| CF4X1C-1000 | | | 900 lb. | 48 x 28 | Wood | 1000 | 79 | 10 | | |
| CF4X1C-1500 | | | 900 lb. | 48 x 28 | Wood | 1500 | 79 | 10 | | |
| CF4X1C-5200 | | | 900 lb. | 66 x 41 | Wood | 5200 | 250 | 10 | | |
| CF4X1C-6500 | | | 900 lb. | 72 x 41 | Wood | 6500 | 310 | 10 | | |
| CF4X1C-8000 | | | 900 lb. | 82 x 41 | Wood | 8000 | 365 | 10 | | |
| CG4X1C-500 | | | 1-1/4 | Orange | 900 lb. | 48 x 28 | Wood | 500 | 79 | 14 |
| CG4X1C-900 | | | | | 900 lb. | 48 x 45 | Wood | 900 | 96 | 14 |
| CG4X1C-1600 | 900 lb. | 48 x 45 | | | Wood | 1600 | 96 | 14 | | |
| CG4X1C-3200 | 900 lb. | 66 x 41 | | | Wood | 3200 | 250 | 14 | | |
| CG4X1C-6500 | 900 lb. | 96 x 41 | | | Wood | 6500 | 700 | 14 | | |
| CG4X1C-900S | Empty | 48 x 28 | | | Wood | 900 | 79 | 14 | | |
| CH4X1C-350 | 1-1/2 | Orange | | | 900 lb. | 48 x 28 | Wood | 350 | 79 | 16 |
| CH4X1C-1200 | | | 900 lb. | 48 x 45 | Wood | 1200 | 96 | 16 | | |
| CH4X1C-4000 | | | 900 lb. | 82 x 41 | Wood | 4000 | 365 | 16 | | |
| CJ4X1C-225 | 2 | Orange | 900 lb. | 48 x 28 | Wood | 225 | 79 | 21 | | |
| CJ4X1C-700 | | | 900 lb. | 48 x 45 | Wood | 700 | 96 | 21 | | |
| CJ4X1C-2000 | | | 900 lb. | 82 x 41 | Wood | 2000 | 365 | 21 | | |
| CJ4X1C-2800 | | | 900 lb. | 82 x 41 | Wood | 2800 | 365 | 21 | | |
| CL4X1C-150 | 3 | Orange | 900 lb. | 48 x 45 | Wood | 150 | 96 | 41 | | |

Plenum-Gard®

Features

- Sizes 1/2 in. through 3 in.
- Pre-installed pull tape available in sizes 1/2 in. through 3 in.
- Outside Diameters meet IPS Dimensions
- Footage sequentially marked

Standard Stock – Coils

| Cat. No. | Size (in.) | Colour | Pull Tape | Coil Length (ft.) | Product Wt. per 100 ft. (lb.) |
|------------|-------------|--------|-------------|-------------------|-------------------------------|
| CD4X1C-500 | 1/2 | Orange | 900 lb. | 500 | 7 |
| CE4X1-350 | 3/4 | | Empty | 350 | 8 |
| CE4X1-350S | | | Empty/Split | 350 | 8 |
| CF4X1C-100 | 1 | | 900 lb. | 100 | 10 |
| CF4X1-100S | | | Empty/Split | 100 | 10 |
| CF4X1C-250 | | | 900 lb. | 250 | 10 |
| CF4X1-250 | | | Empty | 250 | 10 |
| CF4X1-250S | | | Empty/Split | 250 | 10 |
| CG4X1C-200 | | | 1-1/4 | 900 lb. | 200 |
| CG4X1-200S | Empty/Split | | | 200 | 14 |
| CH4X1C-150 | 1-1/2 | | 900 lb. | 150 | 16 |
| CH4X1-150S | | | Empty/Split | 150 | 16 |
| CJ4X1C-100 | 2 | | 900 lb. | 100 | 21 |
| CJ4X1-100S | | | Empty/Split | 100 | 21 |
| CL4X1C-150 | 3 | | 920 lb. | 150 | 24 |

Specifications

| Size (in.) | I.D. Min. Ref. (in.) | Min. O.D. (in.) | Max. O.D. (in.) | Min. Bend Radius (in.) |
|------------|----------------------|-----------------|-----------------|------------------------|
| 1/2 | 0.60 | 0.815 | 0.835 | 2 |
| 3/4 | 0.74 | 1.025 | 1.045 | 2 |
| 1 | 1.00 | 1.292 | 1.312 | 3 |
| 1-1/4 | 1.35 | 1.630 | 1.650 | 3 |
| 1-1/2 | 1.50 | 1.868 | 1.888 | 4 |
| 2 | 2.00 | 2.329 | 2.439 | 4 |
| 3 | 3.00 | 3.422 | 3.452 | 4 |

How to Build a Catalogue Number:

| Position 1 Product | Position 2 Size (in.) | Position 3 Type | Position 4 Wall | Position 5 Colour | Position 6 Pull Line | Position 7 Length |
|-----------------------|---|--------------------|--------------------|---|-------------------------|---|
| C = Plenum-Gard | D = 1/2 E = 3/4 F = 1 G = 1-1/4 H = 1-1/2 J = 2 L = 3 | 4 = Corrugated | X = Standard | 1 = Orange 2 = Black 3 = Grey 4 = White 5 = Blue 7 = Yellow 8 = Red | C = 900 lb. Tape | Example -1000 = Feet -1000S = 1000 Feet Split |

- Custom Orders are not returnable
- Custom lengths are available in minimum order quantities of 1000 ft.
- Custom colour runs are available in minimum order quantities of 10,000 ft.

Options:

- Colour: Black, Blue, Grey, Red, White and Yellow
- Two, three or four way parallel
- Split Duct
- Custom print line

Riser-Gard™

Product Overview

Riser-Gard™ is a nonmetallic flexible raceway for use in Riser and General Purpose applications. Riser-Gard™ is available with tape pre-installed.

Riser-Gard™ is listed for Riser applications or optical fiber/telecommunication raceways.

Riser-Gard™ is listed for Riser, General Purpose and other cabling optical fiber/telecommunication applications. Riser-Gard™ is suitable for use in vertical runs in shaft or between floors, as well as areas other than the plenum.

Important:

Installed cables must be of suitable rating for the application.



Applications: Riser and General Purpose.

Technical Information

| UL Standard 2024 | Maximum Value |
|-----------------------------------|---------------|
| Maximum Flame Propagation | 6.0 ft. |
| Maximum Air Temperature at 12 ft. | 189°C (372°F) |

- Storage: -20°C to 70°C (-4°F to 158°F)
- Handling: -20°C to 40°C (-4°F to 104°F)
- No UV protection (not suitable for outdoor use)
- Do NOT store outside

- For use in Riser and General Purpose areas
- Riser-Gard™ is also suitable for poured concrete
- Not approved for exposed applications
- Available in sizes 3/4 in. through 3 in.

- Pull tape can be factory pre-installed in 1 in. through 3 in.
- Outside diameters meet IPS dimensions
- Footage sequentially marked



Standard Stock - Reels

| Cat. No. | Size (in.) | Colour | Pull Tape | Reel Size (F x W) (in.) | Reel Type | Length (ft.) | Reel Wt. (lb.) | Product Wt. per 100 ft. (lb.) | | | |
|-------------|------------|--------|-----------|-------------------------|-----------|--------------|----------------|-------------------------------|------|-----|----|
| DE4X1-1000 | 3/4 | Orange | Empty | 34 x 23 | Wood | 1000 | 30 | 12 | | | |
| DF4X1C-500R | | | | 43 x 23 | Wood | 500 | 56 | 15 | | | |
| DF4X1C-1000 | | | | 48 x 28 | Wood | 1000 | 79 | 15 | | | |
| DF4X1C-1500 | 1 | Orange | Empty | 48 x 28 | Wood | 1500 | 79 | 15 | | | |
| DF4X1C-2700 | | | | 48 x 45 | Wood | 2700 | 96 | 15 | | | |
| DF4X1C-5200 | | | | 66 x 41 | Wood | 5200 | 250 | 15 | | | |
| DF4X1C-6500 | | | | 72 x 41 | Wood | 6500 | 310 | 15 | | | |
| DF4X1C-7000 | | | | 72 x 45 | Steel | 7000 | 148 | 15 | | | |
| DF4X1C-9400 | | | | 84 x 45 | Steel | 9400 | 199 | 15 | | | |
| DG4X1C-900 | | | | 1-1/4 | Orange | 900 lb. | 48 x 28 | Wood | 900 | 79 | 17 |
| DG4X1C-500R | 48 x 23 | Wood | 500 | | | | 56 | 17 | | | |
| DG4X1C-1500 | 48 x 45 | Wood | 1500 | | | | 96 | 17 | | | |
| DG4X1C-1600 | 48 x 45 | Wood | 1600 | | | | 96 | 17 | | | |
| DG4X1C-3200 | 66 x 41 | Wood | 3200 | | | | 250 | 17 | | | |
| DG4X1C-4500 | 72 x 45 | Steel | 4500 | | | | 148 | 17 | | | |
| DG4X1C-5600 | 82 x 41 | Wood | 5600 | | | | 365 | 17 | | | |
| DG4X1C-6500 | 96 x 41 | Steel | 6500 | | | | 700 | 17 | | | |
| DH4X1C-1200 | 1-1/2 | Orange | Empty | | | | 48 x 45 | Wood | 1200 | 96 | 22 |
| DH4X1C-4000 | | | | | | | 82 x 45 | Steel | 4000 | 193 | 22 |
| DH4X1C-4500 | | | | 84 x 45 | Steel | 4500 | 199 | 22 | | | |
| DJ4X1C-700 | 2 | Orange | Empty | 48 x 45 | Wood | 700 | 96 | 27 | | | |
| DJ4X1C-2000 | | | | 82 x 41 | Wood | 2000 | 265 | 27 | | | |
| DJ4X1C-2800 | | | | 84 x 45 | Steel | 2800 | 199 | 27 | | | |
| DL4X1C-750 | 3 | Orange | Empty | 72 x 41 | Wood | 750 | 310 | 27 | | | |

Riser-Gard™

Features

- Riser-Gard™ is also suitable for direct burial. Not approved for exposed applications.
- Available in sizes 3/4 in. through 3 in.
- Pull tape can be factory pre-installed in 1 in. through 3 in.
- Outside Diameters meet IPS Dimensions
- Footage sequentially marked

Standard Stock – Coils

| Cat. No. | Size (in.) | Colour | Pull Tape | Coil Length (ft.) | Product Wt. per 100 ft. (lb.) |
|------------|------------|--------|-------------|-------------------|-------------------------------|
| DE4X1-350 | 3/4 | Orange | Empty | 350 | 12 |
| DF4X1C-125 | | | 900 lb. | 125 | 15 |
| DF4X1C-250 | 1 | | 900 lb. | 250 | 15 |
| DF4X1-250 | | | Empty | 250 | 15 |
| DF4X1C-500 | 1 | | 900 lb. | 500 | 15 |
| DF4X1-250S | | | Empty/Split | 250 | 15 |
| DG4X1-200 | 1-1/4 | | Empty | 200 | 17 |
| DG4X1-200S | | | Empty/Split | 200 | 17 |
| DG4X1C-200 | | | 900 lb. | 200 | 17 |
| DG4X1C-500 | | | 900 lb. | 500 | 17 |
| DH4X1-150S | 1-1/2 | | Empty/Split | 150 | 22 |
| DH4X1C-150 | | | 900 lb. | 150 | 22 |
| DJ4X1-100S | 2 | | Empty/Split | 100 | 27 |
| DJ4X1C-100 | | | 900 lb. | 100 | 27 |
| DL4X1C-250 | 3 | | 900 lb. | 250 | 27 |

Specifications

| Size (in.) | I.D. Min. Ref. (in.) | Min. O.D. (in.) | Max. O.D. (in.) | Min. Bend Radius (in.) |
|------------|----------------------|-----------------|-----------------|------------------------|
| 3/4 | 0.74 | 1.025 | 1.075 | 5 |
| 1 | 0.98 | 1.290 | 1.340 | 6 |
| 1-1/4 | 1.31 | 1.640 | 1.690 | 8 |
| 1-1/2 | 1.54 | 1.880 | 1.930 | 10 |
| 2 | 2.00 | 2.350 | 2.400 | 12 |
| 3 | 3.00 | 3.422 | 3.452 | 18 |

Custom Orders

| How to Build a Catalogue Number: | | | | | | |
|----------------------------------|--|--------------------------|-----------------|---|----------------------|---|
| Position 1 Product | Position 2 Size (in.) | Position 3 Configuration | Position 4 Wall | Position 5 Colour | Position 6 Pull Line | Position 7 Length |
| D = Riser-Gard | E = 3/4 F = 1 G = 1-1/4 H = 1-1/2 J = 2 L = 3 | 4 = Corrugated | X = Standard | 1 = Orange 2 = Black 3 = Grey 4 = White 5 = Blue 7 = Yellow 8 = Red | C = 900 lb. Tape | Example -1000 = Feet -1000S = 1000 Feet Split |

- Custom Orders are not returnable
- Custom lengths are available in minimum order quantities of 1000 ft.
- Custom colour runs are available in minimum order quantities of 10,000 ft.

Options:

- Colour: Black, Blue, Grey, Red, White and Yellow
- Two, three or four way parallel
- Split Duct
- Custom print line

Riser-Gard™

Flexible Raceway Accessories

(Approved for low voltage use only)

Low Voltage Add-On Bracket



Low Voltage Adjustable Brackets




SC100ADJC

| Cat. No. | Description | Std. Carton Quantity | Std. Ctn. Wt. (lb.) |
|----------|-------------|----------------------|---------------------|
| SC100SC | 1 gang | 24 | 2.3 |

| Cat. No. | Size | Std. Carton Quantity | Std. Ctn. Wt. (lb.) |
|-----------|--------|----------------------|---------------------|
| SC100ADJC | 1 gang | 24 | 7.5 |
| SC200ADJC | 2 gang | 20 | 6.9 |

Low Voltage Brackets

| Cat. No. | Description | Resi-Rings (in.) | Std. Carton Quantity | Std. Ctn. Wt. (lb.) |
|----------|-------------|------------------|----------------------|---------------------|
| SC100A | 1 gang | 3/4, 1, 1-1/4 | 24 | 5.3 |
| SC200A | 2 gang | | | 7.7 |
| SC300A | 3 gang | - | 5 | 1.6 |

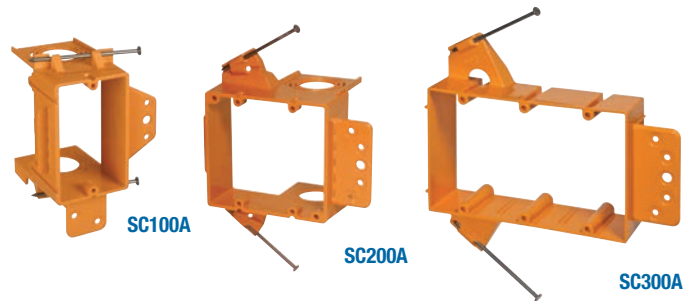

SC100A


SC200A

SC300A

Cable Clips

| Cat. No. | Size (in.) | Standard Order Quantity | Std. Ctn. Qty. | Std. Ctn. Wt. (lb.) |
|----------|------------|-------------------------------------|----------------|---------------------|
| SC14CC | 1/4 | 1 ea. (Equals one bag of 100 clips) | 10 bags of 100 | 2.23 |
| SC12CC | 1/2 | 1 ea. (Equals one bag of 25 clips) | 10 bags of 25 | 2.31 |
| SC34CC | 3/4 | 1 ea. (Equals one bag of 10 clips) | 20 bags of 10 | 2.96 |

Carlton's cable clips with pre-installed nails provide fast and easy installation for either a single cable, 2-3 cables or 1 bundled cable.

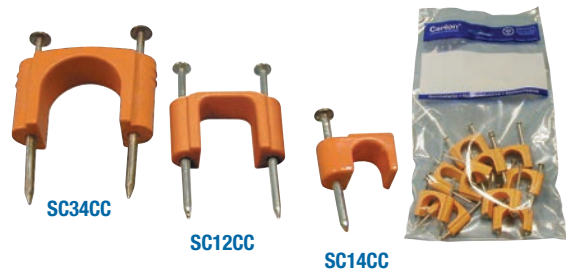

SC34CC

SC12CC

SC14CC

Conduit Clamps



| Cat. No. | Size (in.) | Standard Order Quantity | Std. Carton Quantity | Std. Ctn. Wt. (lb.) |
|----------|------------|------------------------------------|----------------------|---------------------|
| SCE977EC | 3/4 | 1 ea. (Equals one bag of 5 clamps) | 20 bags of 5 | 1.5 |
| SCE977FC | 1 | | 12 bags of 5 | 1.3 |
| SCE977GC | 1-1/4 | | 8 bags of 5 | 1.1 |
| SCE977HC | 1-1/2 | | 6 bags of 5 | 1.0 |
| SCE977JC | 2 | | 6 bags of 5 | 1.5 |

Carlton's orange conduit clamps are designed specifically for the installation of Riser-Gard™.

Note: Each clamp requires 2 screws, 2 nuts and/or 2 bolts.

Hal-Free Riser-Gard™

Product Overview

Hal-Free Riser-Gard™ is a halogen free nonmetallic flexible raceway for use in riser and general purpose applications. In the event of a fire, this product will not release halogen elements into the air, which makes it ideal for applications in tunnels, laboratories and high-tech environments.

Custom lengths and split ducts are available upon request. Hal-Free Riser-Gard™ is available in white only.

Technical Information:

| UL Standard 2024 | Maximum Value |
|---------------------------|---------------|
| Maximum Flame Propagation | 3 ft. 6 in. |
| Maximum Air Temperature | 197°C (387°F) |

- Storage and Handling: -20°C to 66°C (-4°F to 150°F)
- No UV protection (not suitable for outdoor use)
- Do NOT store outside
- Free from halogen elements
- Available in sizes 1 in. through 2 in.
- Available in white only
- Sequentially marked footage



Applications: Riser and General Purpose

Standard Stock - Reels



| Cat. No. | Size (in.) | Colour | Nom. I.D. (in.) | Nom. O.D. (in.) | Pull Tape | Reel Size (F x W) (in.) | Reel Type | Reel Length (ft.) | Reel Wt. (lb.) | Product Wt. per 100 ft. (lb.) |
|-------------|------------|--------|-----------------|-----------------|-----------|-------------------------|-----------|-------------------|----------------|-------------------------------|
| HF4X4C-5000 | 1 | White | 1.049 | 1.365 | 900 lb. | 72 x 41 | Wood | 5000 | 310 | 7.5 |
| HG4X4C-4000 | 1-1/4 | | 1.250 | 1.550 | | | | 4000 | 310 | 7.5 |
| HH4X4C-2000 | 1-1/2 | | 1.500 | 1.850 | | | | 2000 | 250 | 12 |
| HJ4X4C-2000 | 2 | | 2.000 | 2.425 | | | | 2000 | 365 | 21 |

Resi-Gard™

Nonmetallic Adapters and Couplings

- For use with Riser-Gard™ and General Purpose



Couplings

| Cat. No. | Size (in.) | Colour | Standard Carton Quantity | Standard Carton Weight (lb.) |
|----------|------------|--------|--------------------------|------------------------------|
| SCA240E | 3/4 | Orange | 25 | 0.783 |
| SCA240F | 1 | | 20 | 0.972 |

Threaded Adapters

| Cat. No. | Size (in.) | Colour | Standard Carton Quantity | Standard Carton Weight (lb.) |
|----------|------------|--------|--------------------------|------------------------------|
| SCA243E | 3/4 | Orange | 100 | 2.30 |
| SCA243F | 1 | | 50 | 2.00 |

Snap-In Adapters

| Cat. No. | Size (in.) | Colour | Standard Carton Quantity | Standard Carton Weight (lb.) |
|----------|------------|--------|--------------------------|------------------------------|
| SCA253E | 3/4 | Orange | 100 | 2.90 |
| SCA253F | 1 | | 50 | 2.30 |

Nonmetallic Adapters and Couplings

- For use with Plenum-Gard®



Coupling

| Cat. No. | Size (in.) | Colour | Standard Carton Quantity | Standard Carton Weight (lb.) |
|----------|------------|--------|--------------------------|------------------------------|
| A340F | 1 | Orange | 50 | 2.50 |

Threaded Adapter

| Cat. No. | Size (in.) | Colour | Standard Carton Quantity | Standard Carton Weight (lb.) |
|----------|------------|--------|--------------------------|------------------------------|
| A343F | 1 | Orange | 50 | 1.55 |

Snap-In Adapter

| Cat. No. | Size (in.) | Colour | Standard Carton Quantity | Standard Carton Weight (lb.) |
|----------|------------|--------|--------------------------|------------------------------|
| A353F | 1 | Orange | 50 | 3.00 |

Resi-Gard™

Flexible Raceway

(Approved for low voltage use only)

Ideal for providing a main chase from the main distribution panel to a secondary hub in the attic or basement. Resi-Gard™ nonmetallic flexible raceway is available in 3/4 in. to 2 in. diameter sizes with factory installed pull tape in sizes 1 in. to 2 in. The raceway is hand bendable, lightweight and easily cut to length to reduce scrap. Bright orange colour clearly signifies a low voltage installation.



Standard Length Coils

| Cat. No. | Size (in.) | Pull Tape | Coil Length | Prod. Wt. (lb.) Coil |
|-------------|------------|-----------|-------------|----------------------|
| SCE4X1-100 | 3/4 | 900 lb. | 100 | 11.5 |
| SCF4X1C-100 | 1 | | | 17.9 |
| SCG4X1C-100 | 1-1/4 | | 21.5 | |
| SCH4X1C-50 | 1-1/2 | | 11.2 | |
| SCJ4X1C-50 | 2 | 50 | 13.4 | |

Standard Length Reels

| Cat. No. | Size (in.) | Pull Tape | Reel Length | Prod. Wt. (lb.) Reel |
|--------------|------------|-----------|-------------|----------------------|
| SCE4X1-1000 | 3/4 | 900 lb. | 1000 | 115.0 |
| SCF4X1C-1500 | 1 | | 1500 | 268.5 |
| SCJ4X1C-500 | 2 | | 500 | 133.5 |

Resi-Gard™ Fittings

A complete line of Carlton® one-piece quick connect couplings, threaded adapters and snap-in terminator adapters are available for quick, easy professional installation of Resi-Gard™ flexible raceway.



Quick Connect Couplings

| Cat. No. | Size (in.) | Std. Ctn. Qty. | Std. Ctn. Wt. (lb.) |
|----------|------------|----------------|---------------------|
| SCA240E | 3/4 | 25 | 0.783 |
| SCA240F | 1 | 20 | 0.972 |



Quick Connect Threaded Adapters

| Cat. No. | Size (in.) | Std. Ctn. Qty. | Std. Ctn. Wt. (lb.) |
|----------|------------|----------------|---------------------|
| SCA243E | 3/4 | 25 | 0.633 |
| SCA243F | 1 | 20 | 0.778 |



Quick Connect Snap-In Adapters

| Cat. No. | Size (in.) | Std. Ctn. Qty. | Std. Ctn. Wt. (lb.) |
|----------|------------|----------------|---------------------|
| SCA253E | 3/4 | 25 | 0.783 |
| SCA253F | 1 | 20 | 0.918 |



Male Terminal Adapters*

| Cat. No. | Size (in.) | Std. Ctn. Qty. | Std. Ctn. Wt. (lb.) |
|----------|------------|----------------|---------------------|
| SCE943G | 1-1/4 | 50 | 3.0 |
| SCE943H | 1-1/2 | 25 | 2.5 |
| SCE943J | 2 | 50 | 6.8 |



Standard Couplings*

| Cat. No. | Size (in.) | Std. Ctn. Qty. | Std. Ctn. Wt. (lb.) |
|----------|------------|----------------|---------------------|
| SCE940G | 1-1/4 | 30 | 3.5 |
| SCE940H | 1-1/2 | 25 | 3.9 |
| SCE940J | 2 | 30 | 5.2 |

*Must be cemented to Resi-Gard™ Flexible Raceway using ONLY Resi-Gard™ Solvent Cement.

Micro-Gard™

Plenum & Micro-Gard™ Riser

Carlton® Micro-Gard™ Plenum and Micro-Gard™ Riser are specifically designed to provide fiber pathways in plenum and riser applications in Multi-Dwelling Units (MDUs) and other premise structures.

The 8/6 and 12/10 mm size conduits can be installed individually or used to optimize space in existing duct structures. And the small size significantly reduces the structural damage caused during pass-throughs.

Micro-Gard™ Plenum and Riser are listed for plenum and riser applications. They're easy to handle, easy to install and easy to conceal, thus making them the ideal MDU cable management system.

Carlton® Micro-Gard™ Plenum and Micro-Gard™ Riser. Small. Slick. Speedy. Ideal for Telecom Installs!

Features

- cUL Listed for Plenum and Riser applications
- Two Sizes: 8/6 mm and 12/10 mm. The smaller sizes accommodate the size constraints of multi-dwelling units and make installations faster and easier.
- Smooth interior wall eliminates snag points and provides low coefficient of friction regardless of whether jetting or pull-tape is used
- Superior burn-through resistance for longer cable pulls
- Pre-installed pull-tape makes installing cable faster and easier (option available for empty duct)
- Sequentially marked footage to easily identify lengths and reduce waste
- Reel sizes from 1000 to 5000 feet for easy handling on the jobsite
- Future-proofing raceway system for fast, easy wire/cable upgrades, changes and moves
- Used in cable bundles



Micro-Gard™

Plenum & Micro-Gard™ Riser



| Cat. No. | Size | Type | Colour | Pre-Installed Tape | Min. Bend Radius (in.)* | Feet/Reel | Reel Size (in.) |
|--------------|----------|--------|--------|--------------------|-------------------------|-----------|-----------------|
| MGP08MT-1000 | 8/6 mm | Plenum | White | 200 lb. | 2 | 1000 | 24 |
| MGP08MT-2500 | 8/6 mm | | | | 2 | 2500 | 24 |
| MGP08MT-5000 | 8/6 mm | | | | 2 | 5000 | 36 |
| MGP12MT-1000 | 12/10 mm | | | | 4 | 1000 | 24 |
| MGP12MT-2500 | 12/10 mm | | | | 4 | 2500 | 24 |
| MGP12MT-5000 | 12/10 mm | | | | 4 | 5000 | 36 |
| MGR08JT-1000 | 8/6 mm | Riser | Orange | | 2 | 1000 | 24 |
| MGR08JT-2500 | 8/6 mm | | | | 2 | 2500 | 24 |
| MGR08JT-5000 | 8/6 mm | | | | 2 | 5000 | 36 |
| MGR12JT-1000 | 12/10 mm | | | | 4 | 1000 | 24 |
| MGR12JT-2500 | 12/10 mm | | | | 4 | 2500 | 24 |
| MGR12JT-5000 | 12/10 mm | | | | 4 | 5000 | 36 |

* Important: Do not exceed the minimum bend radius during installation of the product.

How to Interpret a Catalogue Number

| Position 1 Product | Position 2 Type | Position 3 Size | Position 4 Colour | Position 5 Pull Line | Position 6 Length |
|--------------------|-------------------------|------------------------------|-------------------------|----------------------|------------------------------|
| MG = Micro-Gard | P = Plenum R = Riser | 08 = 8/6 mm 12 = 12/10 mm | J = Orange M = White | T = 200 lb. Tape | Example -1000 = 1000 Feet |

Flex-Plus® Blue™ ENT

Flex-Plus® Blue™ ENT is a nonmetallic flexible raceway for use in walls, floors and non-plenum ceilings. It's lightweight, hand bendable and free from sharp edges, which reduces installation time and saves money.

- Ideal storage conditions down to -20°C

(See page I61 for technical information.)

Options

- Sizes 1/2 in. through 2 in.
- Colours can designate different voltages
- Yellow colour for communication circuits and signaling cable
- Red colour for fire alarm circuits
- Blue colour for power circuits



FT-4 Rated
where noted
by



Standard Stock – Reels

| Cat. No. | Size (in.) | Colour | Nom. I.D. (in.) | Nom. O.D. (in.) | Pull Tape | Min. Bend Radius | Reel Type (W=Wood) | Reel Length | Reel Wt. (lb.) | Wt. per 100 ft. (lb.) |
|-------------|------------|--------|-----------------|-----------------|-----------|------------------|--------------------|-------------|----------------|-----------------------|
| 1205AKC-001 | 1/2 | Blue | 0.56 | 0.84 | Empty | 36 x 24 | W | 1500 | 40 | 10 |
| 1207AAC-001 | 3/4 | | 0.76 | 1.05 | | | | 1000 | 40 | 14 |
| 12008C-750 | 1 | | 1.00 | 1.315 | | | | 750 | 40 | 20 |
| 12009C-750 | 1-1/4 | | 1.402 | 1.66 | | | | 750 | 90 | 19 |
| 12009C-500 | 1-1/4 | | 1.402 | 1.66 | | 500 | | 90 | 19 | |
| 12010C-750 | 1-1/2 | | 1.554 | 1.90 | | 750 | | 90 | 39 | |
| 12011C-500 | 2 | | 2.030 | 2.375 | | 500 | | 90 | 32 | |
| 12011C-225 | 2 | | 2.030 | 2.375 | | 225 | | 90 | 32 | |

1-1/4 in. - 2 in. available in yellow & red, made to order; contact your Regional Sales Office.

Standard Stock – Coils

| Cat. No. | Size (in.) | Colour | Nom. I.D. (in.) | Nom. O.D. (in.) | Pull Tape | Min. Bend Radius | Coil Length (ft.) | Wt. per 100 ft. (lb.) |
|-------------|------------|--------|-----------------|-----------------|-----------|------------------|-------------------|-----------------------|
| 12005C-200 | 1/2 | Blue | 0.56 | 0.84 | Empty | 6 | 200 | 10 |
| 12005C-370 | 1/2 | | 0.56 | 0.84 | | 6 | 370 | 10 |
| 12007C-100 | 3/4 | | 0.76 | 1.05 | | 6 | 100 | 14 |
| 12007C-240 | 3/4 | | 0.76 | 1.05 | | 6 | 240 | 14 |
| 12008C-160 | 1 | | 1.00 | 1.315 | | 6 | 160 | 22 |
| 12009C-500C | 1-1/4 | | 1.402 | 1.66 | | 7 | 500 | 19 |
| 12010C-300C | 1-1/2 | | 1.554 | 1.90 | | 8-1/4 | 300 | 39 |
| 12011C-225C | 2 | | 2.030 | 2.375 | | 9-1/2 | 225 | 32 |

NOTE: The solid blue colour of ENT conduit is a registered trademark of Carlton®.

ENT may show colour deterioration in direct sunlight when stored outdoors over an extended period of time. It is suggested that all ENT products not be stored outside.

Stub Downs

Vertical Stub Down

Carlton Vertical Stub Downs are designed to provide a quick, easy connection to a wood deck or transition from slab-to-slab using Carlton's "Quick Connect" snap-in design... simply snap the ENT in place. The integral snaps provide a secure mount – preventing the ENT from pulling out while maintaining the ability for easy removal of the fitting once the deck is removed. All in a concrete-tight application. The underside of this fitting provides ample room to attach a Carlton coupling to the ENT to continue the run. Carlton Vertical Stub Downs are manufactured out of a highly engineered thermoplastic material to provide extra strength and durability and are available in sizes 1/2 in., 3/4 in. and 1 in.

| Cat. No. | Size (in.) | Std. Ctn. Qty. | Std. Ctn. Wt. (lb.) |
|----------|------------|----------------|---------------------|
| A210D | 1/2 | 50 | 3.8 |
| A210E | 3/4 | | 3.7 |
| A210F | 1 | | 4.8 |



45° Stub Down

Carlton 45 Degree Stub Downs are designed to allow a smooth transition from cross deck ENT runs to vertical applications. The integral snaps provide a secure mount – preventing the ENT from slipping or pulling out- but also allow the stub to easily be removed. The underside of this fitting provides ample room to attach a Carlton coupling to the ENT to continue the run. Carlton 45 Degree Stub Downs are manufactured out of a highly engineered thermoplastic material to provide extra strength and durability. They're concrete-tight and available in sizes 1/2 in., 3/4 in. and 1 in.

| Cat. No. | Size (in.) | Std. Ctn. Qty. | Std. Ctn. Wt. (lb.) |
|----------|------------|----------------|---------------------|
| A220D | 1/2 | 25 | 1.8 |
| A220E | 3/4 | | 2.0 |
| A220F | 1 | | 2.6 |
| A220G | 1-1/4 | | 2.8 |
| A220H | 1-1/2 | | 3.3 |
| A220J | 2 | | 4.1 |



Vertical Stub Down Transition Adapter

CARLTON NONMETALLIC EXCLUSIVE... Carlton Vertical Stub Down Transition Adapters like our Vertical Stub Downs, provide a means to transition from ENT to another wire management product where code requires other wire management means. The integral snaps provide a secure mount – preventing the ENT from slipping or pulling out, while the deck mount flange has a threaded port allowing connection to other conduit system using terminal adapter. Carlton Vertical Stub Down Transition Adapters are manufactured out of polycarbonate material to provide extra strength and durability. They're concrete-tight and available in sizes 1/2 in., 3/4 in. and 1 in.



| Cat. No. | Size (in.) | Std. Ctn. Qty. | Std. Ctn. Wt. (lb.) |
|----------|------------|----------------|---------------------|
| A200D | 1/2 | 50 | 3.8 |
| A200E | 3/4 | | 3.7 |
| A200F | 1 | | 4.8 |



90° Stub Down Transition Adapter

CARLTON NONMETALLIC EXCLUSIVE... Carlton 90 Degree Stub Downs are designed to allow a smooth transition from cross deck ENT runs to vertical applications where code requires other wire management means. The integral snaps provide a secure mount – preventing the ENT from slipping or pulling out, while the deck mount flange has a threaded port allowing connection to any conduit system using a terminal adapter. Carlton 90 Degree Stub Downs are manufactured out of polycarbonate material to provide extra strength and durability. They're concrete-tight and available in sizes 1/2 in., 3/4 in. and 1 in.



| Cat. No. | Size (in.) | Std. Ctn. Qty. | Std. Ctn. Wt. (lb.) |
|----------|---------------------------------|----------------|---------------------|
| A230D | 1/2 Female ENT to NPSC (Female) | 25 | 2.0 |
| A230E | 3/4 Female ENT to NPSC (Female) | | 2.4 |
| A230F | 1 Female ENT to NPSC (Female) | | 3.3 |



ENT Accessories

Transition Adapters

Male ENT to Schedule 40 PVC Conduit

CARLON EXCLUSIVE...Carlton Male ENT to Schedule 40 PVC Conduit Transition Adapters are designed to connect Schedule 40 conduit to Carlton Flex-Plus® Blue™ ENT boxes and fittings. Simply solvent cement the PVC adapter to the Schedule 40 conduit and snap the adapter into the Carlton's "Quick Connect" snap-in connector on the box or fitting. Carlton Male ENT to Schedule 40 Adapters are concrete-tight and available in sizes 1/2 in., 3/4 in. and 1 in.



| Cat. No. | Size | Std. Ctn. Qty. | Std. Ctn. Wt. (lb.) |
|----------|------------------------|----------------|---------------------|
| A263D | 1/2 ENT to 1/2 Sch. 40 | 100 | 2.4 |
| A263E | 3/4 ENT to 3/4 Sch. 40 | | 3.2 |
| A263F | 1 ENT to 1 Sch. 40 | | 4.5 |

ENT to EMT

Carlton ENT to EMT Transition Adapters are designed to easily transition from Carlton Flex-Plus® Blue™ ENT to EMT using Carlton's "Quick Connect" snap-in design. The EMT is held securely in place using the small screw provided. This helps prevent the EMT from slipping/shifting out of the adapter. All ENT to EMT adapters are manufactured out of polycarbonate material to provide extra strength and durability. They're concrete-tight and available in sizes 1/2 in., 3/4 in. and 1 in.



| Cat. No. | Size | Std. Ctn. Qty. | Std. Ctn. Wt. (lb.) |
|----------|--------------------|----------------|---------------------|
| A245D | 1/2 ENT to 1/2 EMT | 100 | 3.4 |
| A245E | 3/4 ENT to 3/4 EMT | | 4.1 |
| A245F | 1 ENT to 1 EMT | | 5.4 |

Reducer

CARLON EXCLUSIVE...Carlton ENT Reducers are designed to provide an easy transition from 1 in. Carlton ENT to 3/4 in. ENT or from 3/4 in. Carlton ENT to 1/2 in. ENT. They're concrete-tight and manufactured out of polycarbonate material to provide extra strength and durability. Carlton ENT Reducers provide flexibility while on the jobsite by minimizing the need to carry size specific boxes and fittings. Carlton ENT Reducers provide the versatility to convert Carlton fittings and boxes to many different sizes and configurations.



| Cat. No. | Size (in.) | Std. Ctn. Qty. | Std. Ctn. Wt. (lb.) |
|----------|------------|----------------|---------------------|
| A273DE | 3/4 to 1/2 | 100 | 3.2 |
| A273EF | 1 to 3/4 | | 2.4 |

ENT Accessories


Quick Connect Adapters and Couplings

- Carlton One-Piece ENT Quick Connect Couplings, Threaded Adapters and Snap-In Terminator Adapters are suitable for damp locations. Quick Connect Couplings and Threaded Adapters are concrete-tight when used with Carlton ENT.
- All sizes of rigid nonmetallic conduit fittings are compatible with ENT when using ENT cement
- Rigid nonmetallic conduit fittings are recommended for use with Carlton 1-1/4 in. – 2 in. Flex-Plus Blue ENT
- Use of ENT Blue Quick-Set Cement is required. See page I67 for details.
- When One-Piece Quick Connect Snap-In Terminator Adapters are installed in a concrete application, Carlton's flat sealing washers must be used on the box connection ends

Rigid Nonmetallic Conduit Adapters and Couplings



All socket fittings should be attached using Carlton solvent cement. Using Carlton fittings with Carlton nonmetallic conduit insures system integrity. Socket type for joining nonmetallic conduit.



Standard Couplings



| Cat. No. | Size (in.) | Std. Ctn. Qty. | A | B | Min. D (in.) | Max. O.D. (in.) | C | L | Std. Ctn. Wt. (lb.) |
|-------------|------------|----------------|---------------|-------|--------------|-----------------|---------------|-------|---------------------|
| | | | Typical (in.) | | | | Typical (in.) | | |
| CE940DR-CTN | 1/2 | 150 | 0.852 | 0.836 | 0.728 | 1-7/64 | 11/16 | 1-1/2 | 4.1 |
| CE940ER-CTN | 3/4 | 100 | 1.064 | 1.046 | 0.840 | 1-5/16 | 3/4 | 1-5/8 | 4.4 |
| CE940F-UPC | 1 | 50 | 1.330 | 1.310 | 1.210 | 1-5/8 | 15/16 | 2 | 3.5 |
| E940G | 1-1/4 | 30 | 1.677 | 1.655 | 1.535 | 1-63/64 | 1 | 2-1/8 | 3.5 |
| E940H | 1-1/2 | 25 | 1.918 | 1.894 | 1.755 | 2-15/64 | 1-1/8 | 2-3/8 | 3.9 |
| E940J | 2 | 30 | 2.393 | 2.369 | 2.190 | 2-47/64 | 1-3/16 | 2-1/2 | 5.3 |

Couplings



| Cat. No. | Size (in.) | Std. Ctn. Qty. | Std. Ctn. Wt. (lb.) |
|----------|------------|----------------|---------------------|
| A240D | 1/2 | 150 | 2.90 |
| A240E | 3/4 | 100 | 3.00 |
| A240F | 1 | 50 | 2.30 |



Threaded Adapters




| Cat. No. | Size (in.) | Std. Ctn. Qty. | Std. Ctn. Wt. (lb.) |
|----------|------------|----------------|---------------------|
| A243DC | 1/2 | 150 | 2.55 |
| A243EC | 3/4 | 100 | 2.30 |
| A243FC | 1 | 50 | 2.00 |



| Cat. No. | Size (in.) | Std. Ctn. Qty. | Std. Ctn. Wt. (lb.) |
|----------|------------|----------------|---------------------|
| A253D | 1/2 | 150 | 2.70 |
| A253E | 3/4 | 100 | 2.90 |
| A253F | 1 | 50 | 2.30 |



For adapting nonmetallic conduits to boxes threaded fittings, metallic systems. Male threads on one end, socket end on other.



Male Terminal Adapter

| Cat. No. | Size (in.) | Std. Ctn. Qty. | A | B | Min. D (in.) | Max. O.D. (in.) | C | S | L | Std. Ctn. Wt. (lb.) |
|----------|------------|----------------|---------------|-------|--------------|-----------------|---------------|-------|---------|---------------------|
| | | | Typical (in.) | | | | Typical (in.) | | | |
| E943D | 1/2 | 150 | 0.852 | 0.836 | 0.597 | 1-1/8 | 5/8 | 9/16 | 1-5/16 | 2.8 |
| E943E | 3/4 | 100 | 1.064 | 1.046 | 0.800 | 1-11/32 | 3/4 | 9/16 | 1-3/8 | 3.5 |
| E943F | 1 | 50 | 1.330 | 1.310 | 1.018 | 1-5/8 | 1 | 11/16 | 1-25/32 | 3 |
| E943G | 1-1/4 | 30 | 1.677 | 1.655 | 1.332 | 2-1/32 | 1 | 3/4 | 1-15/16 | 4 |
| E943H | 1-1/2 | 25 | 1.918 | 1.894 | 1.566 | 2-5/32 | 1-3/16 | 3/4 | 2-1/16 | 2.5 |
| E943J | 2 | 30 | 2.393 | 2.369 | 2.000 | 2-21/32 | 1-3/16 | 3/4 | 2-1/8 | 7 |

Mud Box Assemblies

Carlton Mud Box Assemblies are available in five unique styles... blank, ceiling ring, one-gang, two-gang and 4-inch square. All Mud Box Assemblies are manufactured out of polycarbonate material to provide extra strength and durability, are concrete-tight and have twelve integral connectors...two-1 in., six-3/4 in. and four-1/2 in. Using our new ENT Reducers (see page 156), this product will meet ANY jobsite application.



Mud Box with Ceiling Ring

- Threaded brass inserts for fan (#10-32 screws and fixture (#8-32 screws) mountings
- Listed for fixture support up to 50 lb.
- Listed for ceiling fans up to 35 lb.



| Cat. No. | Description | Std. Ctn. Qty. | Std. Ctn. Wt. (lb.) |
|----------|---------------------------------------|----------------|---------------------|
| A863CFG | Mud Box w/Ceiling Ring and Ground Lug | 24 | 16.1 |




Mud Box with One-Gang Ring



| Cat. No. | Description | Std. Ctn. Qty. | Std. Ctn. Wt. (lb.) |
|----------|--|----------------|---------------------|
| A863SG | Mud Box w/One-Gang Ring and Ground Lug | 24 | 16.2 |

Mud Box Assemblies



Mud Box with Two-Gang Ring

| Cat. No. | Description | Std. Ctn. Qty. | Std. Ctn. Wt. (lb.) |
|----------|--|----------------|---------------------|
| A863DG | Mud Box w/Two-Gang Ring and Ground Lug | 24 | 16.6 |




Mud Box Assemblies with Mounting Feet

Carlton Mud Box Assemblies with Mounting Feet are specifically engineered and designed for use in Tunnel Form applications. The mounting feet are located on all four corners and allow the box to attach directly to the wall of the form using pop rivets. The pop rivets help keep the box in position during the pour and provide a safe, secure, and rust resistant mount.

| Cat. No. | Description | Std. Ctn. Qty. | Std. Ctn. Wt. (lb.) |
|----------|-----------------------------|----------------|---------------------|
| A863CFGF | Ceiling Ring and Ground Lug | 24 | 17.46 |
| A863DGF | Double Gang and Ground Lug | | 17.99 |
| A863SGF | Single Gang and Ground Lug | | 17.44 |

Mounting Brackets and ENT Bridge

Mounting Brackets

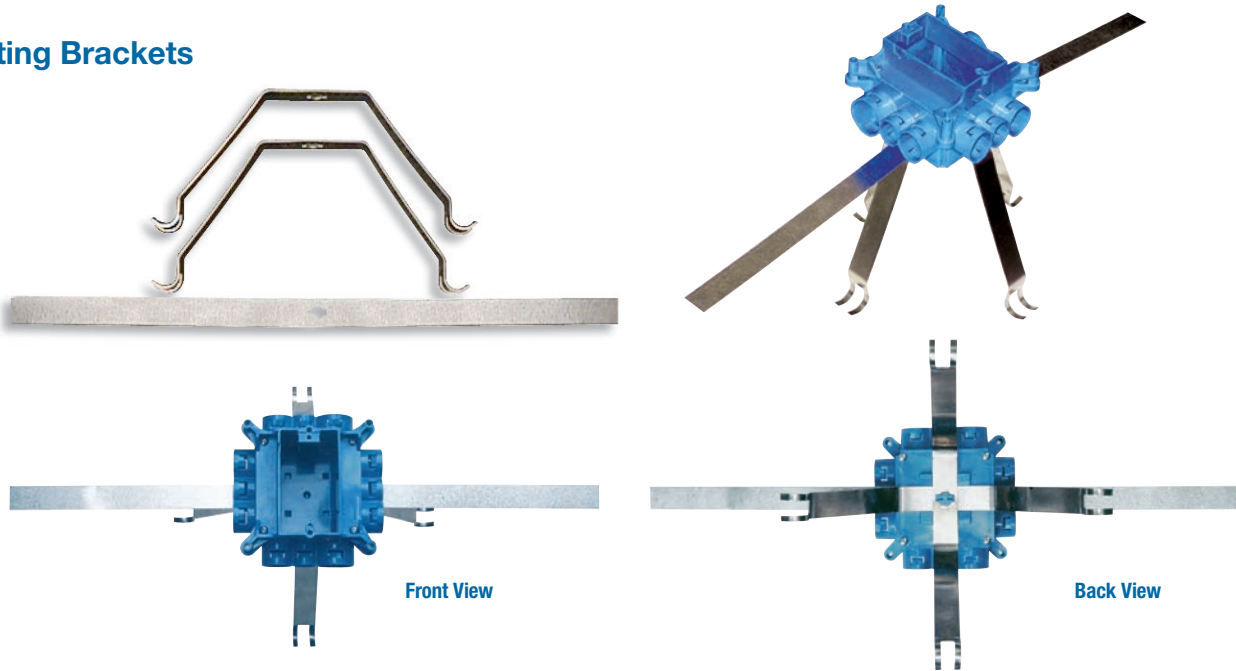


Front View

Back View

CARLON EXCLUSIVE... The Carlon ENT Mounting Bracket is specifically designed for use with Carlon ENT Mud Box Assemblies in vertical concrete walls where one- or two-gang boxes are needed. The stainless steel spring-loaded mechanism provides a secure outlet box between concrete forms while the soft steel strap allows for the outlet box to be secured to rebar. The bracket combination assures a straight box opening and a concrete-tight fit. Mud Box not included.

| Cat. No. | Description | Std. Ctn. Qty. | Std. Ctn. Wt. (lb.) |
|----------|----------------------|----------------|---------------------|
| A863MB | Mud Box Mounting Kit | 1 | 0.98 |

ENT Bridge




CARLON EXCLUSIVE... The Carlon ENT Bridge is designed to support long ENT runs in concrete pour applications. This makes pulling wire/cable a snap. Installation is easy... simply mount the ENT bridge, using nails or screws, to the wood deck mounting and snap the ENT into place. The bridge is designed to hold the conduit in place while minimizing dips in the conduit over long runs. The Carlon ENT Bridge is manufactured out of a highly engineered thermoplastic material to provide extra strength and durability and can accommodate ENT sizes 1/2 in., 3/4 in. and 1 in. (The Carlon ENT bridge can be used with rigid nonmetallic conduit too.)

| Cat. No. | Description | Std. Ctn. Qty. | Std. Ctn. Wt. (lb.) |
|----------|-------------|----------------|---------------------|
| A293DEF | ENT Bridge | 50 | 9.0 |

ENT Technical Information


Concrete Encasement Guidelines

1. Cut ENT square and cleanly.
2. Insert end into fitting, making sure two (2) full corrugations are snapped into fitting beyond flexible tabs (2 clicks).
3. ENT should be tied to rebar at 2-3 foot intervals to prevent flotation. Keep ENT straight. Small deflections over a long run may accumulate significant degrees of bend which will affect conductor installation. Suitable materials include wire, cable ties and tape.
4. When using rigid nonmetallic conduit fittings for concrete-tight performance:



- A. Do not use chemical primer or cleaner.
- B. Apply a light, uniform coat of cement labeled for use with ENT on the coupling and ENT.
- C. Do not use a dauber.
- D. Brush excess cement out of ENT grooves.

- E. Promptly insert ENT into fitting while cement is wet, until the stop is reached, and give a quarter turn.
- F. Do not disturb until joint is set.



Features

- ENT rated for 75°C Canada (90°C conductors US and 75°C Canada)
- Recognized for use with PVC rigid nonmetallic conduit fittings with all sizes of ENT
- One piece ENT Coupling, Threaded Terminator and RNC Transition Fitting are rated concrete-tight without tape
- Recognized for use in 2-hour fire resistive nonload bearing and load bearing wall assemblies
- Recognized for use in 1-hour fire resistive nonload bearing wall assemblies
- Recognized for use in a fire resistive ceiling assembly (up to 3 hours)
- Conductors easily push through the raceway (up to approximately 50 feet)
- For use in buildings in accordance with CEC Section 12-1500
- Outside Diameters meet IPS Dimensions
- Storage: -20°C to 70°C
- Handling: -20°C to 40°C

Typical Applications

- Residential: Low or high rise – multi or single family
- Commercial: Low or high rise – office, retail, hotel/motel, restaurant, etc.
- Schools, classrooms, dormitories, offices
- Fire Alarm Systems
- Recreational vehicles and parks
- Solar Photovoltaic systems
- Marinas and boatyards
- Other uses per the current CEC

Low Voltage Brackets and Kits

Low Voltage Kit

The Carlton Low Voltage Adjustable Floor Bracket is specifically designed for the low voltage, structured cabling market... the floor box is industry standard orange to identify low voltage applications, the open design provides the space needed for low voltage bend radius requirements and the Leviton QuickPort® Quad 106® Insert provides up to four low voltage outlets ports. The Carlton Low Voltage Adjustable Floor Bracket is ideal for any residential or commercial low voltage application.

The floor bracket also features a patented screw design allowing it to be adjusted to most finished floor heights by simply turning the screw clockwise or counterclockwise and adjusting flush to the floor.

The floor bracket kit comes complete with a nonmetallic (white or ivory) or brass cover, a Leviton QuickPort® Quad 106® Insert, new work and old work metal mounting brackets and mounting screws.

- White, Ivory or Brass Cover
- Orange – Identifies Low Voltage Installations
- Open Design Floor Bracket – Accommodates Low Voltage Bend Radius Requirements
- Bracket Adjusts to Most Finished Floor Depths
- Leviton QuickPort® Quad 106® Insert – Install up to 4 Low Voltage Inserts
- Two-Door Design



| Cat. No. | Cover | Std. Ctn. Qty. | Std. Ctn. Wt. (lb.) |
|-----------|---------------------|----------------|---------------------|
| SC100FBWC | Nonmetallic – White | 8 | 5.62 |
| SC100FBVC | Nonmetallic – Ivory | | 5.62 |
| SC100FBBC | Brass | | 13.78 |

Installation



Install clip over subfloor.



Screw in to adjust to height of flooring or carpet.



Beautiful flush fit every time!

Low Voltage Brackets



SC100ADJC

One-Gang and Two Gang – Low Voltage

| Cat. No. | Description | Size W x H (in.) | Std. Ctn. Qty. | Std. Ctn. Wt. (lb.) |
|-----------|--------------------------------------|------------------|----------------|---------------------|
| SC100ADJC | One-Gang Adjustable Backless Bracket | 3-7/8 x 3-3/4 | 24 | 7.5 |
| SC200ADJC | Two-Gang Adjustable Backless Bracket | 5-5/8 x 3-5/8 | 20 | 6.9 |



Old Work Backless Brackets – One-Gang

| Cat. No. | Description | Size (in.) | Std. Ctn. Qty. | Std. Ctn. Wt. (lb.) |
|----------|--|---------------|----------------|---------------------|
| SC100RR | One-Gang Backless Old Work Bracket with swing clamps | 2-1/4 x 3-1/4 | 12 | 1.4 |



One-Gang

| Cat. No. | Description | Size (in.) | Std. Ctn. Qty. | Std. Ctn. Wt. (lb.) |
|-----------|--|------------|----------------|---------------------|
| B100R-CRD | One-Gang Backless Old Work Bracket with swing clamps | 2-1/4 x 3 | 12 | 1.4 |



Two-Gang

| Cat. No. | Description | Size (in.) | Std. Ctn. Qty. | Std. Ctn. Wt. (lb.) |
|----------|--|-------------|----------------|---------------------|
| SC200RR | Two-Gang Backless Old Work Bracket with swing clamps | 3.92 x 4.00 | 6 | 0.9 |

Low Voltage Backless Bracket



SC100A



SC300A



SC200A

Open-backed to easily accommodate the bend radiuses required for low voltage cabling and deep devices such as volume controls and is designed to fit a standard one-gang faceplate. It also features an easy nail-on mounting or screw-in bracket, while the hard shell provides increased durability and no racking. Resi-Rings accept 3/4 in., 1 in. and 1-1/4 in. Resi-Gard.

| Cat. No. | Description | Size W x H (in.) | Std. Ctn. Qty. | Std. Ctn. Wt. (lb.) |
|----------|-----------------------------|------------------|----------------|---------------------|
| SC100A | One-Gang Backless Bracket | 2.32 x 3.73 | 24 | 7.5 |
| SC200A | Two Gang Backless Bracket | 5.35 x 3.81 | 24 | 7.7 |
| SC300A | Three Gang Backless Bracket | 8.69 x 7.20 | 5 | 1.6 |

Low Voltage Add-On Bracket



This low voltage bracket provides a low voltage outlet next to a previously installed high voltage outlet. Great for both new construction and rework, it attaches easily to most electrical boxes and is designed to fit a standard two-gang faceplate. Resi-Rings accept 3/4 in. Resi-Gard only

| Cat. No. | Description | Size W x L (in.) | Std. Ctn. Qty. | Std. Ctn. Wt. (lb.) |
|----------|-------------------------|------------------|----------------|---------------------|
| SC100SC | One-Gang Add-On Bracket | 1.80 x 3.68 | 24 | 2.3 |

3-Gang Recessed Plate



The New Carlon RDV 3-Gang Old Work Plate

Cat. No. CSC300PR, has been developed to simplify today's in-home entertainment/networking needs. The box is designed to accommodate the wires, cables and cords used with flat panel display installations.

It features a two-gang low voltage opening and a one-gang opening complete with device box (devices and plates not included).

The hi-gloss, recessed design eliminates unsightly wires, cables and cords and blends with any décor. The RDV Old Work Plate makes installing flat panel displays faster and easier!


3-Gang Recessed Plate

Features

- 3-Gang dual service capability: Accommodates (1) high and (2) low voltage services using one plate (boxes, devices and plates not included)
- Recessed low profile design: Eliminates unsightly wires and plug heads
- Universal 1-gang outlet / switch opening: Including the box you need
- Pre-assembled box and frame: Reduces labor time and saves money
- Shallow design: Provides ample room behind the dry wall and between the studs and accommodates cable bend requirements
- 4 Swing out clamps: Locks the plate securely to the wall – horizontal or vertical mount
- Superior hi-gloss, paintable finish: Professional appearance. Blends with any décor
- Nonmetallic, ABS material: Lightweight and easy to handle

Specifications

| Cat. No. | Description | Std. Carton Qty. | Std. Carton Wt. (lb.) |
|----------|---|------------------|-----------------------|
| CSC300PR | RDV 3-Gang Old Work Plate with Outlet Box | 6 | 4.84 |

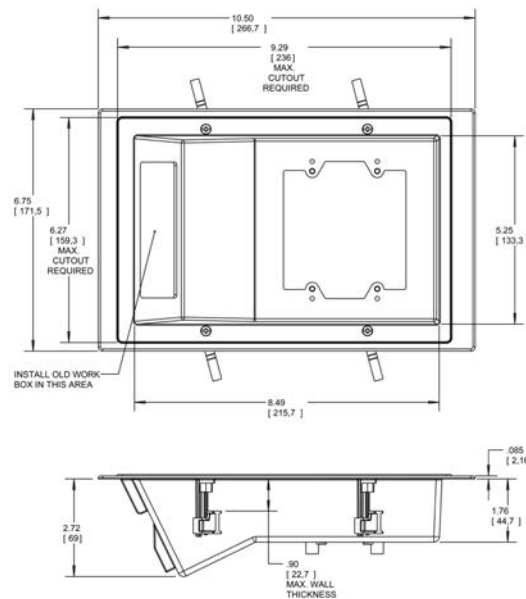

Installed



Top view showing ample room between drywall and studs.

Cements

Medium – Clear



| Recommended pipe application and sizes | Set-up time (Evaporation Rate) | Recommended installation temp. | Lap Shear @ 23°C | Viscosity at 24°C as manufactured |
|--|---|--------------------------------|--|-----------------------------------|
| Recommended for all grades and types of Carlton PVC conduit, duct, wireway and fittings, except Flex-Plus® Blue™ ENT (Electrical Nonmetallic Tubing.) Up through 6 in. diameter. | Under -12°C not recommended -1 to 10°C 5-6 minutes 10 to 21°C 3-4 minutes 21 to 32°C 1-2 minutes | 5 to 37.7°C | 2 hrs. 350 psi 16 hrs. 800 psi 72 hrs. 1,500 psi | 500-900 cps |

| Cat. No. | Size | Applicator | Description | Ctn. Qty. | Ctn. Wt. (lb.) |
|----------|--------|------------|------------------|-----------|----------------|
| VC9963C | 473 ml | Dauber | PVC Medium Clear | 24 | 29.0 |

Regular – Clear



| Recommended pipe application and sizes | Set-up time (Evaporation Rate) | Recommended installation temp. | Lap Shear @ 23°C | Viscosity at 24°C as manufactured |
|--|---|--------------------------------|--|-----------------------------------|
| Recommended for all grades and types of Carlton PVC conduit, duct, wireway and fittings, except Flex-Plus® Blue™ ENT (Electrical Nonmetallic Tubing.) Up through 6 in. diameter. | Under -12°C not recommended -1 to 10°C 5-6 minutes 10 to 21°C 3-4 minutes 21 to 32°C 1-2 minutes | 5 to 37.7°C | 2 hrs. 350 psi 16 hrs. 800 psi 72 hrs. 1,500 psi | 500-900 cps |

| Cat. No. | Size | Applicator | Description | Ctn. Qty. | Ctn. Wt. (lb.) |
|----------|--------|------------|-------------------|-----------|----------------|
| VC9965C | 118 ml | Dauber | PVC Regular Clear | 24 | 8.4 |

Cements

All Weather – “Quick-Set” Cement



| Recommended pipe application and sizes | Set-up time (Evaporation Rate) | Recommended installation temperature | Lap Shear @ 23°C | Viscosity at 24°C as manufactured |
|--|--|--------------------------------------|--|-----------------------------------|
| Recommended for all grades and types of Carlton PVC conduit, duct, wireway and fittings, except Flex-Plus® Blue™ ENT (Electrical Nonmetallic Tubing.) Up through 6 in. diameter. | -20 to -12°C 6-8 minutes -12 to -1°C 4-5 minutes -1 to 10°C 3-4 minutes 10 to 21°C 1-2 minutes 21 to 32°C 1/2-11/2 minutes | -20 to 37.7°C | 2 hrs. 350 psi 16 hrs. 800 psi 72 hrs. 1,500 psi | 400-700 cps |

| Cat. No. | Size | Applicator | Ctn. Qty. | Ctn. Wt. (lb.) |
|----------|--------|------------|-----------|----------------|
| VC9983C | 473 ml | Dauber | 24 | 30.0 |
| VC9985C | 118 ml | | | 7.5 |

Meets ASTM D-2564

Primers

Multi-Purpose Spray – On PVC Cement



No Waste • Sprays on in seconds • Fast setting

- Equivalent to a medium bodied low-VOC, quick setting clear cement
- No more spills
- Reuse can until empty
- Installation: 10 to 26°C
Storage: 1 to 48°C
- Meets ASTM D-2564
- 3 year shelf life
- One 120 ml can is equivalent to 120 ml of non-aerosol PVC cement*

*Equivalence is subject to usage and will vary



Applications

- For use up to 4 in. dia. Sch 40 PVC electrical conduit
- For use with PVC Raceways only. Not recommended for use on water, sewer, natural gas, compressed gas or air connections.



| Temperature Range | Recommended Set Time | | |
|-------------------|------------------------------------|----------------------------------|----------------------------------|
| | Pipe Sizes 1/2 in. to 1-1/4 in. | Pipe Sizes 1-1/2 in. to 2 in. | Pipe Sizes 2-1/2 in. to 4 in. |
| 15 to 37.7°C | 2 min. | 5 min. | 30 min. |
| 4 to 15°C | 5 min. | 10 min. | 2 hrs. |
| -17 to 4°C | 10 min. | 15 min. | 12 hrs. |

Recommended set time may vary depending on humidity

| Cat. No. | Size | Ctn. Qty. | Ctn. Wt. (lb.) |
|----------|--------|-----------|----------------|
| VC9AC5C | 120 ml | 12 | 5.6 |

Sealers

Multi-Purpose Weather-Gard™ Spray-On Rubber Film



No Waste • Sprays on in seconds • Fast setting

- Weatherproof
- Forms a protective weatherproof seal on electrical connections
- Dries in minutes to crystal clear rubber film
- Prevents corrosion on electrical connections
- Recommended installation temperatures 10 to 26°C
- Can be used on wood and plastic
- 2 year shelf life

Applications

- Electrical connections
- Outdoor lighting
- Panel boxes
- Pool motors and timers
- Water valves and connections
- Sprinkler connections and control box
- Marine applications



| Cat. No. | Size | Ctn. Qty. | Ctn. Wt. (lb.) |
|----------|--------|-----------|----------------|
| VC9WG5C | 120 ml | 12 | 5.6 |

Multi-Purpose Spray-On Rubber Thread Gasket



No Waste • Sprays on in seconds • Fast setting

- Dries to rubber gasket to seal pipe threads
- Seals out leaks
- Protects against rust and corrosion
- UV Resistant
- Weatherproof
- 2 year shelf life

Applications


- PVC
- Copper
- Iron
- Brass



| Cat. No. | Size | Ctn. Qty. | Ctn. Wt. (lb.) |
|----------|--------|-----------|----------------|
| VC9TS5C | 120 ml | 12 | 5.6 |

Installation Instructions

Cement Joints

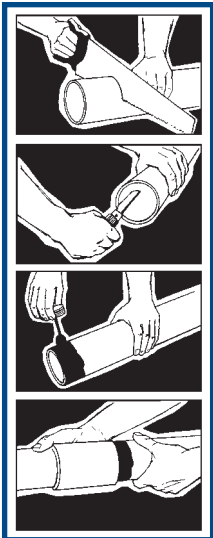

Carlton nonmetallic products are joined by means of solvent cement joints. Sizes 1/2 in. through 1-1/2 in. should be cut square (using a fine tooth handsaw) and deburred.

For sizes 2 in. through 6 in. a miter box or similar saw guide should be utilized to keep the material steady. After cutting and deburring, wipe ends clean of dust, dirt and shavings.

Joining process as follows: Be sure that conduit end is clean and dry. Apply coat of Carlton Solvent Cement (use dauber) to end of conduit, the length of the socket to be attached. Push conduit firmly into fitting while rotating conduit slightly about one-quarter turn to spread cement evenly. Allow joint to set approximately 10 minutes.



Cementing PVC Conduit

1. Make square saw cut with fine tooth saw.
2. Deburr and round inside edge of the cut end.
3. Clean socket ID and spigot OD of dirt and moisture.
4. Apply a uniform coat of cement to spigot end and push onto socket bottom, rotating 1/4 turn.
5. Allow time to set before disturbing. This will depend upon temperature.

Cementing PVC Conduit for Submerged Areas Requiring Air or Water Tightness

1. Follow the procedure outlined above for cementing conduit.
2. Test workmanship by conducting a low pressure air (3.0 - 5.0 psi) test after system is installed and cemented joints are set.
3. Plug and block ends to prevent movement prior to pressurization.
4. Check for leaks with soap solution.
5. Even low pressure air can cause high thrust loads and caution must be observed.

Cementing ENT for Concrete-Tight Applications

1. Use Carlton Socket tight fittings or couplings.
2. Do not use chemical primer or cleaner.
3. Apply a light uniform coat of cement, labeled for use with ENT.
4. A brush shall be used to apply the cement.
5. Brush excess cement out of ENT grooves.
6. Promptly insert ENT into fitting while cement is wet, until the fitting stop is reached, and give 1/4 turn.
7. Do not disturb until the joint is set.

Carlton recommends the use of Carlton cement for proper solvent cement joints. Since this cement is prepared particularly for our product compounds and tolerances, we cannot guarantee joints assembled with cement materials supplied by other manufacturers. Regular grade grey solvent cement will accommodate most application situations being of a general purpose nature. In situations requiring an extremely fast-setting joint (low temperature or difficult installation conditions), Carlton All Weather Quick-Set Cement is recommended. Standard grade clear cement is recommended for non-critical utility applications where gap filling and leak testing are not required.

| Average number of joints per can | | | | | | |
|----------------------------------|--------|--------|--------|--------|--------|--------|
| Trade Size (in.) | 237 ml | 473 ml | 946 ml | 3.78 L | 120 ml | 480 ml |
| 1/2 | 140 | 275 | 550 | 2,200 | 70 | 275 |
| 3/4 | 90 | 180 | 360 | 1,440 | 45 | 180 |
| 1 | 70 | 140 | 280 | 1,120 | 35 | 140 |
| 1-1/4 | 50 | 100 | 200 | 800 | 25 | 100 |
| 1-1/2 | 37 | 75 | 150 | 600 | 18.5 | 75 |
| 2 | 20 | 40 | 80 | 320 | 10 | 40 |
| 2-1/2 | 17 | 35 | 70 | 280 | 8.5 | 35 |
| 3 | 15 | 30 | 60 | 240 | 7.5 | 30 |
| 3-1/2 | 13 | 27 | 54 | 216 | 6.5 | 27 |
| 4 | 12 | 25 | 50 | 200 | 6 | 25 |
| 5 | 9 | 19 | 38 | 150 | N/A | N/A |
| 6 | 6 | 12 | 24 | 95 | N/A | N/A |

CAN: Average shelf-life of all Carlton cement is 24 months (unopened cans stored below 26°C.)
 SPRAY: Average shelf-life of all Carlton Spray PVC Cement is 3 years.
 All Carlton cements are specially formulated to be used with Carlton PVC products, and do not require primers when parts are clean of dirt and moisture.

Conduit Cutters

Kwikcut Cutter



For fast, smooth field cuts of 1/2 in. through 1 in. Innerduct.



| Cat. No. | Size (in.) | Std. Ctn. Qty. |
|----------|------------|----------------|
| CC120B | 8 | 10 |

Medium Cutter



Hand held cutter makes fast square, smooth field cuts on Innerduct sizes 1/2 in. through 1-1/4 in.

| Cat. No. | Size (in.) | Std. Ctn. Qty. |
|----------|------------|----------------|
| CC125 | 9 | 1 |

Large Cutter



For clean cuts of Innerduct sizes 1/2 in. through 2 in.

| Cat. No. | Size (in.) | Std. Ctn. Qty. |
|----------|------------|----------------|
| CC122 | 17- 1/2 | 1 |

EZ BEND™ Conduit Bending Equipment

For field bending of small and large diameter nonmetallic conduit, the easy answer is Carlton EZ BEND® conduit bending equipment.



- Lightweight
- Fast, Simple and Safe
- Includes complete instructions and a convenient bending chart
- Portable
- Less expensive than factory bends

* EZ BEND is a registered Trademark of Bradshaw Manufacturing, Inc.

EZ BEND™ Conduit Bender, Jr.

A practical, convenient portable conduit bender for 1/2 in. through 2 in. diameter nonmetallic conduit allows bends up to 14 in. radius and to 90° elbows. The EZ BEND® Conduit Bender, Jr. is a time-saving, easy-to-carry unit featuring a bracket to store the power cord, a carrying handle, and a clasped cover. The unit operates on a standard 20 amp, 120 V circuit.

Dimensions: 7-1/2 in. x 8-1/2 in. x 31 in.
Operating Temperature: 82° - 93°C



Carlton's EZ BEND Conduit Bending Equipment is designed with the electrical contractor in mind. The completely portable and fully encased EZ BEND benders and plug kits can be transported from job to job without damage or harm to the equipment. Additionally, the heavy duty construction and integrity of Carlton's EZ BEND Conduit Bending Equipment ensures that it will last for years to come.

| Cat. No. | Std. Ctn. Qty. | Std. Ctn. Wt. (lb.) |
|----------|----------------|---------------------|
| G280J | 1 | 10 |

Field Bending Rigid Nonmetallic Conduit

1. Heating

Conduit section to be bent must be heated evenly over the entire length of the curve. Carlton offers EZ BEND electric heaters designed specifically for the purpose, in sizes to accommodate all conduit diameters. These devices employ infra-red heat energy which is most quickly absorbed by the conduit. Small sizes are ready to bend after a few seconds, while larger diameters require two or three minutes, or more, depending on conditions. The use of torches or other flame-type devices is not recommended. PVC conduit exposed to excessively high temperatures may take on a brownish colour. Sections showing evidence of such scorching should be discarded.

2. Forming The Bend

1/2 in. thru 1-1/2 in. Diameters – When properly heated the conduit is very flexible and can be shaped to almost any configuration. The conduit is then cooled by sponging with water, and the bend is ready to install.

2 in. and Larger Diameters – Larger sizes of conduits and ducts require internal support to prevent “crimping” or deforming during the bending process. Bending plugs are inserted in each end of the conduit section before heating. The plugs expand to provide an airtight seal. (Note: Carlton does not offer bending plugs.)



Minimum practice is required to master the three steps in bending nonmetallic conduits and ducts.

3. Cooling

As the conduit is heated, the retained air expands, and the increased internal pressure allows the conduit to be bent without deforming. The conduit must be cooled before the plugs are removed. For an immediate cool and set, sponge with cold water.

Special Bends

For “blind” bends or for compound turns in a conduit run, the heated conduit may be solvent cemented in place while still flexible.

PV-Mold®

PV-Mold® Nonmetallic Pole Riser System

RUS Accepted




Carlton PV-Mold is a non-metallic pole riser system designed to protect communications or power cable installed on poles.

Features

- Meets or exceeds requirements outlined in the National Electric Safety Code (NEC)
- Designed in accordance with NEMA TC-19 specifications
- Ultraviolet, cold temperature and corrosive atmosphere resistant
- No grounding required
- Belled end fits over each added section or conduit
- Requires no maintenance
- PV-Mold acts as an insulator against electrical shock
- Interchangeable parts and accessories to match the needs of specific requirements

Flanged Overall Length 10 Feet, Including Bell



| Size (in.) | Depth of Bell (in.) |
|------------|---------------------|
| 1 | 2 - 2-1/4 |
| 1-1/2 | 2 - 2-1/4 |
| 2 | 2 - 2-1/4 |
| 3 | 3 - 2-1/4 |
| 4 | 4 - 2-1/4 |
| 5 | 4 - 2-1/4 |
| 6 | 5 - 2-1/4 |



Slots are 1/2 in. from side to side allow for expansion and contraction.
 Slot Dimensions: for sizes 2 in. through 6 in. are 5/16 in. wide, 3/4 in. long.
 Slot Dimensions: for 1 in. and 1-1/2 in. are 3/16 in. wide, 3/4 in. long.
 Slot Spacing: 18 in. from center, beginning 6 in. from end.





| Cat. No. | Size (in.) | Std. Ctn. Qty. | Std. Ctn. Wt. (lb.) | Dimensions (in.) | | | | Actual Impact @ 0°C 20 Pound Tup |
|----------------------|------------|----------------|---------------------|------------------|-------|-------|-------|-------------------------------------|
| | | | | A | B | C | H | |
| Standard Duty | | | | | | | | |
| 59208N | 1 | 294 | 1059 | 0.100 | 1-5/8 | 2-3/8 | 1-5/8 | 40 ft. - lb. |
| 59211N | 2 | 136 | 726 | 0.100 | 2-3/8 | 4-1/2 | 2-3/8 | 100 ft. - lb. |
| 59213N | 3 | 66 | 761 | 0.150 | 3-1/2 | 6 | 3-1/2 | 110 ft. - lb. |
| 59215N | 4 | 65 | 910 | 0.150 | 4-1/2 | 6-1/2 | 4-1/2 | 110 ft. - lb. |
| 59216N | 5 | 30 | 515 | 0.150 | 5-1/2 | 7-1/2 | 5-1/2 | 110 ft. - lb. |

| Cat. No. | Size (in.) | Std. Ctn. Qty. | Std. Ctn. Wt. (lb.) | Dimensions (in.) | | | | Actual Impact @ 0°C 20 Pound Tup |
|-------------------------------|------------|----------------|---------------------|------------------|---------|-------|---------|-------------------------------------|
| | | | | A | B | C | H | |
| Heavy Duty Schedule 40 | | | | | | | | |
| 59010N | 1-1/2 | 200 | 1142 | 0.145 | 1-29/32 | 3-1/2 | 1-29/32 | 100 ft. - lb. |
| 59011N | 2 | 136 | 1214 | 0.154 | 2-3/8 | 4-1/2 | 2-3/8 | 150 ft. - lb. |
| 59013N | 3 | 66 | 934 | 0.216 | 3-1/2 | 6 | 3-1/2 | 150 ft. - lb. |
| 59015N | 4 | 65 | 1621 | 0.237 | 4-1/2 | 6-1/2 | 4-1/2 | 260 ft. - lb. |
| 59016N | 5 | 30 | 870 | 0.258 | 5-1/2 | 7-1/2 | 5-1/2 | 260 ft. - lb. |
| 59017N | 6 | 30 | 1160 | 0.280 | 6-5/8 | 8-3/4 | 6-5/8 | 260 ft. - lb. |

PV-Mold®




Polyethylene Vented Boots and Adapters

1. A field cut may be needed to accommodate different boot or adapter to Carlton U-Mold size combinations.
2. Recommendation: 2 sets of mounting holes per boot/fitting. To add mounting holes, use a 3/8 in. drill bit and drill out where needed.
3. When 3 in. or smaller conduit is being used, it's recommended that the bottom (largest section) of the boot or adapter section be buried 2 in. to 3 in. below ground surface.



| Cat. No. | Size (in.) | Std. Ctn. Qty. | Std. Ctn. Wt. (lb.) | Dimensions (in.) | | | |
|---------------------|------------|----------------|---------------------|------------------|-------|-------|------|
| | | | | A | B | C | D |
| Vented Boots | | | | | | | |
| E938JR | 2 x 6 | 4 | 13.5 | 20.50 | 4.80 | 6.13 | 6.20 |
| E938NT | 4 x 8 | | 21.0 | 21.00 | 15.00 | 11.34 | 9.76 |

| Cat. No. | Size (in.) | Std. Ctn. Qty. | Std. Ctn. Wt. (lb.) | Dimensions (in.) | | | |
|-----------------|------------|----------------|---------------------|------------------|------|------|------|
| | | | | A | B | C | D |
| Adapters | | | | | | | |
| E939JN | 2 x 4 | 8 | 10.0 | 11.00 | 6.75 | 5.88 | 5.07 |
| E939NR | 4 x 6 | 6 | 11.7 | 11.00 | 6.75 | 7.08 | 7.13 |



| Cat. No. | Size (in.) | Std. Ctn. Qty. | Std. Ctn. Wt. (lb.) | Dimensions (in.) | | | | |
|---------------------|------------|----------------|---------------------|------------------|-------|-------|-------|-------|
| | | | | A | B | C | D | E |
| Vented Boots | | | | | | | | |
| E938NRR | 4 x 6 | 6 | 26.4 | 20.87 | 16.57 | 12.87 | 11.68 | 11.43 |
| E938PRR | 5 x 6 | | 23.2 | 16.74 | 3.65 | 10.84 | 11.43 | - |


| Cat. No. | Size (in.) | Std. Ctn. Qty. | Std. Ctn. Wt. (lb.) | Dimensions (in.) | | | | |
|-----------------|------------|----------------|---------------------|------------------|------|-------|------|------|
| | | | | A | B | C | D | E |
| Adapters | | | | | | | | |
| E939NRT | 4 x 6 | 3 | 14.0 | 19.75 | 4.25 | 12.50 | 8.50 | 7.40 |



| Cat. No. | Size (in.) | Std. Ctn. Qty. | Std. Ctn. Wt. (lb.) |
|------------------------------|------------|----------------|---------------------|
| Duct to Riser Fitting | | | |
| E939NL | 4 x 3 | 15 | 5.6 |
| E939N | 4 x 4 | | 5.3 |

PV-Mold®

PV-Mold® Installation Instructions

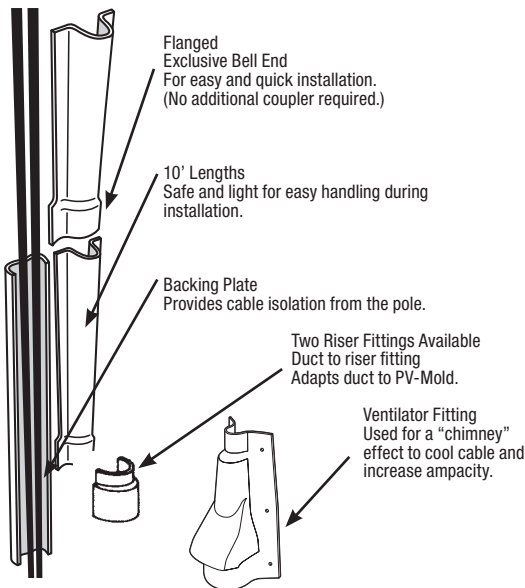

Installation is easy with PV-Mold Pole Risers

1. Install ventilator or duct to riser fittings at the base of the pole.
2. Nail backing plate sections to the surface of the pole. Three nail holes are provided in each section. Place the "U" sections over the cable and backing plate, with belled end at the bottom and attach using 1/4 in. lag bolts.

Field Installation Instructions for Carlton PV-Mold Adapters

For Adapters (E939JN, E939NR, E939NRT)

E939JN

To transition from 4 in. Conduit to 2 in. PV-Mold
Place Adapter over conduit, attach to pole using the top and bottom mounting holes, place PV-Mold over top section of Adapter and secure PV-Mold to pole.

To transition from 4 in. Conduit to 3 in. PV-Mold
Measure 6.3 in. up from bottom (large end) of adapter and cut. Assemble to pole as described above.

To transition from 3 in. Conduit to 2 in. PV-Mold*
Measure 4.75 in. up from bottom (large end) of adapter and cut. Assemble to pole as described above.

E939NR

To transition from 5 in. Conduit to 4 in. PV-Mold
Place Adapter over conduit, attach to pole using the top and bottom mounting holes, place PV-Mold over top section of Adapter and secure PV-Mold to pole.

To transition from 6 in. Conduit to 5 in. PV-Mold
Measure 7.25 in. up from bottom (large end) of adapter and cut. Assemble to pole as described above.

To transition from 5 in. Conduit to 5 in. PV-Mold*
Measure 4.5 in. down from the top of adapter and cut. Assemble to pole as described above.




*For these transitions it is not necessary to cut the Adapter. If the Adapter is not modified, it is recommended that the bottom 3 in. of the Adapter be buried below grade.

E939NRT

To transition from 6 in. Conduit to 4 in. PV-Mold
Place Adapter over conduit and attach to pole using the top and bottom mounting holes, place PV-Mold over top section of Adapter and secure PV-Mold to pole.

To transition from 6 in. Conduit to 5 in. PV-Mold
Measure 5.25 in. down from the top of the adapter and cut. Assemble to pole as described above.

To transition from 6 in. Conduit to 6» PV-Mold
Measure 9.5 in. up from the bottom of the adapter and cut. Assemble to pole as described above.



PV-Mold®


PV-Mold® Installation Instructions

Field Installation Instructions for Carlton PV-Mold Vented Boots

For Vented Boots (E938JR, E938NT, E938NRR, E938PRR)

E938JR


To transition from 5 in. or smaller Conduit to 2 in. PV-Mold
Place Vented Boot over conduit, attach to pole using the top and bottom mounting holes, place PV-Mold over top section of Vented Boot and secure PV-Mold to pole.
To transition from 5 in. or smaller Conduit to 3 in. and larger PV-Mold
For 3 in. PV-Mold: Measure 3.75 in. from the TOP of the Boot and cut. Place the Boot over the Conduit and attach to the pole. Place belled end of PV-Mold over the top end of the boot and secure.
For 4 in. and 5 in. PV-Mold: Measure 12 in. up from the BOTTOM of the Boot and cut.
Place the Boot over the conduit and attach to the pole. Place the Belled end of the PV-Mold AGAINST the top edge of the vent protrusion and secure to the pole.



E938JR

E938NT


To transition from 6 in. to 8 in. Conduit to 4 in. PV-Mold
Place Boot over conduit and attach to the pole using the mounting holes.
Place PV-Mold over top section of Vented Boot and secure to the pole.
It is recommended that for conduit sizes smaller than 8 in., the bottom 3 in. of the boot be buried below grade. The E938NT can also be used to transition multiple smaller conduits to PV-Mold.



E938NT

E938NRR


To transition from 6 in. or smaller conduit to 4 in. PV-Mold
Place Vented Boot over conduit and attach to pole using the top and bottom mounting holes.
Place PV-Mold over top section of Vented Boot and secure PV-Mold to pole
To transition from 6 in. or smaller conduit to 5 in. PV-Mold
Measure 4.125 in. down from the top of the vented boot and cut. Assemble to pole as described above.
To transition from 6 in. or smaller conduit to 6 in. PV-Mold
Measure 8.25 in. down from the top of the vented boot and cut. Assemble to pole as described above.



E938NRR

E938PRR

To transition from 6 in. or smaller conduit to 5 in. PV-Mold
Assemble to pole as described above.



E938PRR