CONQUEST STEELING. WINDOW WELL COVERS STRONG, LIGHT, EASY

CAN BE INSTALLED THREE DIFFERENT WAYS:

STANDARD INSTALLATION:



SLOPED INSTALLATION:




HINGE INSTALLATION:



PRODUCT FEATURES:

- Pre-drilled holes in hinge make installation easy.
- UV protected polycarbonate does not become brittle and is easy to clean
- Light weight construction with swivel and sliding hinge allows for easy emergency opening
- Rigid aluminium frame easily withstands Canadian winters.
- Available in a variety of standard and custom sizes.

STRONG

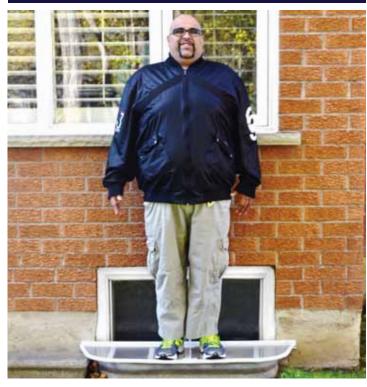

LIGHT



WINDOW WELL COVER SIZING

MEASUREMENT GUIDE:


Take following four measurements of your window well to ensure you select the best fitting cover. Covers are designed to be up 2" larger than your window well. Custom covers are available if your well does not match with a stock sized cover.

Length (L): The opening of your window well where it is connected to the house. Measure from outside edge to outside edge, but do not include the attachment flanges.

Projection (P): The distance from the basement wall to outside of the window well. Measure at the middle of the window well.

Front Length (LF): The length of the flat section between the two corners at the front of the window well. Do not included the radius of the corners. For square window wells this dimension will be the same as the Length.

Middle Length (MF): The opening of the window well measured 9" back from the front edge of the well. Not required for square window wells.



NOTE: Window well covers are made 2" larger than window wells to allow for some overlap.

	QUANTITY	LENGTH 'L' (INCHES)	PROJECTION 'P' (INCHES)	FRONT LENGTH 'L-F' (INCHES)	MIDDLE LENGTH 'L-M' (INCHES)	ANY OTHER INFORMATION
1						
2						
3						
4						
5						

COVERS	Designed for Length	Designed for Projection	Max Length	Max Middle Length	Max Front Length	Max Projection	Max Height for Sloped Installation
Standard Cover Sizes	-	-	-	-	-	-	-
WWC 4014	36"	12"	38.5"	36.75"	22.5"	13"	5"
WWC 4614	42"	12"	44.5"	42.75"	28.5"	13"	5"
WWC 5324	49"	22"	51.5"	46.5"	29"	23"	7"
WWC 5824	54"	22"	56.5"	51.5"	34"	23"	7"
WWC 6624	62"	22"	64.5"	59.5"	42"	23"	7"
WWC 7824	74"	22"	76.5"	71.5"	54"	23"	7"
Popular Customs	-	-	-	-	-	-	-
WWC 4914	45"	12"	47.5"	45.75"	31.5"	13"	5"
WWC 5314	49"	12"	51.5"	49.75"	35.5"	13"	5"
WWC 5814	54"	12"	56.5"	54.75"	40.5"	13"	5"
WWC 6614	62"	12"	64.5"	62.75"	40.5"	13"	5"
WWC 7814	74"	12"	76.5"	74.75"	60.5"	13"	5"
WWC 4024	36"	22"	38.5"	33.5"	16"	23"	7"
WWC 4624	42"	22"	44.5"	39.5"	22"	23"	7"
WWC 7024	66"	22"	68.5"	63.5"	46"	23"	7"

P 416 741 3236

F 416 741 3136

www.conqueststeel.com