



COREtec Pro Plus XL Enhanced

Product Specifications


Style Number	VV491
Construction	Solid Poly
Edge Profile	Enhanced
Nominal Dimensions	9" wide, 7
US Units	
Actual Product Width	9.06"
Actual Product Length	72.83"
Wear Layer Thickness	20 mil (0.
Overall Product Thickness	0.204"
Core Thickness	0.157"
Attached Underlayment	Attached
Attached Underlayment	0.047"
Thickness	
Finish	UV Acrylic
Installation Methods	Floating c
Profile	Angle/Tap
Country of Origin	Imported

Packaging

Area per Box	36.64 sq
Pieces per Box	8 pcs
Weight per Box	61.95 lbs
Boxes per Pallet	48 boxes



Colors

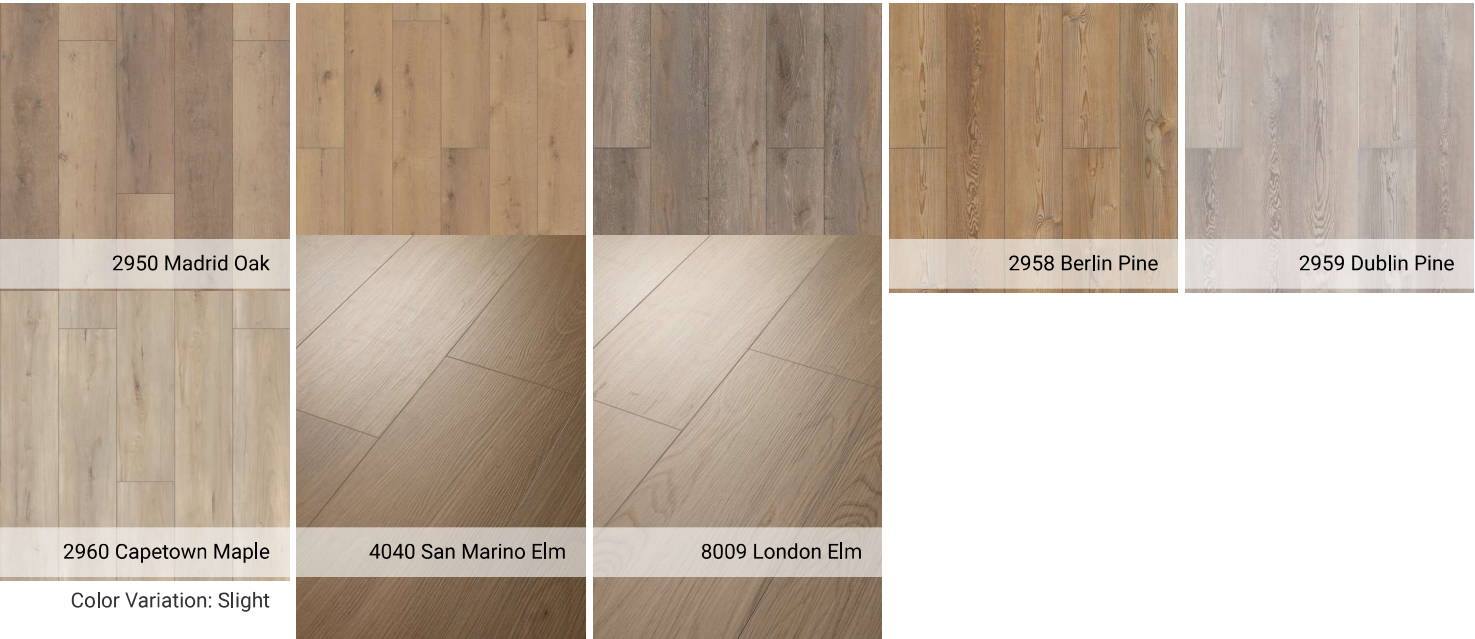



COREtec Pro Plus XL Enhanced

Performance

Resistance to Heat (ASTM F1514)	Passes
Resistance to Light (ASTM F1515)	Passes
Resistance to Chemicals (ASTM F925)	Passes
Smoke Density (ASTM E662)	Passes
Radiant Panel (ASTM E648)	Passes, Class I
Slip Resistance (ASTM D2047)	ADA compliant

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

Warranties

- USF Lifetime
- [Residential Resilient Limited Warranty - Defects, Wear, Waterproof, Petproof](#)
- USF 15 Year Heavy Commercial