


Fissured
Mineral Fiber

A non-directional mineral fiber panel for all-around workability, affordability and great-looking installations.



APPLICATIONS


- Schools / Classrooms
- Libraries / Media Centers
- Retail / Department Stores
- Offices
- Open Plan Areas
- Healthcare Spaces – High NRC
- Computer Rooms – High NRC
- Other Commercial Buildings / Space Applications




FEATURES AND BENEFITS

- Non-directional fissured pattern
- Cuts cleanly, leading to quicker installation and lower installation costs
- High NRC panels are excellent for budgeted projects requiring high sound absorption
- High NRC panels comply with LEED v4 for School classroom acoustics prerequisite
- Customline options provide three dramatic geometric designs with discreet small-scale fissure pattern
- Deep face-scoring assists in masking the presence of metal grid on Customline products
- High humidity and sag resistant
- Some products available in fire-rated (Protectone) versions
- Environmental Product Declaration (EPD) available for this product
- Health Product Declaration (HPD) available for this product
- Available in 6 standard colors for item numbers HHF-154, HHF-157, HHF-197, FFCL-224
- High NRC has USDA Certified Biobased content of 98%

SUSPENSION SYSTEM OPTIONS

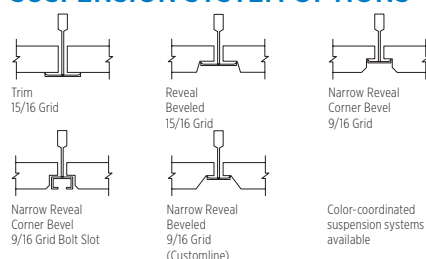

CUSTOMLINE SCORING OPTIONS



LEED® v4

RECYCLED CONTENT

CLASS A PROTECTONE®	33 - 70% 44%
------------------------	-----------------

☐ EA: Optimize Energy Performance

☐ EA: Prereq. Min. Energy Performance

☐ EQ: Interior Lighting

☒ MR: PBT Source Reduction (Healthcare)

☒ EQ: Acoustic Performance

☒ EQ: Prereq. Min. Acoustic Performance (Schools) Applies only to High NRC

☒ EQ: Low-Emitting Materials

☒ EQ: Daylight

☒ MR: Material Ingredients (HPDs)

☒ MR: Sourcing Raw Materials

☒ MR: Environmental Product Declarations (EPDs)

☒ MR: Construction and Demolition Waste Management Planning



EPD Available



HPD Available



Recycled Content



High NRC Only

CertainTeed
SAINT-GOBAIN



Customer Support | certainteed.com/ceilings | 800-233-8990

Fissured
Mineral Fiber



All products in this line
feature these attributes:




FINE FISSURED HIGH NRC

FINE FISSURED HIGH NRC					Format	Dimensions (in.)	NRC (UL Classified)	CAC (UL Classified)	Recycled Content	UL Fire-Rated	LR	Pieces/ carton	Sq. Ft./ carton	Lbs./ carton	Cartons/ pallet
TRIM															
	NRC 70	HHF-457 HNRC	Panels	24 x 24 x 3/4	0.70	35	70%	—	0.83	14	56	55	16		
		HHF-497 HNRC	Panels	24 x 48 x 3/4	0.70	35	70%	—	0.83	8	64	62	16		
REVEAL															
	NRC 70	HHF-454 HNRC	Panels	24 x 24 x 3/4	0.70	35	70%	—	0.83	14	56	55	16		
		HHF-494 HNRC	Panels	24 x 48 x 3/4	0.70	35	70%	—	0.83	8	64	62	16		


FINE FISSURED

FINE FISSURED					Format	Dimensions (in.)	NRC (UL Classified)	CAC (UL Classified)	Recycled Content	UL Fire-Rated	LR	Pieces/ carton	Sq. Ft. / carton	Lbs./ carton	Cartons/ pallet
TRIM															
	NRC 55	HHF-157	Panels	24 x 24 x 5/8	0.55	33	33%	—	0.84	16	64	50	20		
		PFF-157	Panels	24 x 24 x 5/8	0.55	35	44%	Yes*	0.84	16	64	70	20		
		HHF-197	Panels	24 x 48 x 5/8	0.55	35	33%	—	0.84	8	64	45	20		
		PFF-197	Panels	24 x 48 x 5/8	0.55	40	44%	Yes*	0.84	8	64	70	20		
		HHF-177	Panels	20 x 48 x 5/8	0.55	35	33%	—	0.84	8	80	51	20		
		HHF-2067	Panels	20 x 60 x 5/8	0.55	35	33%	—	0.84	8	66.7	52	16		
REVEAL															
	NRC 55	HHF-154	Panels	24 x 24 x 5/8	0.55	33	33%	—	0.84	16	64	45	20		
		PFF-154	Panels	24 x 24 x 5/8	0.55	35	44%	Yes*	0.84	16	64	70	20		
		HHF-194	Panels	24 x 48 x 5/8	0.55	35	33%	—	0.84	8	64	45	20		

NARROW REVEAL

	NRC 55	HHF-150	Panels	24 x 24 x 5/8	0.55	35	33%	—	0.84	16	64	45	20
---	---------------	---------	--------	---------------	------	----	-----	---	------	----	----	----	----

FINE FISSURED METRIC

			Format	Dimensions (mm)	NRC (UL Classified)	CAC (UL Classified)	Recycled Content	UL Fire-Rated	LR	Pieces/ carton	Sq. m/ carton	Lbs./ carton	Cartons/ pallet
METRIC TRIM													
	NRC 55x	HHF-2067M	Panels	500 x 1500 x 15	0.55	35	33%	—	0.84	8	6	52	20

* Protectone®: A fire-resistive ceiling when used in applicable UL assemblies. Protectone product is indicated by a Yes in the UL Fire-Rated column.

To specify color other than white, order by item number followed by color code. Example: HHF-154 BEB. Color List: Beige Breeze – BEB, Blondewood – BLW, Silver Lining – SIL, Wet Clay – WEC, White Wash – WIW. Only available for HHF-154, HHF-157, HHF-197, and FFCL-224 products.



CAN'T FIND A SIZE? Contact your local Sales Representative or call 800-233-8990

Fissured
Mineral Fiber

All products in this line
feature these attributes:



FINE FISSURED CUSTOMLINE

FINE FISSURED CUSTOMLINE					Format	Dimensions (in.)	NRC (UL Classified)	CAC (UL Classified)	Recycled Content	UL Fire-Rated	LR	Pieces/ carton	Sq. Ft./ carton	Lbs./ carton	Cartons/ pallet
REVEAL															
	NRC 55	FFCL-224	Panels	24 x 48 x 3/4	0.55	38	33%	n/a	0.84	8	64	64	16		
	NRC 50	FFCL-448	Panels	24 x 48 x 3/4	0.50	38	33%	n/a	0.84	8	64	60	16		
		FFCL-812	Panels	24 x 48 x 3/4	0.50	38	33%	n/a	0.84	8	64	64	16		
		PFFCL-224	Panels	24 x 48 x 3/4	0.50	40	44%	Yes*	0.84	8	64	75	16		
NARROW REVEAL															
	NRC 55	FFCLN-224	Panels	24 x 48 x 3/4	0.55	38	33%	n/a	0.84	8	64	64	16		
	NRC 50	FFCLN-448	Panels	24 x 48 x 3/4	0.50	38	33%	n/a	0.84	8	64	60	16		
		FFCLN-812	Panels	24 x 48 x 3/4	0.50	38	33%	n/a	0.84	8	64	64	16		

* Protectone®: A fire-resistive ceiling when used in applicable UL assemblies. Protectone product is indicated by a Yes in the UL Fire-Rated column.

To specify color other than white, order by item number followed by color code. Example: HHF-154 BEB. Color List: Beige Breeze – BEB, Blondewood – BLW, Silver Lining – SIL, Wet Clay – WEC, White Wash – WIW. Only available for HHF-154, HHF-157, HHF-197, and FFCL-224 products.

CAN'T FIND A SIZE? Contact your local Sales Representative or call 800-233-8990

PHYSICAL DATA

MATERIAL
Mineral Fiber

ASTM E1264 CLASSIFICATION
Type III, Form 2, Pattern C E
(Standard & High NRC)
Type IV, Form 2, Pattern C E K (Customline)

FIRE CLASS (ASTM E1264)
All are Class A per ASTM E84 & CAN S102
Flame Spread: 25 or less
Smoke Developed: 50 or less

VOC EMISSIONS

Independently certified compliant with California Department of Public Health CDPH/EHLB/Standard Method Version 1.1, 2010.

MOLD/MILDEW RESISTANCE

BioShield treatment included for added mold and mildew resistance.

INSTALLATION CONSIDERATION

Differing manufacturing dates should not be mixed in a single ceiling.

MAINTENANCE

Wipe with a soft cloth or vacuum with brush attachment.

WARRANTY

10-year 104/90 Limited Warranty increases to 15 years when installed with CertainTeed Suspension Systems. Full warranty information can be found at certainteed.com/ceilings.