


# DARE

## QUALITY ELECTRIC FENCING PRODUCTS

*Since 1946*



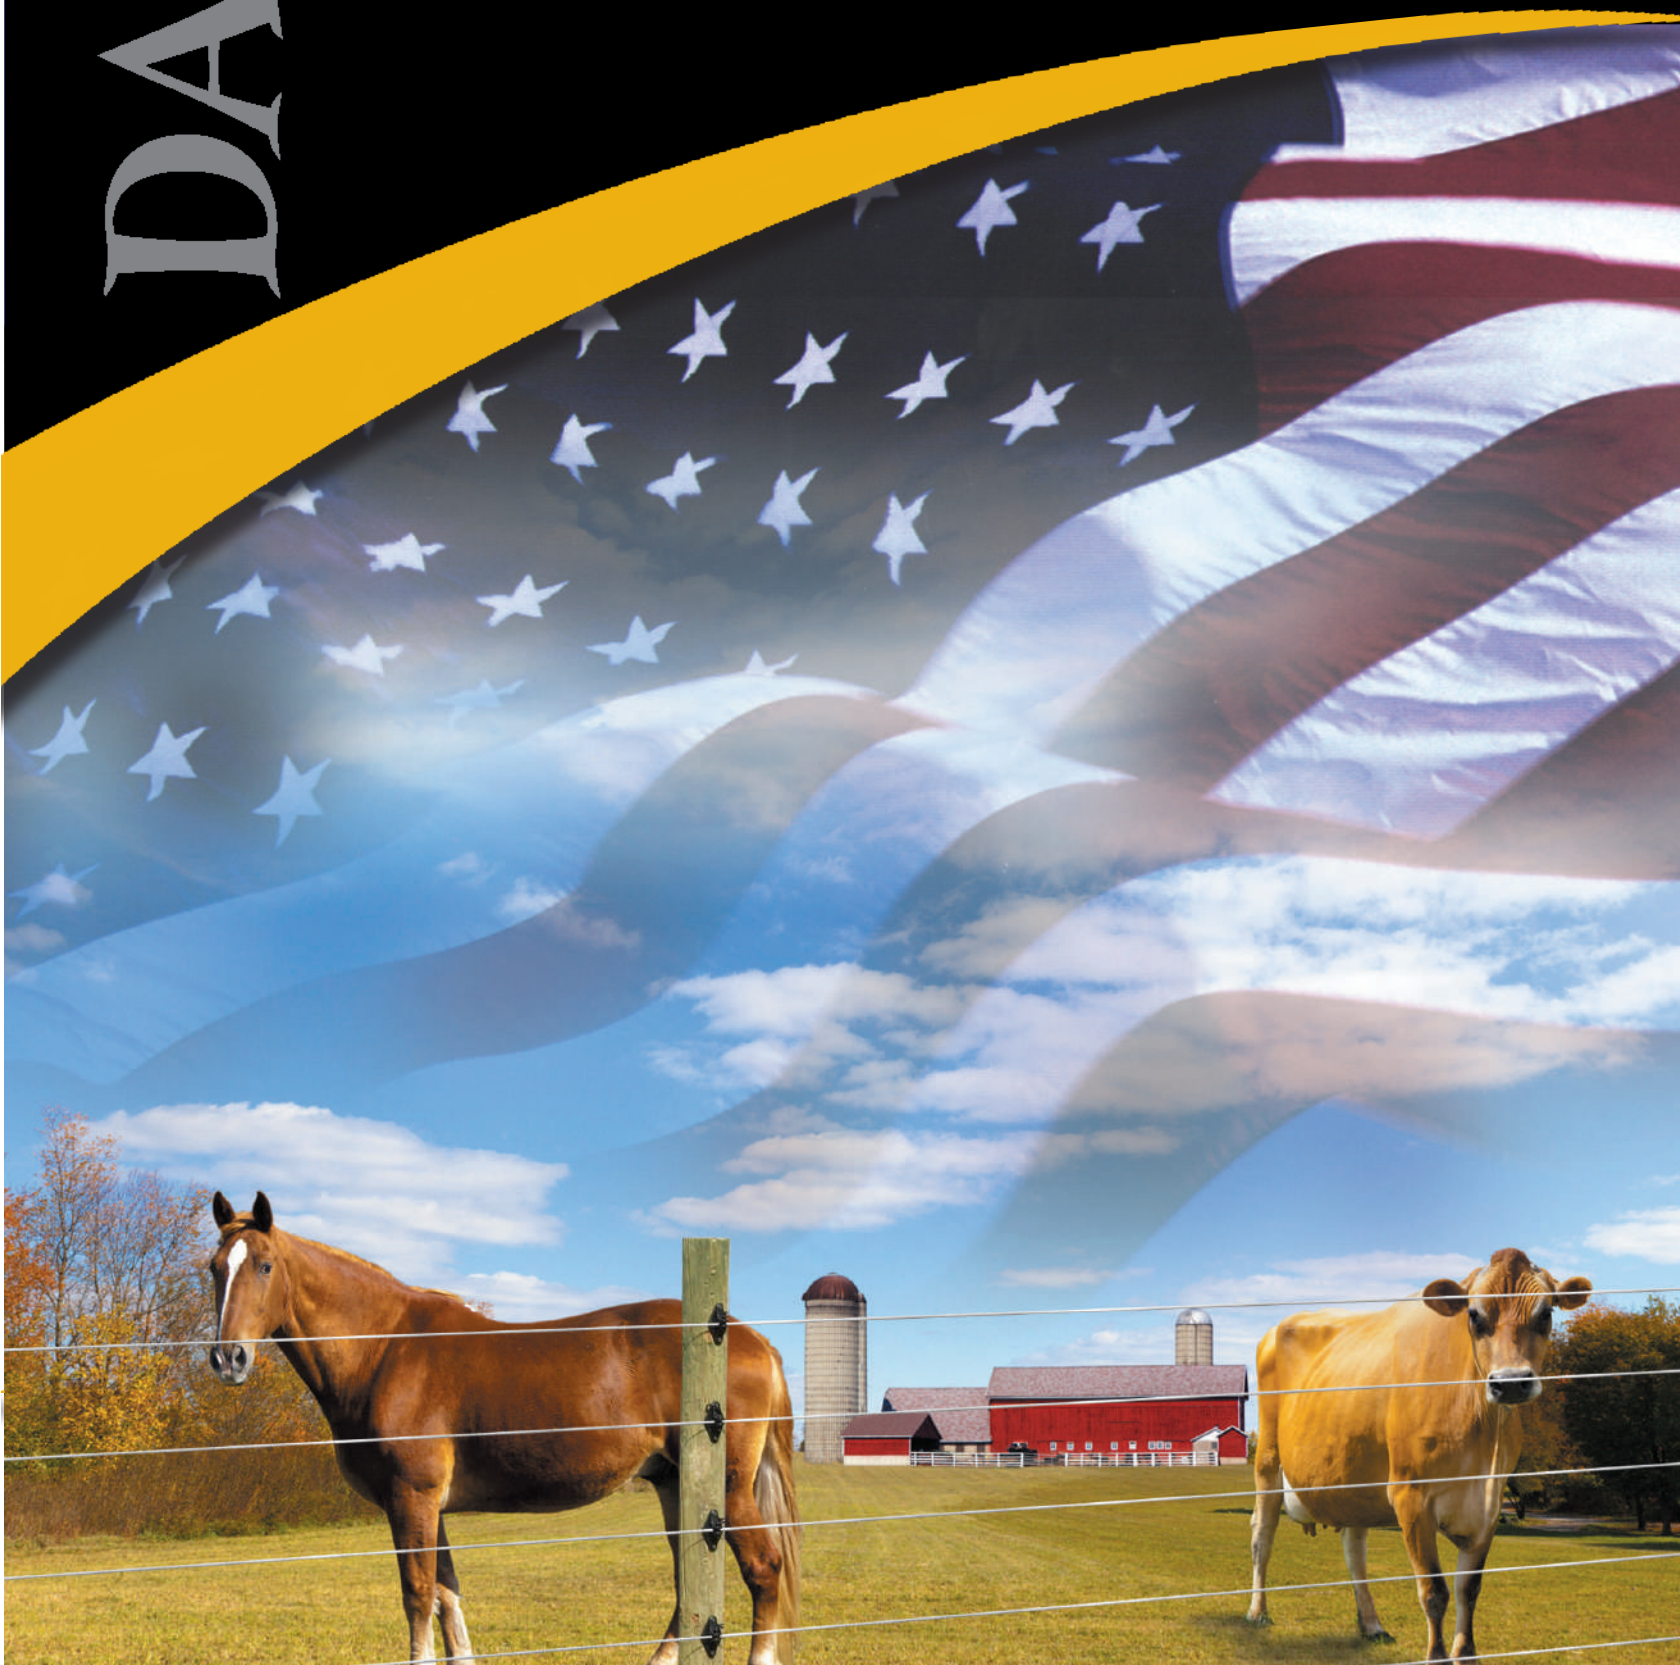

## The Dare Way.

Since 1946, Dare has withstood the test of time, by doing what we've always done best—manufacturing a full line of quality electric fencing equipment and other related products.

Our philosophy is simple—continue manufacturing quality products to enhance the long term customer relationships we have developed right from the beginning. Utilize and maintain a knowledgeable and dedicated workforce and sales team. Strive to be the industry leader in product quality and innovation.

And above all, guarantee overall customer satisfaction...

*That's the Dare way!*

- 1 FENCE ENERGIZERS
- 3 FAULT FINDER / GARDEN GROW FENCE KIT / O.K. CORRAL KIT
- 4 GATE HANDLES AND GATE HARDWARE
- 5 INSULATORS
- 12 FASTENERS AND CLIPS
- 13 ELECTRIC FENCE POSTS
- 14 ALUMINUM ELECTRIC WIRE
- 14 POLY FENCING AND EQUINE PRODUCTS
- 17 POLYTAPE AND POLYWIRE ACCESSORIES
- 19 HIGH TENSILE FENCE SUPPLIES
- 22 SPLICING EQUIPMENT
- 25 ELECTRIC FENCE TESTERS AND MISCELLANEOUS PARTS
- 26 INSTALLATION ACCESSORIES
- 27 PANS AND PAILS
- 28 FARM TANK FLOAT VALVES
- 29 PLANOGRAMS AND MERCHANDISING



© 2018 DARE PRODUCTS, INC.

# ELECTRIC FENCE ENERGIZERS

Dare Products' wide range of high performance Electric Fence Energizers. All Dare energizers use **ULTRA LOW OR LOW IMPEDANCE** technology with these standard features:

- Modular circuitry for fast and easy service
- All weather construction for longer life
- Peak Joule output under the most difficult fence conditions
- Two year OTC warranty including lightning damage
- Built in lightning protection
- UL and CSA approved on most models
- Designed and assembled in USA

## ENFORCER—110 Volt Models

Best value! Provides the most output for each dollar spent. Use where electrical power source is available—only costs pennies a day to operate. When possible, 110 volt models are always the first choice.

### Estimates for Overgrown Fence

Model	Energy Output (In Joules)	Acres Controlled (Up to)	Outperforms 110 Volt Energizers rated at
110 Volt			
DE 20	.05	1	1-2 Acres
DE 60	.10	3	2-5 Acres
DE 80	.20	5	5-10 Acres
DE 120	.30	20	5-10 Miles
DE 200	.50	50	10-15 Miles
DE 300	.75	75	15-20 Miles
DE 400	1.0	100	20-30 Miles
DE 600	1.5	150	30-50 Miles
DE 1200	3.0	300	50-75 Miles
DE 2400	6.0	600	75-100 Miles
DE 4000	10.0	1000	100-150 Miles
DE 6400	16.0	2000	150-200 Miles




## SENTRY—6 and 12 Volt Battery Models

Better value! Provides more output for each dollar spent. If an electrical power source is not available, the external 12 volt rechargeable battery model is a great alternative.\* Deep cycle batteries recommended.

### Estimates for Clean Multi-Wire Fence

Model	Energy Output (In Joules)	Acres Controlled (Up to)	Outperforms Battery Energizers rated at
6-12 Volt			
DSB 100	0.25	25	5-15 Miles
DS 140	0.35	35	5-10 Miles
DSX 140	0.35	35	5-10 Miles
DS 300	0.75	75	10-20 Miles
DS 400	1.0	100	20-30 Miles
DS 800	2.0	200	30-50 Miles

\*Battery not included

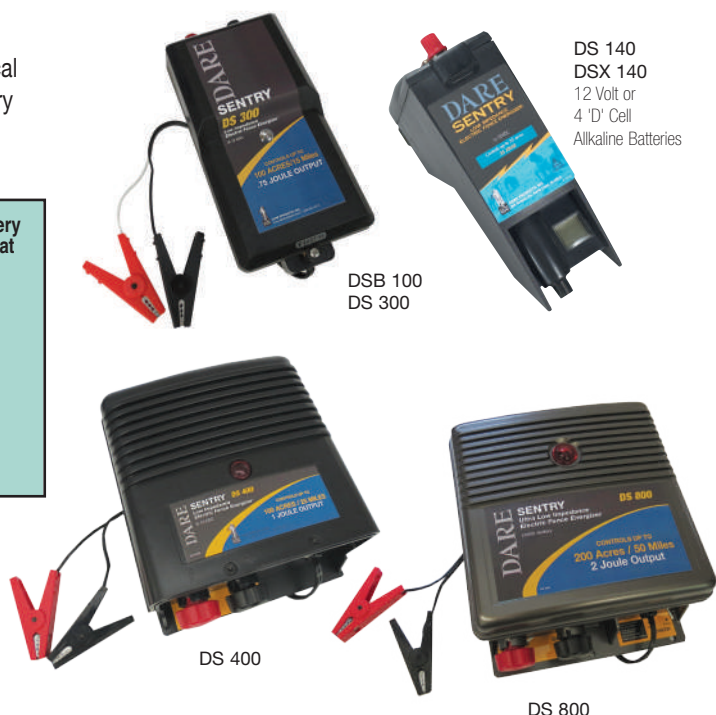

Energizer repair parts for all models are available. Please contact Dare for more information.





## ECLIPSE—6 and 12 Volt Solar Battery Models

Most convenient. The 6 or 12 volt solar energizer is ideal for use in remote areas where an electrical power source is not available. These models have a self-contained battery and may be preferred for its convenience.

### Estimates for Clean Single Wire Fence

Model	Volt	Energy Output (In Joules)	Acres Controlled (Up to)	Outperforms Solar Battery Energizers rated at
DS 20	6 Volt	.07	10	1-3 Miles
DS 40	12 Volt	.10	40	5-10 Miles
DS 100	12 Volt	.25	100	10-25 Miles
DS 200	12 Volt	.50	200	25-50 Miles

### Two Year Over the Counter Warranty

Dare Products warrants all fence energizers to the original purchaser for a period of two (2) years from the date of purchase, when installed in accordance with the installation instructions. You must retain your receipt for proof of purchase. Without original receipt, warranty reverts back to original manufacture date found on back of unit. This warranty also covers damage to the energizer caused by lightning and voltage spikes.



DS 20



DS 40



DS 100



DS 200

## POWERPRO SERIES

### ULTRA Low Impedance

Shocks through wet and heavy vegetation for the toughest electric fence conditions. Controls mid-sized to large animals, exotics and wildlife. Generous user-friendly 2-year OTC warranty—includes lightning damage.

### "Dual Power Energizers" with Advanced Features

- AC/DC Dual Power - 110V Plug-in or 12V Battery—clips included
- Ultra Low Impedance - Full and Half Power, Battery Check and Voltage indicator

Model 110V Plug-In 12V Battery	Energy Output (In Joules)	Acres Controlled (Up to)	Powers up to (Miles)
DPP 400	1	100	25
DPP 1200	3	300	50



DPP 400  
DPP 1200

- Remote Control On/Off Compatible • Makes Fence Repairs a Snap
- LED Lights Showing Fence Condition and Ground Check

Model 110V	Energy Output (In Joules)	Acres Controlled (Up to)	Powers up to (Miles)
DPP 1800	4.5	450	75
DPP 3000	7.5	750	125
DPP 9600	24	3,000	300



DPP 1800  
DPP 3000  
Remote/Fault Finder  
Included



DPP 9600

# POWERPRO FAULT FINDER/REMOTE

Quickly locates faults on your electric fence. Large LCD screen displays fence voltage, amps and direction of fault. Cordless design works on all brands of pulsing energizers. Durable impact and water resistance design with built in belt clip. 9 volt battery sold separately.

**ITEM NO. 3460 • 1 to counter pkg • 4 to shipper • 4 lbs.**

Same as above except REMOTE CAPABILITY.

For use with models DPP 1800, DPP 3000, and DPP 9600

**ITEM NO. 3480 • 1 to counter pkg • 4 to shipper • 4 lbs.**



## GARDEN GROW ELECTRIC FENCE KIT



Includes everything needed to keep small animals and pets out of unwanted areas, such as gardens, flower beds, trash containers and more.

### COMPLETE KIT INCLUDES:

- 10 Fence Posts (3466) • Electric Fence Energizer (DE 20) • 250' Heavy Duty Polywire (3467)
- 1 Ground Rod with Clamp (3469 & 2303) • 3 Split Bolt Wire Connectors (2083-3) • 15 ft. x 18 Gauge Hook-Up Wire (3468) • 1 Fence Tester (460)

**ITEM NO. DEGK 20 'How Does Your Garden Grow' Electric Fence Garden Kit**

**• 1 to counter pkg • 2 to shipper • 16 lbs.**

**28" GARDEN POLY POST** Molded of UV resistant polypropylene. Four wire holders for standard or poly wire and 1/2" tape. Individually bar-coded. GREEN.

**ITEM NO. 3466 • 20 per bundle • 5 lbs.**



# GATE HANDLES AND GATE HARDWARE

## OLD IRONSIDES®

These features make OLD IRONSIDES® better:

- Safety hook and body formed as one...from 7/8" diameter steel pipe.
- Spring mechanism consists of 4 1/4" long compression spring fastened to a 5/16" diameter eyebolt.
- All metal parts permanently assembled using 20 tons of force. No flimsy snap-on/push-on fasteners used anywhere.
- Large insulating grip measures 5 1/8" long with a 2 1/4" diameter flange for extra shock protection. Molded of a soft flexible material that will not chip, crack or break when abused.
- Performs in any climate. Metal parts plated to resist rust. Molded grip contains carbon black to deter UV rays.

**ITEM NO. 1793 • 10 to inner carton • 50 to shipper • 39 lbs.**



**1793**

The heaviest, toughest DARE electric fence gate handle ever.

## PREMIUM GATE HANDLE

Extra large flanges prevents getting shocked. Heavy duty inner spring and large stamped hook for superior conductivity and ease of use. Reinforced tension spring for long life. Molded of high density polyethylene with UV inhibitors. Black.

**ITEM NO. 3590 • 10 gates to pkg • 2 pkgs (20) to shipper • 8 lbs.**



**3590**

## RUB'RGATE®

Don't be shocked - be safe - with RUB'RGATE electric fence spring gate handle. Hard hat yellow.

RUB'RGATE soft pliable rubber outer case internally reinforced with semi-rigid, non-conductive vinyl inner tube. This provides a firm grip and acts as an extra layer of insulation. Generous, sensibly spaced flanges allow plenty of hand room. Large, heavy stamped steel plated safety hook. Enclosed spring stretches 3 1/2" to keep wire taut.

**ITEM NO. 1247 • 10 gates to pkg • 5 pkgs (50) to shipper • 15 lbs.**



**1247**

## 'OLD FAITHFUL 'TM

High quality, hi-impact styrene insures long and trouble-free life. Measures 4 3/4" between flanges. All metal parts plated. Heavy stamped steel hook. Enclosed spring stretches 3 1/2" to keep wire taut. Red.

**ITEM NO. 503 • 10 gates to pkg • 5 pkgs (50) to shipper • 13 lbs.**




**503**

## GATE ANCHOR KIT

for Wood Post and T-Post. Consists of: two #2238 anchors, two #2249 insulators with nails, and two #2550 insulators. (Gate handle not included).

**ITEM NO. 3230 • Individually packed • 10 to shipper • 4 lbs.**

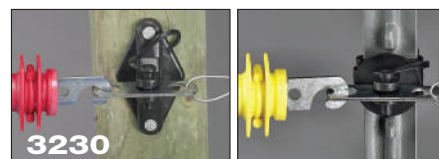

**3230**

## WOOD POST GATE ANCHOR

screw in style. Anchors easily into wood post for a strong hold. Accommodates all styles of gate handles on the market. Heavy duty steel for long life.

**ITEM NO. 3560 • 2 to pkg • 10 pkgs to shipper • 3.5 lbs.**




**3560**

## EXPANDO GATE

Stretches to fit gate opening up to 20 feet. Retracts to keep gate off ground when open. Electrified when closed, neutral when open. Highly visible and effective.

EXPANDO GATE assembly consists of: One Rub'R gate handle, one large galvanized spring, two pinlock style wood post insulators with galvanized nails, two pinlock style T-Post insulators, one anchor/activator, one fence line clamp/tap and complete schematic instructions. Equipped to fit wood post or T-Post openings.


**ITEM NO. 2222 • Individually packed • 5 to shipper • 12 lbs.**

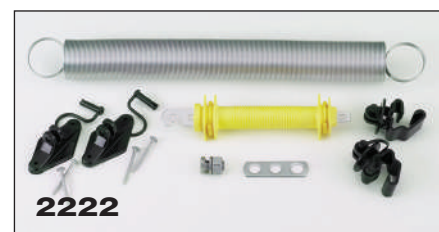

**2222**



**BUNGEE STYLE GATE** Safe for horses and all livestock. Stretches to fit openings up to 20 feet. Hardware included for both Wood and T-Posts.  
*ITEM NO. 2950 • Individually packed • 5 to shipper • 6 lbs.*

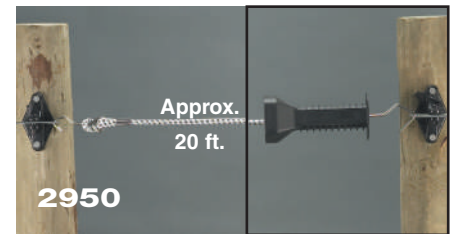

**ROWND UP LATCH SINGLE** One way universal gate latch. Works on wood, tube, galvanized metal, chain link, ornamental and more. Self latching one handed operation, locks securely with or without padlock.  
*ITEM NO. 3258 • Individually packed • 6 to shipper • 15 lbs.*



**ROWND UP LATCH DOUBLE** Universal gate latch, same as above except two-way. Both models feature universal mounting, universal strike bar, reinforced 10 gauge steel with powder coated finish.  
*ITEM NO. 3260 • Individually packed • 6 to shipper • 19 lbs.*



## INSULATORS

### ROUND POST INSULATORS

**DESIGNED TO PERFORM WITH SOLID STATE ELECTRIC FENCE SHOCKERS**

**WESTERN® SCREW-TIGHT** for round posts. Fits 1/4" to 9/16" diameter posts and 5/8" fiberglass T posts. Extends wire 1" from post. Installs without tools. Adjustable while current is "on". High density polyethylene with UV inhibitors. Yellow.

*ITEM NO. WESTERN-RP-25 • 25 to pkg • 20 pkgs (500) to shipper • 26 lbs.*

*ITEM NO. WESTERN-RP-25W SAME AS ABOVE - WHITE*

*ITEM NO. WESTERN-RP-25B SAME AS ABOVE - BLACK*



**LARGE WESTERN® FOR SUCKER RODS** and other oversized round posts. Fits 1/4" to 7/8" dia and 5/8" fiberglass T-Posts. Holds all wire, polywire, polyrope and polytape up to 1 1/2". Yellow.

*ITEM NO. XLRP-25 • 25 to pkg • 10 pkgs (250) to shipper • 17 lbs.*

*ITEM NO. XLRP-25W SAME AS ABOVE - WHITE*

*ITEM NO. XLRP-25B SAME AS ABOVE - BLACK*



---

## WOOD POST INSULATORS

**SNUG® 1728-25 INSULATOR** for wood posts. Extends wire 1" from post. Flexible base fits round and flat sided posts. Single headed nails supplied. Molded of high density polyethylene with UV inhibitors. Yellow.

**ITEM NO. 1728-25 • (complete with nails) • 25 to pkg • 20 pkgs (500) to shipper • 14 lbs.**



Extends wire 1" from face of post.

Pat. No. 4, 599, 488

---

### SNUG®-SWP-25 SNUG WOOD POST INSULATOR

Extends wire 1<sup>3</sup>/<sub>4</sub>". YELLOW. Nails included.


**ITEM NO. SNUG-SWP-25 • (complete with nails) • 25 to pkg.**

**• 20 pkgs. (500) to shipper • 19 lbs.**

**ITEM NO. SNUG-SWP-25B SAME AS ABOVE - BLACK**

**ITEM NO. SNUG-SRS-25 • (without nails) • 25 to pkg. • 20 pkgs. (500) to shipper • 14 lbs.**

**ITEM NO. SNUG-SRS-25B SAME AS ABOVE - BLACK**

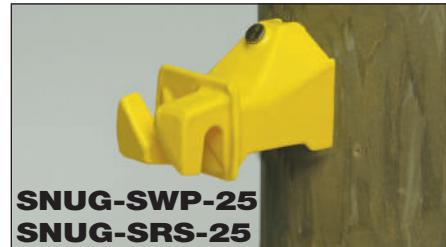

Extends wire 1<sup>3</sup>/<sub>4</sub>" from post.

---

### WOODEX® 5WP/15 for wood posts. Extends wire 5 inches from post.

Excellent for hogging down over old field fence. Strong and sturdy. Molded of high density polyethylene with UV inhibitors. Complete with nails. Yellow.

**ITEM NO. WOODEX 5WP-15 • 15 to pkg • 15 pkgs (225) to shipper • 21 lbs.**

**ITEM NO. WOODEX 5WP-15B SAME AS ABOVE - BLACK**



Extends wire 5" from post.

---

### SNUG-XWP-15 for wood posts. Tower style extends wire 3<sup>1</sup>/<sub>2</sub>" from post. Use

with high tensile and standard wire, polwire and rope up to 3/8" or 1/2" polytape.

Versatile—can be mounted on top of post and hold 2 wires (neutral and hot) if needed.

Molded of high density polyethylene with UV inhibitors. Nails not included. Black.

**ITEM NO. SNUG-XWP-15 • 15 to pkg • 15 pkgs (225) to shipper • 15 lbs.**



**SNUG® HT INSULATOR** for wood posts. Designed for high tensile use. Perfect for Equi-Rope and temporary fencing. Large diameter flange prevents arcing. Heavy fingers carry wire 3/4" from post. Offered with galvanized ring shank nails or plain. Molded of high density polyethylene with carbon black for superior UV resistance. Performs in any climate.

**ITEM NO. SNUG-HTN • (complete with galvanized ring shank nails) • 25 to pkg**

**• 20 pkgs (500) to shipper • 26 lbs. • Black**

**ITEM NO. SNUG-HT • (without nails) • 25 to pkg • 20 pkgs (500) to shipper • 19 lbs. • Black**

White available, see page 15.



Suitable for high tensile.



---

**PINLOCK INSULATOR** for wood posts. Heavy cross sections withstand the pressure of high tensile fencing. Attached pin easily locks and unlocks fence wire. Large flange prevents 'shorts' and arcing. Molded of high density polyethylene with carbon black for superior UV resistance. Performs in any climate. Black.

**ITEM NO. 2249-25 • (complete with galvanized ring shank nails) • 25 to pkg. • 20 pkgs (500) to shipper • 31 lbs.**

**ITEM NO. 2285-25 • (without nails) • 25 to pkg. • 20 pkgs (500) to shipper • 22 lbs.**

**ITEM NO. 2285-25W SAME AS ABOVE - WHITE**

**ITEM NO. 2285-25Y SAME AS ABOVE - YELLOW**



Suitable for high tensile.

---

**RING INSULATOR** for corners, ends and line posts. Angled slot securely holds wire and rope up to 3/8". Black.

**ITEM NO. 2671-25 • 25 to pkg. • 10 pkgs (250) to shipper • 15 lbs.**

White available, see page 15.



---

**RING INSULATOR 6" EXTENDER** screws into Wood Posts. Holds rope up to 8 MM, 1/2" tape, and wire. White.


**ITEM NO. 2947-10 N • 10 to pkg. • 6 pkgs (60) to shipper • 6.6 lbs.**



---

**RING INSULATOR POWER DRIVER** Use with 110V or 12 Volt power drills. Works with all Dare Ring Insulators.

**ITEM NO. 3003 • Individually packed • 5 to shipper • 2 lbs.**

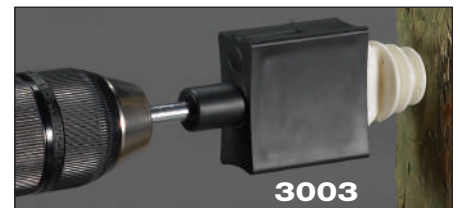

---

**TUBE STYLE WOOD POST INSULATOR** Rigid high density polyethylene with carbon black for superior UV resistance. Performs in any climate. Four inches long x 3/8" diameter. Ribs prevent insulator from sliding. Available with or without galvanized staples.

With 17/8" type III galvanized staple.

**ITEM NO. 1724 N • 50 to pkg • 10 pkgs (500) to shipper • 15 lbs.**

Insulator only - without staple

**ITEM NO. 1718 • 50 to pkg • 20 pkgs (1000) to shipper • 12 lbs.**



Suitable for high tensile.

---

**PERMATEMP STAPLE INSULATOR** for wood posts. Designed to be used with high tensile permanent electric fence or cameo monofilament line. Can be installed after wire is strung. Molded of highest quality polypropylene with carbon black for superior UV resistance. Performs in any climate. Type III galvanized 17/8" staple included.

**ITEM NO. 1710 • 50 to pkg • 10 pkgs (500) to shipper • 13 lbs.**



Suitable for high tensile.

## T - POST INSULATORS

**SUPER SNUG®** for T posts. Fits 1.25 & 1.33 lb/ft T posts. Large flange prevents arcing. Solid wire holders for electric fence wire, polywire and rope up to 8 mm. Snaps on and around post. Molded of high density polyethylene with UV inhibitors for all-weather performance. Yellow.

**ITEM NO. SNUG-STP-25 • 25 to pkg • 20 pkgs (500) to shipper • 22.5 lbs.**

**ITEM NO. SNUG-STP-25W** SAME AS ABOVE - WHITE

**ITEM NO. SNUG-STP-25B** SAME AS ABOVE - BLACK


SNUG JR. for small 1.0 lb./ft. T Posts

**ITEM NO. 1372-25 • 25 to pkg • 20 pkgs (500) to shipper • 13 lbs.**

**STPX-25** T post insulator for Equi-Rope, coated wire, & large diameter fence materials up to 3/8". White.

**ITEM NO. STPX-25 • 25 to pkg • 20 pkgs (500) to shipper • 24 lbs.**

**ITEM NO. STPX-25B** SAME AS ABOVE - BLACK

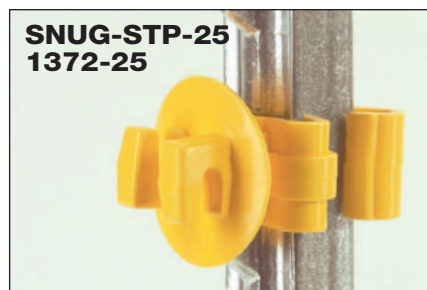

**EXTRA LENGTH SNUG®** for T POSTS. Extends wire 2 1/2" from face of post... otherwise same as STP. Yellow.

**ITEM NO. SNUG-XLSTP-25 • 25 to pkg • 10 pkgs (250) to shipper • 12 lbs.**

**ITEM NO. SNUG-XLSTP-25B** SAME AS ABOVE - BLACK



**EXTENDED LENGTH SNUG®** for T POSTS. Extends wire 5" from face of post. Use to hog down sagging field fence...otherwise same as STP. Yellow

**ITEM NO. SNUG-X5TP-15 • 15 to pkg • 15 pkgs (225) to shipper • 18 lbs.**

**ITEM NO. SNUG-X5TP-15B** SAME AS ABOVE - BLACK



Extends wire 5" from post

**WESTERN® SCREW TIGHT** for T Posts & sucker rods.


Adjusts to fit:

- T posts, steel - small, medium & large, with or without studs.
- T posts, fiberglass - medium & large sizes only.
- Sucker rods - 3/4" diameter only.
- U posts - small, 1 1/8" wide. Backside only.
- Small garden U posts—1 1/8" wide.

Insulator opens to attach anywhere on post.

**ITEM NO. 2193-25 • 25 to pkg • 10 pkgs (250) to shipper • 19 lbs.**

**ITEM NO. 2193-25B** SAME AS ABOVE - BLACK

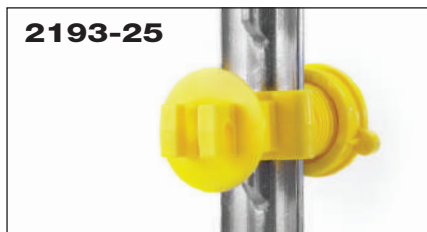


Adjusts to fit all T posts & 3/4" sucker rod

Pat. No. 4, 845, 317

**REVERSED T POST INSULATOR EXTENDER** Holds wire 3" from backside of T-Post. Snaps on and around post - insulator faces backward.

**ITEM NO. SNUG-RT-25 • 25 to pkg • 10 pkgs (250) to shipper • 17 lbs.**

**ITEM NO. SNUG-RT-25B** SAME AS ABOVE - BLACK

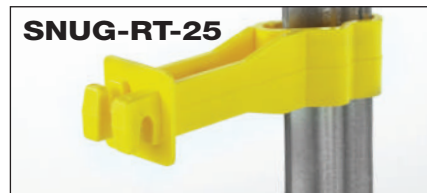

Pat. No. 4, 077,611

---

## T POST TOP'R® SAFETY TOP AND ELECTRIC FENCE INSULATOR

Fits all standard T-Posts and can be nailed on top of wood posts. Protects horses and other valuable livestock from sharp, jagged T post tops. Large heavy-duty cap/insulator can be installed with wire holders facing front, back, right or left. Holds wire, polywire, polyrope and polytape up to 1½". Molded of high density polyethylene with UV inhibitors for all weather performance. Yellow.

**ITEM NO. 2027 • 10 to pkg • 10 pkgs (100) to shipper • 16 lbs.**

**ITEM NO. 2027B** SAME AS ABOVE - BLACK

**ITEM NO. 2929** SAME AS ABOVE - WHITE (page 16)



**Fits all standard T posts**

Pat. No. 6,353,187

---

## PINLOCK INSULATOR

for T Posts. Fits 1.25 & 1.33 lb/ft posts. Heavy cross sections with-stand the pressure of high tensile fencing. Large flange prevents 'shorts' and arcing. Molded of high density polyethylene with carbon black for superior UV resistance. Performs in any climate. Black.

**ITEM NO. 2550-25 • 25 to pkg • 20 pkgs (500) to shipper • 23 lbs.**

**ITEM NO. 2550-25W** SAME AS ABOVE - WHITE

**ITEM NO. 2550-25Y** SAME AS ABOVE - YELLOW



**Suitable for high tensile**

---


## LOCKJAWZ INSULATOR

Fits all standard T-Posts (1.25-1.33 lb.) and has 6 positions 360° mounting options for both use as an In-Line and T-Post Corner Insulator. Easy "Weave-In" wire installation fits: polyrope, polywire, steel/aluminum/high tensile/barbed (single and dual strand) wires. Intuitive 1-piece design with no pins to lose! Molded from UV-Stabilized, HDPE. Proudly "Made in USA!" Colors: High Visibility Orange, Black, and White.

**ITEM NO. T-360 ORANGE • 25 to pkg • 20 pkgs (500) to shipper • 17 lbs.**

**ITEM NO. T-360 BLACK** SAME AS ABOVE - BLACK

**ITEM NO. T-360 WHITE** SAME AS ABOVE - WHITE

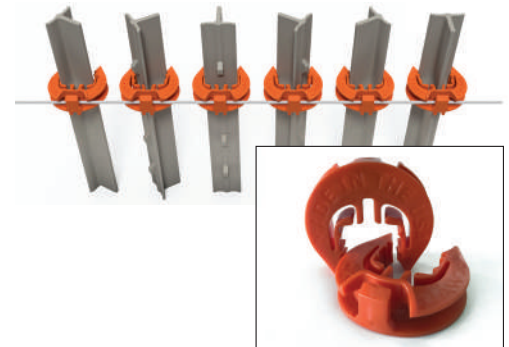

---

## U - POST, CHAIN LINK, & SPECIALTY INSULATORS

### SNUG® INSULATORS

for U Posts & chain link fence. Holds wire 2¾" from post. Solid wire holders take smooth, barbed and polywire. Molded of high density polyethylene with UV stabilizer for all weather performance. Yellow.


Fits 1¾" to 2⅛" wide posts.

**ITEM NO. SNUG-SU-25 • 25 to pkg • 10 pkgs (250) to shipper • 14 lbs.**

**ITEM NO. SNUG-SU-25** SAME AS ABOVE - BLACK

Fits 2⅝" wide Steel City posts. Holds wire 1" from post.

**ITEM NO. XLSU-25 • 25 to pkg • 20 pkgs (500) to shipper • 20lbs.**

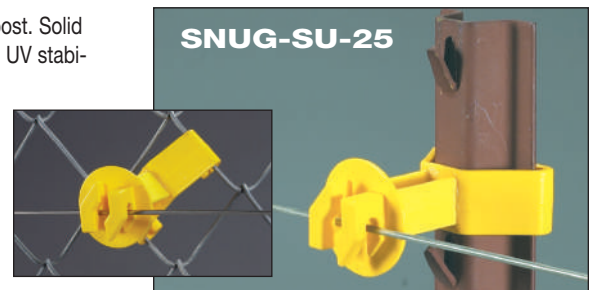

---

### GARDEN U-POST INSULATOR

Fits all 1" to 1⅝" U-posts. Ideal for gardens and light duty electric fencing. Holds wire ¾" from post. Snaps on without tools. Yellow.

**ITEM NO. SNUG-LGU-25 • 25 to pkg • 10 pkgs (250) to shipper • 8 lbs.**



Pat. No. D 669,437



## U POST TOP'R® SAFETY TOP AND ELECTRIC FENCE INSULATOR.

Fits 1<sup>3</sup>/<sub>4</sub>" and 2<sup>1</sup>/<sub>8</sub>" wide full weight U posts. Protects horses and other valuable livestock from sharp post tops. Large, heavy-duty cap/insulator can be installed with wire holders facing front or back. Holds wire, polywire, polyrope and polytape up to 1<sup>1</sup>/<sub>2</sub>". Molded of high density polyethylene with UV inhibitors for all weather performance. Yellow.

**ITEM NO. 2087 • 10 to pkg • 10 pkgs (100) to shipper • 15 lbs.**

**ITEM NO. 2087W** SAME AS ABOVE - WHITE

**ITEM NO. 2087B** SAME AS ABOVE - BLACK

**2087**

Pat. Nos. 4,680,428  
6,353,187



## INSULATOR FOR CHAIN LINK POSTS, TOP RAIL, TUBE GATES & CORRAL PANELS

Fits vertical or horizontal tubes/pipes up to 2" round or square. Holds rigid wire up to 5/16" and pliable ropes up to 3/8". Extends wire 3.5" from post. Heavy duty 1/4" hardware included. (Can be fastened to almost anything). Black.

**ITEM NO. 3359-10 • 10 to pkg • 10 pkgs (100) to shipper • 18 lbs.**

**3359-10**



Pat. No. D 594,821 S



## TRADITIONAL STYLE INSULATORS

**ELFIN® ELECTRIC FENCE INSULATOR** for wood posts. Weather resistant black polyethylene performs in any climate. One wire holder takes any standard fence wire. Metal wire holding clip not required. Black only.

**ELFIN® WITH NAIL FOR WOOD POSTS**

**ITEM NO. ELF-WP-25 • 25 to pkg • 20 pkgs (500) to shipper • 15 lbs.**

**ELFIN® INSULATOR ONLY**

**ITEM NO. ELF-RS-25 • 25 to pkg • 20 pkgs (500) to shipper • 10 lbs.**

**ELFIN® EXTENDER INSULATOR** for T Post, U Post & chain link fence. Extends wire five inches from fence. Fits either side of chain link, studded T & U posts. Consists of heavy steel bracket with Elfin® insulator, screw, and cotter pin. All metal parts plated to resist rust.

**ITEM NO. 1362-10 • 10 to counter pkg • 10 pkgs (100) to shipper • 16 lbs.**



**ELF-WP-25  
ELF-RS-25**



**1362-10**



## DARE BLACK WIDOW™ ELECTRIC FENCE INSULATOR

High density black linear polyethylene with UV inhibitors. Operates well in any climate, in any part of the world. 45 degree slot easily accepts any fence wire and holds it in place.

BLACK WIDOW™...a very good insulator. Black only.

**BLACK WIDOW™ WITH NAIL FOR WOOD POSTS**

**ITEM NO. BW-WP-25 • 25 to pkg • 20 pkgs (500) to shipper • 15 lbs.**

**BLACK WIDOW™ INSULATOR ONLY**

**ITEM NO. BW-RS-25 • 25 to pkg • 20 pkgs (500) to shipper • 10 lbs.**

**ITEM NO. BW-RS-100 • 100 to pkg • 5 pkgs (500) to shipper • 10 lbs.**



**BW-WP-25  
BW-RS-25  
BW-RS-100**

---

## PORCELAIN AND PORCELAIN STYLE INSULATORS

### TRIPLE GROOVE LINE INSULATORS

Old-fashioned style insulators molded of modern high density polyethylene. Smooth and glossy like porcelain. Takes any size fence wire. Install like any insulators. Will not crack or shatter if struck with hammer. White.

**ITEM NO. TGN-25 • insulators with nails • 25 to pkg • 20 pkgs (500) to shipper • 20 lbs.**

Use 458 clip to secure wire to insulator (page 12).



**PORCELAIN LINE INSULATORS** Produced from specially formulated electrical porcelain for superior dielectric and mechanical strength. Imported.

Standard size porcelain line insulator with 10d double headed nail and poly washer.

**ITEM NO. 16D-25 • 25 to pkg • 10 pkgs (250) to shipper • 24 lbs.**

Small porcelain lag insulator. Use for line and corners.

**ITEM NO. 2802-25 • 25 to pkg • 4 pkgs (100) to shipper • 23 lbs.**

Large porcelain lag insulator. Heavy duty. Use for line and corners.



**ITEM NO. 2799-25 • 25 to pkg • 2 pkgs (50) to shipper • 29 lbs.**

Heavy duty porcelain corner insulator. No. 36

**ITEM NO. 2356-10 • 10 to pkg • 25pkgs (250) to shipper • 48 lbs.**

Heavy duty porcelain corner insulator. No. 4 horseshoe style.

**ITEM NO. 1629-10 • 10 to pkg • 10 pkgs (100) to shipper • 24 lbs.**



---

## CORNER INSULATORS

**ROUNDER™ CORNER** White polyethylene corner knob insulator. Looks like porcelain. Weighs less. Works great. White only.

**ITEM NO. 1388-10 • 10 to pkg • 25 pkgs (250) to shipper • 8 lbs.**



**CORNER POST INSULATOR** Insulator opens and latches closed for ease of fence installation. Molded of high density polyethylene with carbon black for superior UV resistance. Performs in any climate. Black only.

**ITEM NO. BW-CP-10 • 10 to pkg • 25 pkgs (250) to shipper • 6 lbs.**



**CORNER KNOB INSULATOR** Large flanges. Heavy center section. Large enough to withstand strain of fence wire and offer complete insulation. Flexible tabs speed installation. Not recommended for high tensile. Molded of high density polyethylene with carbon black for superior UV resistance. Performs in any climate. Black only.

**ITEM NO. BW-KK-10 • 10 to pkg • 25 pkgs (250) to shipper • 7 lbs.**




**HIGH STRAIN CORNER AND END INSULATOR** Molded of high strength engineering grade polymer. Able to withstand the constant pressure of high tensile fence wire. Use for corners, ends, dips and rises. All weather black only.  
**ITEM NO. 1752-10 • 10 to pkg • 25 pkgs (250) to shipper • 12 lbs.**



**DOUBLE U END AND CORNER INSULATOR** Designed with heavy cross sections to withstand the pull of high tensile wire. Molded of an engineering grade polymer. All weather black.  
**ITEM NO. 2210-10 • 10 to pkg • 20 pkgs (200) to shipper • 12 lbs.**



**“EGG” STYLE CORNER AND END INSULATOR**  
 Glass reinforced polyester. Strongest Dare corner. Suitable for high tensile and Rope to 1/4".  
**ITEM NO. 2949-10 • 10 to pkg • 10 pkgs (100) to shipper • 8 lbs.**

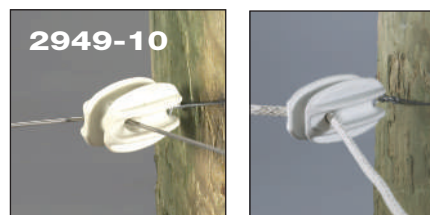

**TUBULAR CORNER POST & END POST INSULATOR**  
 Provides insulation for 90° turn or end loop on any style post. Flat-sided design resists rolling and speeds installation. Heavy sidewalls provide extra protection against ‘shorts’ or ‘grounds’. Molded of polyethylene with carbon black to withstand the elements. Molded with metal insert designed to take high-tensile strain. 19 1/2" long.  
**ITEM NO. 1779 • 10 to pkg • 10 pkgs (100) to shipper • 16 lbs.**  
 Custom lengths and bulk coils available on request.  
**ITEM NO. 3015 • 100' coil**



**HIGH STRAIN CORNER & END ASSEMBLY** Performs superbly from any wood post or tree - as a corner - for straight line fencing. Consists of 3/8" diameter hi-carbon steel bracket, 1752 insulator and self-locking nut. Wire clip may be required when used for straight line fencing. All metal parts zinc plated.  
**ITEM NO. 451 • 10 assemblies to pkg • 5 pkgs (50) to shipper • 16 lbs.**  
**ITEM NO. 451-4 • 4 each to pkg • 6 pkgs to shipper • 8 lbs.**



## FASTENERS & CLIPS

**‘TWISTER’ COTTER CLIP** Fasten wire to pre-drilled posts or sucker rods. Use to attach ‘old-style’ insulators to drilled posts. 14 ga. galvanized wire. A favorite on the Gayle farm in Kansas.  
**ITEM NO. 457-50 • 50 to pkg • 10 pkgs (500) to shipper • 6.5 lbs.**



**‘CLIPPER’** Wire to insulator fastening clip. Handy spring clip for fastening electric fence wire to grooved insulators. Galvanized spring wire.  
**ITEM NO. 458 • 100 to pkg • 10 pkgs (1000) to shipper • 5 lbs.**






## STUDDED 'T' POST FASTENING CLIPS for 1.25 & 1.33 LB/FT standard size STUDDED T POSTS. Not for electric fence. Heavily galvanized 11 gauge wire.

Use to fasten fence or barbed wire to posts.

**ITEM NO. 440 • 25 to pkg • 40 pkgs (1000) to shipper • 19 lbs.**

**ITEM NO. 440-100 • 100 to pkg • 10 pkgs (1000) to shipper • 19 lbs.**

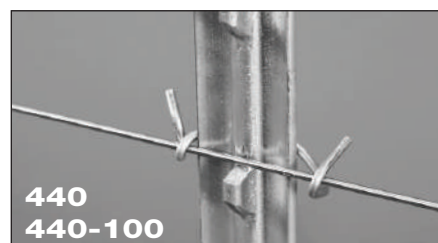

## CLIP FOR WOOD AND POLY BATTENS Fits all sizes up to 2"x2".

Use to fasten high tensile, ordinary electric, non-electric, smooth or barbed fence wire to treated wood and poly battens. 12½ gauge type III galvanized wire.

**ITEM NO. 1699 • 100 to pkg • 10 pkgs (1000) to shipper • 26 lbs.**



# ELECTRIC FENCE POSTS

**STEP-IN POLY POST** Ideal for temporary electric fencing such as controlled grazing/pasture management. Lightweight, self-insulating, and convenient to use. Strong H section post molded of UV resistant polypropylene. Eight wire holders for steel wire, poly wire and poly tape up to 1½" wide. Spaced 6" to 37" from ground up. 7" metal spike easily stepped into hard ground. Specifications: 48" long, 41" above ground. Packed 50 to retail store display carton. Individually bar-coded. Specify black, white, yellow, orange, green or pink.

**ITEM NO. 2400, 2400 W, 2400 Y, 2400 O, 2400 G, 2400 P • 50 to carton • 39 lbs.**



**63" STEP-IN POLY POST** Molded of UV resistant polyolefin reinforced with glass-fiber. 8 holders for wire/tape/rope. 63" length—54" above ground. White.

**ITEM NO. 2600W • 30 to carton • 28 lbs.**



**PIG TAIL STEP-IN POST** 42" overall, 35" above ground. Ideal for temporary electric fencing for grazing and pasture management. Heavy duty 9/32" galvanized steel rod. Use with all types of wire, rope, or polytape. Steps easily into hard ground with sharp reinforced step-in plate. Top piece molded with UV inhibitors and is rated to 30,000 volts. Individually bar-coded. White top.

**ITEM NO. 3600 • 10 per bundle • 13 lbs.**



## DARE WESTERN® / SET-EZE® POST


A natural combination. Western® Screw Tight Insulators and Posts.

Wrap around anchor plate, cold drawn steel rod. 20 posts to carton.

Specifications	Item Number	Description	Wt. Per 100
23/64" dia. steel rod. Welded anchor plate.  20 posts to carton. With insulators as noted.	62-2W-54	Post with 2 Western Insulators	156 lbs.
	62-1W-54	Post with 1 Western Insulator	151 lbs.

## SET-EZE® ADJUSTABLE STEEL POSTS BUNDLED - NOT BOXED

Specifications	Item Number	Description	Wt. Per 100
5/16" dia. steel rod. Welded anchor plate. 25 posts to bundle.	1552-48	Post Only	118 lbs.

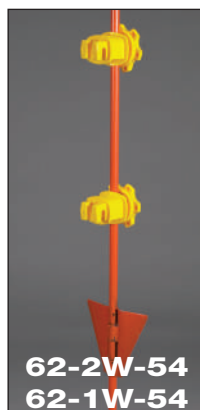

# ALUMINUM ELECTRIC FENCE WIRE

Aluminum electric fence wire is four times more conductive than galvanized steel and more visible. Lightweight and easy to install. Guaranteed against rust. Do not use with a weed burner style of charger. Recommended for use with a low impedance type energizer.

14 ga x 1/4 mile

**ITEM NO. 14AL1320 • 4 to carton/shipper • 31 lbs.**

16 ga x 1/4 mile

**ITEM NO. 16AL1320 • 4 to carton/shipper • 20 lbs.**

14 ga x 1/2 mile

**ITEM NO. 14AL2640 • 4 to carton/shipper • 59 lbs.**

16 ga x 1/2 mile

**ITEM NO. 16AL2640 • 4 to carton/shipper • 40 lbs.**

16 ga x 164 ft

**ITEM NO. 16AL164 • 16 to carton/shipper • 12 lbs.**



## EQUINE PRODUCTS

### EQUINE POLYROPE

**7MM POLY EQUI-ROPE X 656 FT.** Premium braided HDPE& polyester mix rope with 12 strands of stainless steel wire. 9/32" approx. diameter. White 1,350 lbs. average breaking strength.

**ITEM NO. 3097 • 2 rolls per carton • carton weight 25 lbs.**

**6MM POLY EQUI-ROPE X 600 FT.** Braided HD Dacron rope with 7 strands of stainless steel wire. 1/4" approx. diameter. Approx. 1,100 lbs. average breaking strength. WHITE.

**ITEM NO. 3094 • 2 rolls per carton • carton weight 20 lbs.**

**ITEM NO. 3094B** (Same as 3094, but black rope with white tracers—high visibility for horses)

**6MM POLY TWISTED ROPE X 600 FT.** Twisted HD polyethylene rope with 7 strands of stainless steel wire. 15/64" approx. diameter. 720 lbs. approximate tensile strength. WHITE.

**ITEM NO. 3365 • 2 rolls per carton • carton weight 17 lbs.**

**4MM POLY EQUI-ROPE X 656 FT.** Braided HD polyethylene rope with 3 strands of stainless steel wire. 5/32" approx. diameter. 495 lbs. average breaking strength. WHITE.

**ITEM NO. 3095 • 4 rolls per carton • carton weight 16 lbs.**

**HOT BRAID POLY ROPE** Super conductivity with 9 strands of mixed metal. Braided high density polyethylene with UV inhibitors. 3/16" diameter for high visibility and strength. Average breaking strength 500 lbs. For long distances of temporary or permanent fence. White with green tracer.

**ITEM NO. 3580 • 4 rolls per carton • carton weight 22 lbs.**



**3097**



**3094-3365**



**3095**



**3094B**



**3580**

### EQUINE POLYTAPE & POLYWIRE

Highly visible, lightweight and easy to use. A combination of weather resistant polyethylene and strong stainless steel wire conductors.

**POLYTAPE** Woven of white UV resistant polyethylene and stainless conductor wires.

Available in two widths. 1/2" wide with five conductors and 1 1/2" with fifteen conductors. Install with tape insulators only. 3 to 4 twists recommended between posts to prevent whipping from wind.

**ITEM NO. 2327 • 1/2" wide x 200 meters/656 ft. • 6 to ctn • 13 lbs.**

**ITEM NO. 2346 • 1/2" wide x 400 meters/1312 ft. • 6 to ctn • 29 lbs.**

**ITEM NO. 2576 N • 1-1/2" wide x 200 meters/656 ft. • 2 to ctn • 14 lbs.**

**Heavy Duty**—50% heavier strands of stainless steel.

**ITEM NO. 3171 • White • 1-1/2" wide x 200 meters/656 ft. • 2 to ctn • 22 lbs.**

**ITEM NO. 3171B • Black • 1-1/2" wide x 200 meters/656 ft. • 2 to ctn • 22 lbs.**

**POLYWIRE** White polyethylene cord woven of UV resistant polyethylene with three strands of strong stainless steel wire. Available in two lengths. Individually shrink wrapped.

**ITEM NO. 2343 • 250 meters / 820 ft • 10 to ctn • 13 lbs.**

**ITEM NO. 2347 • 400 meters/1312 ft. • 6 to ctn • 12 lbs.**

**Heavy Duty**—same as above with 6 strands of stainless steel.

**ITEM NO. 3174 • 200 meters/656 ft. • 6 to ctn • 13 lbs.**

**ITEM NO. 3177 • 400 meters/1312 ft. • 6 to ctn • 20 lbs.**



**2327  
2346**



**2576 N-Standard  
3171B-Black**



**2343  
2347**



**3174  
3177**

---

## EQUINE INSULATORS

For any polytape up to 1½" wide. Insulators grip tape tightly to prevent whipping and sawing. Heavy tape holder unlocks to aid installation. Molded of all-weather high density polyethylene.

### WOOD POST INSULATOR


for tape. Complete with nails.

**ITEM NO. 2330-25 (yellow) • 25 to pkg • 10 pkgs to shipper • 15 lbs.**


**ITEM NO. 2330-25W SAME AS ABOVE - WHITE**

**ITEM NO. 2330-25B SAME AS ABOVE - BLACK**

Pat no. 6,353,137



**2330-25**




**2330-25W**

### WOOD POST TAPE INSULATOR EXTENDER

For polytape up to 1½" wide. Extends tape 3½" from post. Nails included.

**ITEM NO. 2338-25 (yellow) • 25 to pkg • 10 pkgs to shipper • 18 lbs.**

**ITEM NO. 2338-25W SAME AS ABOVE - WHITE**



**2338-25**



**2338-25W**

### WOOD POST OR VINYL POST INSULATOR

For polywire, polyrope or high tensile wire. Use two galvanized roofing nails or two #8 x 3/4" stainless screws (not included). Equine white.

**ITEM NO. SNUG-HTW • 25 to pkg • 20 pkgs (500) to shipper • 19 lbs.**



### RING INSULATORS

Ring insulators for line, end, and corner posts.

Holds electric wire and rope up to 8mm.

**ITEM NO. 2671W (white) • 10 to pkg • 20 pkgs (200) to shipper • 11 lbs.**

**ITEM NO. 2671-25 (black) • 25 to pkg • 10 pkgs (250) to shipper • 15 lbs.**



**2671-W**




**2671-25**

### RING INSULATOR POWER DRIVER

Use with 110V or 12 Volt power drills. Works with all Dare Ring Insulators.

**ITEM NO. 3003 • Individually packed • 5 to shipper • 2 lbs.**

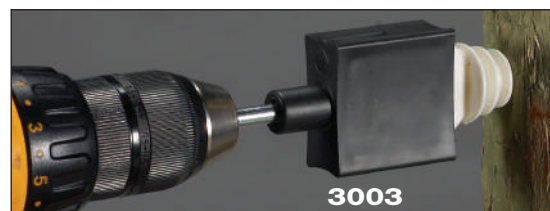


**3003**

### RING INSULATORS 6" EXTENDER

for wood posts.

Holds wire, rope up to 8MM and 1½" tape.

**ITEM NO. 2947-10 N • 10 to pkg • 6 pkgs (60) to shipper • 6.6 lbs.**



**2947-10 N**



**2947-10 N**



---

## EQUINE INSULATORS

### EQUI-ROPE CORNER POST BRACKET KIT

Each consists of: one plated steel bracket, one #1388 insulator and one 1/4-20 locking nut.

**ITEM NO. 3283 N • 4 to pkg • 6 pkgs to shipper • 3.4 lbs.**




---

**T-POST INSULATOR** for polytape up to 1½" wide. Now holds rope and poly-wire. Fits 1.25 & 1.33 lb./ft T posts.

**ITEM NO. 2334-25 (yellow) • 25 to pkg • 10 pkgs (250) to shipper • 12 lbs.**

**ITEM NO. 2334-25W SAME AS ABOVE - WHITE**

**ITEM NO. 2334-25B SAME AS ABOVE - BLACK**



Pat no. 6,353,137


---

### T-POST TAPE INSULATOR EXTENDER

Extends wire 3½" from post. Fits 1.25 and 1.33 lb/ft T-post. For polytape up to 1½" wide.

**ITEM NO. 2340-25 (yellow) • 25 to pkg • 10 pkgs (250) to shipper • 17 lbs.**

**ITEM NO. 2340-25W SAME AS ABOVE - WHITE**



Pat. no. 6,353,137

---

**STPX-25** T post insulator for Equi-Rope, coated wire, & large diameter fence materials up to 3/8". White.

**ITEM NO. STPX-25 • 25 to pkg • 20 pkgs (500) to shipper • 24 lbs.**

**ITEM NO. STPX-25B SAME AS ABOVE - BLACK**



---


### T-POST SAFETY TOP-R

Fits all T-Posts and can be nailed on top of wood post.

For all wire, polywire, polyrope and tape up to 1½".

Will face all directions on post. Equine white.

**ITEM NO. 2929 • 10 to pkg • 10 pkgs (100) to shipper • 16 lbs.**



---

**T-POST VINYL SAFETY CAP** Provides attractive top to T-Post fence line while protecting livestock from jagged tops. Highly visible white.

**ITEM NO. 2927-25 • 25 to pkg • 10 pkgs (250) to shipper • 12 lbs.**




## EQUINE INSULATORS

### ROUND POST INSULATOR for tape up to 1½" wide.

Fits 1/4" to 9/16" dia. posts.

**ITEM NO. 2336-25 (yellow) • 25 to pkg • 10 pkgs (250) to shipper • 13 lbs.**

**ITEM NO. 2336-25W SAME AS ABOVE - WHITE**




### LARGE WESTERN® FOR SUCKER RODS and other oversized

round posts. Fits 1/4" to 7/8" dia and 5/8" fiberglass T-posts. Holds all wire, polywire, poly-rope and polytape up to 1½". Yellow.

**ITEM NO. XLRP-25 (yellow) • 25 to pkg • 10 pkgs (250) to shipper • 17 lbs.**

**ITEM NO. XLRP-25W SAME AS ABOVE - WHITE**

**ITEM NO. XLRP-25B SAME AS ABOVE - BLACK**



### U POST INSULATOR for polytape up to 1½" wide. Fits 1¾" to 2⅞" wide posts.

**ITEM NO. 2332-25 (yellow) • 25 to pkg • 10 pkgs (250) to shipper • 11 lbs.**

**ITEM NO. 2332-25W SAME AS ABOVE - WHITE**

**ITEM NO. 2332-25B SAME AS ABOVE - BLACK**



### U POST TOP'R for tape. Holds all wire, polywire, polyrope and polytape up to 1½".

**ITEM NO. 2087 (yellow) • 10 to pkg • 10 pkgs (100) to shipper • 15 lbs.**


**ITEM NO. 2087-25W SAME AS ABOVE - WHITE**

## POLYTAPE AND POLYWIRE ACCESSORIES

### TAPE ELECTRICAL CONNECTOR for tape up to 1½". Use to connect

fence charger to tape or as an end clamp. May be used to fasten 1/2" tape to a gate handle.

**ITEM NO. 2743 • 2 connectors to counter pkg • 10 pkgs (20 connectors) to shipper • 3 lbs.**



1/2" polytape fastened to gate




### TAPE BUCKLE / GATE ANCHOR for tape up to 1/2" polytape.

Use to splice two lengths of tape. Attach to pinlock insulator to form gate anchor or tape end. Has many uses.

**ITEM NO. 2768 • 5 buckles to pkg • 10 pkgs (50 buckles) to shipper • 2 lbs.**

Tape buckle for 1½" tape.

**ITEM NO. 2880 • 2 buckles to pkg • 10 pkgs (20) to shipper • 2 lbs.**



## POLYTAPE & POLYWIRE ACCESSORIES

**CORNER AND END TENSIONERS** for 1½" polytape installed on wood or T-posts. Use at corners, ends or T junctions. Fully insulated. All metal parts are of #300 series stainless steel. Insulators are molded of white high density polyethylene with UV inhibitors. Each assembly includes an electrical connector consisting of one self tapping lag screw and one wire terminal. Use to connect to energizer or jumper as well.



**ITEM NO. 4023 3-way Tensioner • 1 to pkg • 10 pkgs to shipper • 4 lbs.**

**ITEM NO. 2810 N Corner Tensioner • 2 to pkg • 10 pkgs to shipper • 4 lbs.**

**ITEM NO. 3245 N Tape Clip for 1½" Tape • 25 to pkg • 10 pkgs to shipper • 2.5 lbs.**

**ITEM NO. 2809 N End Tensioner • 2 to pkg • 10 pkgs to shipper • 3 lbs.**


**ITEM NO. 3115 Corner and End Tensioner for 1.25/1.33 T-posts • 1 to pkg 10 pkgs to shipper • 3 lbs.**



**GATE HANDLE** for 1½" Polytape.

**ITEM NO. 4024 Gate Handle with 1½" tape tensioner • 1 to pkg • 20 pkgs to shipper • 6 lbs.**

**ITEM NO. 1247W White Gate Handle only • 10 gates to pkg • 5 pkgs (50) to shipper • 15 lbs.**



**1247W** (Handle only)

**IN-LINE TENSIONER** Use with Equi-Rope and electric fence wire gauges 14 thru 18. Molded of engineering grade polymer. Imported.

**ITEM NO. 2341 • 1 to pkg • 20 to shipper • 6 lbs.**

**HANDLE** for 2341 In-Line Tensioner.

**ITEM NO. 2770 • 5 to shipper • 10 lbs.**



**WIRE TIGHTENER** Use with polywire, 1/2" polytape, and steel wire gauges 14 thru 18. Not designed for high tensile.

**ITEM NO. 2769 • 5 to counter pkg • 4 pkgs (20) to shipper • 3 lbs.**



**E-Z'REEL** large winder & spool. Equipped with neck strap & fence hooks to hang. Holds 500' Equi-rope & 1½" polytape; 1/4 mile of 1/2" polytape and 1 mile polywire.

**ITEM NO. 3199 • 2 to shipper • 10 lbs.**

**EMPTY SPOOL** Replacement spool or extra for #3199. Same capacity as above.

**ITEM NO. 3200 • 4 to shipper • 10 lbs.**



**3199**



**3200**



---

## POLYTAPE & POLYWIRE ACCESSORIES

**TAPE AND WIRE WINDER** Use to recover electric fence wire, polywire or polytape. Complete with spool. Capacity—22 lbs. of steel wire or 400 meters (1/4 mile) of polywire.

**ITEM NO. WW-1 • 6 to shipper • 9 lbs.**

**ITEM NO. EFS-1 (extra spools) • 10 to shipper • 5 lbs.**



**ELECTRIC ROPE CLAMP** Use to splice or end polyrope 1/4" to 5/16" in diameter. Also use to connect hot wire from energizer. New collar eases installation—acts as extra helping hand.

**ITEM NO. 3098 N • 4 to pkg • 10 pkgs (40) to shipper • 4 lbs.**




---

## HIGH TENSILE FENCE SUPPLIES


**WIRE STRAINER/TIGHTENER** Install in fence line to periodically renew tension. Heavy cast cog with spring loaded latch. Hot dip zinc coated frame exceeds type III specifications. No raw uncoated steel edges. Use no. 1701 handle to tighten.

**ITEM NO. 1703 • 20 strainers to shipper • 11 lbs.**

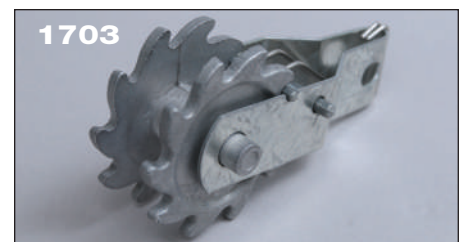

**WIRE STRAINER/TIGHTENER** Tighten with 9/16" crescent or open end wrench or 1701 handle.

**ITEM NO. 1703C • 50 strainers to shipper • 20 lbs.**



**STRAINER HANDLE** Use to tighten strainers no. 1703 & 1703C. Tension measuring scale on handle. Heavy riveted construction. Zinc plated.

**ITEM NO. 1701 • 5 to shipper • 5 lbs.**




**NO-CUT WIRE STRAINER** Use to tighten high tensile and other smooth fence wire. Die-cast zinc. Tighten with #2776 or 1/2" drive socket handle.

**ITEM NO. 2775 • 20 to shipper • 5 lbs.**

**TIGHTENER HANDLE** Use with #2775

**ITEM NO. 2776 • 5 to shipper • 10 lbs.**



## HIGH TENSILE FENCE SUPPLIES

### TENSION MEASURING SPRING

Install in each fence line together with strainer. Necessary to keep wires taut during temperature changes. Use to determine tension on wires. All parts are hot dip galvanized and exceed type III specifications.

**ITEM NO. 1713 • 20 to shipper • 28 lbs.**



### GALVANIZED BARBED FENCE STAPLES

Slash-cut style staple with barbs. Heavy .148" diameter by length shown. Type III zinc coating for long life. Suitable for high tensile and all other types of fence installations.

1-7/8" staple

**ITEM NO. 1692 • 50 staples to counter pkg • 20 pkgs (1000) to shipper • 21 lbs.**

1-7/8" staple

**ITEM NO. 2415 • 10 lbs. to counter pkg • 4 pkgs (40 lbs) to shipper • 43 lbs.**



### BRACE PINS

Use to hold horizontal wood brace beams. 3/8" dia. x 5" & 10". Galvanized steel.

10 in. pin

**ITEM NO. 1714-5 • 5 to counter pkg • 10 pkgs (50) to shipper • 15 lbs.**

5 in. pin

**ITEM NO. 1715-5 • 5 to counter pkg • 10 pkgs (50) to shipper • 8 lbs.**



### POLY BATTEN

Use as wire spacer between line posts. Place every 25 ft. or as needed. Battens float above ground. 1 1/2" wide x 1" deep x 49". Notched every inch. High density polyethylene with carbon black UV inhibitor. Black.

Use with clip no. 1699. See page 13.

**ITEM NO. 2490 • 25 to bundle • 18 lbs.**




### FIBERGLASS BATTEN

1/2" diameter x 48". 3/16" holes every 2".

Use cotter pin type fastener #457-50 (page 12). UV resistant. White.

**ITEM NO. 3408 • 20 to bundle • 12 lbs.**

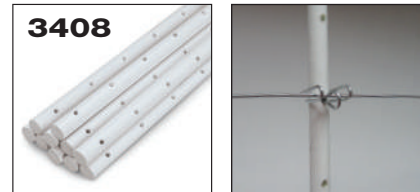


### UNDERGROUND EARTH ANCHOR

Use wherever an earth anchor is needed. 3/16" x 54" cable attached for easy installation. Drive 24 to 30 inches into the ground. Pull up to set. 1100 lb. holding power in average soil.

**ITEM NO. 2208 • 1 to counter pkg • 5 pkgs to shipper • 2.2 lbs.**

DUCKBILL DRIVING ROD. Use to drive no. 2208. 1/2" dia x 36" steel.

**ITEM NO. 2217 • 1 to shipper • 3 lbs.**

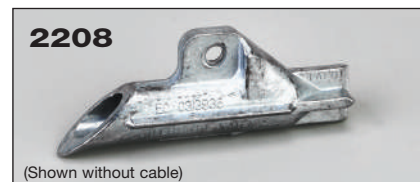


(Shown without cable)

### WIRE DEREELEDER/SPINNING JENNY

Knock-down style. Equipped with brake pad to prevent overrunning. Use to spin off coils of high tensile or ordinary fence wire. Accommodates any common weight fence wire coil. Adjusts to fit 17" to 23" I.D. coil. Packaged to display on retail counter. Ships UPS.

**ITEM NO. 2420 • 1 to counter pkg • 5 to shipper • 60 lbs.**

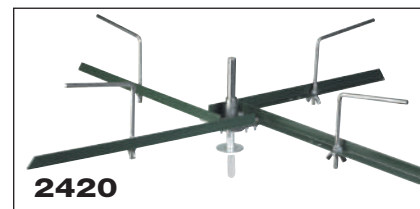


### WIRE DEREELEDER/SPINNING JENNY - PROFESSIONAL MODEL

Equipped with fully adjustable brake to prevent overrunning. Large angle iron base permits truck bed mounting. Accommodates any common weight fence wire coil. Adjusts to fit 17" to 23" I.D. coils.

Some assembly required.

**ITEM NO. 2577 • 1 to shipper • 21 lbs.**

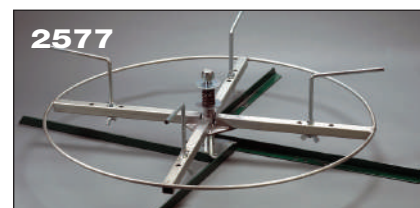

---

## HIGH TENSILE FENCE SUPPLIES

**WIRE TWISTING TOOL** Use to spin, bend, splice & dice high tensile wire. Also use to bend T Post and batten clips. 7/16" dia x 5" zinc plated steel tool. Drilled three holes. (Will not chop)  
**ITEM NO. 1707 - S • 1 to counter pkg • 10 pkgs to shipper • 3 lbs.**

**1707-S**



**WIRE CUTTER** Specially hardened jaws designed to cut 12½ ga. high tensile wire. Pocket size - 9" overall length. Imported.  
**ITEM NO. 2290 • 1 to counter pkg • 5 to shipper • 5 lbs.**

**2290**



**ROUND NOSE PLIERS** for general use, fence installation & repair. Will not cut high tensile wire. Imported.  
**ITEM NO. 2999 • Individually labeled • 5 to shipper • 6 lbs.**

**2999**



**FENCE TOOL** for general use. Corrugated hammerhead, two wire cutters & staple puller. Large 10½" overall length. Will not cut high tensile wire. Individually carded. Imported.  
**ITEM NO. 3001 • 5 to shipper • 8 lbs.**

**3001**



**CHAIN GRAB PULLER** for the professional installer. Use to stretch and splice fence wire. Smooth jaws for minimal wire marking. Imported.  
**ITEM NO. 2456 • 1 to shipper • 7 lbs.**

**2456**



**FENCE POST BRACKETS** Build 'H' braces without drilling. Use two nailing brackets per horizontal. 16 gauge galvanized steel. Individually labeled.  
SMALL. Use to attach 2" - 4" dia. horizontals to 3½" - 5" dia. posts.  
**ITEM NO. 2965 • 8 to counter pkg • 6 to shipper • 6 lbs.**  
LARGE. Use to attach 4" - 6" dia. horizontals to 5" - 8" dia. posts.  
**ITEM NO. 2966 • Bulk • 50 to shipper • 13 lbs.**

**2965-Small  
2966-Large**





# SPLICING EQUIPMENT

**DARE SLEEVES, TAPS AND TOOLS** The sleeves and taps are designed to speed and improve installation and repair of all common sizes of barb, woven and smooth fence wire. DARE SPLICING SLEEVES equal and often exceed the breaking strength of the original wire. They are the only style recommended by most manufacturers of high-tensile systems. DARE TAPS are handy when used to connect hook-up, ground-ing and jumper wires to the fence line. Trouble-free connections can be made quickly and easily. Special application tools are made of high-carbon tool steel and are provided with gauges to insure strong and dependable splices and connections.

## SPLICING SLEEVES

Use to splice 14-15½ gauge smooth wire.

**ITEM NO. DP 1-2/25 • 25 to pkg • 20 pkgs (500) to shipper • 1.6 lbs.**

**ITEM NO. DP 1-2/100 • 100 to pkg • .3 lbs.**

Use to splice 12½ gauge smooth wire.

**ITEM NO. DP 2-3/25 • 25 to pkg • 20 pkgs (500) to shipper • 2.9 lbs.**

**ITEM NO. DP 2-3/100 • 100 to pkg • .5 lbs.**

**ITEM NO. DP 2-3/500 • 500 to pkg • 3 lbs.**

Extra length splicing sleeves. Use in place of two #DP 2-3 sleeves. For 12½ ga.

**ITEM NO. XL 2-3/100 • 100 to pkg • 1.0 lb.**

Use to splice 10 & 11 ga. smooth and 14 & 15½ ga. barbed wire.

**ITEM NO. DP 3-4/10 • 10 to pkg • 20 pkgs (200) to shipper • 3.5 lbs.**

**ITEM NO. DP 3-4/100 • 100 to pkg • 1.6 lbs.**


Use to splice 9 ga. smooth, 12½ & 13½ ga. barbed wire.

**ITEM NO. DP 4-5/10 • 10 to pkg • 20 pkgs (200) to shipper • 4.7 lbs.**

**ITEM NO. DP 4-5/100 • 100 to pkg • 2.2 lbs.**

Use to splice 7 ga. smooth wire.

**ITEM NO. DP 5-6/100\* • 100 to pkg • 5 lbs.**

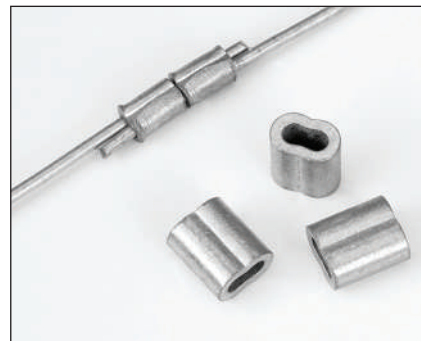

## FENCE TAPS

Connect 12½-14½ ga. smooth wire & 15½ ga. barbed wire to 12½-16 ga. smooth hook-up wire.

**ITEM NO. DPT 3-4/10 • 10 to pkg • 20 pkgs (200) to shipper • 1.2 lbs.**

**ITEM NO. DPT 3-4/100 • 100 to pkg • .5 lb.**



## CRIMPING TOOLS FOR SLEEVES & TAPS

Four slot hand tool to press sleeves and taps above, except DP 5-6.

Our best selling tool. Imported. 21" overall.

**ITEM NO. 2154 • 1 to pkg • 5 to shipper • 32 lbs.**

Two slot hand tool to press sleeve DP 2-3 and fence tap DPT 3-4 only. 12" overall.

Small compact size makes your fencing chore a snap.

**ITEM NO. 2132 • 1 to pkg • 5 to shipper • 15 lbs**



**DARELINK<sup>+</sup>** In-line style wire splicer. Use to splice high tensile and other fence wires. Embossed jaws grip firmly. No tools required.

Use to splice 12½ / 16 ga (.099" / .062") wire - best for high tensile.

**ITEM NO. 2081 (5057) • 100 to shipper • 3 lbs.**

Use to splice 11½ / 12¼ ga (.113" / .102") wire

**ITEM NO. 2108 (5059) • 100 to shipper • 4 lbs.**

Use to splice 10 / 11 ga (.135" / .120") wire

**ITEM NO. 2114 (5063) • 100 to shipper • 7 lbs.**

Use to splice Cameo, Bayco and 8-9 ga (.163" / .148") wire

**ITEM NO. 2545 (5065) • 100 to shipper • 7 lbs.**

**2081, 2108, 2114, 2545**



**DAREVISE<sup>+</sup>** A 'no knot' method to secure high tensile fence wire to end posts. Embossed jaws grip firmly. Pull tested to meet or exceed breaking strength of high tensile fence wire.

Use for 12½ to 16 ga (.099"- .062") wire. Best for high tensile.

**ITEM NO. 2080 (5056) • 100 to shipper • 3 lbs.**

Use for 11½ to 12¼ ga (.113" / .102") wire

**ITEM NO. 2112 (5058) • 100 to shipper • 4 lbs.**

Use for 10 to 11 ga (.135" / .120") wire

**ITEM NO. 2113 • (5062) • 100 to shipper • 4 lbs.**

Use for Cameo, Bayco and 8-9 ga (.163" / .148") wire

**ITEM NO. 2544 (5064) • 100 to shipper • 4 lbs.**

**2080, 2112, 2113, 2544**



**SPLIT BOLT/LINE TAP** Die cast zinc split bolt and washer with galvanized steel nut provide trouble-free connections. Use to connect hook-up or grounding wire to fence. Not a splice.

**ITEM NO. 2083 • 10 to pkg • 10 pkgs (100) to shipper • 8 lbs.**

**DARE LINE CLAMP/TAP** Split bolt style. 3-pack.

**ITEM NO. 2083-3 • 3 to pkg • 10 pkgs (30) to shipper • 2.5 lbs.**



**2083  
2083-3**

**KWIK SPLICE™** Quick, easy and economical splices for fence wire, smooth & barbed. Splicing tool #3075 required.

Stainless steel splice for 12½-15½ ga (.099"- .067") high tensile smooth & woven wire.

**ITEM NO. 3070 KWIK SPLICE SLEEVE • 50 to pkg • 6 pkgs (300) to shipper • 5 lbs.**

Galvanized steel splice for 12½-14 ga barbed & 9 ga (.148") smooth wire.

**ITEM NO. 3071 KWIK SPLICE SLEEVE • 50 to pkg • 6 pkgs (300) to shipper • 4 lbs.**

Galvanized steel wire for 10-16 ga (.135"- .062") smooth & woven wire.

**ITEM NO. 3072 KWIK SPLICE SLEEVE • 50 to pkg • 6 pkgs (300) to shipper • 4 lbs.**

Galvanized steel splice for 12½-15½ (.099"- .067") smooth & woven high tensile wire.

**ITEM NO. 3073 KWIK SPLICE SLEEVE • 50 to pkg • 6 pkgs (300) to shipper • 4 lbs.**

Galvanized steel wire for 15½ ga high tensile barbed wire.

**ITEM NO. 3080 KWIK SPLICE SLEEVE • 50 to pkg • 6 pkgs (300) to shipper • 5 lbs.**




**3070 3071 3072 3073 3080**

**KWIK SPLICE™ CRIMPING TOOL** Use to attach/crimp KWIK SPLICE™.

Cuts high tensile wire. 18" overall.

**ITEM NO. 3075 KWIK SPLICE TOOL • 1 to carton/shipper • 6.4 lbs.**

**3075**

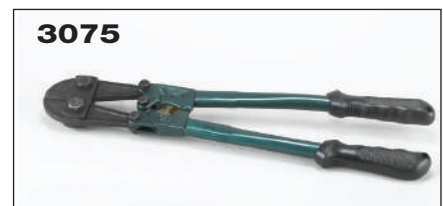




Gripple Plus Wire Joiners and Tensioners range for use in fencing, trellising, and greenhouse applications.

- Suitable for all types and sizes of wire (mid or high tensile steel, and polymer wire too)
- Use on plain, barbed, or electric wire and on all types of stock fence • Adjustable and re-tensionable
- Ideal for use at installation and for fast and economic repairs • Four times faster than traditional methods

The fundamental principle of a Gripple Plus device is simple: there are two channels, each with an independent locking mechanism. The “lock” is created by the roller, which is free to move in one direction only and grips the wire as it moves back. This concept allows tension to be applied throughout the life of the wire.

Gripple Plus Range						
WIRE TYPE	ITEM #	PRODUCT	WIRE DIAMETER	WIRE RANGE (gauge)	MAX. LOAD	PACKAGING & WEIGHT
Plain wire / Field Fence (Pre Fab) / Electric Fence	2881	Gripple Plus SMALL	1.40 - 2.20	17 - 13	300kg / 600 lb	10/pkg 15 pkgs/ctn 11 lbs/ctn
	2882	Gripple Plus MEDIUM	2.00 - 3.25	14 - 10 <i>including H.T. 12-1/2 smooth</i>	400kg / 880 lb.	20/pkg 10 pkgs/ctn 12.5 lbs/ctn
	2883	Gripple Plus LARGE	3.25 - 4.20	10 - 7 1/2 <i>best for monofilament nylon horse wire</i>	600kg / 1320 lb	10/pkg 12 pkgs/ctn 12.6 lbs/ctn
Barbed Gripple						
High tensile barbed wire 15 1/2 ga	2882	Gripple Plus MEDIUM <i>(see above specs for 14-10 ga smooth)</i>	1.60 - 1.70	15 1/2 - 15 ga H.T. barbed wire	4000 kg / 800 lbs	20/pkg 10 pkgs/ctn 12.5 lbs/ctn
Mild Steel / Barbed Wire	2886	Barbed Wire Gripple	2.00 - 2.50	smooth 7 - 8 & barbed 14 - 12 1/2	150 kg / 330 lbs	10/pkg 20 pkgs/ctn 13 lbs/ctn
Gripple Tool						
Installation, maintenance & repair tool	2885	Gripple Tensioning Tool	Tool used to tension wires once Gripples have been installed. Allows each line wire to be tensioned and re-tensioned individually, optimizing the life of your fence. The torque tensioning tool is lightweight and compact. Ideal for hobby farming. 16" overall • 1 to ctn/shipper • 3.2 lbs.			



**MEDIUM GRIPPLE® STARTER PAK** Contains 50 no. 2882 medium Gripples® and 1 no. 2885 Gripple Tensioning Tool.

ITEM NO. 2430 • 50 #2882 & 1 #2885 to Starter pk • 1 Starter pk to shipper • 8 lbs.

**MEDIUM GRIPPLE® PROMO PAK** Contains 250 no. 2882 medium Gripples® and 1 no. 2885 Gripple Tensioning Tool.

ITEM NO. 2431 • 250 #2882 & 1 #2885 to Promo pk • 1 Promo pk to shipper • 19 lbs.




## GRIPPLE® H-POST KIT

The fastest, simplest, and safest method to build an H-Brace Anchoring System.

- Carries loads up to 2,750 pounds
- No bending, twisting, or tensioning individual stay wires
- Can be tensioned and re-tensioned

Consists of one large HANG FAST GRIPPLE® and 1 1/64 (.165") diameter x 16' 6" long stainless steel cable. Gripple Tensioning Tool required (not supplied)

ITEM NO. 2436 • 36 assemblies (1 per pack) per shipper • 31 lbs.

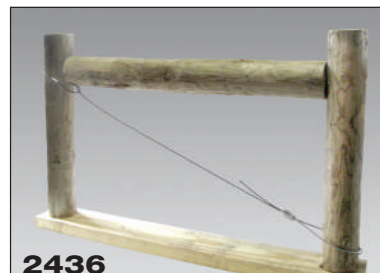



# ELECTRIC FENCE TESTERS & MISC. PARTS

## ELECTRIC FENCE BEEPER

Simple and easy to use for checking your electric fence. Emits a high pitch beep when held near a live wire. Works on any fence energizer brand. Conveniently attaches to your key ring. Merchandised with the versatile mounting strip holding 8 pieces.

**ITEM NO. EFB-1 • 1 per card • 8 per strip • 2 lbs.**



## DIGITAL VOLTMETER

for electric fence. Reads up to 9,999 volts. Very accurate and reliable. Powered by 9-volt battery supplied. Imported.

**ITEM NO. 2411 • 1 to pkg • 5 to shipper • 4 lbs.**



## MULTI-LITE

Graduated electric fence tester shows how many volts are on the charger or on the fence line. Voltages are plainly marked on the case from 600 volts to 7,000 volts.

**ITEM NO. 3360 • 1 per card • 4 to shipper • 1.5 lbs.**



## FIVE-O-LITE TESTER

Graduated electric fence tester actually shows how many volts are on the charger or on the fence line. Voltages are plainly marked on the case from 600 volts to 5,000 volts. Individually carded.

**ITEM NO. 1360 • 1 per card • 5 testers to package • 10 testers to shipper • wt 3 lbs.**



## SINGLE LAMP TESTER

Essential to make spot checks in the field. Tells whether fence is working and helps locate faults such as 'opens', 'shorts', and partial grounds. Lamp protected by resistor.

**ITEM NO. 460 • 1 to pkg • 20 to shipper • 2 lbs.**



## FENCE GUARDIAN / NIGHT LIGHT

Bright LED lights with 2 high visibility lenses. Blinks at a constant rate. Slows if excess load occurs. Below 2,000 volts, the flash stops. Uses very little power so your fence won't be affected. Can be seen up to 1,000 feet plus.

**ITEM NO. 2221 • 1 to pkg • 4 to shipper • 3 lbs.**



## WEED CHOPPERS

Three and four prong style to fit weed chopper type of electric fence controllers. Specify 3 or 4 prongs. Carded.

**ITEM NO. • 482-3 (3 prong) • 1 to pkg • 10 to ctn. • 1 lb.**

**ITEM NO. • 483-4 (4 prong) • 1 to pkg • 10 to ctn. • 1 lb.**

FUSES to fit most types of electric fence controllers. Dimensions 1/4" x 1 1/4". AGC - 1 amp. Check manufacturer's specifications.

**ITEM NO. 485-1 • 5 to blister card • 20 cds (100) to shipper • 1 lb.**

1 AMP 250-V GDB. Special fast-blow fuse for Dare Energizers.

**ITEM NO. 3151 • 5 per pkg • 1 lb.**



**482-3  
483-4**



**485-1**

# INSTALLATION ACCESSORIES

**LIGHTNING CHOKE** New design to reduce the impact of lightning traveling the fence line to the controller. Complete with instructions. (Mounting screws not included).  
**ITEM NO. 2454 • 1 to pkg. • 5 pkgs to shipper • 7 lbs.**



**LIGHTNING ARRESTOR KIT** Heavy duty, farm tested and proven, electric fence lightning arrestor. Complete with wire clamp, ground rod clamp and mounting screws. Imported.  
**ITEM NO. LA-112 • 1 to blister pkg • 10 pkgs to shipper • 6 lbs.**



**SURGE PROTECTOR** A must for every 110-V fence controller. Protect electronic equipment from power surges. Light 'On' working—Light 'off' tripped surge, reset by unplugging and resume normal operation. Rating 15A-125 VAC-60Hz-1875 W-500 Volts type 3 SPD. Meets UL and CSA standards.  
**ITEM NO. 2219 • 1 per card • 5 cards per shipper • 1 lb.**



**UNDERGROUND & HOOK-UP WIRE** Two layers of polyethylene over class III galvanized steel wire. Perfect for underground use and to connect fence charger to fence. Designed for direct burial. Withstands 20,000 volts.

## 14 GA GALV. CORE WIRE

**ITEM NO. 2488 • 50 ft per spool • 5 spls per shipper • 10 lbs.**  
**ITEM NO. 2212 • 165 ft per spool • 1 spl per shipper • 6 lbs.**  
**ITEM NO. 2212-250 • 250 ft per spool • 1 spl per shipper • 10 lbs.**  
**ITEM NO. 2212-500 • 500 ft per spool • 1 spl per shipper • 18 lbs.**

## 12½ GA GALV. CORE WIRE

**ITEM NO. 2277 • 165 ft per spool • 1 spl per shipper • 8 lbs.**  
**ITEM NO. 2277-250 • 250 ft per spool • 1 spl per shipper • 11 lbs.**  
**ITEM NO. 2277-500 • 500 ft per spool • 1 spl per shipper • 23 lbs.**



**2488, 2212, 2212-250, 2212-500  
 2277, 2277-250, 2277-500**

**INSULATOR TUBING** Has many uses. Black polyethylene tubing accommodates up to 12½ gauge fence wire. Use under driveways, gates, to insulate one wire from another. Withstands 20,000 volts.  
**ITEM NO. 2453 • 50 ft • 10 coils to shipper • 11 lbs.**



**ELECTRIC FENCE SWITCH** for outdoor use on electric fence. Install several in each electric fence for convenience and safety. Switch off areas to allow repairs. Use to change polarity of fence wires. Schematic included.  
**ITEM NO. 2211 • single throw switch • 10 to shipper • 5 lbs.**  
**ITEM NO. 2199 • double throw switch • 10 to shipper • 6 lbs.**



**JUMPER LEADS** for electric fence. Use with smooth steel wire, polywire, electric rope and 1/2" tape. Quick solid connections for temporary fencing. Use between 'hot' wires, ground wires or energizer to fence. 30 inches long.

**ITEM NO. 3556 • 1 to pkg • 10 pkgs to shipper • 3 lbs.**



**ENERGY LIMITER** Restricts the flow of current to specific sections of fence that may be shorted by rising water, snow, or weed growth. Prevents shorted wire from grounding entire fence. Also known as 'FLOOD GATE CONTROLLER'.

**ITEM NO. 2209 • 1 to pkg • 5 pkg to shipper • 2 lbs.**



**GROUND RODS & GROUND CLAMPS** The most important part for an effective electric fence installation. Use one to three (or more) ground rods as suggested by the fence controller manufacturer.

DIE CAST ZINC GROUND CLAMP - Blister packed

**ITEM NO. 2303 • 1 to pkg • 10 to shipper • 3 lbs.**

HOT DIPPED GALVANIZED STEEL GROUND ROD 5/8" DIA X 6'

**ITEM NO. 2301-1 • 10 to bundle • 58 lbs.**

HOT DIPPED GALVANIZED STEEL GROUND ROD 5/8" DIA X 8'

**ITEM NO. 2304 • 10 to bundle • 82 lbs.**

COPPER CLAD STEEL GROUND ROD 5/8" DIA X 8'

**ITEM NO. 2457 • 10 to bundle • 85 lbs.**

COPPER GROUND ROD 1/2" DIA X 8'

**ITEM NO. 3358 • 10 to bundle • 54 lbs.**



**2303, 2301-1, 3358  
2304, 2457**

**ELECTRIC FENCE WARNING SIGN** LARGE, 5 1/2" x 9". Easily attaches to wire, Equi Rope and Poly Tape. Black on yellow. Individually labeled.

**ITEM NO. 3400 • 1 to pkg • 10 pkgs (60) to shipper • 1.8 lbs.**

Printed on both sides. 4" x 8" with bold black letters on bright yellow laminated vinyl. Two holes to anchor on post or hang from wire.

**ITEM NO. 1614-3 • 3 to pkg • 20 pkgs (60) to shipper • 3 lbs.**



## PANS & PAILS

**PAN** Shoats, goats, hogs, dogs...soaking your feet and travel kitty litter pans...there are many uses for these handy pans. 1/8" side walls makes them longer lasting and resistant to damage, destruction, and weather. Black smooth finish. Easily cleaned. Resilient polyethylene.

5-quart utility pan (4.6 liters). Top diameter: 11 5/8", height: 4 1/8", bottom diameter: 9 1/2". 14 ozs. each.

**ITEM NO. 1566 • 5 qt. pan • packed 12 to shipper • 11lbs.**

12-quart utility basin (11.2 litres). Large enough to use when draining oil. Top diameter: 17", height: 4 1/4", bottom diameter: 13 1/2", 27 ounces.

**ITEM NO. 1604 • 12 qt. pan • packed 12 to shipper • 20 lbs.**



DARE pans and pails are hefty and hardy with thicker sidewalls. When filled to capacity they hold their shapes and pour without wobble or flex. Capacities, as rated, are irrevocably guaranteed. Quality materials all the way.

**PAIL** 10-quart (9.64 litres) best quality polyethylene.

Colors: Black, White, Red, Yellow, Green, Burgundy, and Blue.

**ITEM NO. 1609 • 10 qt. pail • packed 12 to shipper • 15 lbs. • specify color**





# FARM TANK FLOAT VALVES

Universal farm tank watering valves convert tanks or barrels into **automatic** stock waterers. Requires little attention and keep open tanks filled with freshwater. Adjustable to several heights, they are easily installed by hanging plated brackets over edge of tank. Brackets for Poly tanks included as well. Designed to operate from gravity flow or pressure up to 70 PSI. Installation instructions with each valve.

## ALUMINUM HOUSED FLOAT VALVE

Model 1780. Precision die cast outer housing. Encased styrofoam float. Two sets of brackets—fits poly tanks and steel tanks. 300 GPH.  
**ITEM NO. 1780 • 1 to pkg • 6 to shipper • 10.5 lbs.**



**1780**



**798**

## PLASTIC HOUSED FLOAT VALVE— ECONOMY MODEL

Model 798. Low priced, very efficient and reliable. Outer housing molded of high impact resin. Withstands weather and abuse. Encased styrofoam float. Two sets of brackets - fits poly tanks and steel tanks. 300 GPH.  
**ITEM NO. 798 • 1 to pkg • 6 to shipper • 8.5 lbs.**

Complies with basic anti-siphoning regulations. Available in die-cast aluminum or high impact plastic housing with replaceable non-siphoning unit.

## ALUMINUM HOUSED NON-SIPHONING FLOAT VALVE

Precision die-cast aluminum float housing, Encased styrofoam float and molded non-siphoning unit. 300GPH.  
**ITEM NO. 1800 • 1 to pkg • 6 to shipper • 11 lbs.**



**1800**



**2175**

## PLASTIC HOUSED NON-SIPHONING FLOAT VALVE

Economy Model. Float housing molded of high impact ABS plastic. Has same float and non-siphoning unit as valve listed above. Withstands abuse and weather. Will not corrode. 300 GPH.  
**ITEM NO. 2175 • 1 to pkg • 6 to shipper • 9 lbs.**

## REPLACEMENT PARTS

Interior Float Assembly. Neoprene seal. Cotter pin.  
**ITEM NO. 1041 • fits 798, 1780, 2175 & 1800 • 6 to shipper • 2 lbs.**  
Neoprene seal—fits on top of float assembly.  
**ITEM NO. 1770 • No standard shipper**

Replaceable Orifices

**ITEM NO. 1394 • Standard volume - fits 798 & 1780 • no standard shipper**  
**ITEM NO. 1252 • Low volume - fits 798 & 1780 • no standard shipper**  
**ITEM NO. 1482 • Standard volume - fits 1800 & 2175 • no standard shipper**

Non-siphoning Tubular Vent Assembly. Complete tube, valve stem, valve and replacement orifice.

**ITEM NO. 1533 • Individually pkd • 6 to shipper • 2 lbs.**



**1770**

**1041**



**1533**



**1394, 1252, 1482**

# PLANOGRAMS & MERCHANDISING

Dare Products offers a variety of customized planograms for every size and type of store. Complete assortments for electric fencing, high tensile, equine and more are available. Call 1-800-922-3273 or email [service@dareproducts.com](mailto:service@dareproducts.com) for more information. A complete listing of marketing materials and additional literature is also available on our website [www.dareproducts.com](http://www.dareproducts.com).



Example of 12' Electric Fencing Center




4' Equine Center



Dare 4' Shelf Strips




Fencing header signs for all categories including equine and high tensile. Two styles: Lifestyle (above) or Product (below).

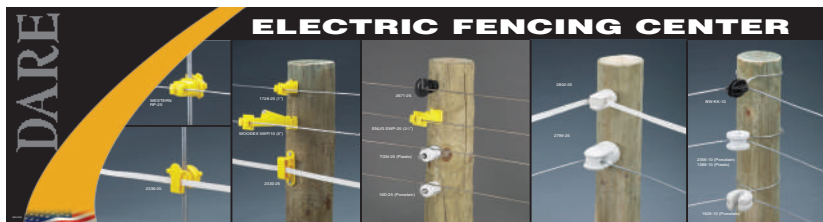

4' High Tensile Center




Retail display boxes—  
1 and 2 foot



Box labels and bin tags  
for most items



How To booklets  
• Fencing Made Easy  
• Equine Fencing  
• High Tensile Fencing  
• Problem Solver

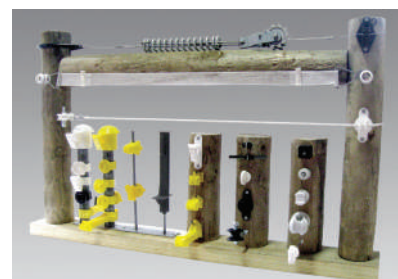

In-store displays for all fencing  
categories (combination shown)



**CALL TOLL FREE: 1-800-922-DARE (3273)**  
**FAX: (269) 965-3261 E-mail: [service@dareproducts.com](mailto:service@dareproducts.com)**  
***No voice mail! We welcome all telephone calls.***

**DARE** **PRODUCTS, INC.**

860 BETTERLY ROAD / SPRINGFIELD, MI 49037 USA / PHONE (269) 965-2307

[www.dareproducts.com](http://www.dareproducts.com)