


Technical Product Specifications

Dryer Vent Kit - Supurr-Vent[®] Louvered Vent Hood with pipe & collar, Supurr-Flex[®] UL Listed Clothes Dryer Transition Duct, (2) clamps

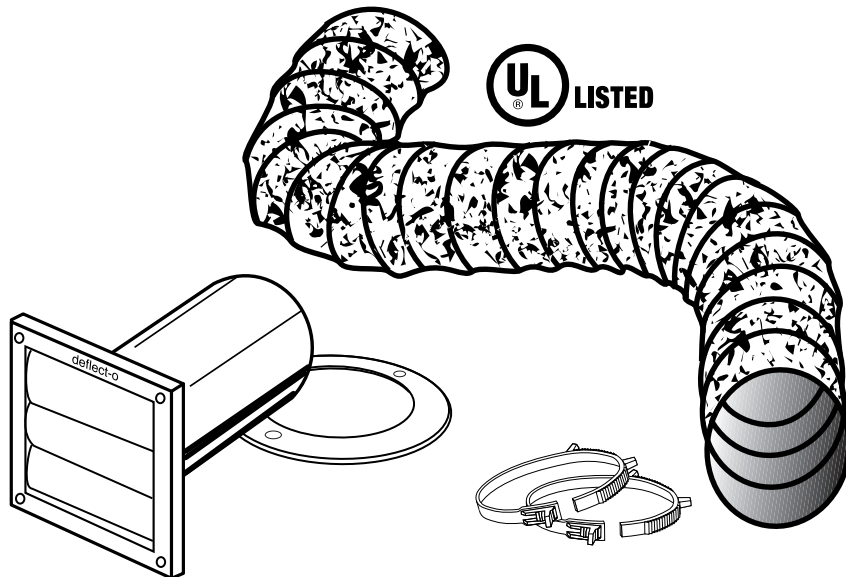

SK5WF, SK8WF, SK8BF

Model No.	Description	Color
SK5WF	5 ft. Dryer Vent Kit	White
SK8WF	8 ft. Dryer Vent Kit	White
SK8BF	8 ft. Dryer Vent Kit	Brown

Performance Data

for plastic molded louvered vent hoods

Hood

- Calcium filled Polypropylene
- Melting point: 325° F approx.
- UV Inhibitor added

Pipe

- Aluminum

Collar

- styrene

Clamps

- 4" dia., polypropylene plastic

Duct



- UL Listed Clothes Dryer Transition Duct

Operating Temperature Range

- 265°F

General Information

- fire resistant, flexible, easy to install
- UL Listed Supurr-Flex[®] Duct
- quick, easy installation kit
- duct clamps included
- durable, weather resistant hood
- Supurr-Vent[®] hood louvers operate quietly for maximum exhaust air flow and seals when not in operation to help prevent back drafts

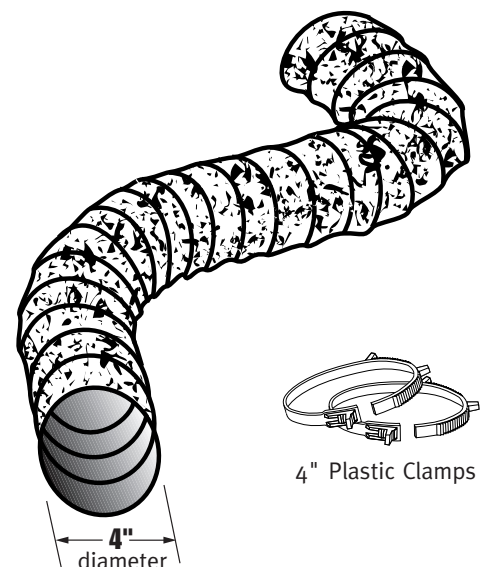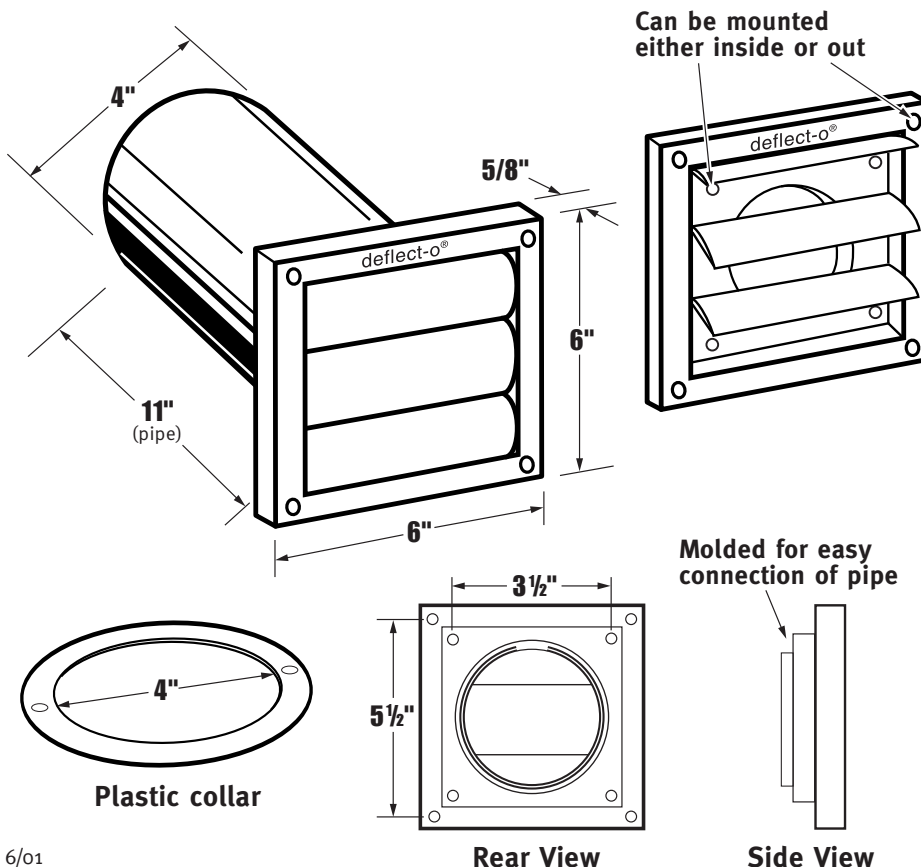

4" Plastic Clamps

Supurr-Flex[®] UL LISTED
Clothes Dryer
Transition Duct

6/01

© 2001

DEFLECTO CORPORATION • P.O. Box 50057 • Indianapolis, IN 46250 • www.deflecto.com
DEFLECTO/Canada Ltd. • St. Catharines, Ontario • Canada L2M 3Y2

Deflecto's policy is one of continual product improvement in design and manufacturing wherever possible, therefore all specifications and designs are subject to change without notice and without incurring obligations.

SK5WFtps