



Technical Data Sheet



Eclectic Products LLC
Manufacturing Facility
101 Dixie Mae Drive
Pineville, Louisiana
eclecticproducts.com
800.349.4667

ISO 9001:2015
Compliant
Quality Management
Systems

Administration Office
Eugene, Oregon
eclecticproducts.com
800.693.4667

UNITED STATES



Net Wt 6 oz
Net Wt 23 oz
Net Wt 45 oz (not shown)
Gallon

FAMOWOOD

ORIGINAL WOOD FILLER

PRODUCT DESCRIPTION

First choice of woodworking professionals for more than 70 years! Whether you are masking small or large defects, FAMOWOOD® can be used inside or outside and takes stains and paints evenly, making it ideal for any custom project. FAMOWOOD® spreads evenly into crack and holes without shrinking, crumbling or cracking. In addition, FAMOWOOD® requires very little sanding to achieve a desired finished look.

WHERE TO USE / APPLICATIONS

Use to fill cracks or holes in wood. Spread evenly into cracks or hole, let dry and sand smooth to surface repaired. Paint or stain to match wood surface.

FEATURES AND BENEFITS

ACTS LIKE REAL WOOD – saw, drill, sand, plane and nail

INTERIOR/EXTERIOR – use indoors or outdoors

WON'T CRACK OR SHRINK – spread evenly into cracks and holes without crumbling or cracking

SUPERIOR STRENGTH – hard finish with little or no shrinkage

QUALITY FINISH – takes stains and paints evenly with minimal sanding




TECHNICAL INFORMATION

PHYSICAL PROPERTIES

| | |
|--------------------------|---|
| Colors (16): | Alder, Ash, Birch, Cedar, Cherry, Fir, Mahogany, Maple, Natural/Tupelo, Oak/Teak, Pine, Red Oak, Walnut, White, White Pine, White Glaze |
| VOC: | 255 gram/liter |
| Solvent: | Acetone, Methyl Ethyl Ketone and Petroleum Distillate |
| Density: | 13.9 lbs/gal |
| Solids: | 79% +/- 1.0% (by weight) |
| Vehicle: | Nitrocellulose Lacquer |
| Application Temperature: | 40 to 80 °F (4 to 27 °C) |
| Service Temperature: | 10 to 150 °F (-12 to 66 °C) |
| Storage Temperature: | Store between 45 and 85 °F (7 and 29 °C) |
| Freeze/thaw stability: | Yes |
| Shelf life: | 1 year |

TEST RESULTS: FAMOWOOD vs. COMPETITION

APPLIED FORCE NEEDED TO CAUSE WOOD FILLER POP OUTS

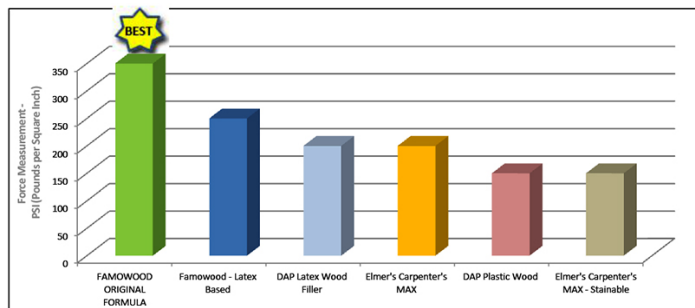

BETTER ADHESION = NO POP OUTS!


Psi (pounds per square inch). ASTM D 4541-93. Average adhesion strength in a 1/4" deep x 2" diameter defect (Average of 5 samples).



Technical Data Sheet

FAMOWOOD ORIGINAL WOOD FILLER

PERCENT SHRINKAGE

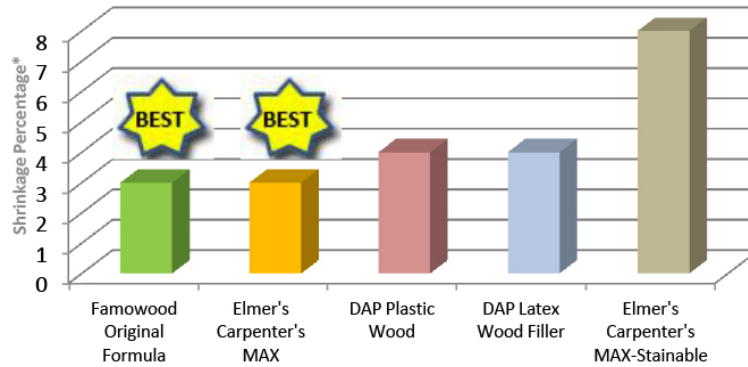

*Volume was measured on a lab scale using the following formula:
 $(Initial\ Volume - Final\ Volume) / Initial\ volume \times 100 = Percent\ Shrinkage$

STAINABILITY

| Wood Filler | Stain Quality |
|-------------------------------------|----------------|
| FAMOWOOD ORIGINAL FORMULA | Stains Well |
| FAMOWOOD LATEX BASED | Stains Well |
| DAP Plastic Wood | Stains Well |
| Elmer's Carpenter's MAX – Stainable | Stains Well |
| DAP Latex Wood Filler | Resists Stains |
| Elmer's Carpenter's MAX | Resists Stains |

DIRECTIONS and APPLICATION NOTES

Always test a small area before full use.

- Step 1 Surface must be clean and dry.
- Step 2 Allow contents to dry thoroughly before sanding (approx. 30 minutes).
- Step 3 Accepts most water-based and oil-based stains.
- NOTE:** TEST STAIN COMPATABILITY BEFORE USE.
- Step 4 For deep repairs: allow 1st layer to dry before applying subsequent layers.
- Step 5 Replace lid tightly.
- Step 6 Use FAMOWOOD Wood Filler Thinner to restore to original consistency or for clean-up.



FAMOWOOD
ORIGINAL WOOD FILLER

HEALTH and SAFETY

This product contains a chemical known to the State of California to cause cancer. Avoid inhalation of dust from sanding. If ventilation is inadequate while sanding, use a respirator to protect against dust inhalation. Keep away from heat, spark and flame. Use with adequate ventilation. Avoid breathing vapors. Open windows and doors during application and curing. Avoid contact with eyes and skin.

Before working with this product, read and become familiar with information concerning hazards, proper use and handling. SDS's are available online at the following links:

USA-

English (ALL Colors except White Glaze): <http://eclecticproducts.com/downloads/sds-famowood-original-wood-filler-english.pdf>

English (White Glaze): <http://eclecticproducts.com/downloads/sds-famowood-original-wood-filler-white-glaze-english.pdf>

Spanish (ALL Colors except White Glaze): <http://eclecticproducts.com/downloads/sds-famowood-original-wood-filler-spanish.pdf>

Spanish (White Glaze): <http://eclecticproducts.com/downloads/sds-famowood-original-wood-filler-white-glaze-spanish.pdf>

To request a hard copy of the SDS, please send an e-mail to sds@eclecticproducts.com.

LIMITED WARRANTY

The product is warranted against any defect in materials or workmanship under normal use for a period of 180 days after the date of purchase. The product is also warranted under any implied warranties provided under applicable state law, including, without limitation, the implied warranty of merchantability and the implied warranty of fitness for a particular purpose, for a period of 180 days after the date of purchase. This warranty covers only the original buyer of the product. For warranty service, the buyer should contact the store where the product was purchased, or write Eclectic Products, Inc., P.O. Box 4450, Pineville LA 71361 or call 800.767.4667. This warranty gives you specific legal rights, and you also have other rights, which vary from state to state.