

# 4' Plug In Shop Light

# LED

## 35 Watt 3200lms Shop Light Specifications



The ETi 35 watt 3200 lumen Plug In LED shop light fixture offers exceptional performance for precision lighting applications, while reducing energy and maintenance cost when compared with conventional light sources. Lasting over 5 times longer, these shop light fixtures are high quality replacements for conventional fluorescent equivalents in 4000K. They are UL listed for use in damp and dry locations. Linkable by cord included. Warranty 5 years. Suitable for installations from - 4° F to 95° F.


### KEY FEATURES & BENEFITS

- 35 Watts
- 3200 lumens
- Linkable
- 84 CRI, 4000K
- UL-Damp and Dry Locations
- Replaces most applications using 32w Fluorescent lamps
- Rated life 50,000 hours



This light source meets restrictions on hazardous substances.

### FIXTURE DIMENSIONS



SKU# 54103162

Dimension A = 48"

Dimension B = 5.3"

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. For FCC Part 15 user information, please see [www.etiled.us/fcc15b](http://www.etiled.us/fcc15b)

### APPLICATION INFORMATION

Designed to be used anywhere a traditional fluorescent fixture is used. Typically used in work shops, garages and utility rooms. Other applications apply in commercial, office, retail, restaurants, schools, hospitals and hotel/motel locations.



855-384-7754 [www.etissl.com](http://www.etissl.com)

# 4' Plug In Shop Light

# LED

## SPECIFICATION DATA

Project \_\_\_\_\_

Item Number \_\_\_\_\_


Prepared by \_\_\_\_\_ Date \_\_\_\_\_

## ORDERING INFORMATION

Item Number	Description	Wattage	Input Voltage (VAC)	Average Rated Life <sup>1</sup>	Typical Lumens <sup>2</sup>	CCT <sup>3</sup>	CRI <sup>4</sup>	Power Factor	R9	Duv	CBCP	Beam	Operating Frequency
54103162	LED SHOP LIGHT	35	120	50,000	3200	4000K	84	>.95	46	0.0004	279	120	60Hz
<sup>1</sup> Hours lifetime with 70% lumen maintenance													
<sup>2</sup> Thermally stable typical lumens (±10%)													
<sup>3</sup> Thermally stable CCT (±10%)													
<sup>4</sup> Color rendering index/Ra													

## SHIPPING INFORMATION

Item Number	Item UPC	Item Dimensions (H x L x W)	Item Weight (lbs)	Inner Pack Qty	Inner Carton Bar Code	Inner Carton Dimensions (H x L x W)	Inner Pack Weight (lbs)	Master Pack Qty	Master Carton Bar Code	Master Dimensions (H x L x W)	Master Pack Weight (lbs)
54103162	836607009319	2.8" x 50" x 6.8"	5.2	N/A	N/A	N/A	N/A	4	50836607009314	6.34" x 50.7" x 14.4"	25

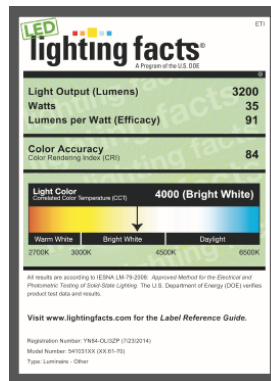

### ADA Compliant

Meets American with Disabilities Act standard extension requirements

**The Americas Headquarters**  
**720 Corporate Woods Parkway**  
**Vernon Hills, IL 60061**

855-384-7754 [www.etissl.com](http://www.etissl.com)