

Recessed Can Retrofit Kit

LED
53181101

10 Watt, 2700K 4" Downlight Recessed Can Specifications




The ETi LED 10 Watt 625 lumen 4" Recessed Can Retrofit Kit offers exceptional performance for precision lighting applications, while reducing energy and maintenance cost when compared with conventional light sources. Fits standard 4" recessed cans with friction clips and is IC rated for direct installation. They are UL listed for use in damp and dry locations and are RoHS compliant with no lead or mercury. Warranty period 5 years or 60 months. Suitable for installations from – 4° F to 104° F.

KEY FEATURES & BENEFITS

- 10 Watt High Power
- 625 Lumens
- Dimmable
- 90 CRI, 2700K Warm White
- IC rated, Title 24
- UL - Damp Location
- Rated Lifetime: 50,000 hours

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. For FCC Part 15 user information, please see www.etiled.us

LAMP DIMENSIONS



SKU# 53181101

Dimension A = 4.92"

Dimension B = 2.56"



APPLICATION INFORMATION

ETi SSL offers an expansive line of energy efficient LED recessed can kits. These kits are approved for most wiring and ceiling types. Typical applications include; indoor recessed can, high hat in residential, office, retail, restaurant, school, hospital and hotel / motel locations.

ETi SOLID STATE™
LIGHTING
INC.

855-384-7754 www.etissl.com

10 Watt 625lms 4" Recessed Can Retrofit Kit

LED

53181101

SPECIFICATION DATA

Project _____

ItemNumber _____

Prepared by _____ Date _____

ORDERING INFORMATION

Item Number	Description	Wattage	Base Type	Input Voltage (VAC)	Average Rated Life ¹	Typical Lumens ²	CCT ³	R9	Duv	CRI ⁴	CBCP	Beam	Power Factor	Operating Frequency
53181101	4" Recessed Can Kit, DIM	10	Spring clip with E26 adapter	120	50,000	625	2700K	41	+0.00135	90.2	665	91.6	>0.97	60Hz

¹ Hours lifetime with 70% lumen maintenance


² Thermally stable typical lumens (±10%)

³ Thermally stable CCT (±10%)

⁴ Color rendering index/Ra

SHIPPING INFORMATION

Item Number	Item UPC	Item Dimensions (H x L x W)	Item Weight (lbs)	Inner Pack Qty	Inner Carton Bar Code	Inner Carton Dimensions (H x L X W)	Inner Pack Weight (lbs)	Master Pack Qty	Master Carton Bar Code	Master Dimensions (H x L X W)	Master Pack Weight (lbs)
53181101	8494890 03153	2.6" x 4.9" x 4.9"	0.39	1	8494890 03153	6.5" x 5.4" x 6.3"	0.69	4	50849489 003158	6.9"x15.2"x6.0"	3.2

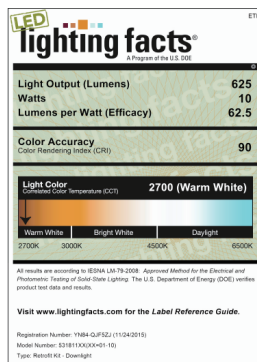

The Americas Headquarters
720 Corporate Woods PKWY
Vernon Hills, IL 60061

855-384-7754 www.etissl.com