



2' x 2' Premium Flat Panel

4250 lm | 120-277VAC | Model 54320161 | Part FPI-22-42-850-MV-D

- > Energy Saving 42.5 Watt Integrated LED
- > Cool White 5000K CCT
- > Lasts 45 years* or 50,000 Hours Continuous Use
- > Maintenance Free — No Bulb Replacements
- > 5 Year Limited Warranty




SPECIFICATIONS

Model	54320161
Part	FPI-22-42-850-MV-D
Description	2' X 2' Premium Flat Panel
Input Voltage (VAC)	120-277
Wattage	42.5
Dimmability	0-10V
Average Rated Life ¹	50,000 hours
Typical Lumens ²	4250
CCT ³	5000K
Location Rating	UL Damp
CRI ⁴	≥80
Beam Angle	120°
Operating Temperature	Min -4°F (-20° C), Max 113°F (45° C)
Power Factor	>0.95
R9	23
DUV	0.0002
CBCP	N/A
Operating Frequency (Hz)	60

- 1 Hours lifetime with 70% lumen maintenance
2 Thermally stable typical lumens (±10%)
3 Thermally stable CCT (±10%)
4 Color rendering index/Ra

TO ORDER:
www.ETiSSL.com
Call: 1.855.ETi.SSLI
1.855.384.7754

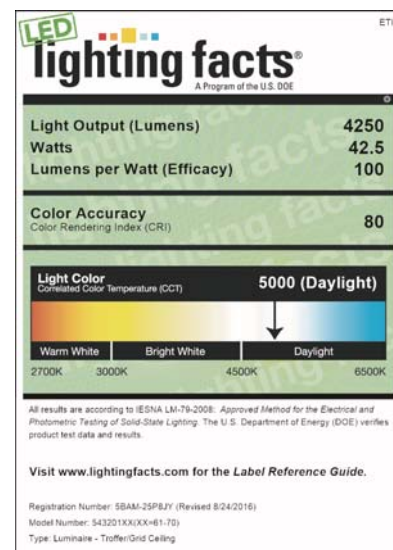



2' x 2' Premium Flat Panel

4250 lms | 120-277VAC | Model 54320161 | Part FPI-22-42-850-MV-D

SHIPPING INFORMATION

Model	54320161
Part	FPI-22-42-850-MV-D
UPC	849489005201
Product Dimensions (L x W x H in.)	1' 11 47/64 x 1' 11 47/64 x 29/32
Product Dimensions (L x W x H cm.)	60.30 x 60.30 x 2.31
Product Weight (lbs.)	9.26
Inner Carton Quantity	N/A
Inner Carton Bar Code	N/A
Inner Carton Dimensions (L x W x H in.)	N/A
Inner Carton Dimensions (L x W x H cm.)	N/A
Inner Carton Weight (lbs)	N/A
Master Carton Quantity	1
Master Carton Bar Code	50849489005206
Master Carton Dimensions (L x W x H in.)	5' 9 29/32 x 2' 3 41/64 x 3 29/64
Master Carton Dimensions (L x W x H cm.)	177.55 x 70.21 x 8.79
Master Carton Weight (lbs)	12.79
Pallet Quantity	32

COMPATIBILITY

Dimmers: NA

Brand	MODEL NO.
Lutron	NTSTV-DV-WH
Lutron	DVSTV-WH
Lutron	DVTV-WH
Lutron	NFTV
Leviton	IPL06-1OZ
Leviton	IP710-DLZ

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. For FCC Part 15 user information, Please see www.ETiSSL.com/fcc15b

TO ORDER:
www.ETiSSL.com
Call: 1.855.ETi.SSLI
1.855.384.7754

ETi Solid State Lighting, Inc.
720 Corporate Woods Parkway
Vernon Hills, IL 60061
Phone: 855.384.7754
Fax: 847.383.6256