

# Industrial Highbay

# LED 50228161

## 143 Watt, 5000K Highbay




The ETi LED 143 Watt 15,000 lumen Highbay with Type V distribution provides exceptional performance and market leading quality for your warehouse and area lighting needs. With a total weight near less than 12lbs. They are UL listed for use in damp and dry locations and are RoHS compliant with no lead or mercury. Warranty period 5 years or 60 months. Suitable for installations from – 4° F to 114° F.

### KEY FEATURES & BENEFITS

- 143 Watt High Power
- 15,000 Lumens
- Non-Dimmable
- 80 CRI, 5000K Warm White
- No UV, IR or mercury
- UL - Damp Location
- Rated Lifetime: 50,000 hours

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. For FCC Part 15 user information, please see [www.etiled.us](http://www.etiled.us)

### LAMP DIMENSIONS



SKU# 50228161  
Dimension A = 18.0"  
Dimension B = 11.2"



Standard mounting with 2" hook and 6' electrical cable. Also, mountable via pendent conduit and provided with 3/4" knock-out.



### APPLICATION INFORMATION

ETi SSL offers the Industrial Grade Highbay which is approved for most wiring and ceiling types. Typical applications include; indoor warehouse, gymnasium, recreational space, retail, public spaces, schools, loading dock, garages and assembly lines/production facilities.





# 143 Watt 15,000lms Industrial Highbay

# LED

## Luminous Intensity Distribution Diagram

## 50228161

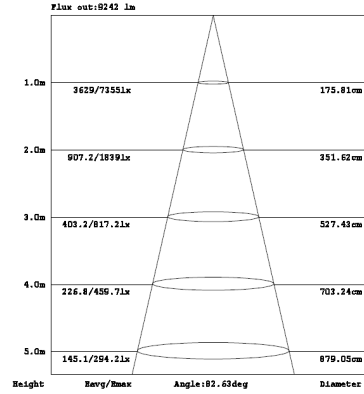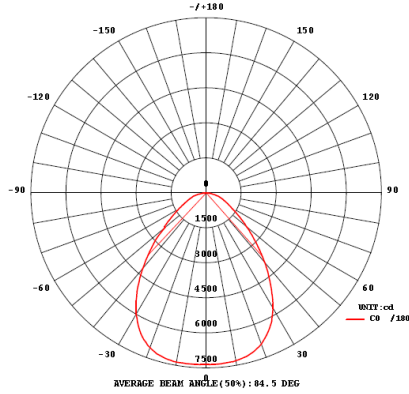

### ORDERING INFORMATION

Item Number	Description	Wattage	Base Type	Input Voltage (VAC)	Average Rated Life <sup>1</sup>	Typical Lumens <sup>2</sup>	CCT <sup>3</sup>	R9	Duv	CRI <sup>4</sup>	CBCP	Beam	Power Factor	Operating Frequency
50228161	Industrial Highbay	143	Hook with 6' whip	120-277	50,000	15,000	5000K			80				60Hz

<sup>1</sup> Hours lifetime with 70% lumen maintenance


<sup>2</sup> Thermally stable typical lumens (±10%)

<sup>3</sup> Thermally stable CCT (±10%)

<sup>4</sup> Color rendering index/Ra

### SHIPPING INFORMATION

Item Number	Item UPC	Item Dimensions (H x L x W)	Item Weight (lbs)	Inner Pack Qty	Inner Carton Dimensions (H x L x W)	Pack Weight (lbs)
50228161	50849489009495	5.59" x 18.11" x 18.11"	8.71	1	7.83" x 20.18" x 20.18"	11.67



**The Americas Headquarters**  
**720 Corporate Woods PKWY**  
**Vernon Hills, IL 60061**

855-384-7754 [www.etissl.com](http://www.etissl.com)