

Under Cabinet

LED

LED 24" Under Cabinet Plug In 3000K Specifications



- The ETi 11 watt 700 lumen LED 24" Under Cabinet Lights offer exceptional performance for precision lighting applications, while reducing energy and maintenance cost. These 24" LED Under Cabinet Lights are made of plastic construction featuring an acrylic diffuser. They are UL listed for use in damp and dry locations and are RoHS compliant with no lead or mercury. Non-dimmable. Warranty period 5 years or 60 months. Rated Lifetime: 35,000 hours


KEY FEATURES & BENEFITS

- Linkable up to maximum 20 units
- Distance between connected fixtures is determined by 14" linking cable (included)
- Plug-In Power Supply
- End-to End Connecting
- 2 Ways to Mount-U or L Bracket
- 3 Position Switch-High, Off, Low
- 700 Lumens, 11 Watts, 3000K



This light source meets restrictions on hazardous substances.

LAMP DIMENSIONS



SKU# 54194112

Dimension A = 1.7"

Dimension B = 24"

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. For FCC Part 15 user information, please see www.etiled.us

APPLICATION INFORMATION

Typical applications for the LED under cabinet plug in light bars include retrofitting traditional fluorescent or xenon fixtures. Typical uses: kitchens, offices, work spaces, utility rooms, garages, cabinets, or shelving in residential or commercial buildings.



LED 24" Under Cabinet Plug In LED

SPECIFICATION DATA

Project _____

Item Number _____


Prepared by _____ Date _____

ORDERING INFORMATION

Item Number	Wattage	Input Voltage (VAC)	Frequency	Average Rated Life ¹	Typical Lumens ²	CCT ³	CRI ⁴	Beam Angle	Power Factor	Location
54194112	11	120	60Hz	35,000	700	3000k	82	90°	>.9	Damp
¹ Hours lifetime with 70% lumen maintenance										
² Thermally stable typical lumens (±10%)										
³ Thermally stable CCT (±10%)										
⁴ Ra/Color rendering index										

SHIPPING INFORMATION

Item Number	Item UPC	Item Dimensions (H x L x W)	Item Weight (lbs)	Inner Pack Qty	Inner Carton Bar Code	Inner Carton Dimensions (H x L x W)	Inner Pack Weight (lbs)	Master Pack Qty	Master Carton Bar Code	Master Dimensions (H x L x W)	Master Pack Weight (lbs)
54194112	83660700 9357	1.7" x 24" x .92"	.82	5 pieces	3083660700 9358	6.8" x 25.4" x 3.2"	4.3	1 tray	50836607007 9352	7" x 25.8" x 3.4"	4.9

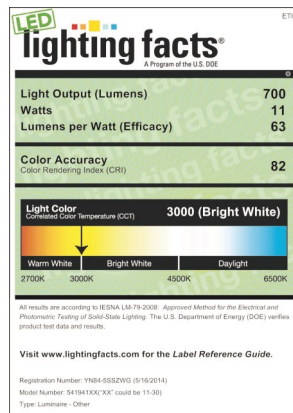

The Americas Headquarters
26650 Renaissance Parkway, STE 6
Cleveland, OH 44128

855-384-7754 www.etissl.com