

H07552

GAS: 9400 / 7500 WATT - **LPG: 8450 / 6750 WATT** 50A 120/240V
ELECTRIC START GAS OR PROPANE DUAL FUEL PORTABLE GENERATOR
EPA AND CARB CERTIFIED

FIRMAN
POWER EQUIPMENT

8716 WEST LUDLOW DR. SUITE #6
PEORIA, AZ 85381
1-844-347-6261
WWW.FIRMANPOWEREQUIPMENT.COM

UPC // 840876175521

GAS STARTING / RUNNING WATTS // 9400 / 7500

LPG STARTING / RUNNING WATTS // 8450 / 6750

VOLTAGE // 120 / 240V

FREQUENCY // 60Hz

ENGINE TYPE // OHV

STARTING SYSTEM // ELECTRIC / RECOIL

FUEL TANK SIZE // 8.0 GAL

RUN-TIME (GAS) // UP TO 12 HRS (@50% LOAD)

DECIBLES // 74 dB (@7m @50% LOAD)

CARTON L×W×H // 32.1" × 22.2" × 24.4"

GROSS WEIGHT // 227 LBS.

UNIT WEIGHT // 210 LBS.

UNITS PER PALLET // 4

UNITS PER CONTAINER // 188 / 40HQ

BONUS // COVER



CONTROL PANEL

(2) 5-20R 20A-120V GFCI

(1) 14-50R 50A-120/240V

(1) L14-30R 30A-120/240V TWIST LOCK

(1) L5-30R 30A-120V TWIST LOCK

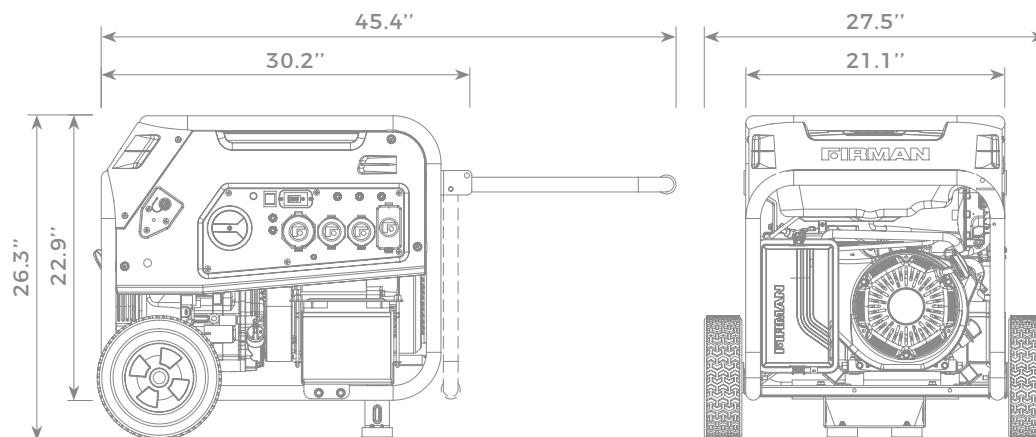

BEST USED FOR





FIRMAN

FIRMAN® DUAL FUEL



LPG INLET
Entrada de LPG
Entrée de LPG

8450 STARTING WATTS POTENCIA DE ARRANQUE	9400 STARTING WATTS POTENCIA DE ARRANQUE
6750 RUNNING WATTS POTENCIA DE FUNCIONAMIENTO	7500 RUNNING WATTS POTENCIA DE FUNCIONAMIENTO

Fuel Selector Switch
Interruptor Selector de Combustible
Carburant Sélecteur

NEUTRAL BONDED TO FRAME
NEUTRO CONECTADO AL BAÑADOR
NEUTRE BÂT À LA MISE À LA TERRE DU VÉHICULE



120V/240V 30A 120V/240V 30A 120V 30A 120VAC 20A GFCI

FIRMAN®

12V 15Ah/20HR

CAUTION:

- Maintenance free, no water or electrolyte supply.
- Do not incinerate.
- Keep the battery and do not expose in hot environment.
- Charge the battery 4 hours by charger with 4A current, or manual start the generator to run for several hours if the generator running time is less than 10 hours with in three months.



90° CE
RoHS 1025

FIRMAN®
POWER ON DEMAND