

FILL-RITE®

Fill-Rite Nozzles



FILL-RITE®

 Tuthill

SOTERA
SYSTEMS

Nozzles

- FRHMN075S
 - Manual nozzle with $\frac{3}{4}$ " NPT inlet
 - Spout hook
 - UL listed
 - Can be used with any fuel pump
 - Standard in all 1200, 2400, 600, and 700 (with $\frac{3}{4}$ " discharge) series pumps
 - Rated for 50 psi (3.4 Bar)
 - Unleaded spout – $\frac{13}{16}$ " (21mm) OD



Nozzles

- FRHMN100S
 - Manual nozzle with 1" NPT inlet
 - Spout hook
 - UL listed
 - Can be used with any fuel pump
 - Standard in all 4200 and 4400 series pumps
 - Rated for 50 psi (3.4 Bar)
 - Leaded spout – 15/16" (24mm) OD



Nozzles

- N075UAU10
 - Automatic nozzle with $\frac{3}{4}$ " NPT inlet
 - Spout hook and spring
 - 2 position hold open latch
 - UL listed
 - Flow Rate Range:
 - Working: 2.5 to 14.5 GPM (9 to 54 LPM)
 - Optimal: 5 to 12 GPM (19 to 45 LPM)
 - Meets or exceeds UL requirements
 - Standard in all 1200, 2400, 600 and $\frac{3}{4}$ " 700 series pumps with automatic nozzle option
 - Rated for 50 psi (3.4 Bar)
 - Unleaded spout – $\frac{13}{16}$ " (21mm)



Nozzles

- N075DAU10
 - Automatic nozzle with $\frac{3}{4}$ " NPT inlet
 - Spout hook and spring
 - 2 position hold open latch
 - UL listed
 - Flow Rate Range:
 - Working: 2.5 to 14.5 GPM (9 to 54 LPM)
 - Optimal: 5 to 12 GPM (19 to 45 LPM)
 - Meets or exceeds UL requirements
 - Sold as nozzle only – Not used in any pump package
 - Rated for 50 psi (3.4 Bar)
 - Leaded spout – $\frac{15}{16}$ " (24mm)




Nozzles

- N100DAU10
 - Automatic nozzle with 1” NPT inlet
 - Spout hook and spring
 - 3 position hold open latch
 - UL listed
 - Flow Rate Range:
 - Working: 5 to 25 GPM (19 to 94 LPM)
 - Optimal: 5 to 15 GPM (19 to 56 LPM)
 - Meets or exceeds UL requirements
 - Sold as nozzle only – Not used in any pump package
 - Rated for 50 psi (3.4 Bar)
 - Diesel spout – 1 1/8” (29mm)




Nozzles

- N100DAU13 - Red
 - Automatic nozzle with 1" NPT angled inlet
 - Spout hook and spring
 - 3 position hold open latch
 - Heavy duty, weather resistant cover
 - UL listed
 - Flow Rate Range:
 - Working: 5 to 40+ GPM (19 to 151+ LPM)
 - Optimal: 8 to 35 GPM (30 to 132 LPM)
 - Meets or exceeds UL requirements
 - Standard in all 3200, 4200, 300 and 1" 700 series pumps with automatic nozzle option
 - Rated for 50 psi (3.4 Bar)
 - Diesel truck stop spout – 1 3/16" (30mm)

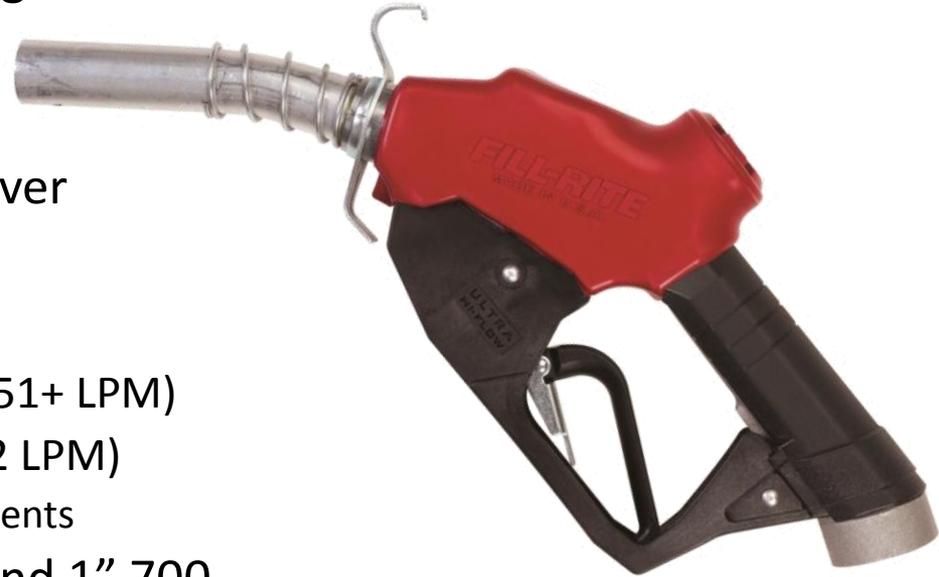


Nozzles

- N100DAU13G - Green
 - Automatic nozzle with 1” NPT angled inlet
 - Spout hook and spring
 - 3 position hold open latch
 - Heavy duty, weather resistant cover
 - UL listed
 - Flow Rate Range:
 - Working: 5 to 40+ GPM (19 to 151+ LPM)
 - Optimal: 8 to 35 GPM (30 to 132 LPM)
 - Meets or exceeds UL requirements
 - Sold as nozzle only – Not used in any pump package
 - Rated for 50 psi (3.4 Bar)
 - Diesel truck stop spout – 1 3/16” (30mm)

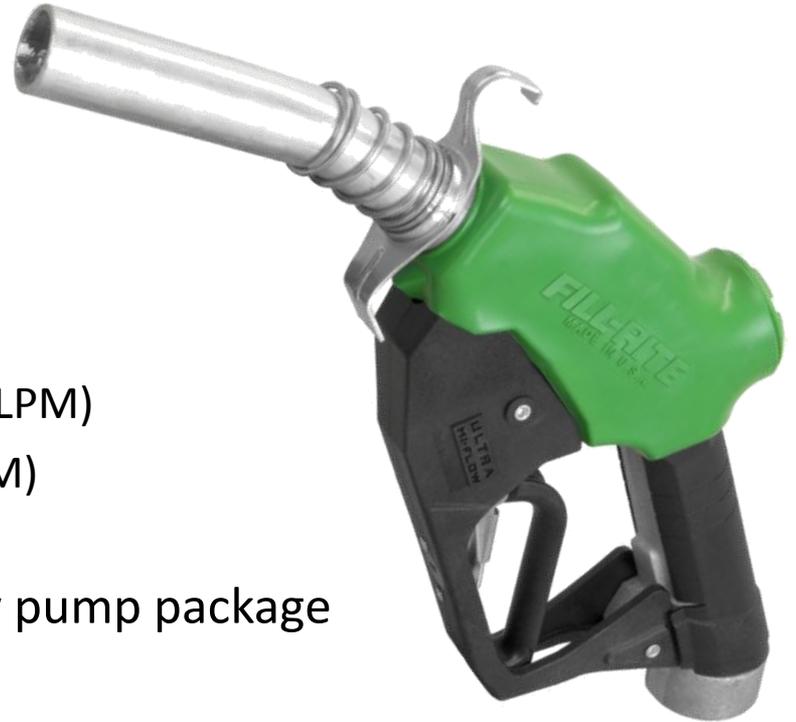


Nozzles

- N100DAU13Y - Yellow
 - Automatic nozzle with 1” NPT angled inlet
 - Spout hook and spring
 - 3 position hold open latch
 - Heavy duty, weather resistant cover
 - UL listed
 - Flow Rate Range:
 - Working: 5 to 40+ GPM (19 to 151+ LPM)
 - Optimal: 8 to 35 GPM (30 to 132 LPM)
 - Meets or exceeds UL requirements
 - Sold as nozzle only – Not used in any pump package
 - Rated for 50 psi (3.4 Bar)
 - Diesel truck stop spout – 1 3/16” (30mm)

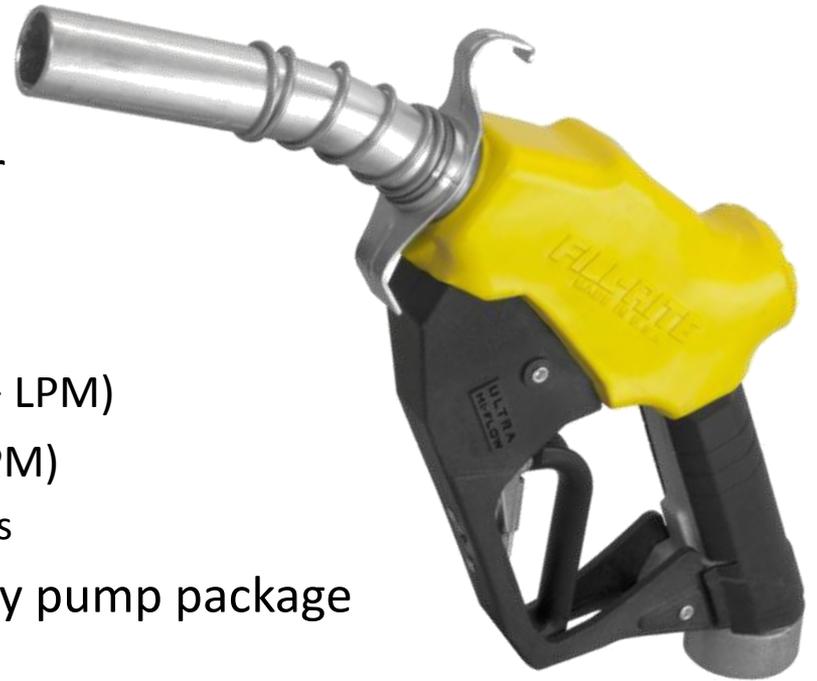

Nozzles

- BDH0707 – Bio-Diesel
 - Automatic nozzle with $\frac{3}{4}$ " NPT inlet
 - Spout hook and spring
 - 2 position hold open latch
 - For B21 – B100 per ASTM D6751 standards
 - Flow Rate Range:
 - Working: 2.5 to 14.5 GPM (9 to 54 LPM)
 - Optimal: 5 to 12 GPM (19 to 45 LPM)
 - Meets or exceeds UL requirements
 - Sold as nozzle only – Not used in any pump package
 - Rated for 50 psi (3.4 Bar)
 - Leaded spout – $15/16$ " (24mm)

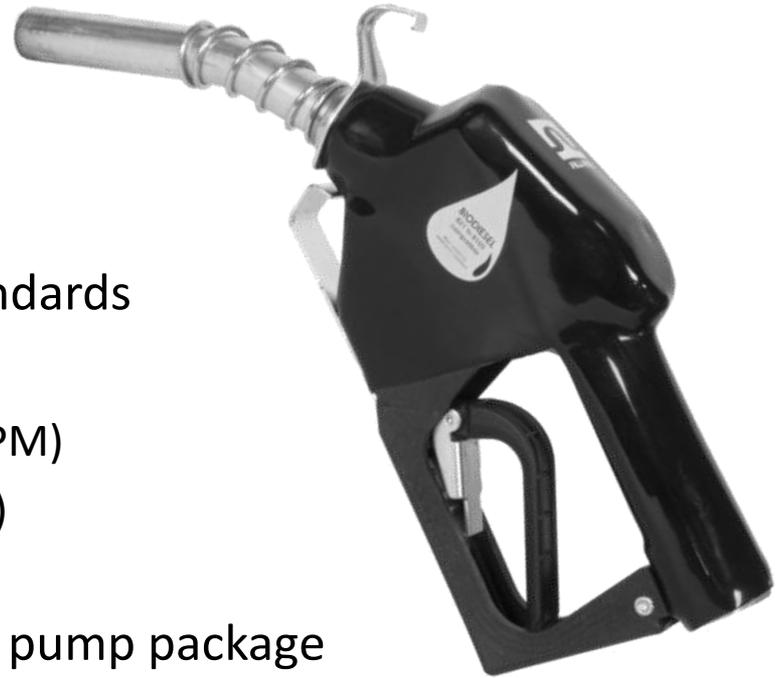

Nozzles

- BDH0708 – Bio-Diesel
 - Automatic nozzle with 1” NPT inlet
 - Spout spring
 - 2 position hold open latch
 - For B21 – B100 per ASTM D6751 standards
 - Flow Rate Range:
 - Working: 5 to 30 GPM (19 to 113 LPM)
 - Optimal: 8 to 25 GPM (30 to 94 LPM)
 - Meets or exceeds UL requirements
 - Sold as nozzle only – Not used in any pump package
 - Rated for 50 psi (3.4 Bar)
 - Diesel truck stop spout – 1 3/16” (30mm)




Nozzles

- FRNA075DAU10 - Arctic
 - Automatic nozzle with ¾” NPT inlet
 - Spout hook and spring
 - 2 position hold open latch
 - Works to -40° F/C
 - Flow Rate Range:
 - Working: 2.5 to 14.5 GPM (9 to 54 LPM)
 - Optimal: 5 to 12 GPM (19 to 45 LPM)
 - Meets or exceeds UL requirements
 - Standard in FR1210GARC and FR700VARC
 - Rated for 50 psi (3.4 Bar)
 - Leaded spout – 15/16” (24mm)



Nozzles

- FRNA100DAU00 - Arctic
 - Automatic nozzle with 1” NPT inlet
 - Spout spring
 - 2 position hold open latch
 - Works to -40° F/C
 - Flow Rate Range:
 - Working: 5 to 40+ GPM (19 to 151+ LPM)
 - Optimal: 8 to 35 GPM (30 to 132 LPM)
 - Meets or exceeds UL requirements
 - Standard in FR4210GARC and FR310VARC
 - Rated for 50 psi (3.4 Bar)
 - Diesel truck stop spout – 1 3/16” (30mm)

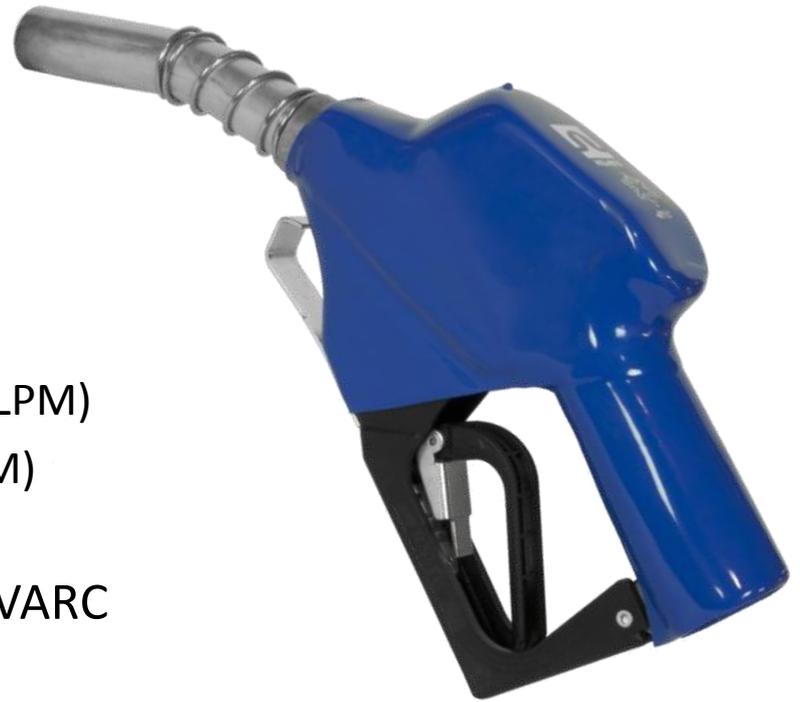

Thank You

- So who do you contact if you should have any questions about the Fill-Rite product line?
 - On-Line Resources:
 - TOPS
 - Available 24 / 7 / 365, Check Pricing, Submit an Order, Order Tracking and Tracking Information, Check Invoices, Request an RGA, Leave Feedback on Products and Services, and Best of all, it is FREE!
 - Our Web Sites (Click links below)
 - Installation Manuals, Sales and Engineering Data Sheets ,Literature, and Brochures
 - Our Great Customer Service Team can be reached at:
 - (800) 634-2695 / (260) 747-7524 / fillrite@tuthill.com

FillRite.com

Sotera.com

FILL-RITE

 **Tuthill**

SOTERA
SYSTEMS