

**80046 - GE garage & basement 20 watt T12 1-pack**

**F20T12/CW/ECO6PK**

- ☞ Passes TCLP, which can lower disposal costs.
- ☞ 1.5 inch diameter T12 with medium bi-pin (g13) base
- ☞ 24 inches long
- ☞ 4100K cool white light appearance
- ☞ Cool white light perfect for sizable spaces
- ☞ For use in large spaces such as basements and garages
- ☞ GE garage & basement fluorescent bulbs' cool white light is perfect for illuminating sizable spaces throughout your home. Use in large open spaces in your home including finished and unfinished basements, garages and rec rooms
- ☞ Lasts 4.1 years based on 6 hours per day usage

**GENERAL CHARACTERISTICS**

Base Description	Medium Bi-Pin
Base Type	Pin/Plug-In
Mercury Content	4.95 mg
Mercury-Picogram per mean lm hr	478.3
Starting Temp (MIN) C-degrees	10 °C
Bulb Material	Soda lime
Rated Life Hours-nominal	9000 h
Primary Application	Garage & Basement
Product Technology	Linear Fluorescent
Base	G13
Bulb Shape	T12

**PHOTOMETRIC CHARACTERISTICS**

Mean Lumens nominal	1150 lm
Nominal Initial Lumen per Watt	60
Initial Lumens-nominal	1200 lm
Color Rendering Index-CRI	60
Color Temperature	4100 K

**PRODUCT INFORMATION**

Product Code	80046
Description	F20T12/CW/ECO6PK
Alternative Unit Of Measure	CASE
Standard Package Quantity	24
Ean UPC	043168980517
Standard Package GTIN	00043168800464
No Of Items Per Sales Unit	
No Of Items Per Standard Package	24
Sales Unit	Case
UCC	043168800464
Alternative Unit Of Measure	EACH
Standard Package Quantity	1
Ean UPC	043168980517
Standard Package GTIN	00043168980517
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	1
Sales Unit	Each
UCC	043168800464

**DIMENSIONS**

Bulb Diameter (DIA) <Max>	1.59 in
Bulb Diameter (DIA) <Min>	1.41 in
Diameter	1.5 in
End of Base Pin to Pin	23.67 in
Face to End of Opposing Pin (B) <Max>	23.5 in
Face to End of Opposing Pin (B) <Min>	23.4 in
Nominal Length	24.0 in

**ELECTRICAL CHARACTERISTICS**

Current Crest Factor (MAX)	1.7
Open Circuit Voltage (rapid start) Min @ Temperature	157.00 V @ 10 °C
Cathode Resistance Ratio - Rh/Rc (MIN)	4.250
Cathode Resistance Ratio - Rh/Rc (MAX)	6.500
Rated power (Watts)	20 W

**CAUTIONS & WARNINGS**


Caution

- Lamp may shatter and cause injury if broken
- Wear safety glasses and gloves when handling lamp.
- Do not use excessive force when installing lamp.

Warning

## Risk of Electric Shock

Turn power off before inspection  
installation or removal.

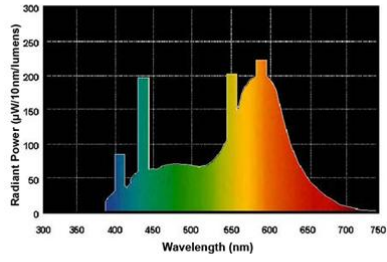

May 31, 2019 7:51:13 AM | For additional information, visit [products.currentbyge.com](http://products.currentbyge.com)