

80085 - GE garage & basement 30 watt T12 1-pack

F30T12CWRSECO6PK

- ☞ Passes TCLP, which can lower disposal costs.
- ☞ 1.5 inch diameter T12 with medium bi-pin (g13) base
- ☞ 36 inches long
- ☞ 4100K cool white light appearance
- ☞ Cool white light perfect for sizable spaces
- ☞ For use in large spaces such as basements and garages
- ☞ GE garage & basement fluorescent bulbs' cool white light is perfect for illuminating sizable spaces throughout your home. Use in large open spaces in your home including finished and unfinished basements, garages and rec rooms
- ☞ Lasts 8.2 years based on 6 hours per day usage

PRODUCT PHOTO



GENERAL CHARACTERISTICS

Base Description	Medium Bi-Pin
Base Type	Pin/Plug-In
Mercury Content	4.95 mg
Mercury-Picogram per mean lm hr	144
Starting Temp (MIN) C-degrees	10 °C
Bulb Material	Soda lime
Rated Life Hours-nominal	18000 h
Primary Application	Full Wattage
Product Technology	Linear Fluorescent
Base	G13
Bulb Shape	T12

PHOTOMETRIC CHARACTERISTICS

Mean Lumens nominal	1910 lm
Nominal Initial Lumen per Watt	73
Initial Lumens-nominal	2200 lm
Color Rendering Index-CRI	60
Color Temperature	4100 K

PRODUCT INFORMATION

Product Code	80085
Description	F30T12CWRSECO6PK
Alternative Unit Of Measure	EACH
Standard Package Quantity	1
Ean UPC	043168980548
Standard Package GTIN	00043168980548
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	1
Sales Unit	Each
UCC	043168800853
Alternative Unit Of Measure	CASE
Standard Package Quantity	24
Ean UPC	043168980548
Standard Package GTIN	00043168800853
No Of Items Per Sales Unit	
No Of Items Per Standard Package	24
Sales Unit	Case
UCC	043168800853

DIMENSIONS

Bulb Diameter (DIA) <Max>	1.59 in
Bulb Diameter (DIA) <Min>	1.41 in
Diameter	1.5 in
End of Base Pin to Pin	35.67 in
Face to End of Opposing Pin (B) <Max>	35.5 in
Face to End of Opposing Pin (B) <Min>	35.4 in
Nominal Length	36.0 in

ELECTRICAL CHARACTERISTICS

Current Crest Factor (MAX)	1.7
Open Circuit Voltage (rapid start) Min @ Temperature	215.00 V @ 10 °C
Cathode Resistance Ratio - Rh/Rc (MIN)	4.250
Cathode Resistance Ratio - Rh/Rc (MAX)	6.500
Rated power (Watts)	30 W

CAUTIONS & WARNINGS

Warning

Risk of Electric Shock


Turn power off before inspection
installation or removal.

Caution

Lamp may shatter and cause injury if broken

Wear safety glasses and gloves when handling lamp.

Do not use excessive force when installing lamp.

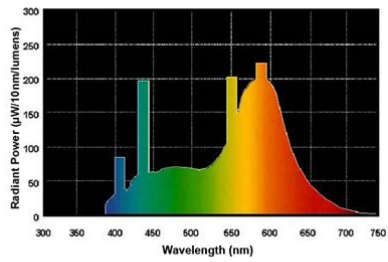

May 31, 2019 7:51:25 AM | For additional information, visit products.currentbyge.com