

12 in LED Plug In Undercabinet Bar



General Product Information:

Common Model Numbers

UC1034-BR2-12LF0-U

UC1034-BR2-12LF0-E

Construction:	Extruded aluminum body
Finish:	BR2= Matte Rubbed Bronze
Diffuser Material:	PC
Diffuser Finish:	White
Mounting:	NA
Head Adjustment:	NA
Motion Detection Range:	NA
Application Type:	Damp Location
Safety Listing:	ETL
Energy Star:	No

Dimensional Information:

ADA Compliant:	NA
Chain/Stem Length:	NA
Canopy Dia.:	NA
Fixture Dimensions:	12" x 2.72" x 0.63"
Fixture Weight:	1.15lbs

Electrical Information:

Lamp Included:	Yes
Lamp Type:	LED
Number of Lamps:	NA
Lamp Wattage:	7.83 W
Lamp CCT:	3090K
Lamp CRI:	83.3
Lamp Life:	50000 Hrs
Total Lumens:	448.5
Dimming:	Yes
Dimming Type:	On Fixture Variable Dimmer
Ballast/Driver:	KTLD-12-1-0A40-LDIM-SL
Input Voltage:	120V, 60Hz, 0.16A
Battery Included:	NA
Battery Type:	NA
Battery Life at Full Charge:	NA
Power Cord:	ZP-UC0812-POWR Flat Plug 2 Prong Polarized
Linkable:	Yes
Connector Cord:	18" 2 Conductors
Power Switch:	On/Off Rocker Switch


UTILITECH

LED lighting facts
A Program of the U.S. DOE

Light Output (Lumens)	448
Watts	7.83
Lumens per Watt (Efficacy)	57.28

Color Accuracy
Color Rendering Index (CRI) **83**

Light Color
Correlated Color Temperature (CCT) **3090 (Bright White)**

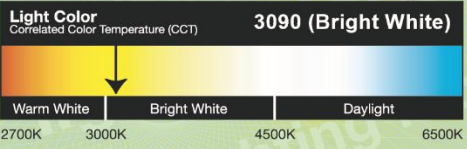

All results are according to IESNA LM-79-2008: Approved Method for the Electrical and Photometric Testing of Solid-State Lighting. The U.S. Department of Energy (DOE) verifies product test data and results.

Visit www.lightingfacts.com for the Label Reference Guide.

Registration Number: YP1G-Z2NVA1 (4/21/2015)
Model Number: UC1034-XXX-12LF0-X
Type: Luminaire - Linear



©2015 Good Earth Lighting

1400 East Business Center Dr, Ste 108 | Mount Prospect, IL 60056

800 -291 -8838

Visit us at: www.goodearthlighting.com