


888-371-7331

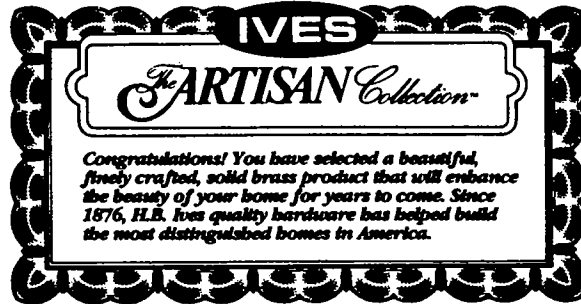


FLUSH PULL

FOR USE ON SLIDING DOORS. FEATURES IVES' EXCLUSIVE BUILT-IN PRONGS — NO SCREWS OR BRADS NEEDED.

INSTALLATION INSTRUCTIONS

TOOLS REQUIRED: Hammer, punch, drill and 2 1/8" spade bit.

1. Position, mark and bore hole 2 1/8" wide x 7/16" deep.
2. Insert pull and push out prongs as illustrated.

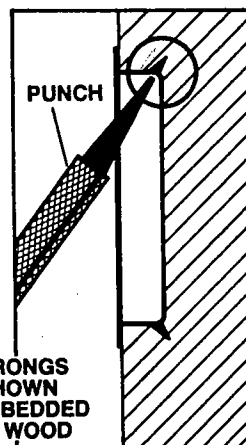

MAINTENANCE INSTRUCTIONS

H.B. Ives Solid Brass products have a clear, protective lacquer coating which helps prevent discoloration. Do not use abrasive waxes or cleaners.

ASK FOR OTHER FINE DECORATIVE HARDWARE BY H.B. IVES



WINDOW
LOCKS



DOOR
STOPS



COAT &
HAT HOOKS



DOOR
BOLTS



FLUSH PULL C221 B3 BRT
MADE IN U.S.A.