

Features

- Two-lever handles offers separate control of hot and cold water.
- Two-handle widespread faucet for 8" - 16" centers.
- Widespread.
- 1.2gpm (gallons per minute) maximum flow rate.
- KOHLER ceramic disc valves exceed industry longevity standards two times for a lifetime of durable performance.
- Coordinates with other products in the Mistos collection.

Material

- Premium metal construction.
- KOHLER finishes resist corrosion and tarnishing.

Technology

- UltraGlide™ engineered ceramic disc valves resist deterioration and mineral buildup, resulting in long-lasting, reliable performance.
- Premium KOHLER finishes with ScratchShield® technology withstands even the toughest daily use.

Installation

- Handles come pre-assembled on valves to simplify installation.
- Handles pre-assembled on valves to simplify installation.



ADA CSA B651 OBC

Codes/Standards

ASME A112.18.1/CSA B125.1
NSF/ANSI 61
NSF/ANSI 372
All applicable US Federal and State material regulations
DOE - Energy Policy Act 1992
EPA WaterSense®
California Energy Commission (CEC)
ADA
ICC/ANSI A117.1
CSA B651
OBC



KOHLER® One-Year Limited Warranty


See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.

Color	Code	Description
-------	------	-------------

	CP	Polished Chrome
	BN	Vibrant® Brushed Nickel

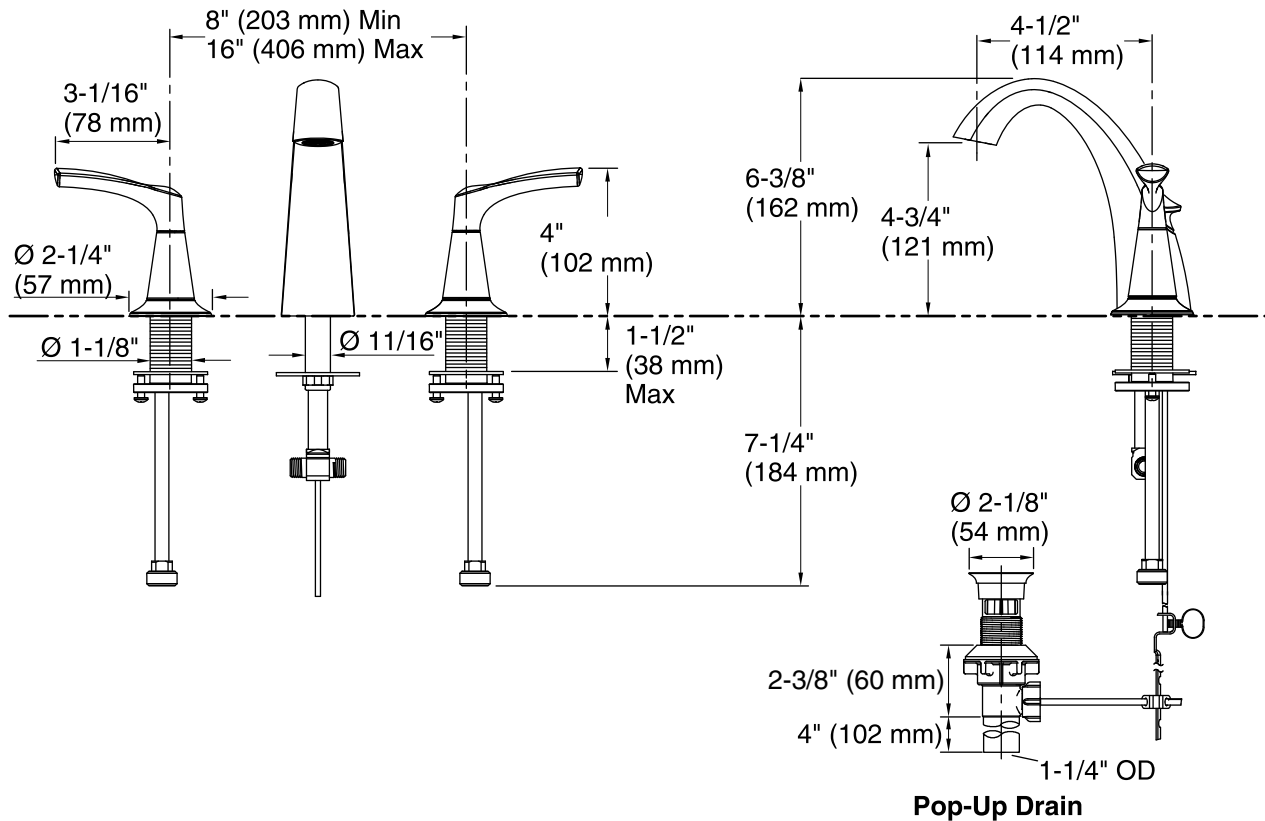

Technical Information

All product dimensions are nominal.

Faucet:

Flow rate: 1.2 gal/min (4.5 l/min)

Pressure: 60 psi (4.1 bar)

Drain included: Yes

Drain tailpiece included: Yes

Spout:

Spout reach: 5" (127 mm)

Handle clearance: 3-1/16" (78 mm)

Notes

Install this product according to the installation instructions.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.