

### Features

- Single lever handle is simple to use and makes adjusting water temperature easy.
- Two-function pull-out sprayhead with touch-control allows you to switch from stream to spray.
- Ceramic disc valve exceeds industry longevity standards, ensuring durable performance for life.
- MasterClean™ sprayface features an easy-to-clean surface that withstands mineral buildup.
- ProMotion® technology's light, quiet braided hose and swiveling ball joint make the pullout sprayhead easier and more comfortable to use.
- Includes soap/lotion dispenser.

### Material

- Premium metal construction.
- KOHLER finishes featuring ScratchShield® withstand even the toughest of daily use.

### Installation

- Installs with 1-, 2-, 3-, or 4- hole sink (escutcheon plate included).
- Flexible supply lines and quick connect fittings make installation easy.
- Longer shank works with countertops 1/2 inch to 2 1/2 inches thick. For thinner countertops additional material may be required.



ADA CSA B651

### Codes/Standards



ASME A112.18.1/CSA B125.1  
NSF/ANSI 61  
NSF/ANSI 372  
All applicable US Federal and State material regulations  
DOE - Energy Policy Act 1992  
California Energy Commission (CEC)  
ADA  
ICC/ANSI A117.1  
CSA B651


### KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.

### Available Colors/Finishes

*Color tiles intended for reference only.*

Color	Code	Description
	CP	Polished Chrome
	VS	Vibrant® Stainless

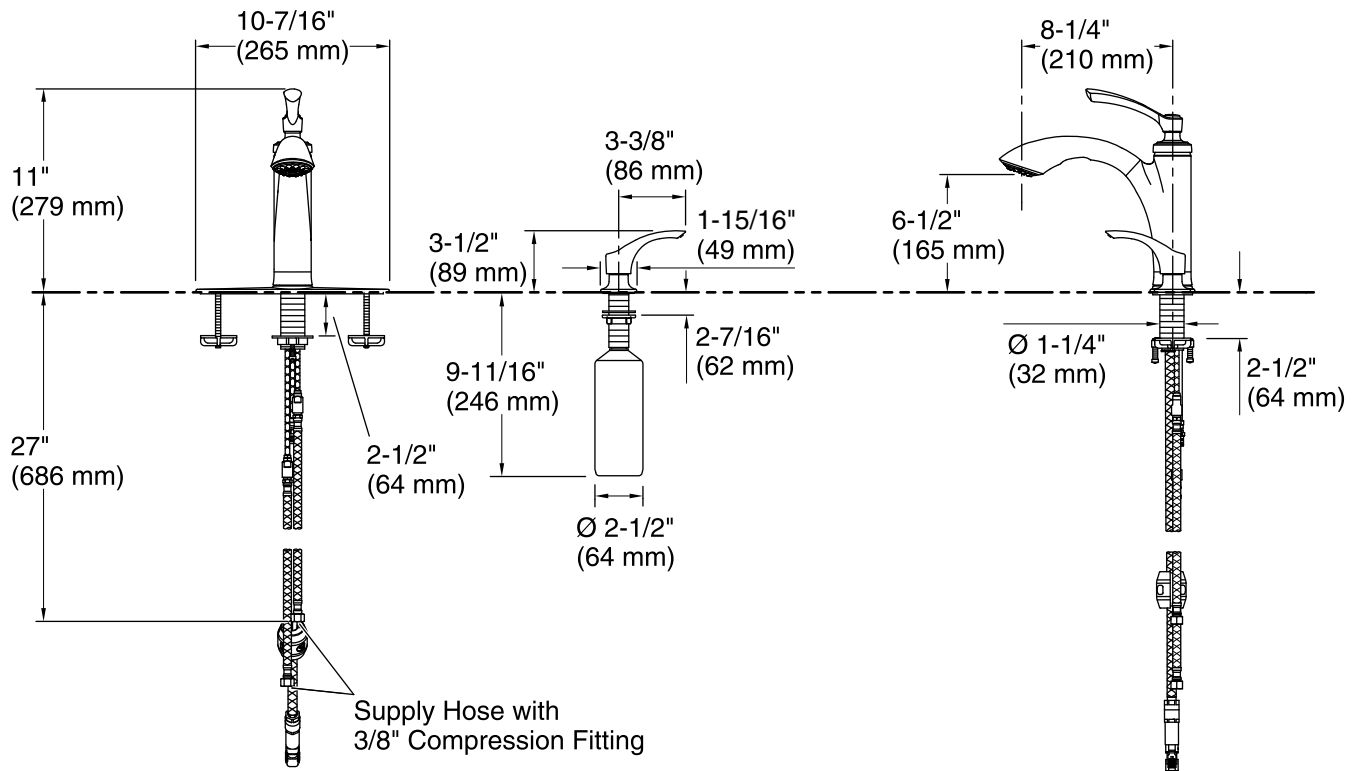

### Technical Information

All product dimensions are nominal.

#### Faucet:

Flow rate: 1.8 gal/min (6.8 l/min)

Pressure: 60 psi (4.1 bar)

### Notes

Install this product according to the installation instructions.

ADA, CSA B651 compliant when installed to the specific requirements of these regulations.