515AN

15 Amp, 125 Volt, NEMA 5-15P, 2-Pole, 3-Wire Grounding Angle Plug, Straight Blade, Commercial Grade - White



Color: White

UPC Code: 07847784293

Country Of Origin: Mexico

NEMA: 5-15P



Technical Information

Electrical Specifications

Amperage: 15 A

Current Interrupting: Certified for current interrupting at full rated current

Dielectric Voltage: Withstands 2000V per UL498

Grounding: Grounding

Pole: 2

Temperature Rise: Max 30C after 50 cycles OL at 150 percent rated current

Voltage: 125 VAC

Wire: 3

Environmental Specifications

Flammability: Rated V-2 per UL 94

Operating Temperature: -40°C to 60°C

Material Specifications

Assembly Screws: Steel, Zinc Plated

Blades/Contacts: Brass

Body Material: PVC

Color: White

Mechanical Specifications

Cord Range: .245 - .700

Product ID: Ratings and NEMA I.D. permanently marked on device

Terminal Accom.: 18-12 AWG

Terminal ID: Brass-Hot, Green-Ground, Silver-Neutral

Product Features

Color: White

NEMA: 5-15P

Standards and Certifications

ANSI: C-73


CSA C22.2 No. 42: File LR-406

NEMA: WD-6

NOM: 057

UL498: File E13393

Warranty: 2-Year Limited

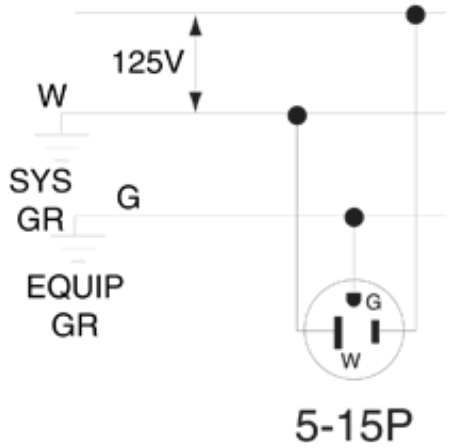

SPECIFICATION SUBMITTAL

JOB NAME:		CATALOG NUMBERS:	
JOB NUMBER:			

Leviton Manufacturing Co., Inc.
201 North Service Road, Melville, NY 11747
Telephone: +1-800-323-8920 · FAX: +1-800-832-9538 · Tech Line (8:30AM-7:30PM E.S.T. Monday-Friday): +1-800-824-3005

Leviton Manufacturing of Canada, Ltd.
165 Hymus Boulevard, Pointe Claire, Quebec H9R 1E9 · Telephone: +1-800-469-7890 · FAX: +1-800-824-3005 · www.leviton.com/canada

Leviton S. de R.L. de C.V.
Lago Tana 43, Mexico DF, Mexico CP 11290 · Tel.: (+52)55-5082-1040 · FAX: (+52)5386-1797 · www.leviton.com.mx



Visit our Website at: www.leviton.com
© 2018 Leviton Manufacturing Co., Inc. All Rights Reserved. Subject to change without notice.

Leviton has a global presence.
If you would like to know where your local Leviton office is located please go to:
www.leviton.com/international/contacts/