
Instruction Manual

Model no. PT-55

Maverick Rain Drop Waterproof Digital Thermometer

Congratulations on the purchase of your new Waterproof thermometer tested to IP67. Your thermometer is able to be immersed in up to 3 ft of water for up to 30 minutes.

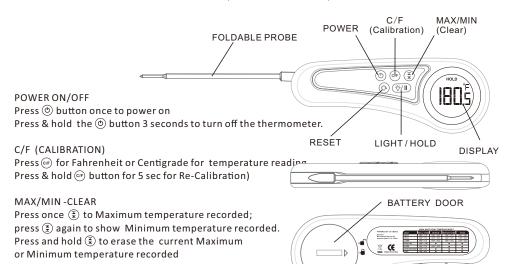

RESET

Press the ③ button to reset the thermometer to factory default

HOLD / BACKLIGHT

Press (*/II) once to hold temperature recorded,

press 🍪 again to un-hold

Every press of this button turns on the backlight for 5 seconds

1. To insert the batteries

Use a coin to open the battery door at the back of unit by turning it from LOCK to UNLOCK. Insert Two CR2032 Lithium batteries with + sign up. Fasten the battery door securely but do not over-turn. (The water resistance features requires maintaining the rubber gasket evenly within the groove.)

2. Temperature Scale

To select temperature reading in Fahrenheit or Centigrade by pressing (cir) button.

3. Getting Started

Press (b) button once to turn on the thermometer.

Press (a) button once to show Maximum temperature recorded with showing "MAX" icon. Press again to show Minimum temperature recorded with showing "MIN" icon.

Press and hold ③ button again to erase the current Maximum or Minimum temperature recorded. The LCD will show "---" to indicate the temperature record is erased.

Press (**/11) button once lock the current temperature displayed on thermometer. The LCD will show "HOLD" icon. Press again to release the locked temperature reading, the "HOLD" icon will be off and back to current temperature display. Backlight will be turned on for better viewing.

USDA SAFE FOOD TEMPERATURES*

MEAT	WELL/DONE	MEDIUM	MEDIUM RARE	RARE
BEEF	160F / 71C	145F* / 63C	135F* / 57C	125F* / 52C
VEAL	160F / 71C	145F* / 63C	135F* / 57C	125F* / 52C
LAMB	160F / 71C	145F* / 63C	135F* / 57C	125F* / 52C
POULTRY	165F* / 74C	_	_	_
PORK	160F / 71C	145F* / 63C	_	_
GROUND MEAT	160F / 71C	_	_	_
FISH	145F / 63C	_	_	



4. RE-CALIBRATION of Thermometer

- Make ice bath with 3 parts ice and 1 part cold water.
- Insert the probe tip into center of ice bath.
- Press and hold (c) button for 5 seconds until the unit show "CAL"
- The thermometer will start calibration range from -3C/+26.6F to +2C/+35.6F to an accurate 0C/+32F Note: Water boils at 208 F/97.8 C at 2000 ft above sea level

5. Battery Status

When the voltage on battery is low, Low Battery Indicator will be shown on LCD. Please replace with new batteries.



6. Manual / Auto Power Off

- Press and hold (b) button for 3 seconds to turn off the thermometer for power saving
- Press (6) button again to turn on the thermometer
- The thermometer will automatically power off if no buttons are pressed for ten minutes.

SPECIFICATIONS:

Operating Range: -4°F to 572°F/-20°C to +300°C Display Range: -4°F to 572°F/-20°C to +300°C

Power: 2 x CR2032

CARE OF YOUR PRODUCT

Don't touch the probe tip with bare fingers after use to avoid burning fingers.

Although this thermometer is waterproof do not wash in dishwasher.

Don't put the thermometer probe inside the oven or microwave oven and always keep at least 6" away from any heat source.

The thermometer probe is made of food-grade stainless steel and is designed for instant measurement only.

Don't measure temperatures above 300°C /572°F. Never burn probe directly over fire. Doing so, the thermometer screen will show "HI" and continuously using at this temperature will cause permanent probe damage,

Use damp cloth or sponge to clean the probe and dry thoroughly after cooking,

Don't subject the thermometer to extreme temperatures, humidity or severe shock.

Don't clean the case with any corrosive materials such as perfume, alcohol or cleaning agent or abrasives. Keep the batteries, stainless steel probe away from children.

Disposal of Your Old Product

Your product is designed and manufactured with high quality materials and components, which can be recycled and reused. When this crossed-out wheeled bin symbol is attached to a product it means the product is covered by the European Directive 2002/96/EC.



Please inform yourself about the local separate collection system for electrical and electronic products.


Please act according to your local rules and do not dispose of your old products with your normal household waste.

The correct disposal of your old product will help prevent potential negative consequences for the environment and human health.

Disposal of Flat Batteries / Accumulators

You, as the end user, are legally obliged (Battery Ordinance) to return all flat batteries and rechargeable batteries. Disposal in the household waste is prohibited.

"European Directive 2006/66/EC" Batteries, including rechargeable batteries, which contain hazardous substances are marked by symbols, which indicate the prohibition of disposal in the household, waste.



MAVERICK LIMITED 90 DAY WARRANTY

Maverick Industries Inc. warrants this product to be free of defects in parts, materials and workmanship for a period of 90 days, from date of purchase. Should any repairs or servicing under this warranty be required, contact Maverick Customer Service by mail or phone for instructions on how to pack and ship the product to Maverick's National Service Center located as follows:

Maverick Customer Service 94 Mayfield Ave. Edison NJ 08837

Telephone: (732) 417-9666

Hours: Weekdays 8:30 AM- 4:30 PM

Do not send any parts or product to Maverick without calling and obtaining a Return Authorization Number and instructions.

This warranty is VOID if instructions for use are not followed; for accidental damage; for commercial use; for damage incurred while in transit; or if the product has been tampered with.

This warranty gives you specific legal rights and you may also have other rights which vary from state to state.

www.maverickhousewares.com

