



METALTECH
SCAFFOLDING®

FULL PRODUCT LINE

WWW.METALTECH.CO



BETTER SELL THROUGH WITH **RETAIL READY** PACKAGING



Consumers and contractors can easily find all the visual information to compare products and make the best purchase decision for their needs, right on the box. Without having to open the packaging.



Convenient QR code on each box, customers can get up to date information on their mobile devices, instruction manuals and assembly videos.



Creative merchandising solutions for any format retailers.

**JOBSITE
SERIES**TM

ALTHOUGH THE METALTECH PRODUCTS SHOWN IN THIS CATALOG ARE IN LINE WITH THE MARKET REQUIREMENTS FOR CANADA AND USA, METALTECH IS NOT RESPONSIBLE FOR ANY MODEL OR PRODUCT SPECIFICATIONS THAT MIGHT CHANGE THROUGHOUT THE YEAR. SOME PRODUCTS MAY NOT BE EXACTLY AS SHOWN IN THE PHOTOS. RESERVING OUR RIGHTS FOR PRINTER'S ERROR OR DISCONTINUED PRODUCTS.

DO NOT HESITATE TO CONSULT METALTECH CUSTOMER SERVICE FOR MORE INFORMATION OR ADVICE.

METALTECH
1735 St-Elzear Blvd. West
Laval (Quebec) Canada H7L 3N6

Toll Free Customer Service Number
1 800 363-7587













Customer Service Fax Number
1 866 517-7585

Customer Service Email
cs@metaltech.co



WE RESERVE THE RIGHT TO CHANGE OR MODIFY CONTENT, SPECIFICATIONS, FEATURES, PRODUCTS, OPTIONS, DIMENSIONS AND MATERIALS AT ANY TIME WITHOUT NOTICE OR OBLIGATION. ALL DIMENSIONS AND MEASUREMENTS ARE APPROXIMATE AND MAY VARY FROM ACTUAL PRODUCTS.

METALTECH IS A REGISTERED TRADEMARK OF METALTECH-OMEGA INC.

	EXTERIOR SCAFFOLDING COMPONENTS - SAFERSTACK®	
	STANDARD FRAMES	8-10
	LADDER ARCH FRAMES	11
	WALK-THRU ARCH FRAMES	12-13
	LIGHT DUTY FRAMES & ACCESSORIES	14
	GUARDRAILS, TOEBOARDS & TIE-OFF BARS	15
	BRACES & SIDE BRACKETS	16
	COUPLING PINS & LOCKS	17
	WALL ATTACHMENTS & CLAMPS	18
	PLATFORMS	19
	BASES	20-21
	STAIRWAYS	22
	ACCESS LADDERS, TAG, HOIST POSTS & PULLEY	23
	RACK, NETTING, TARP & WAGON	24
	WALL BRACKETS, BEAMS & SHORING POSTS	
	WALL BRACKETS	25
	BEAMS	25
	POST DRIVER	25
	LIGHT DUTY SHORING POST	25
	JOBSITE SERIES™	
	JOBSITE SERIES™ 6' BAKER	28-29
	JOBSITE SERIES™ PERRY STYLE™	30-31
	JOBSITE SERIES™ 6'	32-33
	JOBSITE SERIES™ 5'	34
	JOBSITE SERIES™ 4' DELUXE	35
	JOBSITE SERIES™ 4'	36
	4' HIGH PORTABLE SCAFFOLD	37
	JOBSITE SERIES™ DRYWALL & PANEL LIFT	38-39
	ALU SERIES™	
	ALU SERIES™ 6' BAKER	40-41
	ALU SERIES™ 6'	42
	ALU SERIES™ 4'	43
	BUILDMAN™ GRADE	
	BUILDMAN™ 6' DRYWALL BAKER	46-47
	BUILDMAN™ 6'	48-49
	BUILDMAN™ 4'	50
	BUILDMAN™ WALL HAULER™ SERIES 3600 REMOVABLE HANDLE	51
	BUILDMAN™ WALL HAULER™ SERIES 3000 PERMAQUICK™	52
	BUILDMAN™ WALL HAULER™ SERIES 3000 WELDED	53
	BUILDMAN™ WALL HAULER™ SERIES 2000 RESIDENTIAL WELDED	54
	BUILDMAN™ WALL HAULER™ SERIES H	55
	BUILDMAN™ DRYWALL & PANEL LIFT	56
	BUILDMAN™ DRYWALL STILTS	57
	BUILDMAN™ 18"-30" DRYWALL BENCH	58
	BUILDMAN™ WORK STAND	59
	ALUMINUM SCAFFOLDING	
	ALUMINUM SCAFFOLDING SPAN 300 KIT	62-63
	ALUMINUM SCAFFOLDING SPAN 400 KITS	64-65
	EASY-SET SCAFFOLD TOWER™	
	EASY-SET SCAFFOLD TOWER™	66-67
	FIBERGLASS SERIES™ SCAFFOLDING	
	FIBERGLASS SCAFFOLDING	70-71
	FIBERGLASS TOWER KITS	72
	SPEEDY™ SCAFFOLDING	73
	LADDERS, STEPLADDERS AND WORK PLATFORMS	
	12.5' TELESCOPIC LADDER	76
	15.5' TELESCOPIC LADDER	77
	TELESCOPING MULTI-POSITION LADDER	78
	TELESCOPING WORK PLANK AND LADDER JACK	79
	STEPLADDERS	80
	WORK PLATFORMS	81
	TEMPORARY FENCES	
	CROWD & TRAFFIC CONTROL	84
	JOB SITES SECURITY	85
	FENCE ACCESSORIES	86-87
	SET UP AND SAFETY GUIDELINES	
	EXTERIOR SCAFFOLDING - VIEW	88-89
	EXTERIOR SCAFFOLDING - SET UP INSTRUCTIONS	90
	EXTERIOR SCAFFOLDING - SAFETY GUIDELINES	91
	REPLACEMENT PARTS	92-94
	INDEX (BY PRODUCT CODES)	95-97

EXTERIOR SCAFFOLDING COMPONENTS SAFERSTACK®

Metaltech's exterior scaffolding systems and accessories are built to help make your work easier and safer. Safety is key when working in heights. Quality control, testing procedures, precision of the welding process, correct installation are key when assembling a scaffold structure to minimize liability and worker risk of injury. Our SaferStack® design brings safety to another level by nesting each frame into one another when stacked for storage and transport by locking them one onto another. Our scaffolding systems meet or exceed OSHA, ANSI and CSA requirements.

- **SAFERSTACK®**
- **ANTI-SLIP POWDER-COAT FINISH**
- **OSHA, ANSI AND CSA**



EXTERIOR SCAFFOLDING COMPONENTS - SAFERSTACK®

**BUILT TOUGH FOR
SAFETY**

METALTECH®

LESS IS BEST



**STACKS IN 30%
LESS SPACE THAN
REGULAR FRAMES**

**FRAMES INTERLOCK
FOR SAFER STORAGE
AND TRANSPORT**

**SAFERSTACK®
HELPS PREVENT STACKED
FRAMES FROM SLIDING**

**TESTED TO MEET
ANSI, CSA AND
OSHA STANDARDS**

**100% COMPATIBLE
WITH ANY STANDARD
METALTECH® FRAME**




**WITH SAFERSTACK, STACK
100 FRAMES WHERE
YOU CURRENTLY STACK ONLY
70 STANDARD FRAMES**

SAFERSTACK®
A METALTECH INNOVATION


GO ONLINE TO SEE
THE INNOVATION
WWW.METALTECH.CO

CUSTOM MANUFACTURING

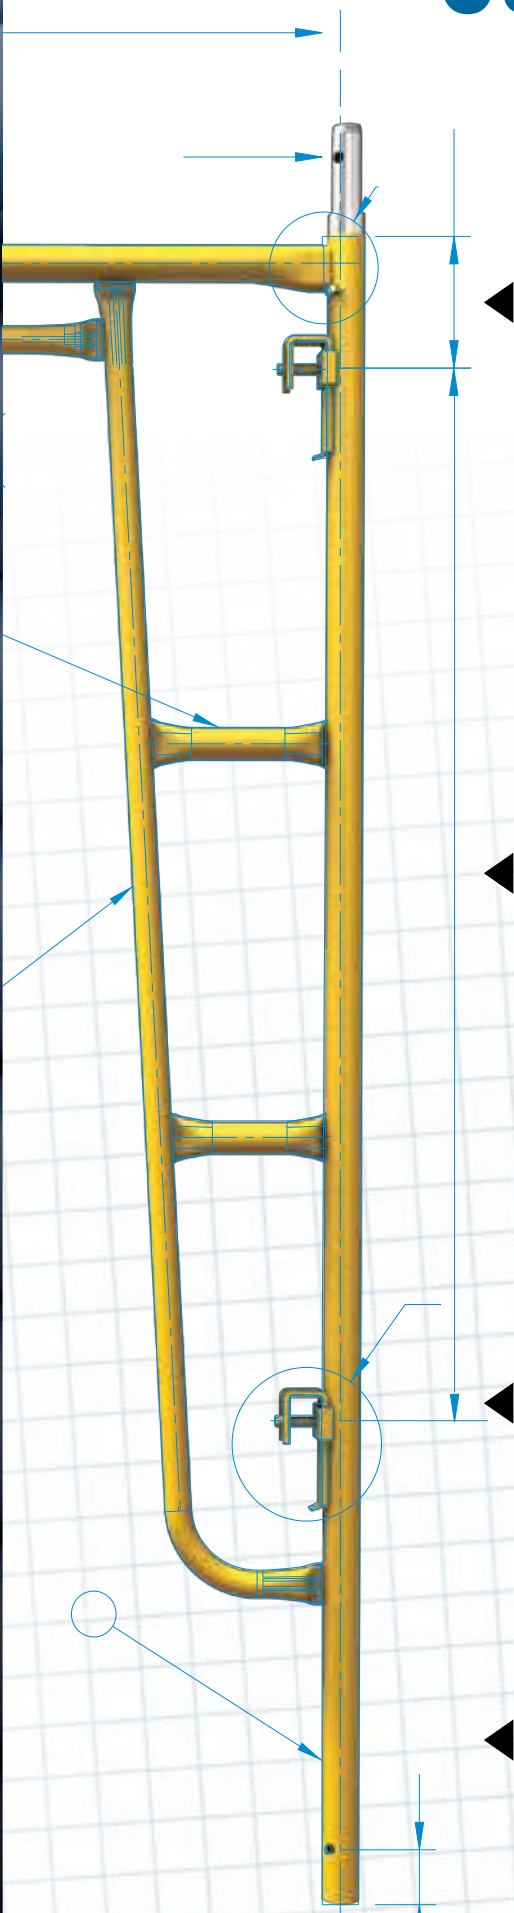

COUPLING PINS

Connect & secure your coupling pin to any scaffold frame legs with our choice of spring-lock, clevis or roll pins. Ask our customer service for more details.

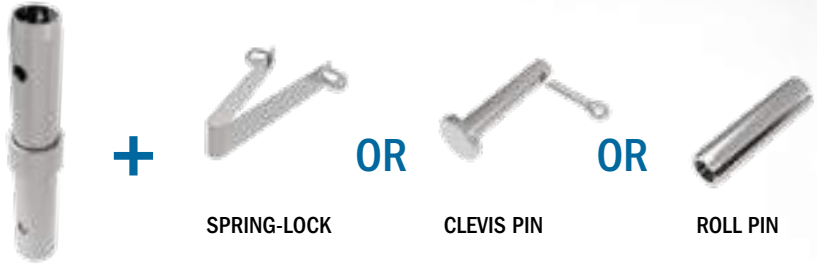


SPRING-LOCK

CLEVIS PIN

ROLL PIN

FRAME LOCKS*

Metaltech offers a wide range of frame locks to meet your needs. Order your choice through our customer service for either one of our Gravity-Lock, T-Lock, F-Lock, C-Lock, U-Lock, V-Lock or K-Lock locking systems.

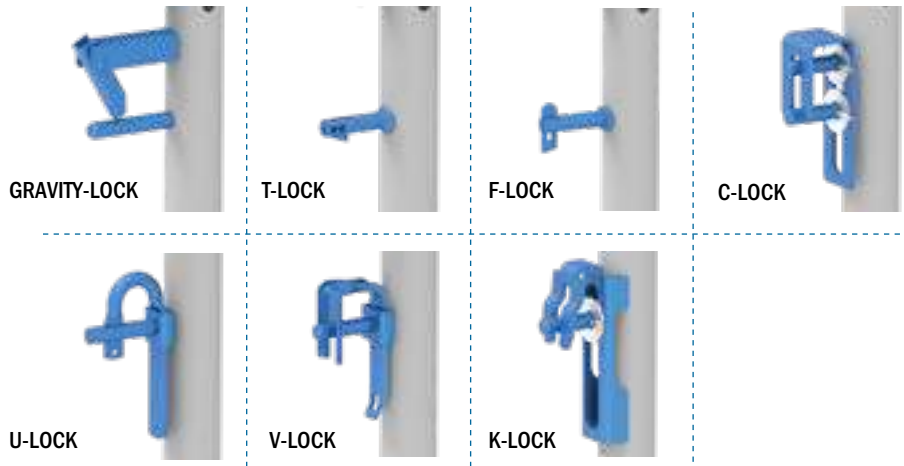

GRAVITY-LOCK

T-LOCK

F-LOCK

C-LOCK

U-LOCK

V-LOCK

K-LOCK

CUSTOM FRAMES*

With our 58 years of experience, supported by our manufacturing facility and engineering team, we can match your needs by developing custom frames. They can be compatible with brands such as Vanguard, Bill Jax, Waco and Safway, we fit them all. Contact our customer service for more information.†

† All trademarks and registered trademarks listed above are the property of their respective owners.

SPECIAL COLORS*

Customize your frames with your color choice. Please inquire with customer service for our competitive prices.



EXTERIOR SCAFFOLDING COMPONENTS - SAFERSTACK®




*Minimum order quantity applies

STANDARD FRAMES




EXTERIOR SCAFFOLDING COMPONENTS - SAFERSTACK®



OSHA
MEETS






DIMENSIONS (H X W)	24" X 60"	36" X 60"	36" X 60"
LOCK SPACING	12 IN.	24 IN.	24 IN.
WEIGHT	26.2 LB	31.8 LB	35.8 LB
INTERIOR TUBES	OUTSIDE DIAMETER 1 IN. - 16 GAUGE	OUTSIDE DIAMETER 1 IN. - 16 GAUGE	OUTSIDE DIAMETER 1 IN. - 16 GAUGE
PERIMETER TUBES	OUTSIDE DIAMETER 1.69 IN. - 13 GAUGE	OUTSIDE DIAMETER 1.69 IN. - 13 GAUGE	OUTSIDE DIAMETER 1.69 IN. - 13 GAUGE
FINISH	POWDER COATED	POWDER COATED	GALVANIZED
COUPLING PIN	SPRING-LOCK	SPRING-LOCK	SPRING-LOCK
FRAME LOCK	V-LOCK	GRAVITY-LOCK	GRAVITY-LOCK
STANDARDS	ANSI AND OSHA	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA
MODEL	M-MF2460VLV1PS	M-MF3660PS	M-MF3660GVPS
UPC	N/A	778300800353	778300801350






* Not Saferstack

DIMENSIONS (H X W)	48" X 60"	48" X 60"	60" X 36"/60" (ADJUSTABLE FRAME)*
LOCK SPACING	36 IN.	36 IN.	48 IN.
WEIGHT	36.8 LB	37 LB	49.8 LB
INTERIOR TUBES	OUTSIDE DIAMETER 1 IN. - 16 GAUGE	OUTSIDE DIAMETER 1 IN. - 16 GAUGE	OUTSIDE DIAMETER 1 IN. - 16 GAUGE
PERIMETER TUBES	OUTSIDE DIAMETER 1.69 IN. - 13 GAUGE	OUTSIDE DIAMETER 1.69 IN. - 13 GAUGE	OUTSIDE DIAMETER 1.69 IN. - 13 GAUGE
FINISH	POWDER COATED	GALVANIZED	POWDER COATED
COUPLING PIN	SPRING-LOCK	SPRING-LOCK	SPRING-LOCK
FRAME LOCK	GRAVITY-LOCK	GRAVITY-LOCK	GRAVITY-LOCK
STANDARDS	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA
MODEL	M-MF4860PS	M-MF4860GVPS	M-MF60EPS
UPC	778300800452	N/A	778300805563






DIMENSIONS (H X W)	60" X 60"	60" X 60"	60" X 60"
LOCK SPACING	48 IN.	48 IN.	48 IN.
WEIGHT	40.8 LB	43.8 LB	38 LB
INTERIOR TUBES	OUTSIDE DIAMETER 1 IN. - 16 GAUGE	OUTSIDE DIAMETER 1 IN. - 16 GAUGE	OUTSIDE DIAMETER 1 IN. - 16 GAUGE
PERIMETER TUBES	OUTSIDE DIAMETER 1.69 IN. - 13 GAUGE	OUTSIDE DIAMETER 1.69 IN. - 13 GAUGE	OUTSIDE DIAMETER 1.625 IN. - 13 GAUGE
FINISH	POWDER COATED	GALVANIZED	POWDER COATED - AVAILABLE IN GALVANIZED
COUPLING PIN	SPRING-LOCK	SPRING-LOCK	SPRING-LOCK
FRAME LOCK	GRAVITY-LOCK	GRAVITY-LOCK	T-LOCK
STANDARDS	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA	ANSI AND OSHA
MODEL	M-MF6060PS	M-MF6060GVPS	M-MF6060PS-A
UPC	778300800551	778300801558	778300800575






DIMENSIONS (H X W)	72" X 60"	76" X 60"	76" X 60"
LOCK SPACING	48 IN.	48 IN.	48 IN.
WEIGHT	42.8 LB	45.8 LB	48 LB
INTERIOR TUBES	OUTSIDE DIAMETER 1 IN. - 16 GAUGE	OUTSIDE DIAMETER 1 IN. - 16 GAUGE	OUTSIDE DIAMETER 1 IN. - 16 GAUGE
PERIMETER TUBES	OUTSIDE DIAMETER 1.69 IN. - 13 GAUGE	OUTSIDE DIAMETER 1.69 IN. - 13 GAUGE	OUTSIDE DIAMETER 1.69 IN. - 13 GAUGE
FINISH	POWDER COATED	POWDER COATED	GALVANIZED
COUPLING PIN	SPRING-LOCK	SPRING-LOCK	SPRING-LOCK
FRAME LOCK	GRAVITY-LOCK	GRAVITY-LOCK	GRAVITY-LOCK
STANDARDS	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA
MODEL	M-MF7260PS	M-MF7660PS	M-MF7660GVPS
UPC	778300800650	778300807659	778300827657







DIMENSIONS (H X W)	60" X 48"	60" X 48"	76" X 24"
LOCK SPACING	48 IN.	48 IN.	48 IN.
WEIGHT	37.8 LB	38.7 LB	29.2 LB
INTERIOR TUBES	OUTSIDE DIAMETER 1 IN. - 16 GAUGE	OUTSIDE DIAMETER 1 IN. - 16 GAUGE	OUTSIDE DIAMETER 1 IN. - 16 GAUGE
PERIMETER TUBES	OUTSIDE DIAMETER 1.69 IN. - 13 GAUGE	OUTSIDE DIAMETER 1.69 IN. - 13 GAUGE	OUTSIDE DIAMETER 1.69 IN. - 13 GAUGE
FINISH	POWDER COATED	GALVANIZED	POWDER COATED
COUPLING PIN	SPRING-LOCK	SPRING-LOCK	SPRING-LOCK
FRAME LOCK	GRAVITY-LOCK	GRAVITY-LOCK	V-LOCK
STANDARDS	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA	ANSI AND OSHA
MODEL	M-MF6048PS	M-MF6048GVPS	M-MF7624VLV1PS
UPC	778300800544	778300801459	N/A





DIMENSIONS (H X W)	60" X 30"	60" X 30"	60" X 24"
LOCK SPACING	48 IN.	48 IN.	48 IN.
WEIGHT	30 LB	31.8 LB	49.8 LB
INTERIOR TUBES	OUTSIDE DIAMETER 1 IN. - 16 GAUGE	OUTSIDE DIAMETER 1 IN. - 16 GAUGE	OUTSIDE DIAMETER 1 IN. - 16 GAUGE
PERIMETER TUBES	OUTSIDE DIAMETER 1.69 IN. - 13 GAUGE	OUTSIDE DIAMETER 1.69 IN. - 13 GAUGE	OUTSIDE DIAMETER 1.69 IN. - 13 GAUGE
FINISH	POWDER COATED	GALVANIZED	POWDER COATED
COUPLING PIN	SPRING-LOCK	SPRING-LOCK	SPRING-LOCK
FRAME LOCK	GRAVITY-LOCK	GRAVITY-LOCK	V-LOCK
STANDARDS	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA	ANSI AND OSHA
MODEL	M-MF6030PS	M-MF6030GVPS	M-MF6024VLV1PS
UPC	778300800537	778300801534	N/A

LADDER ARCH FRAMES



DIMENSIONS (H X W)	76" X 60"	76" X 60"
LOCK SPACING	48 IN.	48 IN.
WEIGHT	52.8 LB	55.8 LB
INTERIOR TUBES	OUTSIDE DIAMETER 1.25 IN. - 16 GAUGE	OUTSIDE DIAMETER 1.25 IN. - 16 GAUGE
PERIMETER TUBES	OUTSIDE DIAMETER 1.69 IN. - 13 GAUGE	OUTSIDE DIAMETER 1.69 IN. - 13 GAUGE
FINISH	POWDER COATED	GALVANIZED
COUPLING PIN	SPRING-LOCK	SPRING-LOCK
FRAME LOCK	GRAVITY-LOCK	GRAVITY-LOCK
STANDARDS	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA
MODEL	M-MA7660LPS	M-MA7660LGVPS
UPC	778300806461	778300816460



DIMENSIONS (H X W)	78" X 60"*	78" X 60"*
LOCK SPACING	48 IN.	48 IN.
WEIGHT	53.5 LB	56.5 LB
INTERIOR TUBES	OUTSIDE DIAMETER 1.25 IN. - 16 GAUGE	OUTSIDE DIAMETER 1.25 IN. - 16 GAUGE
PERIMETER TUBES	OUTSIDE DIAMETER 1.69 IN. - 13 GAUGE	OUTSIDE DIAMETER 1.69 IN. - 13 GAUGE
FINISH	POWDER COATED	GALVANIZED
COUPLING PIN	SPRING-LOCK	SPRING-LOCK
FRAME LOCK	GRAVITY-LOCK	GRAVITY-LOCK
STANDARDS	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA
MODEL	M-MA7860LPS	M-MA7860LGVPS
UPC	778300816477	778300816668



*A set-up charge of \$250 is required for order less than 250 units.

EXTERIOR SCAFFOLDING COMPONENTS - SAFERSTACK®





WALK-THRU ARCH FRAMES

EXTERIOR SCAFFOLDING COMPONENTS - SAFERSTACK®




DIMENSIONS (H X W)	76" X 60"	76" X 60"
LOCK SPACING	48 IN.	48 IN.
WEIGHT	46.8 LB	48.8 LB
INTERIOR TUBES	OUTSIDE DIAMETER 1.25 IN. - 16 GAUGE	OUTSIDE DIAMETER 1.25 IN. - 16 GAUGE
PERIMETER TUBES	OUTSIDE DIAMETER 1.69 IN. - 13 GAUGE	OUTSIDE DIAMETER 1.69 IN. - 13 GAUGE
FINISH	POWDER COATED	GALVANIZED
COUPLING PIN	SPRING-LOCK	SPRING-LOCK
FRAME LOCK	GRAVITY-LOCK	GRAVITY-LOCK
STANDARDS	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA
MODEL	M-MA7660PS	M-MA7660GVPS
UPC	778300806454	778300816453




DIMENSIONS (H X W)	78" X 60"*	78" X 60"*
LOCK SPACING	48 IN.	48 IN.
WEIGHT	47.3 LB	49.3 LB
INTERIOR TUBES	OUTSIDE DIAMETER 1.25 IN. - 16 GAUGE	OUTSIDE DIAMETER 1.25 IN. - 16 GAUGE
PERIMETER TUBES	OUTSIDE DIAMETER 1.69 IN. - 13 GAUGE	OUTSIDE DIAMETER 1.69 IN. - 13 GAUGE
FINISH	POWDER COATED	GALVANIZED
COUPLING PIN	SPRING-LOCK	SPRING-LOCK
FRAME LOCK	GRAVITY-LOCK	GRAVITY-LOCK
STANDARDS	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA
MODEL	M-MA7860PS	M-MA7860GVPS
UPC	778300806652	778300816651

* A set-up charge of \$250 is required for order less than 250 units.

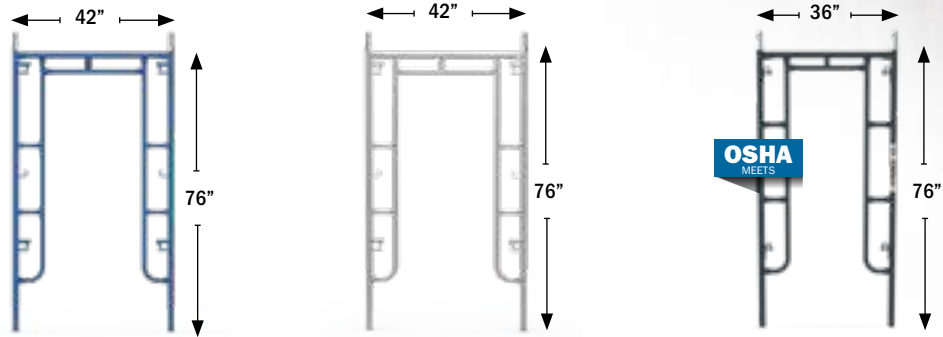


DIMENSIONS (H X W)	76" X 42"	76" X 42"	76" X 36"
LOCK SPACING	48 IN.	48 IN.	48 IN.
WEIGHT	41.1 LB	41.4 LB	40.9 LB
INTERIOR TUBES	OUTSIDE DIAMETER 1.25 IN. - 16 GAUGE	OUTSIDE DIAMETER 1.25 IN. - 16 GAUGE	OUTSIDE DIAMETER 1.25 IN. - 16 GAUGE
PERIMETER TUBES	OUTSIDE DIAMETER 1.69 IN. - 13 GAUGE	OUTSIDE DIAMETER 1.69 IN. - 13 GAUGE	OUTSIDE DIAMETER 1.69 IN. - 13 GAUGE
FINISH	POWDER COATED	GALVANIZED	POWDER COATED
COUPLING PIN	SPRING-LOCK	SPRING-LOCK	SPRING-LOCK
FRAME LOCK	GRAVITY-LOCK	GRAVITY-LOCK	V-LOCK
STANDARDS	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA	ANSI AND OSHA
MODEL	M-MA7642PS	M-MA7642GVPS	M-MA7636VL1PS
UPC	778300806409	778300806416	N/A

Find other Stairways parts on page 22

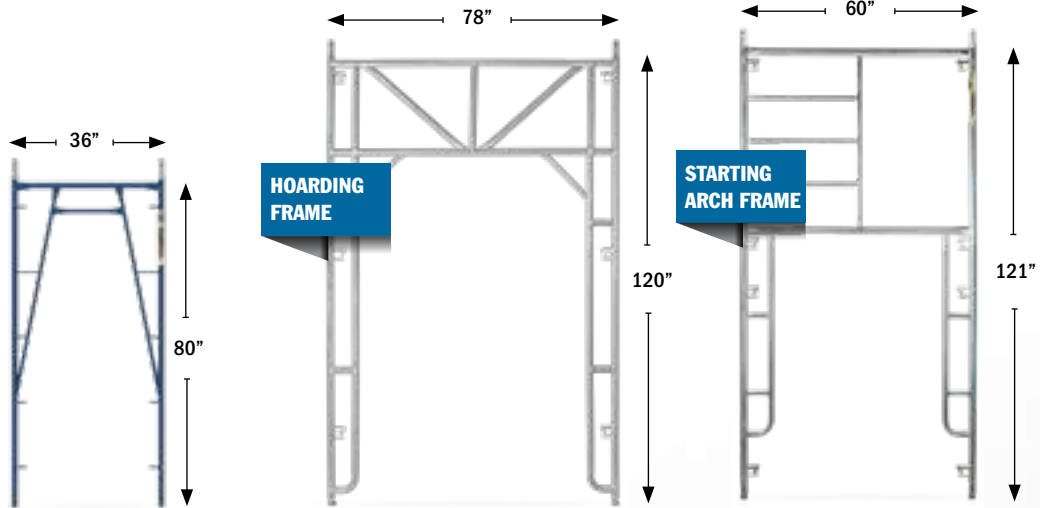


DIMENSIONS (H X W)	80" X 36"	120" X 78"	121" X 60"
LOCK SPACING	16 OR 48 IN.	N/A	N/A
WEIGHT	35.1 LB	101 LB	66.9 LB
INTERIOR TUBES	OUTSIDE DIAMETER 1.25 IN. - 16 GAUGE	OUTSIDE DIAMETER 1.25 IN. - 16 GAUGE	OUTSIDE DIAMETER 1.25 IN. - 16 GAUGE
PERIMETER TUBES	OUTSIDE DIAMETER 1.625 IN. - 13 GAUGE	OUTSIDE DIAMETER 1.69 IN. - 13 GAUGE	OUTSIDE DIAMETER 1.69 IN. - 13 GAUGE
FINISH	POWDER COATED	GALVANIZED	GALVANIZED
COUPLING PIN	SPRING-LOCK	SPRING-LOCK	SPRING-LOCK
FRAME LOCK	GRAVITY-LOCK	GRAVITY-LOCK	GRAVITY-LOCK
STANDARDS	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA
MODEL	M-MA8036ATLW1PS	M-MA12078GV	M-MA12160DEGV
UPC	N/A	778300806102	778300950195




LIGHT DUTY FRAMES



EXTERIOR SCAFFOLDING COMPONENTS - SAFERSTACK®

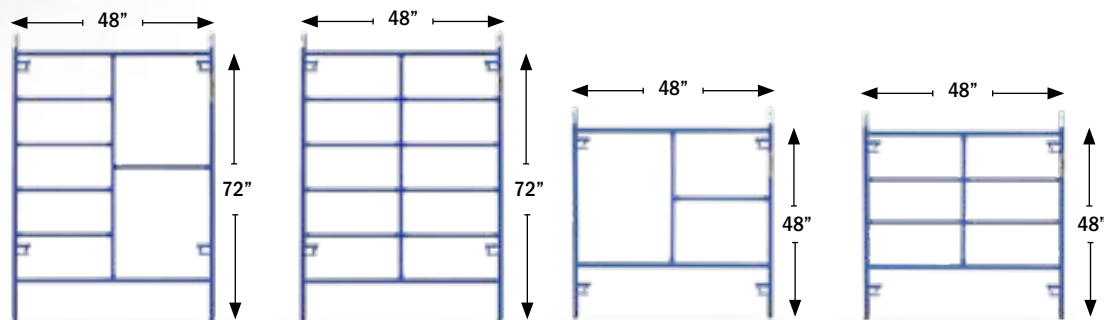

DIMENSIONS (H X W)	72" X 48"	72" X 48"	48" X 48"	48" X 48"
LOCK SPACING	48 IN.	48 IN.	36 IN.	36 IN.
WEIGHT	29.8 LB	37.1 LB	21.8 LB	26.5 LB
INTERIOR TUBES	OUTSIDE DIAMETER 1 IN.	OUTSIDE DIAMETER 1 IN.	OUTSIDE DIAMETER 1 IN.	OUTSIDE DIAMETER 1 IN.
PERIMETER TUBES	OUTSIDE DIAMETER 1.25 IN.	OUTSIDE DIAMETER 1.25 IN.	OUTSIDE DIAMETER 1.25 IN.	OUTSIDE DIAMETER 1.25 IN.
FINISH	POWDER COATED	POWDER COATED	POWDER COATED	POWDER COATED
COUPLING PIN	SPRING-LOCK	SPRING-LOCK	SPRING-LOCK	SPRING-LOCK
FRAME LOCK	GRAVITY-LOCK	GRAVITY-LOCK	GRAVITY-LOCK	GRAVITY-LOCK
STANDARDS	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA	ANSI AND OSHA	ANSI, CSA AND OSHA
MODEL	LD-LD7248-4MPS	LD-LD7248DS-4M	LD-LD4848PS	LD-LD4848DS
UPC	778300814473	N/A	778300814442	N/A



DESCRIPTION	LOCK ARM	GUARDRAIL POST WITH HALF CLAMP	CASTER (WITH 1" STEM)	GALVANIZED LEVELING JACK
DIMENSIONS	24 IN.	56.5 IN.	5 IN.	24 IN.
WEIGHT	1.5 LB	11 LB	3 LB	1 LB
COMPATIBLE	LIGHT FRAMES ONLY	LIGHT FRAMES ONLY	LIGHT FRAMES ONLY	LIGHT FRAMES ONLY
STANDARDS	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA
MODEL	LD-LDLA24	LD-LDGPCL	I-11CAS5P	LD-LDBJP24
UPC	778300880249	N/A	778300211555	778300920129



DESCRIPTION	COUPLING PIN & SPRING-LOCK	COUPLING PIN	SPRING-LOCK
DIMENSIONS	9.5 IN.	8 IN.	N/A
WEIGHT	0.48 LB	0.43 LB	0.05 LB
COMPATIBLE	LIGHT FRAMES ONLY	LIGHT FRAMES ONLY	LIGHT FRAMES ONLY
STANDARDS	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA
MODEL	LD-LDCLS	LD-LDCL	LD-LDLS
UPC	778300001545	778300881345	778300883004

INFO

Our light frames have different dimensions than the other categories of frames and they come with their own assembly components. The lock arms, leveling jacks, casters, coupling pins and spring locks are specifically designed to be used with the light frames only.

GUARDRAILS, TOEBOARDS & TIE-OFF BARS



GUARDRAIL POST WITH WEDGE CLAMP

FINISH	WEIGHT	MODEL	UPC
POWDER COATED	10.8 LB	M-MGPUSL	778300950089
GALVANIZED	11.1 LB	M-MGPUSLGV	778300950096

STANDARDS: ANSI, CSA AND OSHA

GALVANIZED GUARDRAIL

DIMENSIONS	WEIGHT	MODEL	UPC
30 IN.	1.73 LB	M-MGR30	778300950065
48 IN.	2.71 LB	M-MGR4	778300950485
60 IN.	3 LB	M-MGR5	778300950058
84 IN.	4.36 LB	M-MGR7	778300950072
96 IN.	5.19 LB	M-MGR8	N/A
120 IN.	8.22 LB	M-MGR10	778300950102

STANDARDS: ANSI, CSA AND OSHA



DESCRIPTION ADJUSTABLE END-STOP GUARDRAIL

COMPATIBLE	ALL ARCH FRAMES
WEIGHT	10.6 LB
FINISH	POWDER COATED
STANDARDS	ANSI, CSA AND OSHA
MODEL	M-MGRMAEX
UPC	N/A

DESCRIPTION ADJUSTABLE END-STOP GUARDRAIL

COMPATIBLE	ALL ARCH FRAMES
WEIGHT	10.8 LB
FINISH	GALVANIZED
STANDARDS	ANSI, CSA AND OSHA
MODEL	M-MGRMAEXGV
UPC	N/A



GALVANIZED TOEBOARD

DIMENSIONS	WEIGHT	MODEL	UPC
30 IN.	3.49 LB	M-MGT30	778300712304
60 IN.	6.47 LB	M-MGT60	778300712007
84 IN.	8.33 LB	M-MGT84	778300710690
120 IN.	12.20 LB	M-MGT120	778300712052

STANDARDS: ANSI, CSA AND OSHA

ALUMINUM TIE-OFF BAR

DIMENSIONS	WEIGHT	MODEL	UPC
7 FT	31.7 LB	M-BAA07	778300000364
8 FT	35.2 LB	M-BAA08	778300001354
10 FT	42.2 LB	M-BAA10	778300000371

STANDARDS: SCCI, CSA AND OSHA




GET THE METALTECH APP



BRACES & SIDE BRACKETS

EXTERIOR SCAFFOLDING COMPONENTS - SAFERSTACK®

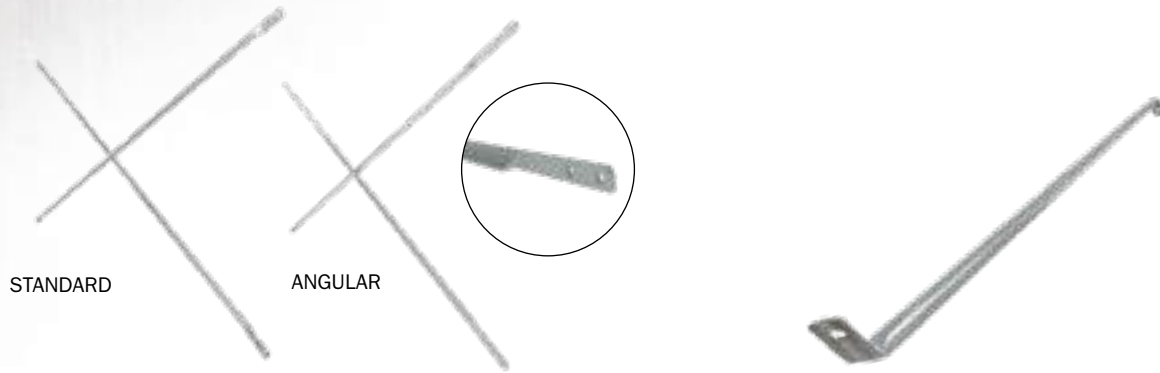

STANDARD

ANGULAR

GALVANIZED STANDARD CROSS BRACE

DIMENSIONS (H X W)	WEIGHT	MODEL	UPC
2 X 7 FT	9.7 LB	M-MC2484	778300820726
27.75 IN. X 7 FT	9.8 LB	M-MC27.7584	778300820757
3 X 7 FT	10.1 LB	M-MC3684	778300820733
4 X 7 FT	10.7 LB	M-MC4884	778300820740
2 X 8 FT	11 LB	M-MC2496	778300820825
3 X 8 FT	11.3 LB	M-MC3696	N/A
4 X 8 FT	11.9 LB	M-MC4896	778300820849
2 X 10 FT	13.5 LB	M-MC24120	778300821020
27.75 IN. X 10 FT	13.6 LB	M-MC27.75120	778300821051
3 X 10 FT	13.8 LB	M-MC36120	778300821037
4 X 10 FT	14.2 LB	M-MC48120	778300821044

GALVANIZED DIAGONAL BRACE

DIMENSIONS	FRAME	WEIGHT	MODEL	UPC
7 FT SPAN	30 IN.	4.89 LB	M-MDB3084	778300930845
7 FT SPAN	60 IN.	5.65 LB	M-MDB6084	778300950706
10 FT SPAN	30 IN.	6.78 LB	M-MDB30120	778300930104
10 FT SPAN	60 IN.	7.10 LB	M-MDB60120	778300951000

STANDARDS: ANSI, CSA AND OSHA

GALVANIZED ANGULAR CROSS BRACE

3 OR 4 X 7 FT	13 LB	M-MC364884AN	N/A
3 OR 4 X 8 FT	15 LB	M-MC364896AN	N/A

STANDARDS: ANSI, CSA AND OSHA



DESCRIPTION	END BRACKET*	SIDE BRACKET	SIDE BRACKET
DIMENSIONS	20 IN.	20 IN.	20 IN.
WEIGHT	10 LB	9.16 LB	9.45 LB
FINISH	POWDER COATED	POWDER COATED	GALVANIZED
NORMES	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA
MODEL	M-ME20	M-MS20	M-MS20GV
UPC	778300892419	778300892402	778300892433

* Galvanized finish available on special order.




DESCRIPTION	SIDE BRACKET*	SIDE BRACKET*
DIMENSIONS	30 IN.	40 IN.
WEIGHT	12.44 LB	15.5 LB
FINISH	POWDER COATED	POWDER COATED
NORMES	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA
MODEL	M-MS30	M-MS40
UPC	778300893003	778300894000

*Galvanized finish available on special order.

*Galvanized finish available on special order.


COUPLING PINS & LOCKS

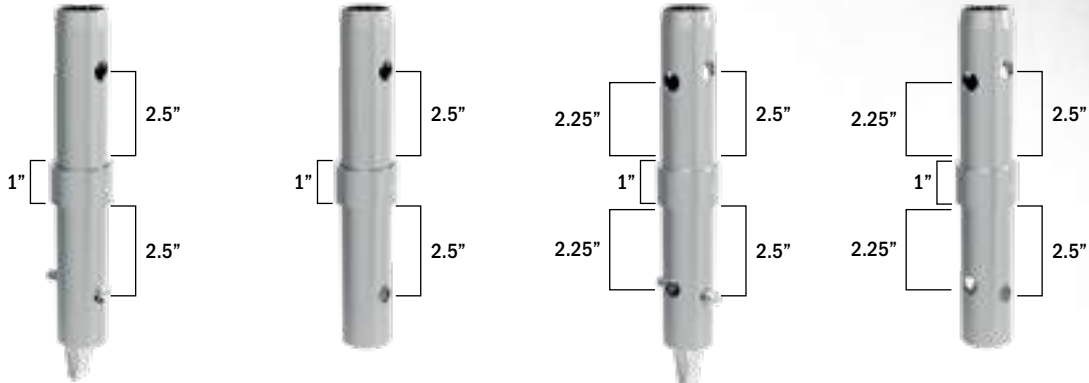

DESCRIPTION	COUPLING PIN & SPRING-LOCK	COUPLING PIN	COUPLING PIN & SPRING-LOCK	COUPLING PIN
HOLE SPACING	2.5 IN.	2.5 IN.	2.5 / 2.25 IN.	2.5 / 2.25 IN.
COLLAR	1 IN.	1 IN.	1 IN.	1 IN.
WEIGHT	0.9 LB	0.86 LB	0.9 LB	0.86 LB
FINISH	GALVANIZED	GALVANIZED	GALVANIZED	GALVANIZED
STANDARDS	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA
MODEL	M-MLC1S	M-MLC1	M-MLC1US	M-MLC1U
UPC	778300882014	778300880348	778300002290	N/A



DESCRIPTION	SPRING-LOCK	PIG TAIL	TOGGLE PIN	BOLT & NUT
DIMENSIONS	FOR HOLE Ø 0.5 IN.	1.5 X 3 IN.	3, 5 IN.	0.375 X 2.25 IN.
WEIGHT	0.04 LB	0.1 LB	0.15 LB	0.08 LB
FINISH	GALVANIZED	GALVANIZED	GALVANIZED	GALVANIZED
STANDARDS	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA
MODEL	M-MLS	M-MLG	M-MTOGGLE	M-MLB
UPC	778300882007	778300950300	778300880416	778300950393

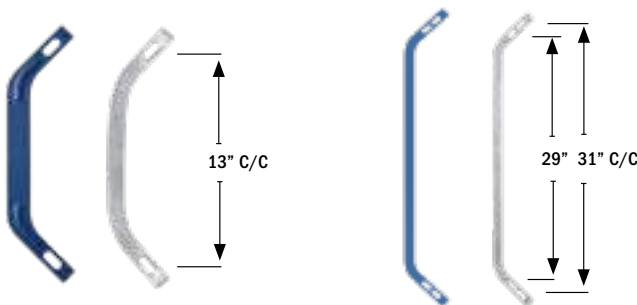

LOCK ARM				
DIMENSIONS	FRAME	WEIGHT	MODEL	UPC
13 IN.	POWDER COATED	0.71 LB	M-MLA13	778300950157
13 IN.	GALVANIZED	0.9 LB	M-MLA13GV	778300951154
29 / 31 IN.	POWDER COATED	1.86 LB	M-MLA2931	778300952939
29 / 31 IN.	GALVANIZED	1.9 LB	M-MLA2931GV	778300952946

STANDARDS: ANSI, CSA AND OSHA



EXTERIOR SCAFFOLDING COMPONENTS - SAFERSTACK®

WALL ATTACHMENTS & CLAMPS

EXTERIOR SCAFFOLDING COMPONENTS - SAFERSTACK®



ALUMINUM TUBE				WALL ATTACHMENT					
DIMENSIONS	WEIGHT	MODEL	UPC	4 FT TUBE	EYE BOLT ⁽¹⁾	CLAMP ⁽²⁾	WEIGHT	MODEL	UPC
10 FT SCHEDULE 40 (Ø 1.9 IN.)	9.4 LB	M-MTA120	778300871209	✓	-	-	5.86 LB	M-MTWA	778300872008
20 FT SCHEDULE 40 (Ø 1.9 IN.)	18.72 LB	M-MTA240	778300872404	✓	✓	-	6 LB	M-MTWAK	778300872015
				✓	✓	✓	9.22 LB	M-MTWAFDUK	778300000913

STANDARDS: ANSI, CSA AND OSHA

STANDARDS: ANSI, CSA AND OSHA



DESCRIPTION	EYE BOLT	WALL ATTACHMENT & PLATE	BOLTED 90° FIXED CLAMP	BOLTED SWIVEL CLAMP
DIMENSIONS	0.375 X 2.5 IN.	4 FT TUBE (MTA)	Ø 1.625 / 1.9 IN.	Ø 1.625 / 1.9 IN.
WEIGHT	0.11 LB	7.6 LB	3.25 LB	3.75 LB
FINISH	GALVANIZED	GALVANIZED AND ALUMINUM	GALVANIZED	GALVANIZED
STANDARDS	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA
MODEL	M-MTWA EYE	M-MTWAGVPL	M-MTCF DU	M-MTCS DU
UPC	778300872107	778300872022	778300862108	778300862115



GALVANIZED WEDGE CLAMPS 90°				GALVANIZED SWIVEL WEDGE CLAMPS			
DIMENSIONS	WEIGHT	MODEL	UPC	DIMENSIONS	WEIGHT	MODEL	UPC
Ø 1.9 / 1.9 IN.	3.3 LB	M-MTCFW1	778300862009	Ø 1.9 / 1.9 IN.	3.7 LB	M-MTCSW1	778300862030
Ø 1.625 / 1.9 IN.	2.32 LB	M-MTCFW2	778300862016	Ø 1.625 / 1.9 IN.	3.62 LB	M-MTCSW2	778300862047
Ø 1.625 / 1.625 IN.	2.3 LB	M-MTCFW3	778300862023	Ø 1.625 / 1.625 IN.	3.5 LB	M-MTCSW3	778300862054

STANDARDS: ANSI, CSA AND OSHA

STANDARDS: ANSI, CSA AND OSHA

PLATFORMS



ALUMINUM PLATFORM WITH 5/8" PLYWOOD DECK

DIMENSIONS	LOAD CAPACITY	WEIGHT	MODEL	UPC
7 FT X 19 IN.	75 LB/FT ²	33.2 LB	M-MPP719	778300900077
7 FT X 24 IN.	75 LB/FT ²	38 LB	M-MPP724	778300900725
7 FT X 28 IN.	25 LB/FT ²	40 LB	M-MPP728	778300002146
8 FT X 19 IN.	75 LB/FT ²	41.5 LB	M-MPP819	N/A
10 FT X 19 IN.	75 LB/FT ²	46 LB	M-MPP1019	778300900107
10 FT X 24 IN.	50 LB/FT ²	62 LB	M-MPP1024	778300900121
10 FT X 28 IN.	25 LB/FT ²	72.5 LB	M-MPP1028	778300900145

STANDARDS: ANSI, CSA AND OSHA

ALUMINUM PLATFORM WITH 5/8" PLYWOOD DECK WITH EDGE CAPPING

DIMENSIONS	LOAD CAPACITY	WEIGHT	MODEL	UPC
7 FT X 19 IN.	75 LB/FT ²	34.2 LB	M-MPP719RE	778300000579
10 FT X 19 IN.	75 LB/FT ²	47 LB	M-MPP1019RE	778300000562

STANDARDS: ANSI, CSA AND OSHA



ALUMINUM PLATFORM WITH 5/8" ANTI-SLIP PLYWOOD DECK WITH EDGE CAPPING

DIMENSIONS	LOAD CAPACITY	WEIGHT	MODEL	UPC
7 FT X 19 IN.	75 LB/FT ²	36 LB	M-MPP719AS	778300900015
10 FT X 19 IN.	75 LB/FT ²	53 LB	M-MPP1019AS	778300900022

ALUMINUM PLATFORM WITH 5/8" ANTI-SLIP PLYWOOD DECK

DIMENSIONS	LOAD CAPACITY	WEIGHT	MODEL	UPC
7 FT X 24 IN.	75 LB/FT ²	38 LB	M-MPP724AS	778300900039
10 FT X 24 IN.	50 LB/FT ²	62 LB	M-MPP1024AS	778300900046

STANDARDS: ANSI, CSA AND OSHA



ALL ALUMINUM PLATFORM

DIMENSIONS	LOAD CAPACITY	WEIGHT	MODEL	UPC
7 FT X 19 IN.	75 LB/FT ²	27.5 LB	M-MPA719	778300901074
8 FT X 19 IN.	75 LB/FT ²	35 LB	M-MPA819	778300000906
10 FT X 19 IN.	75 LB/FT ²	42.46 LB	M-MPA1019	778300901104

STANDARDS: ANSI, CSA AND OSHA

FEATURES

CROSSBEAM

- EVENLY SUPPORTS THE 5/8" THICK PLYWOOD AND PREVENTS IT FROM FLEXING
- GALVANIZED STEEL
- ERGONOMIC HANDLE CUT OUT FOR COMFORT AND EASY HANDLING

STANDARD ON PLYWOOD PLATFORMS MODELS OF 19 IN. WIDE.

EDGE CAPPING

- PREVENTS EXTREMITY WEAR
- RE-INFORCES PLYWOOD DECK EXTREMITIES
- INCREASES THE PLYWOOD LIFESPAN
- CUSTOMIZES YOUR EDGE CAPPING WITH YOUR COMPANY NAME. (MINIMUM ORDER QUANTITY APPLIES)

ONLY AVAILABLE ON PLYWOOD PLATFORMS MODELS OF 19 IN. WIDE.

SIDE RAILS

- PROTECT THE PLYWOOD EDGES TO PREVENT WATER INFILTRATION, DELAMINATION AND PREMATURE WEAR

EXTERIOR SCAFFOLDING COMPONENTS - SAFERSTACK®



GET THE METALTECH APP



BASES



GALVANIZED LEVELING JACK WITH PLATE					GALVANIZED LEVELING JACK WITH SWIVEL BASE				
DIMENSIONS	WEIGHT	TUBE	MODEL	UPC	DIMENSIONS	WEIGHT	TUBE	MODEL	UPC
24 IN.	6 LB	HOLLOW	M-MBSJP24H	778300920112	24 IN.	7.32 LB	HOLLOW	M-MBSJPSW24H	778300000227
24 IN.	11 LB	SOLID	M-MBSJP24	778300920105	24 IN.	13 LB	SOLID	M-MBSJPSW24	778300000210
36 IN.	16 LB	SOLID	M-MBSJP36	778300920310					

STANDARDS: ANSI, CSA AND OSHA

STANDARDS: ANSI, CSA AND OSHA



GALVANIZED LEVELING JACK WITH PLATE - SHORT HANDLE					GALVANIZED LEVELING JACK WITH SWIVEL PLATE - SHORT HANDLE				
DIMENSIONS	WEIGHT	TUBE	MODEL	UPC	DIMENSIONS	WEIGHT	TUBE	MODEL	UPC
24 IN.	5.46 LB	HOLLOW	M-MBSJP24NH	778300002689	24 IN.	8.67 LB	HOLLOW	M-MBSJPSW24NH	778300002702
24 IN.	11 LB	SOLID	M-MBSJP24N	778300002672	24 IN.	13 LB	SOLID	M-MBSJPSW24N	778300002696

STANDARDS: ANSI, CSA AND OSHA

STANDARDS: ANSI, CSA AND OSHA



GALVANIZED LEVELING JACK				
DIMENSIONS	WEIGHT	TUBE	MODEL	UPC
24 IN.	7 LB	HOLLOW	M-MBSJS24H	778300920020
24 IN.	11 LB	SOLID	M-MBSJS24	778300920013
36 IN.	15 LB	SOLID	M-MBSJS36	778300920037

STANDARDS: ANSI, CSA AND OSHA




DESCRIPTION	LEVELING JACK WITH 8" U-HEAD	LEVELING JACK WITH 4" AND 8" FORK HEAD	GALVANIZED U-HEAD
DIMENSIONS	24 IN.	24 IN.	4 IN.
TUBE	SOLID	SOLID	N/A
WEIGHT	16.67 LB	15.94 LB	5.18 LB
STANDARDS	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA
MODEL	M-MBSJP8U24	M-MBSJPF24	M-MBB4UGV
UPC	778300002481	778300002412	N/A



6 X 6 IN. BASE PLATE				6 X 6 IN. SWIVEL BASE PLATE			
WEIGHT	FINISH	MODEL	UPC	WEIGHT	FINISH	MODEL	UPC
2 LB	POWDER COATED	M-MBBF	778300920273	2.92 LB	POWDER COATED	M-MBBS	778300920280
2.2 LB	GALVANIZED	M-MBBFGV	778300920297	4 LB	GALVANIZED	M-MBBSGV	778300920266

STANDARDS: ANSI, CSA AND OSHA

STANDARDS: ANSI, CSA AND OSHA

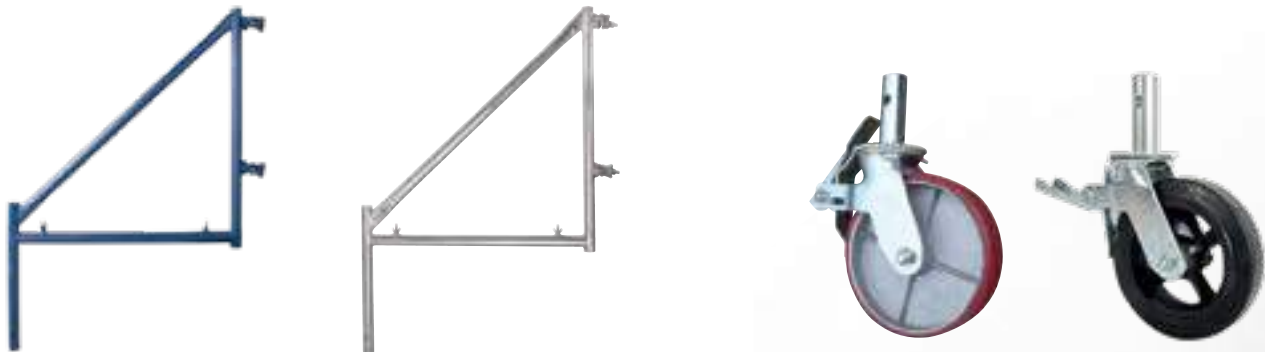

OUTRIGGER					DESCRIPTION	HEAVY-DUTY CASTER	CASTER
DIMENSIONS	WEIGHT	FINISH	MODEL	UPC	LOAD CAPACITY		
32 IN.	22 LB	POWDER COATED	M-M032	778300890101		1,100 LB	750 LB
32 IN.	22.3 LB	GALVANIZED	M-M032GV	778300890118	DIMENSIONS	8 IN.	8 IN.
					WEIGHT	10.65 LB	9.8 LB
					STANDARDS	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA
					MODEL	M-MBC8HD	M-MBC8
					UPC	778300930098	778300930081

STANDARDS: ANSI, CSA AND OSHA



STAIRWAYS

INFO

Find Starting Stairways Frames on page 13


EXTERIOR SCAFFOLDING COMPONENTS - SAFERSTACK®



DESCRIPTION	60" STEEL STAIR WITH HANDRAILS (7' X 60") FOR 60" FRAME	OUTER HANDRAIL (7' X 60") FOR 60" FRAME	INNER HANDRAIL (7' X 60") FOR 60" FRAME	SHORT END OUTER HANDRAIL (7' X 60") FOR 60" FRAME
DIMENSIONS	84 X 60 IN.	103.25 X 78 IN.	103.25 X 61 IN.	103.25 X 61 IN.
WEIGHT	110 LB	19 LB	21 LB	21 LB
FINISH	GALVANIZED	GALVANIZED	GALVANIZED	GALVANIZED
STANDARDS	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA
MODEL	M-MST760	M-MST760OR	M-MST760RFN	M-MST760RDE
UPC	778300961009	778300002238	778300002269	778300002245



DESCRIPTION	SHORT END INNER HANDRAIL (7' X 60") FOR 60" FRAME	STAIRWAY GUARDRAIL FOR 60" FRAME	STAIR STARTING TUBE	STAIR STARTING TUBE
DIMENSIONS	103.25 X 78 IN.	33.5 X 20 IN.	60 IN.	60 IN.
WEIGHT	11 LB	1 LB	8.5 LB	8.8 LB
FINISH	GALVANIZED	GALVANIZED	POWDER COATED	GALVANIZED
STANDARDS	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA
MODEL	M-MST760IR	M-MSTGR6060	M-MSTB	M-MSTBGV
UPC	778300002252	778300950188	778300002276	778300002283



COMPATIBLE WITH:
STEP UP BILJAX,
SCAFFOLD TODAY,
VANGUARD AND
METALTECH*

DESCRIPTION	76" STEEL STAIR & HANDRAILS (7' X 76") FOR 76" FRAME	76" STEEL STAIR (7' X 76") FOR 76" FRAME	OUTER HANDRAIL (7' X 76") FOR 76" FRAME	INNER HANDRAIL (7' X 76") FOR 76" FRAME
DIMENSIONS	84 X 76 IN.	84 X 76 IN.	101 X 74 IN.	91 X 45 IN.
WEIGHT	117.2 LB (53.1 KG)	83 LB (37.6 KG)	20 LB (9.1 KG)	14.2 LB (6.4 KG)
FINISH	POWDER COATED	POWDER COATED	POWDER COATED	POWDER COATED
STANDARDS	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA
MODEL	M-MST776US	M-MST776USNR	M-MST776USOR	M-MST776USIR
UPC	778300002221	778300002191	778300002214	778300002207

* All trademarks and registered trademarks listed above are the property of their respective owners.

ACCESS LADDERS, TAGS, HOIST POSTS & PULLEY



FIT ALL FRAMES



DESCRIPTION	48" ACCESS LADDER	81" ACCESS LADDER	STARTER BRACKET
DIMENSIONS	48 X 16 IN. (15 IN. C/C)	81 X 16 IN. (15 IN. C/C)	12 X 16.5 IN. (15 IN. C/C)
WEIGHT	11 LB (5 KG)	16.5 LB (7.5 KG)	7.1 LB (3.2 KG)
STANDARDS	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA
MODEL	M-MFL4415	M-MFL7715	M-MFLBR
UPC	778300001903	778300001774	778300001781



DESCRIPTION	GIN BLOCK PULLEY	HOIST POST	HOIST POST	HOIST POST & GIN BLOCK PULLEY KIT
LOAD CAPACITY	250 LB	250 LB	250 LB	250 LB
WEIGHT	14.4 LB	32.17 LB	43 LB	46.57 LB
FINISH	GALVANIZED	POWDER COATED	GALVANIZED	POWDER COATED
STANDARDS	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA
MODEL	M-MHP	M-MHA	M-MHAGV	M-MHAP
UPC	778300959204	778300959006	778300959105	778300959402



SCAFFOLD INSPECTION SAFETY TAGS

DESCRIPTION	COLOR	PACKAGE	MODEL	UPC
TAG HOLDER	WHITE	BAG OF 20	M-THUS	778300002153
COMPLETE SCAFFOLD TAG	GREEN	BAG OF 500	M-TGRUS	778300002160
PRE-SHIFT INSPECTION TAG	YELLOW	BAG OF 500	M-TYWUS	778300002177
INCOMPLETE SCAFFOLD TAG	RED	BAG OF 500	M-TRDUS	778300002184

EXTERIOR SCAFFOLDING COMPONENTS - SAFERSTACK®



GET THE METALTECH APP



RACK, NETTING, TARP & WAGON

EXTERIOR SCAFFOLDING COMPONENTS - SAFERSTACK®



DESCRIPTION	SCAFFOLDING RACK	LIFTING SLING	DESCRIPTION	DEBRIS NETTING	DEBRIS NETTING
DIMENSIONS	63 X 47 X 9 IN.	48 X 5 X 9 IN.	DIMENSIONS	10 X 164 FT	10 X 164 FT
COMPATIBLE	60" WIDE FRAME	M-MFRACK	PACKAGE	66 X 11.5 IN.	66 X 11.5 IN.
CAPACITY	24 FRAMES	1,500 LB	COLOR	BLACK	GREEN
WEIGHT	140 LB	21 LB	WEIGHT	46.2 LB	46.2 LB
FINISH	GALVANIZED	ALUMINUM	MODEL	M-MDNET10BK	M-MDNET10GN
MODELS	M-MFRACKGV	M-MFRSLING	UPC	778300000623	778300000616




DESCRIPTION	SCAFFOLD TARP	DESCRIPTION	BUNGEE TIES	SCREW CONNECTORS
DIMENSIONS	13 FT X 100 FT X 10 MIL	DIMENSIONS	11 IN.	1.25 IN. DIAM.
PACKAGE	78 X 9 IN.	PACKAGE	BAG OF 100	BAG OF 250
MATERIAL	FLAME RETARDANT	MODEL	M-MBT11	M-MTESCREW
WEIGHT	69 LB / 250 GSM	UPC	778300000593	778300001347
MODEL	M-MTE13100			
UPC	778300000586			



DESCRIPTION	WAGON WITH 16" WHEELS	WAGON WITH 26" WHEELS	YELLOW FLATPROOF WHEEL	RECYCLED WHEEL *
DIMENSIONS	ADJUSTABLE 7 - 10 FT	ADJUSTABLE 7 - 10 FT	16 IN.	26 IN.
LOAD CAPACITY	1,800 LB	1,800 LB	450 LB	450 LB
WEIGHT	184 LB	312 LB	7 LB	39 LB
STANDARDS	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA
MODEL	M-MW71016	M-MW71026	M-MWC16FP	M-MWC26
UPC	778300940301	778300940400	778300940318	778300940417

* The measurement can vary.
For information purposes only.

WALL BRACKETS, BEAMS & SHORING POSTS

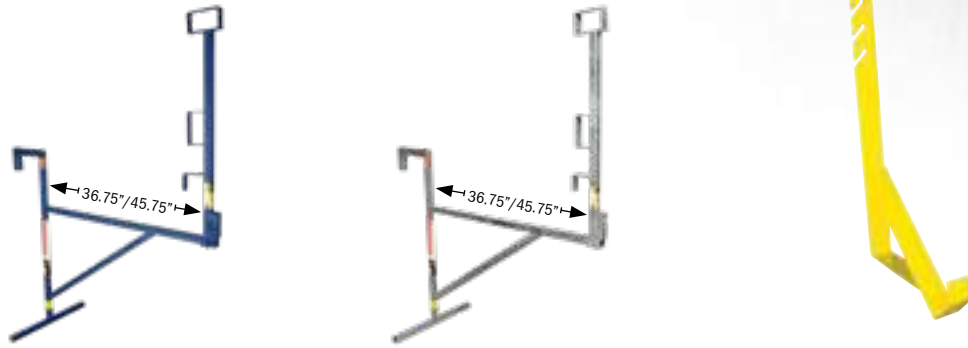

DESCRIPTION	WALL BRACKET	WALL BRACKET	ROOF BRACKET (FIXED)
DIMENSIONS	50.25 X 79 X 27.5 IN.	50.25 X 79 X 27.5 IN.	9.25 X 1.5 X 18.25 IN.
LOAD CAPACITY	1,000 LB	1,000 LB	290 LB
ADJUSTABLE	36.75 OR 45.75 IN.	36.75 OR 45.75 IN.	N/A
WEIGHT	67 LB	71 LB	2.5 LB
FINISH	POWDER COATED	GALVANIZED	POWDER COATED
STANDARDS	OSHA, ANSI, CWB AND CSA	OSHA, ANSI, CWB AND CSA	ANSI, CSA AND OSHA
MODEL	M-MWB42	M-MWB42GV	M-MRBF
UPC	778300940516	778300940523	778300890057



DESCRIPTION	POST DRIVER
FINISH	POWDER COATED
WEIGHT	17.6 LB
MODEL	C-MART
UPC	778300976270



TUFSTUD™ (GALVANIZED STEEL)*			
DIMENSIONS	WEIGHT	MODEL	
360 X 23 CM (12 FT X 9 IN.)	162 LB	M-TUFSTUD144	
180 X 23 CM (6 FT X 9 IN.)	94 LB	M-TUFSTUD72	
90 X 23 CM (3 FT X 9 IN.)	55 LB	M-TUFSTUD36	
45 X 23 CM (1.5 FT X 9 IN.)	36 LB	M-TUFSTUD18	
FASTBOLT FOR TUFSTUD™			
0.75 X 1.5 IN.	N/A	M-FASTBOLT1.5	
0.75 X 2 IN.	N/A	M-FASTBOLT2	

*Imperial unit for approximate reference



ALUMINUM BEAM			
DIMENSIONS	WEIGHT	MODEL	
4 FT X 6.5 IN.	15 LB	M-PA4B	
5 FT X 6.5 IN.	19 LB	M-PA5B	
6 FT X 6.5 IN.	23 LB	M-PA6B	
8 FT X 6.5 IN.	30 LB	M-PA8B	
10 FT X 6.5 IN.	38 LB	M-PA10B	
12 FT X 6.5 IN.	45 LB	M-PA12B	
14 FT X 6.5 IN.	53 LB	M-PA14B	
16 FT X 6.5 IN.	60 LB	M-PA16B	
18 FT X 6.5 IN.	68 LB	M-PA18B	
20 FT X 6.5 IN.	73 LB	M-PA20B	
21 FT X 6.5 IN.	79 LB	M-PA21B	
24 FT X 6.5 IN.	90 LB	M-PA24B	
28 FT X 6.5 IN.	105 LB	M-PA28B	
32 FT X 6.5 IN.	122 LB	M-PA32B	



GALVANIZED LIGHT DUTY SHORING POST*			
DIMENSIONS	WEIGHT	MODEL	UPC
3'6" TO 6'	28 LB	M-SHOREPOST0	778300976317
5'6" TO 10'	30 LB	M-SHOREPOST1	778300976324
6'6" TO 11'	32 LB	M-SHOREPOST2	778300976331
8'6" TO 13'	40 LB	M-SHOREPOST3	778300976348
10'6" TO 15'6"	44 LB	M-SHOREPOST4	778300976355

* The measurements and weights may differ. Contact us to get the latest capacity chart.

WALL BRACKETS, BEAMS & SHORING POSTS



MOBILE SCAFFOLDING JOBSITE SERIES™

Discover Metaltech's fresh, new product and packaging design with our innovative mobile scaffold work platform offering. Innovative safety rail, foldaway tool shelf, locking mechanisms are only a few of the features included in this category. These quick and easy to assemble work platforms offer consumers and contractors affordability, safety and ease of use, all in easy to merchandise packages.

- **SAFETY RAILS**
- **FOLDAWAY TOOL SHELF**
- **GREAT PACKAGING**



JOBSITE SERIES™

**BUILT TOUGH FOR
SAFETY**

METALTECH®


JOBSITE SERIES™ 6' BAKER

JOBSITE SERIES™



Model: I-CISC

INFO



COMPATIBLE WITH:
BILJAX, BUFFALO,
WERNER, UST AND
BUILDMAN 6'
DRYWALL BAKER*

1,000 lb
LOAD CAPACITY

12'
REACH

ASSEMBLED DIMENSIONS (WxDxH)	74.75 X 29.75 X 75 IN. (189.9 X 75.6 X 190.5 CM)
PACKAGE DIMENSIONS (WxDxH)	75 X 30.5 X 5.25 IN. (190.5 X 77.5 X 13.3 CM)
WEIGHT	119 LB (54 KG)
LOAD CAPACITY	1,000 LB (454 KG). Combined weight of user + materials
WORKING HEIGHTS	FROM 27 TO 73 IN. (68.6 TO 185 CM). 2 in. (5 cm) increment adjustable heights
REACH	12 FT (3.7 M). Stackable up to 3 units high for 24 ft (7.4 m) reach
FINISH	POWDER COATED
PLATFORM	1/2 IN. (12 MM) PLYWOOD THICK WITH PROTECTIVE STEEL EDGE BANDING
STRUCTURE	1.5 IN. (3.8 CM) SQUARE TUBE. 16 GAUGE STEEL
CASTERS	5 IN. (13 CM) DOUBLE LOCKING HEAVY DUTY
REPLACEMENT PARTS	SEE PAGE 92
STANDARDS	ANSI, CSA AND OSHA
MODEL	I-CISC
UPC	778300200108

INFO



MULTI PURPOSE

Suitable and safe for all types of interior work. Each end can adjust separately to be used on both level surfaces and stairways. At 29.75" (75.6 cm) wide, it can easily roll through doorways.



QUICK AND EASY HEIGHT ADJUSTMENT

Platform height adjusts at 2" (5 cm) increments from 27" to 73" (68.6 to 185 cm). Double prong spring-loaded locking mechanism. Deck braces allow movement over lower obstacles.

ALSO AVAILABLE WITH TRAPDOOR



Model: I-CISCTP

PLATFORM	PLATFORM WITH TRAPDOOR 1/2 IN. (12 MM) PLYWOOD THICK WITH PROTECTIVE STEEL EDGE BANDING
WEIGHT	131 LB (59.4 KG)
MODEL	I-CISCTP
UPC	778300200122

* All trademarks and registered trademarks listed above are the property of their respective owners.

STANDARDS: **ANSI OSHA CSA**

OPTIONS



SCAFFLOCK™

DESCRIPTION	GUARDRAILS SYSTEM	39" HIGH EXTENSION	TOOL SHELF	SCAFFLOCK™ SAFETY BRAKES
ASSEMBLED DIMENSIONS (W X D X H)	69.75 X 29.25 X 44.5 IN. (177.2 X 74.3 X 113 CM)	73.75 X 29 X 42.5 IN. (187.3 X 73.7 X 108 CM)	30.25 X 20 X 2.75 IN. (76.8 X 50.8 X 6.7 CM)	29.25 X 7.5 X 71.9 IN. (74.3 X 19.2 X 182.6 CM)
PACKAGE DIMENSIONS (W X D X H)	46 X 31.25 X 4.5 IN. (116.8 X 79.4 X 11.4 CM)	83.5 X 30.75 X 3.75 IN. (212.1 X 78.1 X 9.5 CM)	31.25 X 20.75 X 9.25 IN. (79.4 X 52.7 X 23.5 CM)	36 X 5.25 X 5.25 IN. (91.4 X 13.3 X 13.3 CM)
WEIGHT	59 LB (26.8 KG)	60.2 LB (27.3 KG)	5.5 LB (2.5 KG)	31.1 LB (14.1 KG)
INCLUDED IN THE BOX	2 GUARDRAILS WITH GATES, 4 TOGGLE PINS	2 SIDE FRAMES, 2 BRACES, 8 LOCKING PINS	1 TOOL SHELF	2 SAFETY BRAKES
COMPATIBLE WITH	I-CISC, I-CAISC, I-CISCTP, I-CISCH1, I-CISCAS, I-CISCDW AND I-BMSS	I-CISC, I-CISCTP I-CISCH1, I-CISCAS, I-CISCDW AND I-BMSS	I-CISC, I-CISCTP, I-CISCPY, I-CAISC, I-CISCH1, I-CISCAS, I-CISCDW AND I-IRC	I-CISC, I-CISCTP, I-CAISC, I-CISCPY, I-CISCH1, I-CISCAS, I-CISCDW AND I-BMSS
MODEL	I-CISGRJP	I-ISEX4PPNCAS	I-CISTR	I-ISL
UPC	778300001316	778300200405	778300000463	778300001552




FOR 2 UNITS HIGH


FOR 3 UNITS HIGH

DESCRIPTION	SET OF 4 BASE PLATES	SET OF 4 LEVELING JACKS	SET OF 14" OUTRIGGERS	SET OF 46" OUTRIGGERS
ASSEMBLED DIMENSIONS (W X D X H)	4.75 X 4.75 X 4.75 IN. (12 X 12 X 12 CM)	9.5 X 5.5 X 12.25 IN. (23.6 X 13.5 X 31 CM)	19.25 X 4.5 X 24 IN. (48.7 X 11 X 61 CM)	52.75 X 3.75 X 52.25 IN. (134 X 9.5 X 132.7 CM)
PACKAGE DIMENSIONS (W X D X H)	11 X 5.25 X 5.5 IN. (27.8 X 13.3 X 13.8 CM)	13 X 13 X 8 IN. (33.6 X 33.2 X 20.4 CM)	24 X 16.5 X 5 IN. (61 X 41.9 X 12.7 CM)	54.5 X 50.25 X 4.25 IN. (138.4 X 127.6 X 10.8 CM)
WEIGHT	10.1 LB (4.6 KG)	24.2 LB (11 KG)	33 LB (15 KG)	110 LB (49.9 KG)
INCLUDED IN THE BOX	4 BASE PLATES, 4 LOCKING PINS	4 LEVELING JACKS	4 OUTRIGGERS, 4 CASTERS*, 12 LOCKING PINS	4 OUTRIGGERS, 4 CASTERS*, 12 LOCKING PINS
COMPATIBLE WITH	I-CISC, I-CISCTP, I-CAISC, I-CISCPY, I-CISCH1, I-CISCAS, I-CISCDW AND I-BMSS	I-CISC, I-CISCTP, I-CAISC, I-CISCH1, I-CISCAS, I-CISCDW AND I-BMSS	I-CISC, I-CISCTP I-CISCH1, I-CISCAS AND I-CAISC	I-CISC, I-CISCTP, I-CAISC, I-CISCH1, I-CISCAS, I-CISCDW AND I-CISCPY
MODEL	I-IBBF4	I-IBSJP12H4	I-CIS04	I-CIS04TT
UPC	778300001699	778300001644	778300613151	778300613120

*5 IN. (13 CM) DOUBLE LOCKING HEAVY DUTY

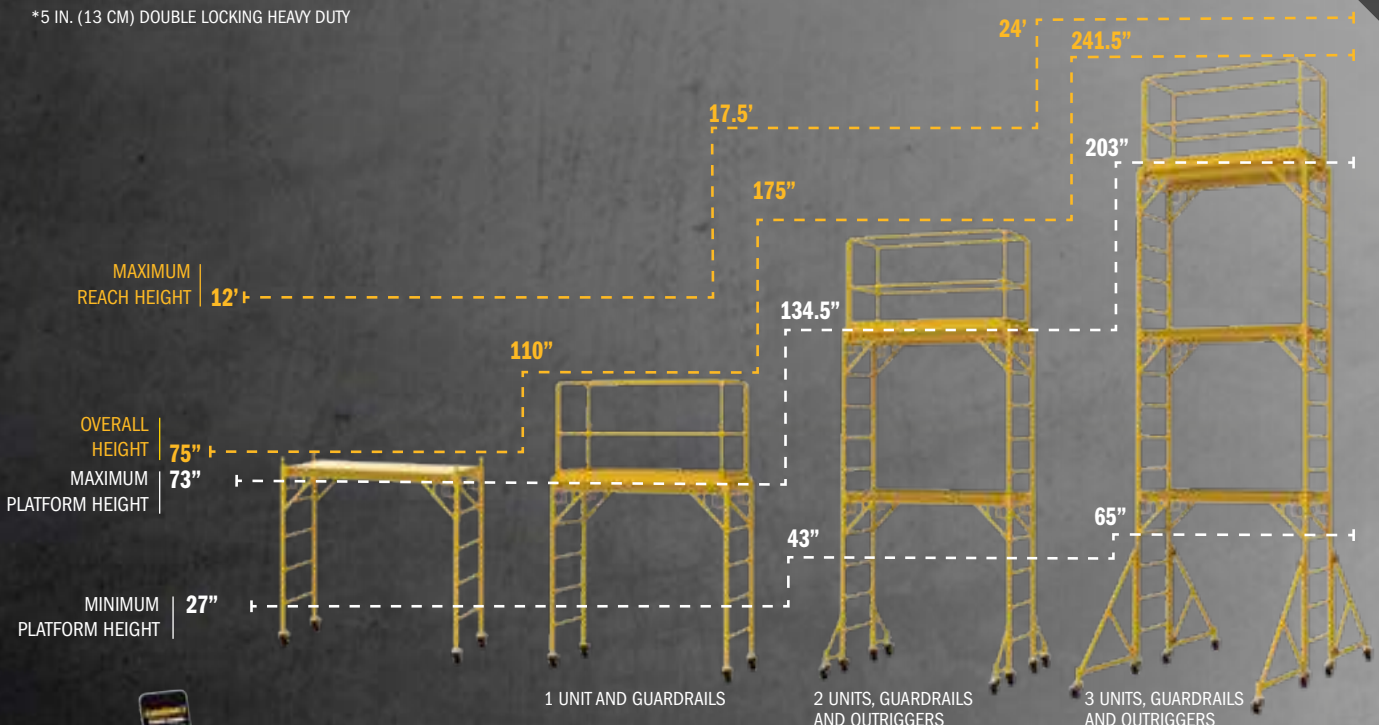

JOBSITE SERIES™



JOBSITE SERIES™ PERRY STYLE™



INFO



COMPATIBLE WITH:
NU-WAVE
PERRY 660*

1,250 lb
LOAD CAPACITY

12'
REACH

ASSEMBLED DIMENSIONS (WXDXH)	73.75 X 29.25 X 78.75 IN. (187.3 X 74.3 X 200 CM)
PACKAGE DIMENSIONS (WXDXH)	75.25 X 30 X 5.25 IN. (191.2 X 76.2 X 13.3 CM)
WEIGHT	134.6 LB (61 KG)
COMPATIBLE WITH	NU-WAVE PERRY MODEL 660*
LOAD CAPACITY	1,250 LB (567 KG). Combined weight of user + materials
WORKING HEIGHTS	FROM 27 TO 75.75 IN. (68.6 TO 192.4 CM). 2 in. (5 cm) increment adjustable heights
REACH	12 FT (3.7 M). Stackable up to 3 units high for 24 ft (7.4 m) reach
FINISH	POWDER COATED
PLATFORM	5/8 IN. (1.6 CM) PLYWOOD THICK WITH PROTECTIVE STEEL EDGE BANDING. ANTI-SLIP
STRUCTURE	1.5 IN. (3.8 CM) SQUARE TUBE. 16 GAUGE STEEL
CASTERS	5 IN. (13 CM) DOUBLE LOCKING HEAVY DUTY
REPLACEMENT PARTS	SEE PAGE 92
STANDARDS	ANSI AND OSHA
MODEL	I-CISCPY
UPC	778300200115

JOBSITE SERIES™

INFO



PERRY STYLE COMPATIBLE
All components are 100% fully compatible with Nu-Wave Perry Model 660*.



ANTI-SLIP DECK
5/8" (16 mm) plywood, slip-resistant.



MULTI PURPOSE
Suitable and safe for all types of interior work. Each end can adjust separately to be used on both level surfaces and stairways. At 29.25" (74.3 cm) wide, it can easily roll through doorways.

OPTIONS



SCAFFLOCK

DESCRIPTION	GUARDRAILS SYSTEM	40" HIGH EXTENSION	TOOL SHELF	SCAFFLOCK™ SAFETY BRAKES
ASSEMBLED DIMENSIONS (W X D X H)	70 X 33.5 X 48.5 IN. (177.8 X 83.8 X 121.9 CM)	73.75 X 30.5 X 43.5 IN. (187.3 X 77.5 X 110.5 CM)	30.25 X 20 X 2.75 IN. (76.8 X 50.8 X 6.7 CM)	29.25 X 7.5 X 71.9 IN. (74.3 X 19.2 X 182.6 CM)
PACKAGE DIMENSIONS (W X D X H)	72.25 X 7.25 X 50.5 PO (182.9 X 17.8 X 127 CM)	83.5 X 30.75 X 3.75 IN. (211.1 X 78.1 X 9.5 CM)	31.25 X 20.75 X 9.25 IN. (79.4 X 52.7 X 23.5 CM)	36 X 5.25 X 5.25 IN. (91.4 X 13.3 X 13.3 CM)
WEIGHT	89 LB (40.4 KG)	63 LB (28.5 KG)	5.5 LB (2.5 KG)	31.1 LB (14.1 KG)
INCLUDED IN THE BOX	2 GUARDRAILS WITH GATES	2 SIDE FRAMES, 2 BRACES, 8 LOCKING PINS	1 TOOL SHELF	2 SAFETY BRAKES
COMPATIBLE WITH	I-CISCPY & NU-WAVE / PERRY MODEL 660*	I-CISCPY & NU-WAVE / PERRY MODEL 660*	I-CISC, I-CISCTP, I-CISCPY, I-CAISC, I-CISCH1, I-CISCAS AND I-CISCDW, I-IRC	I-CISC, I-CISCTP, I-CAISC, I-CISCPY, I-CISCH1, I-CISCAS AND I-BMSS
MODEL	I-CISCPYGR	I-EX4PPNCASPY	I-CISTR	I-ISL
UPC	778300610037	778300000357	778300000463	778300001552



FOR 2 UNITS HIGH




FOR 3 UNITS HIGH




DESCRIPTION	SET OF 4 BASE PLATES	SET OF FOUR 5" HEAVY DUTY CASTERS	SET OF 14" OUTRIGGERS	SET OF 46" OUTRIGGERS
ASSEMBLED DIMENSIONS (W X D X H)	4.75 X 4.75 X 4.75 IN. (12 X 12 X 12 CM)	5 IN. (12.7 CM)	19.25 X 4.5 X 24 IN. (48.7 X 11 X 61 CM)	52.75 X 3.75 X 52.25 IN. (134 X 9.5 X 132.7 CM)
PACKAGE DIMENSIONS (W X D X H)	11 X 5.25 X 5.5 IN. (27.8 X 13.3 X 13.8 CM)	15.75 X 13.75 X 3.25 IN. (40 X 34.9 X 8.3 CM)	24 X 16.5 X 5 IN. (61 X 41.9 X 12.7 CM)	54.5 X 50.25 X 4.25 IN. (138.4 X 127.6 X 10.8 CM)
WEIGHT	10.1 LB (4.6 KG)	21.2 LB (9.6 KG)	45 LB (20.4 KG)	110 LB (49.9 KG)
INCLUDED IN THE BOX	4 BASE PLATES, 4 LOCKING PINS	4 HEAVY DUTY 5" CASTERS, 4 LOCKING PINS	4 OUTRIGGERS, 4 CASTERS**, 12 LOCKING PINS	4 OUTRIGGERS, 4 CASTERS**, 12 LOCKING PINS
COMPATIBLE WITH	I-CISC, I-CISCTP, I-CAISC, I-CISCPY, I-CISCH1, I-CISCAS, I-CISCDW, AND I-BMSS	I-CISCPY	I-CISCPY & NU-WAVE / PERRY MODEL 660*	I-CISC, I-CISCTP, I-CAISC, I-CISCH1, I-CISCAS, I-CISCDW AND I-CISCPY
MODEL	I-IBBF4	I-C4CAS5PYHD	I-CIS04PY	I-CIS04TT
UPC	778300001699	778300001668	778300613137	778300613120

**5 IN. (13 CM) DOUBLE LOCKING HEAVY DUTY

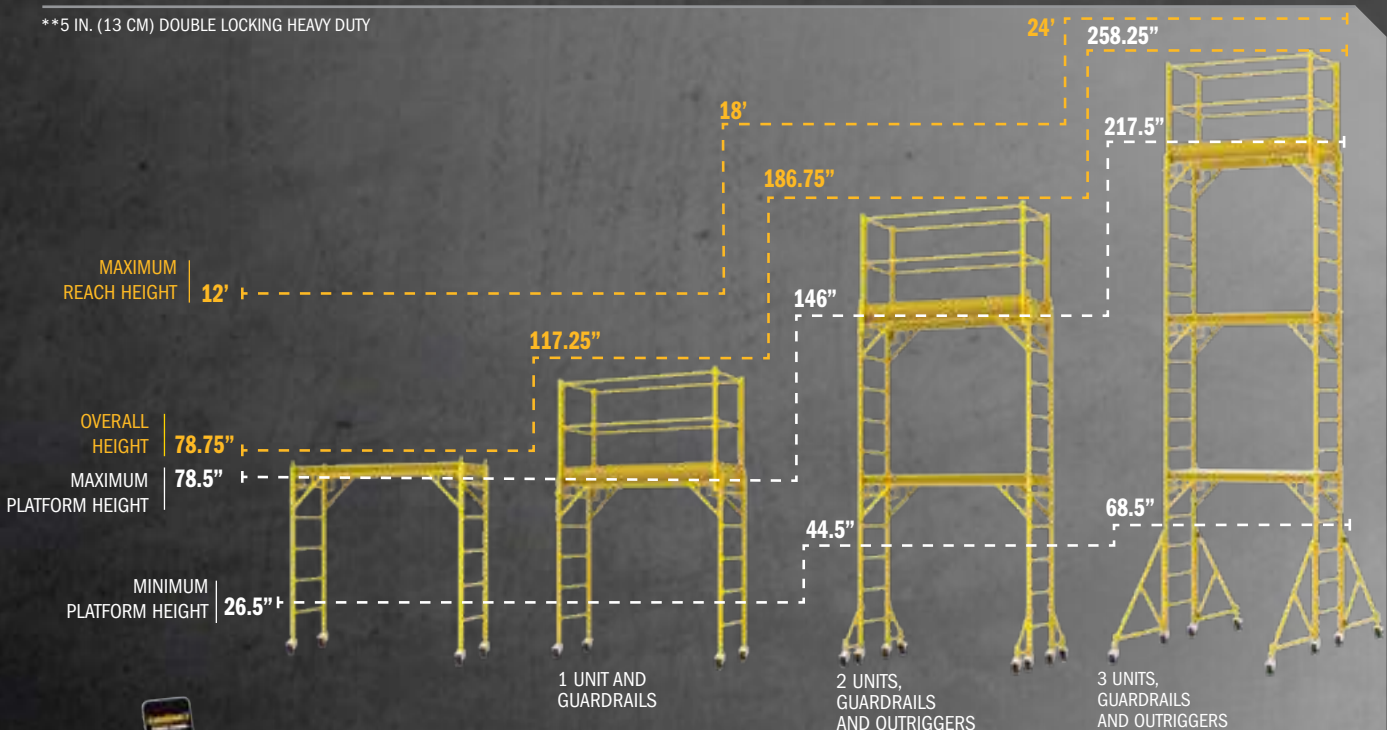

JOBSITE SERIES™



JOBSITE SERIES™ 6'

JOBSITE SERIES™



850 lb
LOAD CAPACITY

12'
REACH

ASSEMBLED DIMENSIONS (WXDXH)	75 X 30.5 X 78.25 IN. (190.5 X 77.5 X 198.8 CM)
PACKAGE DIMENSIONS (WXDXH)	76.75 X 31 X 6.75 IN. (195 X 78.7 X 17.2 CM)
WEIGHT	151 LB (68.5 KG)
LOAD CAPACITY	850 LB (385 KG) Combined weight of user + materials. 300 lb (136 kg) per platform
WORKING HEIGHTS	13 - 25 - 37 - 49 - 61 - 73 IN. (33 - 63.5 - 94 - 124.5 - 155 - 185.5 CM)
REACH	12 FT (3.7 M). Stackable up to 2 units high for 18 ft (5.5 m) reach
FINISH	POWDER COATED
PLATFORMS	3 ANTI-SLIP 14 GAUGE STEEL.
STRUCTURE	1.5 IN. (3.8 CM) ROUND TUBE. 16 GAUGE STEEL
CASTERS	5 IN. (13 CM) DOUBLE LOCKING HEAVY DUTY
REPLACEMENT PARTS	SEE PAGE 92
STANDARDS	ANSI, CSA AND OSHA
MODEL	I-IRC
UPC	778300400157

INFO




STACKABLE UP TO 12' (3.7 M)
Easily stackable up to two units high in order to reach a range of 18' (5.5 m).



EASY STORAGE
Folds flat for compact storage and transport



TWO-MINUTE ASSEMBLY
No tools required.




DESCRIPTION	SET OF 4 OUTRIGGERS WITH CASTERS	GUARDRAILS SYSTEM	36" HIGH EXTENSION	72" HIGH EXTENSION
ASSEMBLED DIMENSIONS (W X D X H)	25 X 3.5 X 23 IN. (63.5 X 8.9 X 58.4 CM)	70.5 X 30.5 X 44.25 IN. (179.1 X 77.5 X 112.4 CM)	75 X 30.5 X 36 IN. (190.5 X 77.5 X 91.4 CM)	75 X 30.5 X 71.5 IN. (190.5 X 77.5 X 181.6 CM)
PACKAGE DIMENSIONS (W X D X H)	27 X 26.25 X 4.5 IN. (66.6 X 66.8 X 11.4 CM)	N/A	76.75 X 31 X 6.75 IN. (195 X 78.7 X 17.2 CM)	76.75 X 31 X 6.5 IN. (195 X 78.7 X 17.2 CM)
WEIGHT	39.76 LB (18 KG)	50 LB (22.7 KG)	114 LB (51.7 KG)	127 LB (57.6 KG)
INCLUDED IN THE BOX	4 OUTRIGGERS, 4 CASTERS*	2 GUARDRAILS, 4 CHAINS, 4 ADAPTERS	3 ANTI-SLIP PLATFORMS 1 SCAFFOLDING STRUCTURE	3 ANTI-SLIP PLATFORMS 1 SCAFFOLDING STRUCTURE
COMPATIBLE WITH	I-IRC	I-IRC	I-IRC	I-IRC
MODEL	I-IR04	I-IRGR	I-IREX3	I-IREX6
UPC	778300411153	778300410101	778300412938	778300412952

*5 IN. (13 CM) DOUBLE LOCKING HEAVY DUTY



DESCRIPTION	TOOL SHELF
ASSEMBLED DIMENSIONS (W X D X H)	30.25 X 20 X 2.75 IN. (76.8 X 50.8 X 6.7 CM)
PACKAGE DIMENSIONS (W X D X H)	31.25 X 20.75 X 9.25 IN. (79.4 X 52.7 X 23.5 CM)
WEIGHT	5.5 LB (2.5 KG)
INCLUDED IN THE BOX	1 TOOL SHELF
COMPATIBLE WITH	I-CISC, I-CISCTP, I-CISCPY, I-CAISC, I-CISCH1, I-CISCAS I-CISCOW, AND I-IRC
MODEL	I-CISTR
UPC	778300000463

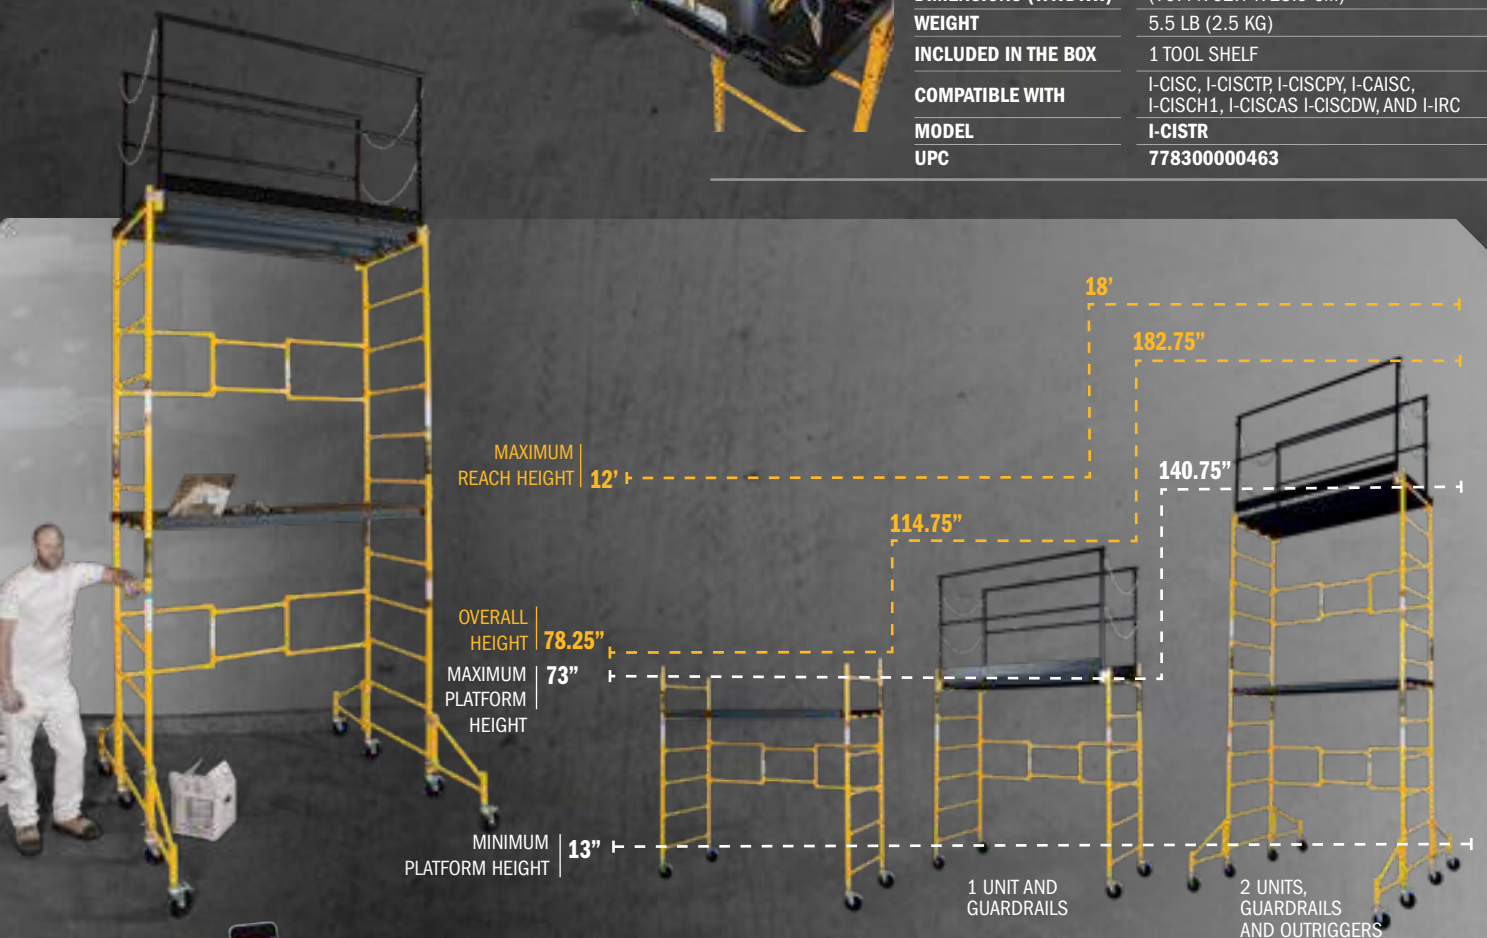

MAXIMUM REACH HEIGHT **12'**

OVERALL HEIGHT **78.25"**

MAXIMUM PLATFORM HEIGHT **73"**

MINIMUM PLATFORM HEIGHT **13"**

1 UNIT AND GUARDRAILS

2 UNITS, GUARDRAILS AND OUTRIGGERS



GET THE METALTECH APP



JOBSITE SERIES™ 5'

JOBSITE SERIES™



FOLD AWAY TOOL SHELF



10'
REACH

900 lb
LOAD CAPACITY

ASSEMBLED DIMENSIONS (WxDXH)	50.5 X 31 X 76.5 IN. (128.3 X 78.7 X 194.3 CM)
PACKAGE DIMENSIONS (WxDXH)	44 X 23 X 7.5 IN. (111.8 X 58.4 X 19.1 CM)
WEIGHT	77 LB (35 KG)
LOAD CAPACITY	900 LB (408 KG) Combined weight of user + materials. 450 lb (204 kg) per platform
WORKING HEIGHTS	11.5 - 25 - 36.5 - 48 IN. (29 - 64 - 93 - 122 CM)
REACH	10 FT (3 M)
FINISH	POWDER COATED
PLATFORM	2 ANTI-SLIP AND 1 STEP BAR. 14 GAUGE STEEL.
STRUCTURE	1.25 IN. (3.2 CM) OUTSIDE DIAMETER. 16 GAUGE STEEL
CASTERS	5 IN. (13 CM) DOUBLE LOCKING HEAVY DUTY
REPLACEMENT PARTS	SEE PAGE 92
STANDARDS	ANSI, CSA AND OSHA
MODEL	I-IMIS
UPC	778300100019

INFO



TRANSPORT

Use it as a cart to haul your equipment and heavy loads to and from job sites. 900 lb (408 kg) capacity.



TOOL SHELF & SAFETY RAIL

Safety rail to hold on to, for stability. Convenient fold away tool shelf for paint can, bucket, screws, nails and tools.



WORKBENCH

Multi-level working area. Adjust platforms up to the desired level for a comfortable workplace.

JOBSITE SERIES™ 4' DELUXE



FOLD AWAY TOOL SHELF



9'
REACH

500 lb
LOAD CAPACITY

ASSEMBLED DIMENSIONS (W X D X H)	49.5 X 22.5 X 57.75 IN. (125.7 X 57.2 X 146.7 CM)
PACKAGE DIMENSIONS (W X D X H)	43.25 X 24 X 4.5 IN. (109.9 X 61 X 11.4 CM)
WEIGHT	65 LB (29.5 KG)
LOAD CAPACITY	500 LB (227 KG) Combined weight of user + materials. 250 lb (113 kg) per platform
WORKING HEIGHTS	10 - 21.5 - 33 IN. (25 - 55 - 84 CM)
REACH	9 FT (2.75 M)
FINISH	POWDER COATED
PLATFORMS	2 ANTI-SLIP AND 1 STEP BAR. 14 GAUGE STEEL.
STRUCTURE	1 IN. (2.5 CM) OUTSIDE DIAMETER. 16 GAUGE STEEL
CASTERS	4 IN. (10 CM) DOUBLE LOCKING HEAVY DUTY
REPLACEMENT PARTS	SEE PAGE 92
STANDARDS	ANSI, CSA AND OSHA
MODEL	I-IMCNDX
UPC	778300100392

JOBSITE SERIES™

INFO



TOOL SHELF & SAFETY RAIL
Safety rail to hold on to, for stability. Convenient fold away tool shelf for paint can, bucket, screws, nails and tools.



RUNNING BOARD
Easy access to decks.



UTILITY HOOKS
Great to hang extensions and hoses.



GET THE METALTECH APP



JOBSITE SERIES™ 4'

JOBSITE SERIES™

FOLD AWAY TOOL SHELF



500lb
LOAD CAPACITY

9'
REACH



ASSEMBLED DIMENSIONS (WxDXh)	49.5 X 22.5 X 57.75 IN. (125.7 X 57.2 X 146.7 CM)
PACKAGE DIMENSIONS (WxDXh)	43.25 X 24 X 4.5 IN. (109.9 X 61 X 11.4 CM)
WEIGHT	59 LB (26.8 KG)
LOAD CAPACITY	500 LB (227 KG) Combined weight of user + materials. 250 lb (113 kg) per platform
WORKING HEIGHTS	10 - 21.5 - 33 IN. (25 - 55 - 84 CM)
REACH	9 FT (2.75 M)
FINISH	POWDER COATED
PLATFORM	2 ANTI-SLIP. 14 GAUGE STEEL.
STRUCTURE	1 IN. (2.5 CM) OUTSIDE DIAMETER. 16 GAUGE STEEL
CASTERS	4 IN. (10 CM) DOUBLE LOCKING HEAVY DUTY
REPLACEMENT PARTS	SEE PAGE 92
STANDARDS	ANSI, CSA AND OSHA
MODEL	I-IMCNT
UPC	778300100224

INFO



TOOL SHELF & SAFETY RAIL

Safety rail to hold on to, for stability. Convenient fold away tool shelf for paint can, bucket, screws, nails and tools.



TRANSPORT

Use it as a cart to haul your equipment and heavy loads to and from job sites. 500 lb (227 kg) capacity.



WORKBENCH

Multi-level working area. Adjust platforms up to the desired level for a comfortable workplace.

4' HIGH PORTABLE SCAFFOLD



9'
REACH

500 lb
LOAD CAPACITY

MOBILE SCAFFOLDING

ASSEMBLED DIMENSIONS (WxDxH)	41 X 22.5 X 45.75 IN. (104.1 X 57.2 X 116.2 CM)
PACKAGE DIMENSIONS (WxDxH)	43.25 X 24 X 3.75 IN. (109.7 X 60.8 X 9.8 CM)
WEIGHT	50 LB (22.7 KG)
LOAD CAPACITY	500 LB (227 KG) Combined weight of user + materials. 250 lb (113 kg) per platform
WORKING HEIGHTS	10 - 21.5 - 33 IN. (25 - 55 - 84 CM)
REACH	9 FT (2.75 M)
FINISH	POWDER COATED
PLATFORMS	2 ANTI-SLIP 14 GAUGE STEEL.
STRUCTURE	1 IN. (2.5 CM) OUTSIDE DIAMETER. 16 GAUGE STEEL
CASTERS	4 IN. (10 CM) DOUBLE LOCKING HEAVY DUTY
REPLACEMENT PARTS	SEE PAGE 93
STANDARDS	ANSI, CSA AND OSHA
MODEL	I-IMCN
UPC	778300100200



TRANSPORT

Use it as a cart to haul your equipment and heavy loads to and from job sites. 500 lb (227 kg) capacity.



WORKBENCH

Multi-level working area. Adjust platforms up to the desired level for a comfortable workplace



EASY STORAGE

Folds flat for compact storage and transport

INFO



GET THE METALTECH APP



JOBSITE SERIES™ DRYWALL & PANEL LIFT



150 lb
LOAD CAPACITY

11'
MAX HEIGHT

ASSEMBLED DIMENSIONS (WXDXH)	57.9 X 48.4 X 57 IN. (147 X 122.9 X 144.7 CM)
PACKAGE DIMENSIONS (WXDXH)	51 X 21.5 X 6.5 IN. (129.5 X 54.5 X 16.5 CM)
WEIGHT	97 LB (44 KG)
LOAD CAPACITY	150 LB (68 KG)
MAXIMUM HEIGHT	11 FT (3.35 M)
LOADING HEIGHT	34 IN. (86 CM)
MAXIMUM PANEL SIZE	4 X 16 FT (1.22 X 4.87 M)
CABLE	HIGH TENSILE 1/8" CABLE (0.3 CM)
CASTERS	5 IN. (13 CM) DOUBLE LOCKING HEAVY DUTY
REPLACEMENT PARTS	SEE PAGE 93
MODEL	I-IDPL
UPC	778300002061

JOBSITE SERIES™

INFO



CRADLE TILTS
Cradle tilts for sloped ceiling or vertical wall installations. 34" (86 cm) loading height.




CASTERS
Three 5" (13 cm) double lock heavy duty swivel casters.



FAST ACTION WINCH
Fast action single stage winch with silent cam lock brake.



JOBSITE SERIES™

 GET THE METALTECH APP

BUILT TOUGH FOR SAFETY

METALTECH

ALU SERIES™ 6' BAKER

ALU SERIES™



700 lb
LOAD CAPACITY

12'
REACH

ASSEMBLED DIMENSIONS (WxDXH)	74 X 30.75 X 74.5 IN. (187.7 X 78.2 X 189.5 CM)
PACKAGE DIMENSIONS (WxDXH)	74.75 X 30.25 X 6.25 IN. (189.7 X 76.9 X 16 CM)
WEIGHT	85 LB (38.6 KG)
LOAD CAPACITY	700 LB (318 KG). Combined weight of user + materials
WORKING HEIGHTS	FROM 26.75 TO 73 IN. (67.9 TO 185.1 CM). 2 in. (5 cm) increment adjustable heights
REACH	12 FT (3.7 M). Stackable up to 3 units high for 24 ft (7.4 m) reach
FINISH	ANODIZED ALUMINUM
PLATFORM	ANTI-SLIP AIRCRAFT GRADE ALUMINUM ALLOY 6063
STRUCTURE	1.5 IN. (3.8 CM) SQUARE TUBE. AIRCRAFT GRADE ALUMINUM ALLOY 6063
CASTERS	5 IN. (13 CM) DOUBLE LOCKING HEAVY DUTY
REPLACEMENT PARTS	SEE PAGE 93
STANDARDS	ANSI, CSA AND OSHA
MODEL	I-CAISC
UPC	778300220106

INFO



STACKABLE UP TO 12' (3.7 M)
Easily stackable up to two units high in order to reach a range of 18' (5.5 m).



MULTI PURPOSE
Suitable and safe for all types of interior work. Each end can adjust separately to be used on both level surfaces and stairways. At 30.75" (78.2 cm) wide, it can easily roll through doorways.



QUICK AND EASY HEIGHT ADJUSTMENT
Platform height adjusts at 2" (5 cm) increments from 26.75 to 73 in. (67.9 to 185.1 cm). Double prong spring-loaded locking mechanism. Deck braces allow movement over lower obstacles.

OPTIONS



SCAFFLOCK

DESCRIPTION	GUARDRAILS SYSTEM	TOOL SHELF	SCAFFLOCK™ SAFETY BRAKES
ASSEMBLED DIMENSIONS (W X D X H)	69.5 X 30 X 41.5 IN. (176.5 X 76.2 X 105.4 CM)	30.25 X 20 X 2.75 IN. (76.8 X 50.8 X 6.7 CM)	29.25 X 7.5 X 71.9 IN. (74.3 X 19.2 X 182.6 CM)
PACKAGE DIMENSIONS (W X D X H)	71 X 45 X 4 IN. (180.3 X 114.3 X 10.2 CM)	31.25 X 20.75 X 9.25 IN. (79.4 X 52.7 X 23.5 CM)	36 X 5.25 X 5.25 IN. (91.4 X 13.3 X 13.3 CM)
WEIGHT	13 LB (5.9 KG)	5.5 LB (2.5 KG)	31.1 LB (14.1 KG)
INCLUDED IN THE BOX	2 GUARDRAILS WITH GATES, 4 TOGGLE PINS	1 TOOL SHELF	2 SAFETY BRAKES
COMPATIBLE WITH	I-CISC, I-CAISC, I-CISCTP, I-CISCH1, I-CISCAS I-CISCOW, AND I-BMSS	I-CISC, I-CISCTP, I-CISCPY, I-CAISC, I-CISCH1, I-CISCAS I-CISCOW, AND I-IRC	I-CISC, I-CISCTP, I-CAISC, I-CISCPY, I-CISCH1, I-CISCAS I-CISCOW, AND I-BMSS
MODEL	I-CAISCGR	I-CISTR	I-ISL
UPC	778300620012	778300000463	778300001552



ADJUSTABLE




FOR 2 UNITS HIGH


FOR 3 UNITS HIGH

DESCRIPTION	SET OF 4 BASE PLATES	SET OF 4 LEVELING JACKS	SET OF 14" OUTRIGGERS	SET OF 46" OUTRIGGERS
ASSEMBLED DIMENSIONS (W X D X H)	4.75 X 4.75 X 4.75 IN. (12 X 12 X 12 CM)	9.5 X 5.5 X 12.25 IN. (23.6 X 13.5 X 31 CM)	24 X 4.5 X 27.25 IN. (61 X 11.4 X 69.2 CM)	52.75 X 3.75 X 52.25 IN. (134 X 9.5 X 132.7 CM)
PACKAGE DIMENSIONS (W X D X H)	11 X 5.25 X 5.5 IN. (27.8 X 13.3 X 13.8 CM)	13 X 13 X 8 IN. (33.6 X 33.2 X 20.4 CM)	27 X 27 X 4 IN. (68.9 X 68.9 X 10.2 CM)	54.5 X 50.25 X 4.25 IN. (138.4 X 127.6 X 10.8 CM)
WEIGHT	10.1 LB (4.6 KG)	24.2 LB (11 KG)	32 LB (14.5 KG)	110 LB (49.9 KG)
INCLUDED IN THE BOX	4 BASE PLATES, 4 LOCKING PINS	4 LEVELING JACKS	4 OUTRIGGERS, 4 CASTERS*, 4 LOCKING PINS	4 OUTRIGGERS, 4 CASTERS*, 12 LOCKING PINS
COMPATIBLE WITH	I-CISCAS, I-CISCTP, I-CISCOW, I-CISCPY, I-CAISC, I-CISCH1, I-CISC AND I-BMSS	I-CISC, I-CISCTP, I-CAISC, I-BMSS, I-CISCAS, I-CISCOW AND I-CISCH1	I-CAISC	I-CISC, I-CISCTP, I-CAISC, I-BMSS, I-CISCAS, I-CISCOW AND I-CISCH1
MODEL	I-IBBF4	I-IBSJP12H4	I-CAIS04	I-CIS04TT
UPC	778300001699	778300001644	778300620166	778300613120

*5 IN. (13 CM) DOUBLE LOCKING HEAVY DUTY

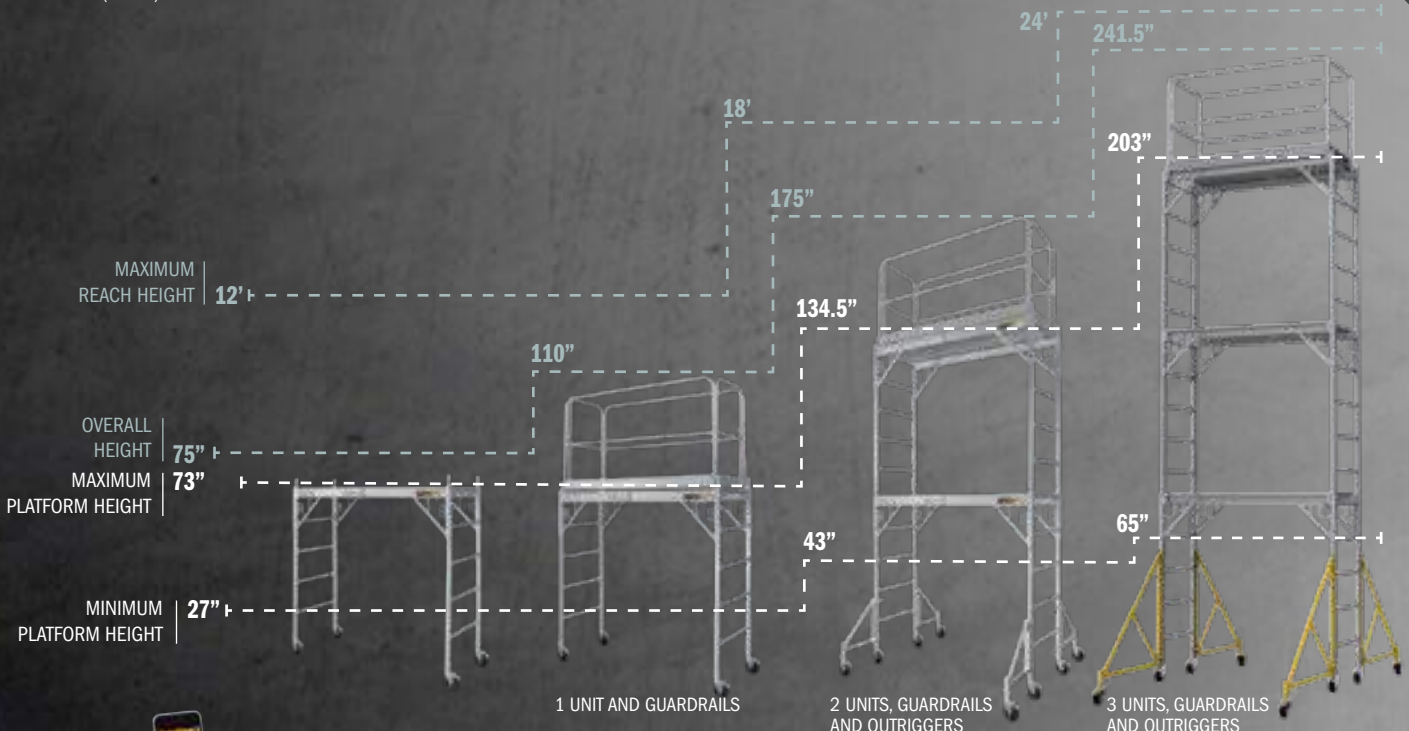

ALU SERIES™



ALU SERIES™ 6'

ALU SERIES™



700 lb
LOAD CAPACITY

12'
REACH

ASSEMBLED DIMENSIONS (WXDXH)	56.5 X 29 X 72 IN. (143.5 X 73.7 X 182.9 CM)
PACKAGE DIMENSIONS (WXDXH)	67.5 X 30.5 X 6.5 IN. (171.5 X 77.5 X 16.5 CM)
WEIGHT	67 LB (30.4 KG)
LOAD CAPACITY	700 LB (318 KG). Combined weight of user + materials
WORKING HEIGHTS	11.75 - 23.5 - 35.25 - 47 - 59 - 70.75 IN. (30 - 60 - 90 - 119 - 150 - 180 CM)
REACH	12 FT (3.7 M)
FINISH	ANODIZED ALUMINUM
PLATFORMS	3 ANTI-SLIP AIRCRAFT GRADE ALUMINUM ALLOY 6063
STRUCTURE	1.5 IN. (3.8 CM) OUTSIDE DIAMETER. AIRCRAFT GRADE ALUMINUM ALLOY 6063
CASTERS	5 IN. (13 CM) DOUBLE LOCKING HEAVY DUTY
REPLACEMENT PARTS	SEE PAGE 93
STANDARDS	ANSI, CSA AND OSHA
MODEL	I-CAIRC
UPC	778300420155

INFO



LIGHTWEIGHT
This aluminum scaffolding offers all the benefits of our steel models, but is lighter and corrosion resistant.



TRANSPORT
Use it as a cart to haul your equipment and heavy loads to and from job sites. 700 lb (318 KG) capacity.



EASY STORAGE
Folds flat for compact storage and transport

ALU SERIES™ 4'



9'
REACH

600 lb
LOAD CAPACITY

ALU SERIES™

ASSEMBLED DIMENSIONS (W X D X H)	42.25 X 22.25 X 47.75 IN. (107.3 X 56.5 X 121.4 CM)
PACKAGE DIMENSIONS (W X D X H)	43.75 X 22.5 X 4.75 IN. (111 X 57.2 X 12.1 CM)
WEIGHT	35.2 LB (16 KG)
LOAD CAPACITY	600 LB (272 KG). Combined weight of user + materials
WORKING HEIGHTS	9.5 - 21.25 - 33 IN. (24 - 54 - 84 CM)
REACH	9 FT (2.75 M)
FINISH	ANODIZED ALUMINUM
PLATFORMS	2 ANTI-SLIP 14 GAUGE STEEL
STRUCTURE	1.2 IN. (3.05 CM) OUTSIDE DIAMETER. AIRCRAFT GRADE ALUMINUM ALLOY 6063
CASTERS	4 IN. (10 CM) DOUBLE LOCKING HEAVY DUTY
REPLACEMENT PARTS	SEE PAGE 93
STANDARDS	ANSI, CSA AND OSHA
MODEL	I-IMAC
UPC	778300100408



TRANSPORT

Use it as a cart to haul your equipment and heavy loads to and from job sites. 600 lb (272 KG) capacity.



LIGHTWEIGHT

This aluminum scaffolding offers all the benefits of our steel models, but is lighter and corrosion resistant.



EASY STORAGE

Folds flat for compact storage and transport

INFO



GET THE METALTECH APP

BUILT TOUGH FOR
SAFETY

METALTECH

INDUSTRIAL AND DRYWALL BUILDMAN™ GRADE

BuildMan™ Grade Scaffold work platforms and panel carts boast higher capacities and more stability than other brands on the market. With larger and higher capacity casters, bigger and thicker steel components and more features, BuildMan™ grade is the choice for professional and industrial users that require more stability, ease of use and larger casters to easily roll over obstacles.

- **HEAVY DUTY**
- **HIGHER CAPACITY**
- **BIGGER CASTERS**



BUILDMAN™ GRADE

**BUILT TOUGH FOR
SAFETY**


METALTECH®

BUILDMAN™ 6' DRYWALL BAKER™

NEW WITH
SAFECLIMB™
PLATFORM



INFO



COMPATIBLE:
BILJAX, BUFFALO,
WERNER, UST
AND METALTECH
BAKER*

1,500 lb
LOAD CAPACITY

12'
REACH

ASSEMBLED DIMENSIONS (W X D X H)	75.75 X 31 X 76 IN. (192.4 X 78.7 X 193 CM)
PACKAGE DIMENSIONS (W X D X H)	76.25 X 34.5 X 7 IN. (193.7 X 87.6 X 17.8 CM)
WEIGHT	180 LB (81.6 KG)
LOAD CAPACITY	1,500 LB (680 KG). Combined weight of user + materials
WORKING HEIGHTS	FROM 29 TO 71.5 IN. (73.7 TO 181.6 CM). 2 in. (5 cm) increment adjustable heights
REACH	12 FT (3.7 M). Stackable up to 2 units high for 18 ft (5.5 m) reach
FINISH	POWDER COATED
PLATFORM	PLATFORM WITH TRAPDOOR. 19/32 IN. (15 MM) PLYWOOD, SLIP-RESISTANT
STRUCTURE	1.75 IN. (4.5 CM) SQUARE TUBE. 16 GAUGE STEEL
CASTERS	6 IN. (15 CM) DOUBLE LOCKING HEAVY DUTY
REPLACEMENT PARTS	SEE PAGE 94
STANDARDS	ANSI, CSA AND OSHA
MODEL	I-BMSS
UPC	778300100057

BUILDMAN™
GRADE

INFO



STACKABLE UP TO 12' (3.7 M)
Easily stackable up to two units high in order to reach a range of 18' (5.5 m).



MULTI PURPOSE
Suitable and safe for all types of interior work. Each end can adjust separately to be used on both level surfaces and stairways. At 31" (78.7 cm) wide, it can easily roll through doorways.



QUICK AND EASY HEIGHT ADJUSTMENT
Platform height adjusts at 2" (5 cm) increments from 28" to 71.5" (71.1 to 181.6 cm). Double prong spring-loaded locking mechanism. Deck braces allow movement over lower obstacles.

* All trademarks and registered trademarks listed above are the property of their respective owners.

OPTIONS




DESCRIPTION	SET OF 4 OUTRIGGERS WITH CASTERS	GUARDRAILS SYSTEM	39" HIGH EXTENSION
ASSEMBLED DIMENSIONS (W X D X H)	21.5 X 4 X 26.5 IN. (54.6 X 10.2 X 67.3 CM)	69.75 X 29.25 X 44.5 IN. (177.2 X 74.3 X 113 CM)	74.25 X 30.75 X 39.75 IN. (188.6 X 78.1 X 101 CM)
PACKAGE DIMENSIONS (W X D X H)	23.5 X 16.75 X 8.25 IN. (59.7 X 42.5 X 21 CM)	46 X 31.25 X 4.5 IN. (116.8 X 79.4 X 11.4 CM)	78 X 34.25 X 4.5 IN. (198.1 X 87 X 11.4 CM)
WEIGHT	52 LB (23.6 KG)	59 LB (26.8 KG)	88.8 LB (40.3 KG)
INCLUDED IN THE BOX	4 OUTRIGGERS, 4 CASTERS*, 12 LOCKING PINS	2 GUARDRAILS WITH GATES, 4 TOGGLE PINS	2 SIDE FRAMES, 2 BRACES, 8 LOCKING PINS
COMPATIBLE WITH	I-BMSS	I-CISC, I-CAISC, I-CISCTP, I-CISCH1, I-CISCAS, I-CISCDW AND I-BMSS	I-CISC, I-CISCTP, I-CISCH1, I-CISCAS, I-CISCDW AND I-BMSS
MODEL	I-BMS04	I-BMSGRJP	I-BMSSEX
UPC	778300100262	778300001828	778300001323

*5 IN. (13 CM) DOUBLE LOCKING HEAVY DUTY




SCAFFLOCK

DESCRIPTION	SET OF 4 BASE PLATES	SET OF 4 LEVELING JACKS	SCAFFLOCK™ SAFETY BRAKES
ASSEMBLED DIMENSIONS (W X D X H)	4.75 X 4.75 X 4.75 IN. (12 X 12 X 12 CM)	9.5 X 5.5 X 12.25 IN. (23.6 X 13.5 X 31 CM)	29.25 X 7.5 X 71.9 IN. (74.3 X 19.2 X 182.6 CM)
PACKAGE DIMENSIONS (W X D X H)	11 X 5.25 X 5.5 IN. (27.8 X 13.3 X 13.8 CM)	13 X 13 X 8 IN. (33.6 X 33.2 X 20.4 CM)	36 X 5.25 X 5.25 IN. (91.4 X 13.3 X 13.3 CM)
WEIGHT	10.1 LB (4.6 KG)	24.2 LB (11 KG)	31.1 LB (14.1 KG)
INCLUDED IN THE BOX	4 BASE PLATES, 4 LOCKING PINS	4 LEVELING JACKS	2 SAFETY BRAKES
COMPATIBLE WITH	I-CISC, I-CISCTP, I-CAISC, I-CISCPY, I-CISCH1, I-CISCAS, I-CISCDW AND I-BMSS	I-CISC, I-CISCTP, I-CAISC, I-CISCH1, I-CISCAS, I-CISCDW AND I-BMSS	I-CISC, I-CISCTP, I-CAISC, I-CISCPY, I-CISCH1, I-CISCAS, I-CISCDW AND I-BMSS
MODEL	I-IBBF4	I-IBSJP12H4	I-ISL
UPC	778300001699	778300001644	778300001552

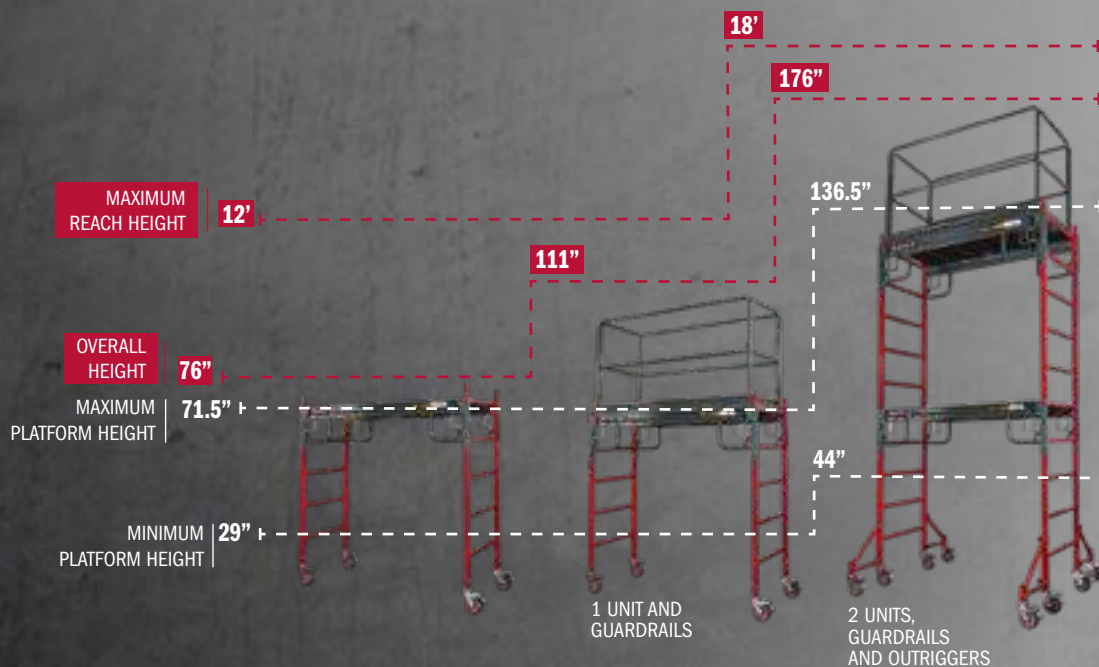

BUILDMAN™ GRADE



BUILDMAN™ 6'

BUILDMAN™
GRADE



1,000 lb
LOAD CAPACITY

12'
REACH

ASSEMBLED DIMENSIONS (W X D X H)	59.25 X 30 X 74 IN. (150.5 X 76.2 X 188 CM)
PACKAGE DIMENSIONS (W X D X H)	70 X 31.25 X 6 IN. (177.8 X 79.4 X 15.2 CM)
WEIGHT	115 LB (52.3 KG)
LOAD CAPACITY	1,000 LB (454 KG) Combined weight of user + materials. Large platforms: MAX. 375 lb (170 kg) / Small platform: MAX. 250 lb (113 kg)
WORKING HEIGHTS	11.75 - 23.75 - 35.75 - 47.75 - 59.75 - 71.75 PO (29.9 - 60.3 - 90.8 - 121.3 - 151.8 - 182.3 CM)
REACH	12 FT (3.7 M). Stackable up to 2 units high for 18 ft (5.5 m) reach
FINISH	POWDER COATED
PLATFORMS	3 ANTI-SLIP. 14 GAUGE STEEL
STRUCTURE	1.5 IN. (3.8 CM) ROUND TUBE. 16 GAUGE STEEL
REPLACEMENT PARTS	SEE PAGE 94
CASTERS	5 IN. (13 CM) DOUBLE LOCKING HEAVY DUTY
STANDARDS	ANSI, CSA AND OSHA
MODEL	I-BM6S
UPC	778300100064

INFO



TWO-MINUTE ASSEMBLY
No tools required.



EASY STORAGE
Folds flat for compact storage and transport



TRANSPORT
Use it as a cart to haul your equipment and heavy loads to and from job sites. 1,000 lb (454 kg) capacity.

OPTIONS



BUILDMAN™ GUARDRAILS AND OUTRIGGERS COMPLETE SYSTEM

PACKAGE DIMENSIONS (W X D X H) 55.5 X 43.5 X 3.5 IN. (140.5 X 110.5 X 9 CM)
WEIGHT 114.6 LB (52 KG)

INCLUDED IN THE BOX 2 GUARDRAIL PANELS, 4 OUTRIGGERS, 4 CASTERS, 4 COUPLING PINS, 20 LOCKING PINS, 8 KNOBS, 4 PIG TAILS


COMPATIBLE WITH I-BM6S
STANDARDS ANSI, CSA AND OSHA

MODEL I-BM6SK
UPC 778300100361


DESCRIPTION **GUARDRAILS SYSTEM**
ASSEMBLED DIMENSIONS (W X D X H) 54.5 X 23.5 X 42 IN. (138.4 X 59.4 X 107 CM)
PACKAGE DIMENSIONS (W X D X H) 55.5 X 43.5 X 2.75 IN. (140.5 X 110.5 X 6.9 CM)
WEIGHT 43.2 LB (19.6 KG)
MODEL I-BM6GR
UPC 778300100491

DESCRIPTION **SET OF 4 OUTRIGGERS WITH CASTERS**
ASSEMBLED DIMENSIONS (W X D X H) 21.25 X 4 X 23.75 IN. (54 X 10.2 X 60.1 CM)
PACKAGE DIMENSIONS (W X D X H) 22.75 X 19.75 X 6 IN. (57.6 X 50.2 X 15.5 CM)
WEIGHT 52 LB (23.6 KG)
CASTERS 5 IN. (13 CM) DOUBLE LOCKING HEAVY DUTY
MODEL I-BM604
UPC 778300100477

DESCRIPTION **SET OF 4 COUPLING PINS**
ASSEMBLED DIMENSIONS (H X DIAM.) 6.5 X 1.9 IN. (16.5 X 4.8 CM)
PACKAGE DIMENSIONS (W X D X H) 11 X 6.5 X 2.5 IN. (28 X 16 X 6.5 CM)
WEIGHT 7.2 LB (3.3 KG)
MODEL I-BM6C4
UPC 778300100538

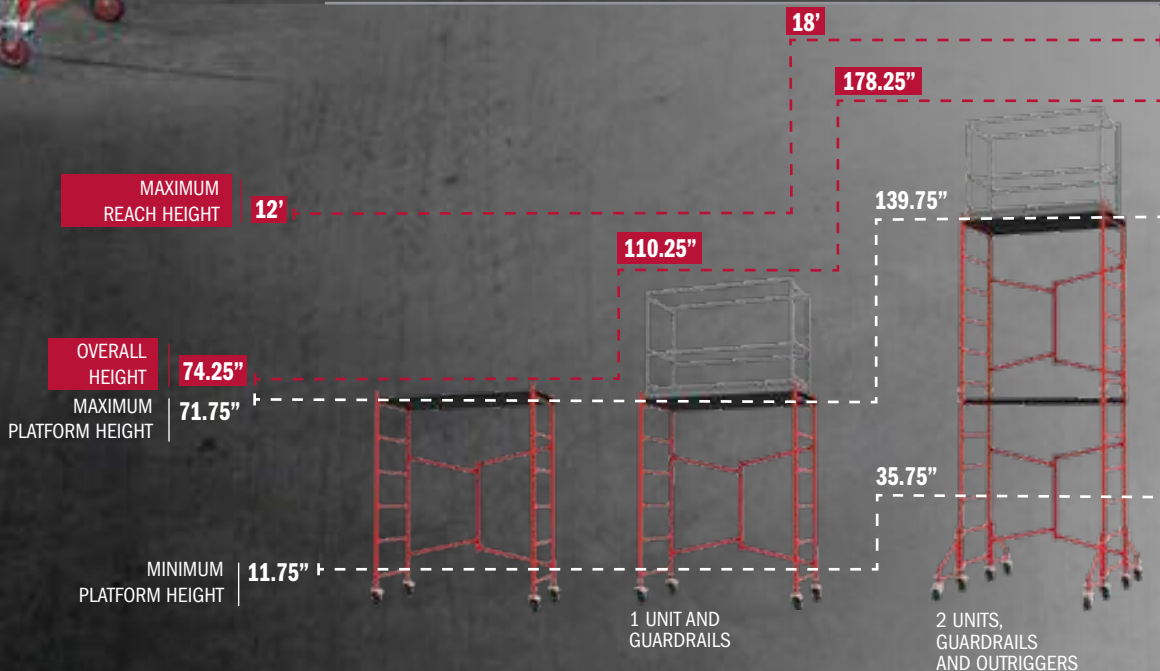

BUILDMAN™ GRADE



BUILDMAN™ 4'

BUILDMAN™
GRADE

FOLD AWAY TOOL SHELF



750 lb
LOAD CAPACITY

9'
REACH



ASSEMBLED DIMENSIONS (WxDxH)	50.5 X 23.75 X 61.5 IN. (128.3 X 60.3 X 156.2 CM)
PACKAGE DIMENSIONS (WxDxH)	44 X 23.25 X 6.25 IN. (111.8 X 59 X 15.9 CM)
WEIGHT	69 LB (31.3 KG)
LOAD CAPACITY	750 LB (340 KG) Combined weight of user + materials. 450 lb (204 kg) per platform
WORKING HEIGHTS	10 - 21.5 - 33 IN. (25 - 55 - 84 CM)
REACH	9 FT (2.75 M)
FINISH	POWDER COATED
PLATFORMS	2 ANTI-SLIP. 14 GAUGE STEEL
STRUCTURE	1.25 IN. (3.2 CM) OUTSIDE DIAMETER. 16 GAUGE STEEL
REPLACEMENT PARTS	SEE PAGE 94
CASTERS	5 IN. (13 CM) DOUBLE LOCKING HEAVY DUTY
STANDARDS	ANSI, CSA AND OSHA
MODEL	I-BM4S
UPC	778300100040

INFO



EASY STORAGE
Folds flat for compact storage and transport



TOOL SHELF & SAFETY RAIL
Safety rail to hold on to, for stability. Convenient fold away tool shelf for paint can, bucket, screws, nails and tools.



TRANSPORT
Use it as a cart to haul your equipment and heavy loads to and from job sites. 750 lb (340 kg) capacity.

WALL HAULER™ SERIES 3600 DRYWALL CART REMOVABLE HANDLE

INFO



KINGPINLESS



POLYURETHANE CASTER



PHENOLIC CASTER



3,600 lb
LOAD CAPACITY

ASSEMBLED DIMENSIONS (W X D X H)	44.25 X 22 X 47.25 IN. (112.4 X 55.9 X 120 CM)
PACKAGE DIMENSIONS (W X D X H)	46.25 X 38.75 X 4.75 IN. (117.5 X 98.4 X 12.1 CM)
PLATFORM DIMENSIONS	11.5 X 44.25 IN. (29.2 X 112.4 CM). Can carry up to 22 gypsum boards of 1/2 in. (13 mm).
WEIGHT	90 LB (40.8 KG)
LOAD CAPACITY	3,600 LB (1,633 KG)
FINISH	POWDER COATED
CASTERS	8 IN. (20 CM). 4 SWIVEL CASTERS, 1 DIRECTIONAL LOCK AND 1 CASTER BRAKE
HANDLE BAR	1.65 IN. (4.2 CM) OUTSIDE DIAMETER. 13 GAUGE STEEL
OPTION	SLIDING COATING, PROTECTS THE SURFACE AGAINST ABRASION (MODEL: I-BMDSP)
REPLACEMENT PARTS	SEE PAGE 94
STANDARDS	ANSI, CSA AND OSHA

RED COLOR		CASTERS		
MODELS	UPC	POLYURETHANE*	PHENOLIC	KINGPINLESS
I-BMD3631R	778300100170	•		
I-BMD3631P	778300100002		•	
I-BMD3631RK	778300100187	•		•
I-BMD3631PK	778300100096		•	•

*POLYPROPYLENE CORE

BUILDMAN™ GRADE



HIGH CAPACITY CASTERS

Four 8 in. (20 cm) high capacity casters for ease of movement in straight lines.



REMOVABLE HANDLE

With its removable support handle, it can easily be transported and stored flat.



FLAT CART

Can also be used as a flat cart to carry bulky loads.

INFO



GET THE METALTECH APP



WALL HAULER™


SERIES 3000

DRYWALL CART

PERMAQUICK™



3,000 lb
LOAD CAPACITY

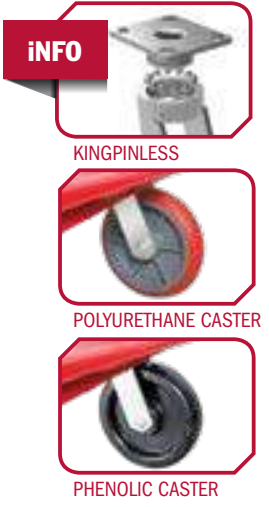

BUILDMAN™ GRADE

ASSEMBLED DIMENSIONS (WxDxH)	43.5 X 24 X 48.75 IN. (110.5 X 61 X 123.8 CM)
PACKAGE DIMENSIONS (WxDxH)	45 X 37.75 X 6.25 IN. (114.3 X 95.9 X 15.9 CM)
PLATFORM DIMENSIONS	12 X 42 IN. (30.5 X 106.7 CM). Can carry up to 24 gypsum boards of 1/2 in. (13 mm).
WEIGHT	107.8 LB (48.9 KG)
LOAD CAPACITY	3,000 LB (1,361 KG)
FINISH	POWDER COATED
CASTERS	8 IN. (20 CM). 4 SWIVEL CASTERS, 1 DIRECTIONAL LOCK AND 1 CASTER BRAKE
HANDLE BAR	1.25 IN. (3.2 CM) OUTSIDE DIAMETER. 14 GAUGE STEEL
OPTION	SLIDING COATING, PROTECTS THE SURFACE AGAINST ABRASION (MODEL: I-BMDSP)
REPLACEMENT PARTS	SEE PAGE 94
STANDARDS	ANSI, CSA AND OSHA

RED COLOR		CASTERS		
MODELS	UPC	POLYURETHANE*	PHENOLIC	KINGPINLESS
I-BMD3031R	778300100071	•		
I-BMD3031P	778300100194		•	
I-BMD3031RK	778300100255	•		•
I-BMD3031PK	778300100316		•	•

*POLYPROPYLENE CORE



HIGH CAPACITY CASTERS
Four 8 in. (20 cm) high capacity casters for ease of movement in straight lines.



PERMAQUICK CONNECT™
PermaQuick Connect™ handle system, once assembled, it is as strong as welded.




SLIDING COATING
Optional sliding coating protects the surface against abrasion.

WALL HAULER™ SERIES 3000 DRYWALL CART WELDED



3,000 lb
LOAD CAPACITY

BUILDMAN™ GRADE

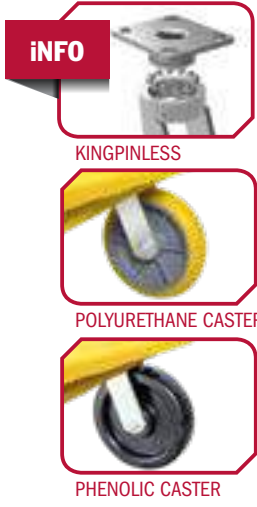

KINGPINLESS
POLYURETHANE CASTER
PHENOLIC CASTER

ASSEMBLED DIMENSIONS (W X D X H)	49.25 X 22.25 X 48.5 IN. (125.1 X 56.5 X 123.2 CM)
PACKAGE DIMENSIONS (W X D X H)	49.25 X 22.25 X 38.25 IN. (125.1 X 56.5 X 97.2 CM)
PLATFORM DIMENSIONS	11.5 X 42 IN. (29.2 X 106.7 CM). Can carry up to 22 gypsum boards of 1/2 in. (13 mm).
WEIGHT	80 LB (36.3 KG)
LOAD CAPACITY	3,000 LB (1,361 KG)
FINISH	POWDER COATED
CASTERS	8 IN. (20 CM), 4 SWIVEL CASTERS, 1 DIRECTIONAL LOCK AND 1 CASTER BRAKE
HANDLE BAR	1.25 IN. (3.2 CM) OUTSIDE DIAMETER, 14 GAUGE STEEL
OPTION	SLIDING COATING, PROTECTS THE SURFACE AGAINST ABRASION (MODEL: I-BMDSP)
REPLACEMENT PARTS	SEE PAGE 94
STANDARDS	ANSI, CSA AND OSHA

YELLOW COLOR		CASTERS		
MODELS	UPC	POLYURETHANE*	PHENOLIC	KINGPINLESS
I-BMD3131YGR	778300000104	•		
I-BMD3131YGP	778300002719		•	
I-BMD3131YGRK	778300002726	•		•
I-BMD3131YGPK	778300002733		•	•

RED COLOR				
MODELS	UPC	POLYURETHANE*	PHENOLIC	KINGPINLESS
I-BMD3131R	778300100088	•		
I-BMD3131P	778300002740		•	
I-BMD3131RK	778300002757	•		•
I-BMD3131PK	778300002764		•	•

*POLYPROPYLENE CORE

OPTION (I-BMDSP)

SLIDING COATING
Optional sliding coating protects the surface against abrasion.

HIGH CAPACITY CASTERS
Four 8 in. (20 cm) high capacity casters for ease of movement in straight lines.

GET THE METALTECH APP

BUILT TOUGH FOR SAFETY

METALTECH

WALL HAULER™

SERIES 2000

DRYWALL CART

RESIDENTIAL WELDED



3,000 lb
LOAD CAPACITY

INFO



KINGPINLESS



POLYURETHANE CASTER



PHENOLIC CASTER

BUILDMAN™
GRADE

ASSEMBLED DIMENSIONS (WxDxH)	38 X 20 X 44.5 IN. (96.5 X 50.8 X 113 CM)
PACKAGE DIMENSIONS (WxDxH)	38 X 20 X 34.25 IN. (96.5 X 50.8 X 87 CM)
PLATFORM DIMENSIONS	10.5 X 38 IN. (26.7 X 96.5 CM). Can carry up to 20 gypsum boards of 1/2 in. (13 mm).
WEIGHT	71.5 LB (32.4 KG)
LOAD CAPACITY	3,000 LB (1,361 KG)
FINISH	POWDER COATED
CASTERS	8 IN. (20 CM). 4 SWIVEL CASTERS, 1 DIRECTIONAL LOCK AND 1 CASTER BRAKE
HANDLE BAR	1.125 IN. (2.9 CM) OUTSIDE DIAMETER. 13 GAUGE STEEL
SLIDING COATING	STANDARD
REPLACEMENT PARTS	SEE PAGE 94
STANDARDS	ANSI, CSA AND OSHA

YELLOW COLOR		CASTERS		
MODELS	UPC	POLYURETHANE*	PHENOLIC	KINGPINLESS
I-BMD2131YGR	778300000098	•		
I-BMD2131YGP	778300002771		•	
I-BMD2131YGRK	778300002788	•		•
I-BMD2131YGPK	778300002795		•	•

RED COLOR		CASTERS		
MODELS	UPC	POLYURETHANE*	PHENOLIC	KINGPINLESS
I-BMD2131R	778300100354	•		
I-BMD2131P	778300002801		•	
I-BMD2131RK	778300002818	•		•
I-BMD2131PK	778300002825		•	•

*POLYPROPYLENE CORE

INFO



SLIDING COATING
Sliding coating protects the surface against abrasion.



HIGH CAPACITY CASTERS
Four 8 in. (20 cm) high capacity casters for ease of movement in straight lines.

WALL HAULER™ SERIES H DRYWALL CART



3,000 lb
LOAD CAPACITY

INFO



KINGPINLESS



POLYURETHANE CASTER



PHENOLIC CASTER

ASSEMBLED DIMENSIONS (W X D X H)	50.75 X 27.25 X 45.75 IN. (128.9 X 69.2 X 116.2 CM)
PACKAGE DIMENSIONS (W X D X H)	50.75 X 27.25 X 6.75 IN. (128.9 X 69.2 X 17.1 CM)
PLATFORM DIMENSIONS	48 X 15.5 IN. (121.9 X 39.4 CM). Can carry up to 24 gypsum boards of 1/2 in. (13 mm).
WEIGHT	87 LB (39.5 KG)
LOAD CAPACITY	3,000 LB (1,361 KG)
FINISH	POWDER COATED
CASTERS	8 IN. (20 CM). 4 SWIVEL CASTERS, 1 DIRECTIONAL LOCK AND 1 CASTER BRAKE
HANDLE BAR	2 IN. (5 CM) OUTSIDE DIAMETER. 9 GAUGE STEEL
REPLACEMENT PARTS	SEE PAGE 94
STANDARDS	ANSI, CSA AND OSHA

YELLOW COLOR		CASTERS		
MODELS	UPC	POLYURETHANE*	PHENOLIC	KINGPINLESS
I-BMDHER31YGR	778300000548	•		
I-BMDHER31YGP	778300002832		•	
I-BMDHER31YGRK	778300002849	•		•
I-BMDHER31YGPK	778300002856		•	•

*POLYPROPYLENE CORE


BUILDMAN™ GRADE

INFO



HIGH CAPACITY CASTERS

Four 8 in. (20 cm) high capacity casters for ease of movement in straight lines.



GET THE METALTECH APP



BUILDMAN™ DRYWALL & PANEL LIFT



200 lb
LOAD CAPACITY

14'-5"
MAX HEIGHT

ASSEMBLED DIMENSIONS (WXDXH)	60.25 X 48.75 X 58.25 IN. (153.3 X 124.1 X 148.1 CM)
PACKAGE DIMENSIONS (WXDXH)	BOX ONE: 49.5 X 14.25 X 7 IN. (125.9 X 36.3 X 17.5 CM) BOX TWO: 50.5 X 21.25 X 6 IN. (128.4 X 54.2 X 15.5 CM)
WEIGHT	146.6 LB (66.6 KG)
LOAD CAPACITY	200 lb (90.7 kg)
MAXIMUM HEIGHT	14 FT 5 IN. (4.39 M)
LOADING HEIGHT	37 IN. (94 CM)
MAXIMUM PANEL SIZE	4 X 16 FT (1.22 X 4.87 M)
CHAINS	COMMERCIAL GRADE
CASTERS	6 IN. (15 CM) DOUBLE LOCKING HEAVY DUTY.
REPLACEMENT PARTS	SEE PAGE 94
MODEL	I-BMDPL
UPC	778300002078

BUILDMAN™
GRADE

INFO



CRADLE TILTS
Cradle tilts for sloped ceiling or vertical wall installations. 34" (86 cm) loading height.



CASTERS
Three 6" (15 cm) double lock heavy duty swivel casters.



FAST ACTION WINCH
Fast action single stage winch with silent cam lock brake.

BUILDMAN™ DRYWALL STILTS

225 lb
LOAD CAPACITY



	18-30 IN. DRYWALL STILTS	24-40 IN. DRYWALL STILTS
ASSEMBLED DIMENSIONS (1 STILT) (WXDXH)	12.5 X 6 X 38 IN. (31.8 X 15.2 X 96.5 CM)	12.5 X 6 X 44 IN. (31.8 X 15.2 X 111.8 CM)
PACKAGE DIMENSIONS (2 STILT) (WXDXH)	13.25 X 8 X 25 IN. (33.7 X 20.3 X 63.5 CM)	13.25 X 8 X 31 IN. (33.7 X 20.3 X 63.5 CM)
ADJUSTABLE HEIGHTS	18 UP TO 30 IN. (46 up to 76 cm) 2 in. (5 cm) increment adjustable heights.	24 UP TO 40 IN. (61 cm up to 1.02 m) 2 in. (5 cm) increment adjustable heights.
MAXIMUM REACH*	9 FT 3 IN. (2.82 M)	10 FT (3.5 M)
MATERIAL	ANODIZED ALUMINUM	ANODIZED ALUMINUM
WEIGHT (1 STILT)	7.1 LB (3.2 KG)	8.1 LB (3.7 KG)
LOAD CAPACITY	225 LB (102 KG)	225 LB (102 KG)
REPLACEMENT PARTS	SEE PAGE 94	SEE PAGE 94
MODEL	I-BMDS1830	I-BMDS2440
UPC	778300001989	778300001996

*Calculated with a 5'9" (1.75 m) person with a vertical 12" (30 cm) reach

BUILDMAN™ GRADE



ADJUSTABLE
Adjustable heights.



DUAL SPRING ACTION
For more flexibility and natural walking feel



CONTACT GRIP
One piece rubber outsole

INFO



GET THE METALTECH APP



BUILDMAN™ 18"-30" DRYWALL BENCH



500 lb
LOAD CAPACITY

9'-3"
REACH

BUILDMAN™
GRADE

OPEN BENCH (W X D X H)	48 X 17.5 X 18 UP TO 30 IN. (121.9 X 44.5 X 46 UP TO 76 CM)
CLOSED BENCH (W X D X H)	48 X 17.5 X 6.25 IN. (121.9 X 44.5 X 15.9 CM)
PACKAGE DIMENSIONS (W X D X H)	16.5 X 7 X 49.25 IN. (42 X 18 X 125 CM)
WORK SURFACE (W X D)	48 X 9.5 IN. (121.9 X 24.1 CM)
WORKING HEIGHT	18 up to 30 in. (46 up to 76 cm) 2 in. (5 cm) increment adjustable heights.
MAXIMUM REACH*	9 FT 3 IN. (2.82 M)
MATERIAL	ALUMINUM 6061-T6
WEIGHT	29.3 LB (13.3 KG)
LOAD CAPACITY	500 LB (227 KG)
REPLACEMENT PARTS	SEE PAGE 94
MODEL	I-BMDWB18
UPC	778300002009

*Calculated with a 5'9" (1.75 m) person with a vertical 12" (30 cm) reach

INFO



ADJUSTABLE
18" to 30" (46 to 76 CM) adjustable heights. Auto-locking system with lock indicator device



STEP-UP
Extra-wide step-up



FOOTING
Anti-slip heavy-duty footing

BUILDMAN™ WORK STAND



300 lb
LOAD CAPACITY



300 lb
LOAD CAPACITY

DESCRIPTION	2' ALUMINUM WORK STAND*	3' ALUMINUM WORK STAND*
OPEN DIMENSIONS (WxD x H)	26.25 X 28.25 X 23.75 IN. (66.5 X 71.9 X 60.1 CM)	27.25 X 36.25 X 35 IN. (69.5 X 91.9 X 89.2 CM)
CLOSED DIMENSIONS (WxD x H)	26.25 X 11.5 X 27.5 IN. (66.5 X 29 X 69.8 CM)	27.25 X 11.5 X 39.5 IN. (69.5 X 29.4 X 100.5 CM)
DECK DIMENSIONS (WxD)	23.75 X 12.25 IN. (60.3 X 31.1 CM)	23.75 X 12.25 IN. (60.3 X 31.1 CM)
LOAD CAPACITY	300 LB (136 KG)	300 LB (136 KG)
WEIGHT	13.2 LB (6 KG)	17.4 LB (7.9 KG)
MATERIAL	ALUMINUM	ALUMINUM
MODEL	E-PWS7000AL	E-PWS7100AL
UPC	778300002030	778300002047

*Available in USA only

*Available in USA only



300 lb
LOAD CAPACITY



300 lb
LOAD CAPACITY

DESCRIPTION	4' ALUMINUM WORK STAND*	5' ALUMINUM WORK STAND*
OPEN DIMENSIONS (WxD x H)	28.5 X 45 X 46.5 IN. (72.4 X 114.5 X 118 CM)	29.5 X 53.5 X 58 IN. (75.1 X 135.8 X 147.3 CM)
CLOSED DIMENSIONS (WxD x H)	28.5 X 11.75 X 51.75 IN. (72.4 X 29.6 X 131.5 CM)	29.5 X 11.75 X 64 IN. (75.1 X 29.7 X 162.4 CM)
DECK DIMENSIONS (WxD)	23.75 X 12.25 IN. (60.3 X 31.1 CM)	23.75 X 12.25 IN. (60.3 X 31.1 CM)
LOAD CAPACITY	300 LB (136 KG)	300 LB (136 KG)
WEIGHT	21.9 LB (9.9 KG)	26 LB (11.8 KG)
MATERIAL	ALUMINUM	ALUMINUM
MODEL	E-PWS7200AL	E-PWS7300AL
UPC	778300002054	778300000494

*Available in USA only

*Available in USA only

BUILDMAN™ GRADE



ALUMINUM SCAFFOLDING

Metaltech's Aluminum scaffolds are our lightest range of scaffolding. It is a high strength system, designed for quick and easy assembly. The Aluminum is a flexible and low maintenance solution used for all jobsites work. Our Span 300 and 400 towers are available in narrow and wide width and in heights ranging from 6' to 41'. They are compatible with Instant Upright, Alufase and Vault scaffolding.†

- **LIGHT WEIGHT**
- **HIGH STRENGTH SYSTEM**
- **QUICK & EASY ASSEMBLY**
- **HIGH DURABILITY**
- **HIGHLY VERSATILE**

†All trademarks and registered trademarks listed above are the property of their respective owners.



ALUMINUM SCAFFOLDING

**BUILT TOUGH FOR
SAFETY**

METALTECH

ALUMINUM TOWER SPAN 300 KITS

INFO

Compatible with Instant Upright, Alufase and Vault scaffolding.[†]

STANDARDS

MEETS ANSI/ASSE A10.8 - 2011
OSHA 29CFR PART 1926
CAN/CSA S269.2



The kits shown below are for 8'-2 1/4" (2.5 m) platform lengths. They give an example of the quantity of items required for assembly. Equivalent kits for 6'-6 3/4" and 10' platform lengths are also available. Please refer to the next page to obtain the item number corresponding to the desired platform length.

SPAN 300 NARROW TOWER KITS

MODEL	MAXIMUM PLATFORM HEIGHT	WEIGHT	LOAD CAPACITY	TOWER KIT DIMENSIONS (W x D x H)	NARROW FRAME AL-F3001	NARROW GUARDRAIL AL-G3000	GUARDRAIL BRACING AL-G4101	DIAGONAL BRACING AL-D0002	HORIZONTAL BRACE AL-H0002	TRAPDOOR BRACE AL-P0002	NARROW PLATFORM AL-T0102	POLYURETHANE SET AL-C0002	SCREW JACK AL-J0001	ADJUSTABLE OUTRIGGER AL-O0000	OUTRIGGER AL-O0002
AL-K3007	13'-1 1/2" (4 M)	364 LB (166 KG)	1,587 LB (720 KG)	8'-2 1/4" X 26 5/8" X 16'-8 1/2" (2.496 X 0.677 X 5.092 M)	4	2	2	4	5	2	1	4	4	4	0
AL-K3013	19'-8 1/4" (6 M)	472 LB (215 KG)	1,587 LB (720 KG)	8'-2 1/4" X 26 5/8" X 23'-8 1/4" (2.496 X 0.677 X 7.092 M)	6	2	2	7	9	3	1	4	4	4	0
AL-K3019	26'-3" (8 M)	589 LB (268 KG)	1,587 LB (720 KG)	8'-2 1/4" X 26 5/8" X 29'-10" (2.496 X 0.677 X 9.092 M)	8	2	2	9	13	4	1	4	4	0	4



SPAN 300 WIDE TOWER KITS

MODEL	MAXIMUM PLATFORM HEIGHT	WEIGHT	LOAD CAPACITY	TOWER KIT DIMENSIONS (W x D x H)	WIDE FRAME AL-F3003	WIDE GUARDRAIL AL-G3001	GUARDRAIL BRACING AL-G4101	DIAGONAL BRACING AL-D0002	HORIZONTAL BRACE AL-H0002	PLATFORM AL-P0101	TRAPDOOR PLATFORM AL-P0002	WIDE PLATFORM AL-T0103	POLYURETHANE SET AL-C0002	SCREW JACK AL-J0001	ADJUSTABLE OUTRIGGER AL-O0000	OUTRIGGER AL-O0002
AL-K3028	13'-1 1/2" (4 M)	496 LB (225 KG)	1,587 LB (720 KG)	8'-2 1/4" X 50 3/4" X 16'-8 1/2" (2.496 X 1.290 X 5.092 M)	4	2	2	8	5	2	2	1	4	4	4	0
AL-K3034	19'-8 1/4" (6 M)	658 LB (300 KG)	1,587 LB (720 KG)	8'-2 1/4" X 50 3/4" X 23'-8 1/4" (2.496 X 1.290 X 7.092 M)	6	2	2	12	9	3	3	1	4	4	4	0
AL-K3040	26'-3" (8 M)	821 LB (373 KG)	1,587 LB (720 KG)	8'-2 1/4" X 50 3/4" X 29'-10" (2.496 X 1.290 X 9.092 M)	8	2	2	16	13	4	4	1	4	4	4	0
AL-K3046	32'-9 3/4" (10 M)	997 LB (453 KG)	1,587 LB (720 KG)	8'-2 1/4" X 50 3/4" X 36'-4 3/4" (2.496 X 1.290 X 11.092 M)	10	2	2	20	17	5	5	1	4	4	0	4
AL-K3052	39'-4 1/2" (12 M)	1160 LB (527 KG)	1,587 LB (720 KG)	8'-2 1/4" X 50 3/4" X 42'-11 3/8" (2.496 X 1.290 X 13.092 M)	12	2	2	24	21	6	6	1	4	4	0	4

[†]All trademarks and registered trademarks listed above are the property of their respective owners.

SPAN 300 PARTS

DESCRIPTION		DIMENSIONS	WEIGHT	MODEL	
FRAME					
A	NARROW	26 5/8" X 43 1/2" (0.677 X 1.106 M)	12.5 LB (5.7 KG)	AL-F3000	
		26 5/8" X 76 1/8" (0.677 X 1.934 M)	18.7 LB (8.5 KG)	AL-F3001	
B	WIDE	50 3/4" X 43 1/2" (1.290 X 1.106 M)	18.7 LB (8.5 KG)	AL-F3002	
		50 3/4" X 76 1/8" (1.290 X 1.934 M)	24.6 LB (11.2 KG)	AL-F3003	
C	6-STEPS LADDER WITH LATCH	78.7" (2 M)	14 LB (6.4 KG)	AL-L0002	
GUARDRAIL FRAME					
D	NARROW	UPPER PIN SYSTEM	26 5/8" X 32 1/4" (0.677 X 0.818 M)	6 LB (2.7 KG)	AL-G3000
		LOWER PIN SYSTEM	26 5/8" X 42" (0.677 X 1.066 M)	6.2 LB (2.8 KG)	AL-G3002
E	WIDE	UPPER PIN SYSTEM	50 3/4" X 32 1/4" (1.290 X 0.818 M)	8.8 LB (4 KG)	AL-G3001
		LOWER PIN SYSTEM	50 3/4" X 42" (1.290 X 1.066 M)	9 LB (4.1 KG)	AL-G3003

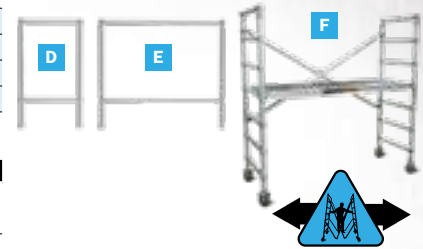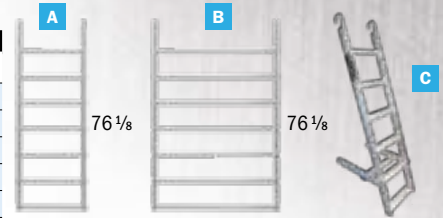

SPAN 300 NARROW FOLDABLE SCAFFOLD KIT

DESCRIPTION	DIMENSIONS	WEIGHT	MODEL
F WITH CASTERS AND TRAPDOOR PLATFORM	6' 3 1/4" X 26 1/8" X 78" (1.912 X 0.677 X 1.980 M)	82.9 LB (37.6 KG)	AL-Q3101

COMPONENTS

DESCRIPTION		DIMENSIONS	COMPATIBLE			WEIGHT	MODEL
GUARDRAIL			2 M	2.5 M	3 M		
G	BRACING	6' 3 1/4" (1.912 M)	•			11.3 LB (5.1 KG)	AL-G4100
		8' 2 1/4" (2.496 M)		•		13 LB (5.9 KG)	AL-G4101
		10' (3.048 M)			•	14.5 LB (6.6 KG)	AL-G4102

BRACE

DESCRIPTION	DIMENSIONS	COMPATIBLE			WEIGHT	MODEL
		2 M	2.5 M	3 M		
H DIAGONAL	6' 10" (2.084 M)	(C/C)	•		4 LB (1.8 KG)	AL-D0001
	8' 7 1/2" (2.630 M)	(C/C)		•	4.8 LB (2.2 KG)	AL-D0002
	10' 8 1/8" (3.25 M)	(C/C)			5.5 LB (2.5 KG)	AL-D0003
I HORIZONTAL	6' 3 1/4" (1.912 M)	(C/C)	•		3.7 LB (1.7 KG)	AL-B0001
	8' 2 1/4" (2.496 M)	(C/C)		•	4.4 LB (2 KG)	AL-B0002
	10' (3.048 M)	(C/C)		•	5.3 LB (2.4 KG)	AL-B0003

COLOR CODED

ALUMINUM PLATFORM

DESCRIPTION	DIMENSIONS	COMPATIBLE			WEIGHT	MODEL
		2 M	2.5 M	3 M		
J WITH ANTI-SLIP PLYWOOD DECK*	6' 3 1/4" X 24" (1.912 X 0.609 M)	•			30.4 LB (13.8 KG)	AL-P0100
	8' 2 1/4" X 24" (2.496 X 0.609 M)		•		37.9 LB (17.2 KG)	AL-P0101
	10' X 24" (3.048 X 0.609 M)			•	43.3 LB (19.7 KG)	AL-P0102
K WITH TRAPDOOR AND ANTI-SLIP PLYWOOD DECK*	6' 3 1/4" X 24" (1.912 X 0.609 M)	•			31 LB (14.1 KG)	AL-P0001
	8' 2 1/4" X 24" (2.496 X 0.609 M)		•		38.5 LB (17.5 KG)	AL-P0002
	10' X 24" (3.048 X 0.609 M)			•	44 LB (20 KG)	AL-P0003
L WITH CHECKER PLATE DECK	6' 6 3/4" X 24" (2.0 X 0.6 M)	•			13.8 LB (6.3 KG)	AL-P1001
	8' 2" X 24" (2.5 X 0.6 M)		•		17.2 LB (7.8 KG)	AL-P1003
	10' X 24" (3.0 X 0.6 M)			•	19.7 LB (8.9 KG)	AL-P1005
M WITH TRAPDOOR AND CHECKER PLATE DECK	6' 6 3/4" X 24" (2.0 X 0.6 M)	•			14.1 LB (6.4 KG)	AL-P1000
	8' 2" X 24" (2.5 X 0.6 M)		•		17.5 LB (7.9 KG)	AL-P1002
	10' X 24" (3.0 X 0.6 M)			•	20 LB (9.1 KG)	AL-P1004

WOODEN TOEBOARD SET

DESCRIPTION	DIMENSIONS	COMPATIBLE			WEIGHT	MODEL
		2 M	2.5 M	3 M		
N NARROW	6' 3 1/4" X 27 1/8" (1.912 X 0.689 M)	•			15 LB (6.8 KG)	AL-T0100
	8' 2 1/4" X 27 1/8" (2.496 X 0.689 M)		•		18.8 LB (8.4 KG)	AL-T0102
	10' (3.048 X 0.689 M)			•	9.8 LB (4.4 KG)	AL-T0104
WIDE	6' 3 1/4" X 51 1/8" (1.912 X 1.298 M)	•			19.1 LB (8.7 KG)	AL-T0101
	8' 2 1/4" X 51 1/8" (2.496 X 1.298 M)		•		25.3 LB (11.5 KG)	AL-T0103
	10' (3.048 X 1.298 M)			•	14.4 LB (6.5 KG)	AL-T0105

FOLDABLE BASE WITH LOWER PINS SYSTEM

DESCRIPTION	DIMENSIONS	COMPATIBLE			WEIGHT	MODEL
		2 M	2.5 M	3 M		
O NARROW WITH ADJUSTABLE LEGS (W X D X H)	6' 3 1/4" X 26 5/8" X 71" (1.912 X 0.677 X 1.803 M)	•			55.4 LB (25.2 KG)	AL-Q3000
	8' 2 1/4" X 26 5/8" X 71" (2.496 X 0.677 X 1.803 M)		•		57.6 LB (26.2 KG)	AL-Q3001
WIDE WITH ADJUSTABLE LEGS (W X D X H)	8' 2 1/4" X 50 3/4" X 71" (2.496 X 1.290 X 1.803 M)			•	76.1 LB (34.6 KG)	AL-Q3004

UNIVERSAL COMPONENTS

DESCRIPTION	DIMENSIONS	COMPATIBLE			WEIGHT	MODEL
		2 M	2.5 M	3 M		
P SWIVEL POLYURETHANE CASTER	Ø 5" (0.125 M)	•	•	•	5 LB (2.3 KG)	AL-C0000
	Ø 8" (0.200 M)	•	•	•	9.6 LB (4.4 KG)	AL-C0002
Q SCREW JACK	MAX. HEIGHT OF 16" (0.406 M)	•	•	•	2.4 LB (1.1 KG)	AL-J0001
	MAX. HEIGHT OF 24 1/4" (0.615 M)	•	•	•	3.1 LB (1.4 KG)	AL-J0002
R SWIVEL BASE PLATE	6" X 6" (0.152 X 0.152 M)	•	•	•	1.42 LB (0.6 KG)	AL-A0000
	ADJUSTABLE OUTRIGGER	5' 8 1/8" TO 8' 1/8" (1.730 TO 2.440 M)	•	•	•	11.4 LB (5.2 KG)
S OUTRIGGER	6' 3/4" (1.849 M)	•	•	•	8.8 LB (4 KG)	AL-O0001
	10' 6" (3.200 M)	•	•	•	15 LB (6.8 KG)	AL-O0002
T IN-LINE CLAMP	Ø 1.99" (0.505 M) (C/C 2 5/8")	•	•	•	1.2 LB (0.5 KG)	AL-A0001



ALUMINUM SCAFFOLDING

*Maximum load capacity: 25 lb/sq.ft. (122 kg/m²)



ALUMINUM TOWER SPAN 400 KITS

ALUMINUM SCAFFOLDING

INFO

Compatible with Instant Upright, Alufase and Vault scaffolding.[†]

STANDARDS

MEETS ANSI/ASSE A10.8 - 2011
OSHA 29CFR PART 1926
CAN/CSA S269.2



The kits shown below are for 8'-2 1/4" (2.5 m) platform lengths. They give an example of the quantity of items required for assembly. Equivalent kits for 6'-6 3/4" and 10' platform lengths are also available. Please refer to the next page to obtain the item number corresponding to the desired platform length.

SPAN 400 NARROW TOWER KITS

MODEL	MAXIMUM PLATFORM HEIGHT	WEIGHT	LOAD CAPACITY	TOWER KIT DIMENSIONS (W x D x H)	NARROW FRAME AL-F4002	NARROW GUARDRAIL AL-G4000	GUARDRAIL BRACING AL-G4101	DIAGONAL BRACE AL-D0002	HORIZONTAL BRACE AL-B0002	TRAPDOOR PLATFORM AL-P0002	NARROW TOEBOARD AL-T0102	POLYURETHANE CASTER AL-C0002	SCREW JACK AL-J0001	ADJUSTABLE OUTRIGGER AL-O0000	OUTRIGGER AL-O0002
AL-K4007	13'-9 3/8" (4.2 M)	321 LB (146 KG)	1,587 LB (720 KG)	8'-2 1/4" X 26 5/8" X 17'-4 3/8" (2.496 X 0.677 X 5.292 M)	4	2	2	4	5	2	1	4	4	4	0
AL-K4013	20'-8" (6.3 M)	451 LB (205 KG)	1,587 LB (720 KG)	8'-2 1/4" X 26 5/8" X 24'-3" (2.496 X 0.677 X 7.392 M)	6	2	2	7	9	3	1	4	4	4	0
AL-K4019	27'-2 3/4" (8.3 M)	521 LB (237 KG)	1,587 LB (720 KG)	8'-2 1/4" X 26 5/8" X 30'-9 3/4" (2.496 X 0.677 X 9.392 M)	8	2	2	9	13	4	1	4	4	0	4

SPAN 400 WIDE TOWER KITS

MODEL	MAXIMUM PLATFORM HEIGHT	WEIGHT	LOAD CAPACITY	TOWER KIT DIMENSIONS (W x D x H)	WIDE FRAME AL-F4005	WIDE GUARDRAIL AL-G4001	GUARDRAIL BRACING AL-G4101	DIAGONAL BRACE AL-D0002	HORIZONTAL BRACE AL-B0002	PLATFORM AL-P0101	TRAPDOOR PLATFORM AL-P0002	WIDE TOEBOARD SET AL-T0103	POLYURETHANE CASTER AL-C0002	SCREW JACK AL-J0001	ADJUSTABLE OUTRIGGER AL-O0000	OUTRIGGER AL-O0002
AL-K4028	13'-9 3/8" (4.2 M)	477 LB (217 KG)	1,587 LB (720 KG)	8'-2 1/4" X 50 3/4" X 17'-4 3/8" (2.496 X 1.290 X 5.292 M)	4	2	2	8	5	2	2	1	4	4	4	0
AL-K4034	20'-8" (6.3 M)	631 LB (287 KG)	1,587 LB (720 KG)	8'-2 1/4" X 50 3/4" X 24'-3" (2.496 X 1.290 X 7.392 M)	6	2	2	12	9	3	3	1	4	4	4	0
AL-K4040	27'-2 3/4" (8.3 M)	786 LB (375 KG)	1,587 LB (720 KG)	8'-2 1/4" X 50 3/4" X 30'-9 3/4" (2.496 X 1.290 X 9.392 M)	8	2	2	15	13	4	4	1	4	4	4	0
AL-K4046	34'-1 1/2" (10.4 M)	954 LB (434 KG)	1,587 LB (720 KG)	8'-2 1/4" X 50 3/4" X 37'-8 1/2" (2.496 X 1.290 X 11.492 M)	10	2	2	20	17	5	5	1	4	4	0	4
AL-K4052	41'-0 1/8" (12.5 M)	1108 LB (503 KG)	1,587 LB (720 KG)	8'-2 1/4" X 50 3/4" X 44'-7 1/8" (2.496 X 1.290 X 13.592 M)	12	2	2	24	21	6	6	1	4	4	0	4


[†]All trademarks and registered trademarks listed above are the property of their respective owners.

SPAN 400 KITS


DESCRIPTION		DIMENSIONS	WEIGHT	MODEL
FRAME				
A	NARROW	26 5/8" X 48 7/8" (0.677 X 1.243 M)	8.8 LB (4 KG)	AL-F4000
		26 5/8" X 65 1/4" (0.677 X 1.657 M)	18.6 LB (8.4 KG)	AL-F4001
		26 5/8" X 81 5/8" (0.677 X 2.072 M)	16.4 LB (7.4 KG)	AL-F4002
B	WIDE	50 3/4" X 48 7/8" (1.290 X 1.243 M)	13 LB (5.9 KG)	AL-F4003
		50 3/4" X 65 1/4" (1.290 X 1.657 M)	16.7 LB (7.6 KG)	AL-F4004
		50 3/4" X 81 5/8" (1.290 X 2.072 M)	20.6 LB (9.3 KG)	AL-F4005
C	6-STEPS LADDER WITH LATCH	78.7" (2 M)	14 LB (6.4 KG)	AL-L0002
D	NARROW WITH LADDER SPAN	26 5/8" X 81 5/8" (0.677 X 2.072 M)	23.3 LB (10.6 KG)	AL-F4101
E	WIDE WITH LADDER SPAN	50 3/4" X 81 5/8" (1.290 X 2.072 M)	27.7 LB (12.6 KG)	AL-F4103
GUARDRAIL FRAME				
F	NARROW WITH UPPER PIN SYSTEM	26 5/8" X 27 5/8" (0.677 X 0.703 M)	6.4 LB (2.9 KG)	AL-G4000
G	WIDE WITH UPPER PIN SYSTEM	50 3/4" X 27 5/8" (1.290 X 0.703 M)	8 LB (3.6 KG)	AL-G4001

COMPONENTS

DESCRIPTION		DIMENSIONS	COMPATIBLE			WEIGHT	MODEL
GUARDRAIL			2 M	2.5 M	3 M		
H	BRACING	6'3 1/4" (1.912 M)	•			11.3 LB (5.1 KG)	AL-G4100
		8'2 1/4" (2.496 M)		•		13 LB (5.9 KG)	AL-G4101
		10' (3.048 M)			•	14.5 LB (6.6 KG)	AL-G4102
BRACE (C/C WIDTH)							
I	DIAGONAL	6'10" (2.084 M)	•			4 LB (1.8 KG)	AL-D0001
		8'7 1/2" (2.630 M)		•		4.8 LB (2.2 KG)	AL-D0002
		10'8 1/8" (3.25 M)			•	5.5 LB (2.5 KG)	AL-D0003
J	HORIZONTAL	6'3 1/4" (1.912 M)	•			3.7 LB (1.7 KG)	AL-B0001
		8'2 1/4" (2.496 M)		•		4.4 LB (2 KG)	AL-B0002
		10' (3.048 M)			•	5.3 LB (2.4 KG)	AL-B0003
ALUMINUM PLATFORM							
K	WITH ANTI-SLIP PLYWOOD DECK*	6'3 1/4" X 24" (1.912 X 0.609 M)	•			30.4 LB (13.8 KG)	AL-P0100
		8'2 1/4" X 24" (2.496 X 0.609 M)		•		37.9 LB (17.2 KG)	AL-P0101
		10' X 24" (3.048 X 0.609 M)			•	43.3 LB (19.7 KG)	AL-P0102
L	WITH TRAPDOOR AND ANTI-SLIP PLYWOOD DECK*	6'3 1/4" X 24" (1.912 X 0.609 M)	•			31 LB (14.1 KG)	AL-P0001
		8'2 1/4" X 24" (2.496 X 0.609 M)		•		38.5 LB (17.5 KG)	AL-P0002
		10' X 24" (3.048 X 0.609 M)			•	44 LB (20 KG)	AL-P0003
M	WITH CHECKER PLATE DECK	6'6 3/4" X 24" (2.0 X 0.6 M)	•			13.8 LB (6.3 KG)	AL-P1001
		8'2" X 24" (2.5 X 0.6 M)		•		17.2 LB (7.8 KG)	AL-P1003
		10' X 24" (3.0 X 0.6 M)			•	19.7 LB (8.9 KG)	AL-P1005
N	WITH TRAPDOOR AND CHECKER PLATE DECK	6'6 3/4" X 24" (2.0 X 0.6 M)	•			14.1 LB (6.4 KG)	AL-P1000
		8'2" X 24" (2.5 X 0.6 M)		•		17.5 LB (7.9 KG)	AL-P1002
		10' X 24" (3.0 X 0.6 M)			•	20 LB (9.1 KG)	AL-P1004
WOODEN TOEBOARD SET							
O	NARROW	6'3 1/4" X 27 1/8" (1.912 X 0.689 M)	•			15 LB (6.8 KG)	AL-T0100
		8'2 1/4" X 27 1/8" (2.496 X 0.689 M)		•		18.8 LB (8.4 KG)	AL-T0102
		10' (3.048 X 0.689 M)			•	9.8 LB (4.4 KG)	AL-T0104
	WIDE	6'3 1/4" X 51 1/8" (1.912 X 1.298 M)	•			19.1 LB (8.7 KG)	AL-T0101
		8'2 1/4" X 51 1/8" (2.496 X 1.298 M)		•		25.3 LB (11.5 KG)	AL-T0103
		10' (3.048 X 1.298 M)			•	14.4 LB (6.5 KG)	AL-T0105
UNIVERSAL COMPONENTS							
P	SWIVEL POLYURETHANE CASTER	Ø 5" (0.125 M)	•	•	•	5 LB (2.3 KG)	AL-C0000
		Ø 8" (0.200 M)	•	•	•	9.6 LB (4.4 KG)	AL-C0002
Q	SCREW JACK	16" (0.406 M)	•	•	•	2.4 LB (1.1 KG)	AL-J0001
		24 1/4" (0.615 M)	•	•	•	3.1 LB (1.4 KG)	AL-J0002
R	SWIVEL BASE PLATE	6" X 6" (0.152 X 0.152 M)	•	•	•	1.42 LB (0.6 KG)	AL-A0000
S	ADJUSTABLE OUTRIGGER	5'8 1/8" TO 8'1/8" (1.730 TO 2.440 M)	•	•	•	11.4 LB (5.2 KG)	AL-O0000
		6'3/4" (1.849 M)	•	•	•	8.8 LB (4 KG)	AL-O0001
T	OUTRIGGER	10' 6" (3.200 M)	•	•	•	15 LB (6.8 KG)	AL-O0002
		Ø 1.99" (0.505 M) (C/C 2 5/8")	•	•	•	1.2 LB (0.5 KG)	AL-A0001

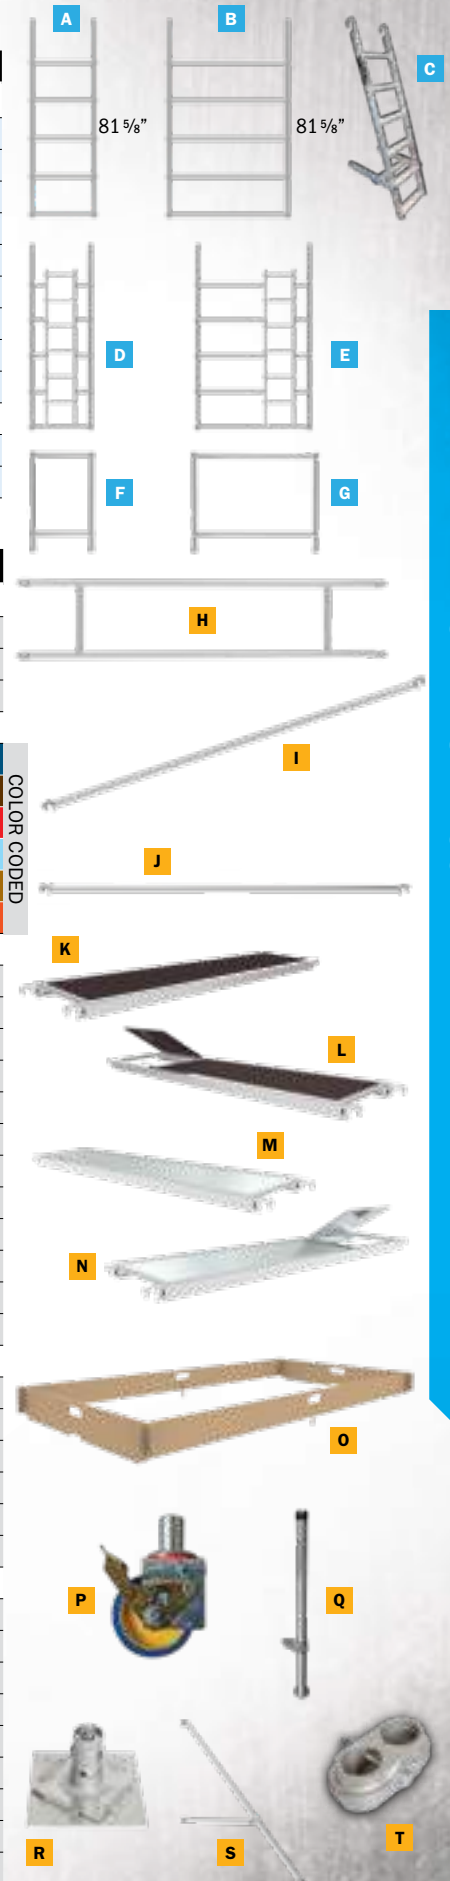

*Maximum load capacity: 25 lb/sq.ft. (122 kg/m²)



EASY-SET SCAFFOLD TOWER™

EASY-SET SCAFFOLD TOWER™



800 lb
LOAD CAPACITY

12'
REACH



12'
REACH



18'
REACH

	6' EASY-SET SCAFFOLD TOWER™	6' EASY-SET SCAFFOLD TOWER™ WITH GUARDRAILS	12' EASY-SET SCAFFOLD TOWER™ WITH GUARDRAILS AND OUTRIGGERS
DIMENSIONS (W X D X H)	65 X 31 X 72 IN. (165 X 78 X 185 CM)	65 X 31 X 108 IN. (165 X 78 X 275 CM)	65 X 31 X 180 IN. (165 X 78 X 455 CM)
STANDING HEIGHT	6 FT (1.8M)	6 FT (1.8M)	12 FT (3.5M)
REACH HEIGHT	12 FT (3.5M)	12 FT (3.5M)	18 FT (5.3M)
PACKAGE DIMENSIONS (W X D X H)	75 X 32 1/2 X 11 1/2 IN. (190 X 82 X 29 CM)	75 X 32 1/2 X 21 1/4 IN. (190 X 82 X 54 CM)	75 X 32 1/2 X 28 3/4 IN. (190 X 82 X 73 CM)
PACKAGING WEIGHT	72.9 LB (33.1 KG)	159.2 LB (72.2 KG)	268 LB (121.5 KG)
LOAD CAPACITY	800 LB (363 KG)	800 LB (363 KG)	800 LB (363 KG)
STANDARDS	MEETS ANSI/ASSE A10.8 - 2011 OSHA 29CFR PART 1926 CAN/CSA S269.2	MEETS ANSI/ASSE A10.8 - 2011 OSHA 29CFR PART 1926 CAN/CSA S269.2	MEETS ANSI/ASSE A10.8 - 2011 OSHA 29CFR PART 1926 CAN/CSA S269.2
MODEL	AL-Q0100	AL-Q0105	AL-Q0106
UPC	778300001460	778300001477	778300001484
	INCLUDED IN PACK	INCLUDED IN PACK	INCLUDED IN PACK
	QTY.	QTY.	QTY.
	1 FOLDABLE BASE	1 FOLDABLE BASE	1 FOLDABLE BASE
	1 PLATFORM	1 PLATFORM	2 PLATFORM
	1 DIAGONAL BRACE	2 DIAGONAL BRACE	4 DIAGONAL BRACE
	4 CASTER	4 CASTER	4 CASTER
		5 HORIZONTAL BRACE	9 HORIZONTAL BRACE
		2 4 RUNG EXTENSION FRAME	2 4 RUNG EXTENSION FRAME
			4 OUTRIGGER
			1 TOE BOARD SET
			2 7 RUNG EXTENSION FRAME

INFO




**BRACE HOOK
FRAME LOCKING PIN**



**ADJUSTABLE LEG AND
CASTER**



OUTRIGGER EXTENSION

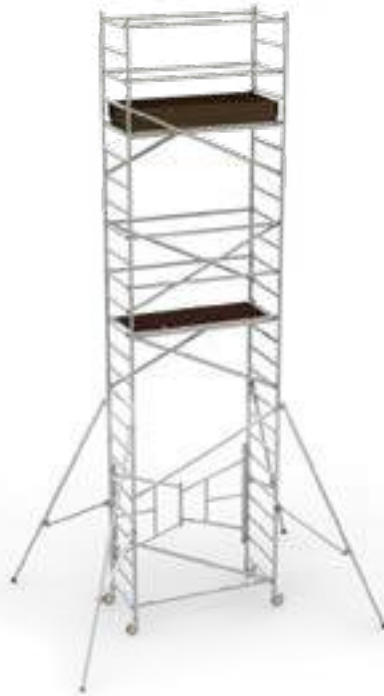

24'
REACH



30'
REACH

**18' EASY-SET SCAFFOLD TOWER™
WITH GUARDRAILS AND OUTRIGGERS**

DIMENSIONS (W X D X H)	65 X 31 X 252 IN. (165 X 78 X 640 CM)
STANDING HEIGHT	18 FT (5.3M)
REACH HEIGHT	24 FT (7.1M)
PACKAGE DIMENSIONS (W X D X H)	75 X 32 1/2 X 33 1/2 IN. (190 X 82 X 85 CM)
PACKAGING WEIGHT	322.6 LB (146.3 KG)
LOAD CAPACITY	800 LB (363 KG)
STANDARDS	MEETS ANSI/ASSE A10.8 - 2011 OSHA 29CFR PART 1926 CAN/CSA S269.2
MODEL	AL-Q0107
UPC	778300001491

**24' EASY-SET SCAFFOLD TOWER™
WITH GUARDRAILS AND OUTRIGGERS**

DIMENSIONS (W X D X H)	65 X 31 X 324 IN. (165 X 78 X 823 CM)
STANDING HEIGHT	24 FT (7.1M)
REACH HEIGHT	30 FT (8.9M)
PACKAGE DIMENSIONS (W X D X H)	88 1/2 X 32 1/2 X 42 IN. (225 X 82 X 107 CM)
PACKAGING WEIGHT	431.5 LB (195.7 KG)
LOAD CAPACITY	800 LB (363 KG)
STANDARDS	MEETS ANSI/ASSE A10.8 - 2011 OSHA 29CFR PART 1926 CAN/CSA S269.2
MODEL	AL-Q0108
UPC	778300001729

INCLUDED IN PACK

QTY.	
1	FOLDABLE BASE
2	PLATFORM
8	DIAGONAL BRACE
4	ADJUSTABLE LEG WITH CASTER
9	HORIZONTAL BRACE
2	4 RUNG EXTENSION FRAME
4	OUTRIGGER
1	TOE BOARD SET
4	7 RUNG EXTENSION FRAME

INCLUDED IN PACK

QTY.	
1	FOLDABLE BASE
3	PLATFORM
10	DIAGONAL BRACE
4	ADJUSTABLE LEG WITH CASTER
13	HORIZONTAL BRACE
2	4 RUNG EXTENSION FRAME
4	JUMBO OUTRIGGER
1	TOE BOARD SET
6	7 RUNG EXTENSION FRAME



PLATFORM HOOK



FOLDING BASE UNIT



FIBERGLASS SERIES™ SCAFFOLDING



The Fiberglass Series™ scaffolding offering is designed for uses when non-conductive, static free or chemical resistance is required. Easy to set up and lighter than steel or aluminum scaffold types, it can quickly be assembled and moved into position.

- **NON-CONDUCTIVE**
- **CHEMICAL ENVIRONMENTS**
- **VERY LIGHT**



FIBERGLASS SERIES™ SCAFFOLDING

**BUILT TOUGH FOR
SAFETY**

METALTECH

FIBERGLASS SCAFFOLDING


TESTED IN CONFORMITY TO CSA STANDARD S269.2

INFO

Imperial units for reference only.



FIBERGLASS SERIES™ SCAFFOLDING

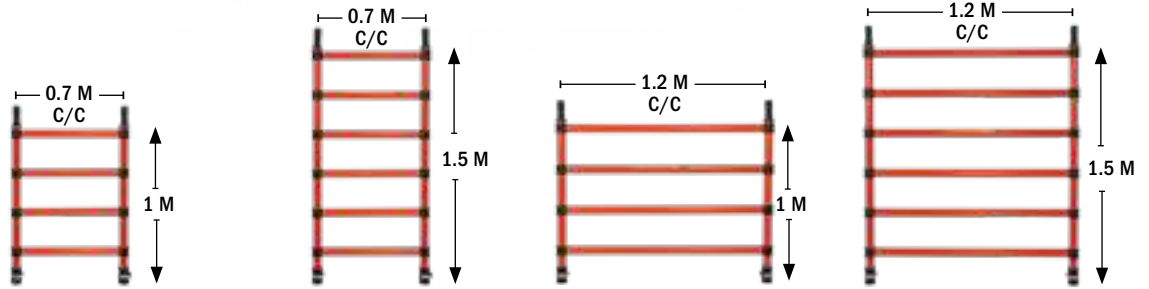

DESCRIPTION	1 X 0.7 M FRAME	1.5 X 0.7 M FRAME	1 X 1.2 M FRAME	1.5 X 1.2 M FRAME
DIMENSIONS (H X W)	1 X 0.7 M (3'-3 3/8" X 2'-3 9/16")	1.5 X 0.7 M (4'-11 1/16" X 2'-3 9/16")	1 X 1.2 M (3'-3 3/8" X 3'-11 1/4")	1.5 X 1.2 M (4'-11 1/16" X 3'-11 1/4")
WEIGHT	5.2 KG (11.4 LB)	7.4 KG (16.4 LB)	6.9 KG (15.3 LB)	10.1 KG (22.2 LB)
STANDARDS	CSA - S269.2	CSA - S269.2	CSA - S269.2	CSA - S269.2
MODEL	F-FRA0710L	F-FRA0715L	F-FRA1210L	F-FRA1215L



WOOD TOEBOARD			DESCRIPTION	TOEBOARD BRACKET
DIMENSIONS	WEIGHT	MODEL	WEIGHT	0.4 KG (0.86 LB)
0.7 M (2'-3 9/16")	0.7 KG (1.64 LB)	F-TB07	STANDARD	CSA - S269.2
1.2 M (3'-11 1/4")	1.5 KG (3.28 LB)	F-TB12	MODEL	F-TBBRACK
2.4 M (7'-10 1/2")	3 KG (6.64 LB)	F-TB24		

STANDARD: CSA - S269.2



BRACE				
DESCRIPTION	DIMENSIONS	WEIGHT	COLOR ID	MODEL
HORIZONTAL	2.4 M (7'-10 1/2")	2.5 KG (5.5 LB)	YELLOW	F-BRAH24
DIAGONAL	2.6 M (8'-6")	2.6 KG (5.7LB)	BLUE	F-BRAD24
0.7 M BRACE PLAN	0.7 X 2.4 M (2' X 7'-10 1/2")	2.5 KG (5.5 LB)	RED	F-PBRA0724
1.2 M BRACE PLAN	1.2 X 2.4 M (4' X 7'-10 1/2")	2.7 KG (5.9 LB)	RED	F-PBRA1224



OUTRIGGER		
DIMENSIONS	WEIGHT	MODEL
2 M (6'-6 3/4")	3.8 KG (8.3 LB)	F-OUT20
3 M (9'-10 1/8")	4.7 KG (10.3 LB)	F-OUT30

STANDARD: CSA - S269.2

STANDARD: CSA - S269.2



DESCRIPTION	8" CASTER WITH LEVELING JACK	90° FIXED CLAMP	SWIVEL CLAMP	ACCESS LADDER
DIMENSIONS	85 CM (2'-9 15/32")	Ø 4.8 / 4.8 CM (1.9 / 1.9 IN.)	Ø 4.8 / 4.8 CM (1.9 / 1.9 IN.)	2.4 - 3.65 M (7'-10 1/2" X 11'-11 11/16")
CAPACITY	N / A	N / A	N / A	149.69 KG (330 LB)
WEIGHT	5.9 KG (13.1 LB)	0.73 KG (1.6 LB)	0.77 KG (1.7 LB)	16.6 KG (36.66 LB)
STANDARD	CSA - S269.2	CSA - S269.2	CSA - S269.2	CSA - S269.2
MODEL	F-ADJ200	F-TCFDU	F-TCSDU	F-LAD2436

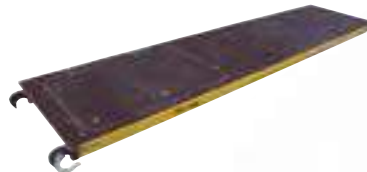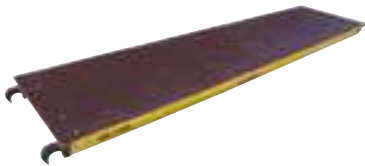

DESCRIPTION	PLATFORM ANTI-SLIP	PLATFORM ANTI-SLIP WITH TRAPDOOR
DIMENSIONS	2.4 M (7'-10 1/2")	2.4 M (7'-10 1/2")
CAPACITY	225 KG (496 LB)	225 KG (496 LB)
WEIGHT	22.6 KG (49.8 LB)	22.4 KG (49.3 LB)
STANDARD	CSA - S269.2	CSA - S269.2
MODEL	F-DP24	F-DH24



FIBERGLASS TOWER KITS

TESTED IN CONFORMITY TO CSA STANDARD S269.2

UP TO 20 TOWER KITS


0.7 M WIDE FIBERGLASS TOWER KITS

MODEL	MAXIMUM PLATFORM HEIGHT	WEIGHT	F-FRA0710L	F-FRA0715L	F-FRA1210L	F-FRA1215L	F-BRAH24	F-BRAD24	F-PBRA0724	F-PBRA1224	F-DP24	F-DH24	F-ADJ200	F-OUT20	F-OUT30	F-LAD2436	F-TB07	F-TB12	F-TB24	F-TBRACK	
F-KIT0715	1.5 M (4'-11 1/16")	208 LB (95 KG)	2	2		6	2	1			1	4									
F-KIT0720	2 M (6'-6 3/4")	283 LB (129 KG)		4		6	4	1			1	4	4			2		2	4		
F-KIT0725	2.5 M (8'-2 7/16")	333 LB (151 KG)	4	2		6	4	1			2	4	4		1	2		2	4		
F-KIT0730	3 M (9'-10 1/8")	354 LB (161 KG)	2	4		6	6	1	1		2	4	4		1	2		2	4		
F-KIT0735	3.5 M (11'-5 25/32")	444 LB (202 KG)		6		10	6	1			2	4		4	1	2		2	4		
F-KIT0740	4 M (13'-1 15/32")	468 LB (213 KG)	4	4		10	8	1			2	4		4	1	2		2	4		
F-KIT0745	4.5 M (14'-9 5/32")	478 LB (217 KG)	2	6		10	8	1			2	4		4	1	2		2	4		
F-KIT0750	5 M (16'-4 27/32")	597 LB (271 KG)		8		10	8	1			3	4		4	2	2		2	4		

1.2 M WIDE FIBERGLASS TOWER KITS

F-KIT1215	1.5 M (4'-11 1/16")	282 LB (128 KG)		2	2	6	2		1	1	1	4									
F-KIT1220	2 M (6'-6 3/4")	303 LB (138 KG)			4	6	4		1	1	1	4					2	2	4		
F-KIT1225	2.5 M (8'-2 7/16")	364 LB (166 KG)		4	2	6	6		1	1	1	4			1		2	2	4		
F-KIT1230	3 M (9'-10 1/8")	488 LB (222 KG)		2	4	10	6		1	1	2	4		4	1		2	2	4		
F-KIT1235	3.5 M (11'-5 25/32")	509 LB (231 KG)			6	10	8		1	1	2	4		4	1		2	2	4		
F-KIT1240	4 M (13'-1 15/32")	572 LB (260 KG)		4	4	10	8		1	2	2	4		4	1		2	2	4		
F-KIT1245	4.5 M (14'-9 5/32")	604 LB (275 KG)		2	6	12	10		1	2	2	4		4	2		2	2	4		
F-KIT1250	5 M (16'-4 27/32")	711 LB (323 KG)			8	14	10		1	3	2	4		4	2		2	2	4		
F-KIT1255	5.5 M (18' 17/32")	736 LB (334 KG)		4	6	14	12		1	3	2	4		4	2		2	2	4		
F-KIT1260	6 M (19'-8 7/32")	796 LB (362 KG)		2	8	14	12		1	3	3	4		4	2		2	2	4		
F-KIT1265	6.5 M (21'-3 29/32")	817 LB (371 KG)		6	6	14	14		1	3	3	4		4	2		2	2	4		
F-KIT1270	7 M (22'-11 19/32")	853 LB (388 KG)		4	8	16	16		1	3	3	4		4	2		2	2	4		

Imperial unit for approximate reference

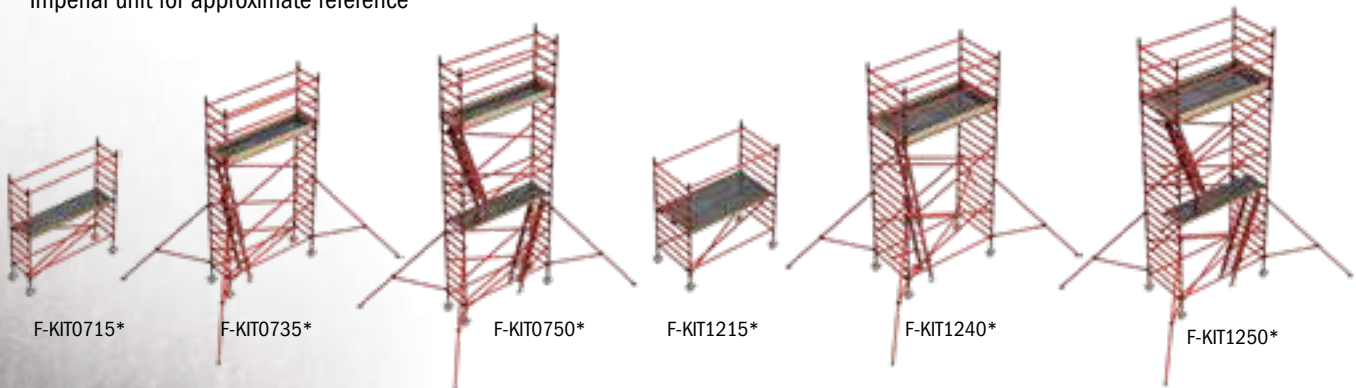

* DRAWINGS DIFFER FROM ACTUAL PRODUCTS

FIBERGLASS SERIES™ SCAFFOLDING

NEW WITH
SAFECLIMB™
PLATFORM

SPEEDY™ SCAFFOLDING

TESTED IN CONFORMITY TO CSA STANDARD S269.2



INFO

Imperial units for
reference only.

3 m
REACH

227 kg
LOAD CAPACITY

ASSEMBLED DIMENSIONS (W X D X H)	196 X 74 X 196 CM (77 3/16 X 29 1/8 X 77 3/16 IN.)
PACKAGE DIMENSIONS (W X D X H)	78 X 206 X 27 CM (30 3/4 X 81 1/8 X 10 5/8 IN.)
WEIGHT	43.5 KG (96 LB)
LOAD CAPACITY	227 KG (500 LB)
REACH	3 M (9' 10 1/8")
PLATFORMS	ANTI-SLIP WITH TRAPDOOR ACCESS
STRUCTURE	5 CM (2 IN.) TUBULAR FIBERGLASS
CASTERS	13 CM (5 IN.) DOUBLE LOCKING HEAVY DUTY
STANDARDS	ANSI, CSA AND OSHA
MODEL	F-ISPC
UPC	778300700660

FIBERGLASS SERIES™ SCAFFOLDING



- » Compact storage
- » Easily assembled
- » Trapdoor access




- » Light weight
- » Corrosion resistant



- » Non conductive
- » Prevent static electricity

INFO



GET THE METALTECH APP

BUILT TOUGH FOR
SAFETY

METALTECH

LADDERS, STEPLADDERS AND WORK PLATFORMS

Metaltech provides a range of ladders and stepladders to complete its work at heights products category, they are designed for specific and multi-purpose use, for interior or exterior applications. Most are built to include aluminum in their construction, they are lightweight, safe, versatile and easy to store.

- **LIGHTWEIGHT**
- **VERSATILITY**
- **EASE AND SAFE TO USE**



LADDERS, STEPLADDERS AND WORK PLATFORMS

**BUILT TOUGH FOR
SAFETY**

METALTECH

12.5' TELESCOPIC LADDER

LADDERS, STEPLADDERS AND WORK PLATFORMS

250 lb
LOAD CAPACITY

16'
REACH

SAFETY GRADE 1

OPEN (W X D X H)	19 X 4.5 X 150 IN. (48.3 X 11.4 X 381 CM)
CLOSED (W X D X H)	19 X 4.5 X 32 IN. (48.3 X 11.4 X 81.3 CM)
PACKAGE DIMENSIONS (W X D X H)	21 X 5.25 X 33.5 IN. (53.3 X 13.3 X 85 CM)
REACH	16 FT (4.9 M)
WEIGHT	25 LB (11 KG)
LOAD CAPACITY	250 LB (113 KG)
OPTION	CARRYING BAG
STANDARD	CSA GRADE 1
MATERIAL	AIRCRAFT GRADE ALUMINUM ALLOY 6061-T6
MODEL	E-LAD12T2
UPC	778300401222

INFO



SAFE AND COMPACT



ADJUSTABLE TO REQUIRED HEIGHT



LIGHTWEIGHT



15.5' TELESCOPIC LADDER

SAFETY GRADE 1

19'
REACH

250 lb
LOAD CAPACITY

OPEN (W X D X H)	19.5 X 4.5 X 188.5 IN. (49.5 X 11.4 X 478.8 CM)
CLOSED (W X D X H)	19.5 X 4.5 X 36 IN. (49.5 X 11.4 X 91.4 CM)
PACKAGE DIMENSIONS (W X D X H)	21.5 X 6 X 38 IN. (54.6 X 15.2 X 96.5 CM)
REACH	19 FT (5.8 M)
WEIGHT	40.5 LB (18.4 KG)
LOAD CAPACITY	250 LB (113 KG)
STANDARD	CSA GRADE 1
MATERIAL	AIRCRAFT GRADE ALUMINUM ALLOY 6061-T6
MODEL	E-LAD15T1
UPC	778300401512



LADDERS, STEPLADDERS AND WORK PLATFORMS

INFO



SAFE AND COMPACT



ADJUSTABLE TO REQUIRED HEIGHT



LIGHTWEIGHT



BUILT TOUGH FOR SAFETY

METALTECH

TELESCOPING MULTI-POSITION LADDER

5 IN 1

300 lb
LOAD CAPACITY

LADDERS, STEPLADDERS AND WORK PLATFORMS



DESCRIPTION	13' MULTI-POSITION LADDER	17' MULTI-POSITION LADDER	21' MULTI-POSITION LADDER	25' MULTI-POSITION LADDER
CLOSED DIMENSIONS (W X D X H)	22.25 X 7.75 X 42.75 IN. (56.5 X 19.7 X 108.6 CM)	23.5 X 8 X 54.5 IN. (59.7 X 20.3 X 138.4 CM)	26.75 X 8.75 X 66.5 IN. (67.9 X 22.2 X 168.9 CM)	29.5 X 8 X 78.5 IN. (74.9 X 20.3 X 199.4 CM)
LADDER HEIGHT	13 FT (4 M)	17 FT (5.2 M)	21 FT (6.4 M)	25 FT (7.6 M)
MAXIMUM REACH*	14 FT 4 IN. (4.4 M)	18 FT 1 IN. (5.5 M)	22 FT (6.7 M)	26 FT (7.9 M)
WEIGHT	27.6 LB (12.5 KG)	34.5 LB (15.6 KG)	42.3 LB (19.2 KG)	53.1 LB (24.1 KG)
NUMBER OF POSITIONS	19	28	38	49
LOAD CAPACITY	300 LB (136 KG)	300 LB (136 KG)	300 LB (136 KG)	300 LB (136 KG)
MATERIAL	ALUMINUM	ALUMINUM	ALUMINUM	ALUMINUM
STANDARD	ANSI TYPE IA, CSA GRADE 1A AND OSHA	ANSI TYPE IA, CSA GRADE 1A AND OSHA	ANSI TYPE IA, CSA GRADE 1A AND OSHA	ANSI TYPE IA
MODEL	E-MTL7000AL	E-MTL7100AL	E-MTL7200AL	E-MTL7300AL
UPC	778300001590	778300001606	778300001613	778300000937

HIGHEST STANDING LEVEL				
STEPLADDER	2 FT 11 IN. (0.89 M)	4 FT 9 IN. (1.4 M)	6 FT 9 IN. (2.1 M)	8 FT 7 IN. (2.6 M)
EXTENSION LADDER	7 FT 9 IN. (2.4 M)	11 FT 7 IN. (3.5 M)	15 FT 5 IN. (3.5 M)	20 FT (6.1 M)
SCAFFOLD SUPPORTS	1 FT 11 IN. (0.58 M)	2 FT 11 IN. (0.89 M)	3 FT 10 IN. (1.2 M)	4 FT 9 IN. (1.4 M)

*Calculated with a 5'9" (1.75 m) person with a vertical 12" (30 cm) reach.

INFO



EXTENSION LADDER



TWO-PERSON STEPLADDER



SCAFFOLD SUPPORTS

TELESCOPING WORK PLANK AND LADDER JACK


LADDERS, STEPLADDERS AND WORK PLATFORMS



INFO




DESCRIPTION	9' TELESCOPING WORK PLANK	13' TELESCOPING WORK PLANK	17' TELESCOPING WORK PLANK
CLOSED DIMENSIONS (WXDXH)	72 X 12 X 2 IN. (183.2 X 30.2 X 5 CM)	96 X 12 X 2 IN. (244.2 X 30.2 X 5 CM)	120 X 12 X 2 IN. (305.2 X 30.2 X 5 CM)
OPEN DIMENSIONS (WXDXH)	107.75 X 12 X 2 IN. (273.8 X 30.2 X 5 CM)	156 X 12 X 2 IN. (396 X 30.2 X 5 CM)	204 X 12 X 2 IN. (518 X 30.2 X 5 CM)
EXTEND	6 UP TO 9 FT (1.8 UP TO 2.7 M)	8 UP TO 13 FT (2.4 UP TO 4 M)	10 UP TO 17 FT (3 UP TO 5.2 M)
LOAD CAPACITY	250 LB (113 KG)	250 LB (113 KG)	250 LB (113 KG)
WEIGHT	31.1 LB (14.1 KG)	41 LB (18.6 KG)	50.7 LB (23 KG)
MATERIAL	ALUMINUM	ALUMINUM	ALUMINUM
STANDARD	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA
MODEL	M-PEP7000AL	M-PEP7100AL	M-PEP7200AL
UPC	778300000241	778300000258	778300000265

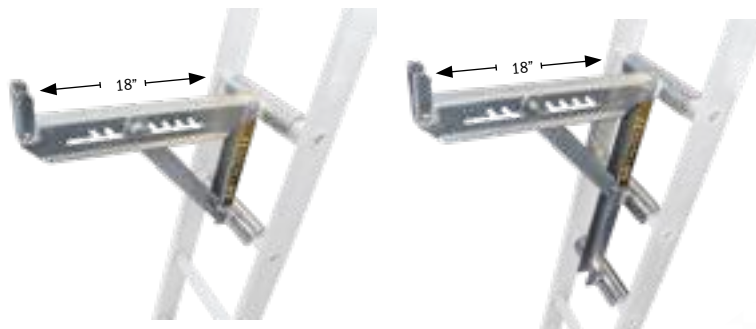

INFO



DESCRIPTION	2 RUNGS LADDER JACK (18 IN.)	3 RUNGS LADDER JACK (18 IN.)
DIMENSIONS (WXDXH)	21.75 X 10 X 16.75 IN. (55.3 X 25.4 X 42.6 CM)	21.75 X 10 X 29 IN. (55.3 X 25.4 X 73.7 CM)
QTY PER BOX	2	2
LOAD CAPACITY	250 LB	250 LB
ADJUSTABLE	8 NOTCHES OF ANGLE ADJUSTMENT	8 NOTCHES OF ANGLE ADJUSTMENT
WEIGHT	12 LB	15 LB
FINISH	ALUMINUM	ALUMINUM
STANDARDS	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA
MODEL	E-LJ20P	E-LJ30P
UPC	778300000005	778300000067



STEPLADDERS

LADDERS, STEPLADDERS AND WORK PLATFORMS



DIRECT
CONTAINER
ORDER ONLY



DIRECT
CONTAINER
ORDER ONLY

DESCRIPTION	FOLDING STEPLADDER ULTRA-LIGHT 2 STEPS*	FOLDING STEPLADDER ULTRA-LIGHT 3 STEPS*
OPEN DIMENSIONS (W X D X H)	17.5 X 17.75 X 35.25 IN. (44.5 X 45.1 X 89.5 CM)	18.75 X 24 X 44.5 IN. (47.6 X 61 X 113 CM)
CLOSED DIMENSIONS	2 IN. (5 CM) THICK WHEN CLOSED	2 IN. (5 CM) THICK WHEN CLOSED
WEIGHT	5.1 LB (2.3 KG)	6.8 LB (3.1 KG)
HIGHEST STANDING LEVEL	19 IN. (48.3 CM)	28.75 IN. (73 CM)
STEPS	2 WITH ANTI-SLIP GROOVES	3 WITH ANTI-SLIP GROOVES
LOAD CAPACITY	200 LB (90.7 KG)	200 LB (90.7 KG)
MATERIAL	AIRCRAFT GRADE ALUMINUM, STEEL AND ABS	AIRCRAFT GRADE ALUMINUM, STEEL AND ABS
COLOR	CUSTOM COLORS AVAILABLE	CUSTOM COLORS AVAILABLE
STANDARDS	ANSI TYPE III AND CSA GRADE 3	ANSI TYPE III AND CSA GRADE 3
4 UNITS SHIPPING BOX	40.2 X 50.8 X 114.3 IN. (102 X 20 X 45 CM)	51.2 X 7.7 X 20.1 IN. (130.1 X 19.6 X 51.1 CM)
MODEL	E-SLA2RD	E-SLA3RD
UPC	778300730001	778300000432

*Direct container order only

*Direct container order only



DIRECT
CONTAINER
ORDER ONLY



DIRECT
CONTAINER
ORDER ONLY

DESCRIPTION	FOLDING STEPLADDER WITH UTILITY TRAY*	FOLDING STEPLADDER 1 STEP*
OPEN DIMENSIONS (W X D X H)	18.5 X 36.5 X 50.75 IN. (47 X 92.7 X 128.9 CM)	18.75 X 16.75 X 19 IN. (47.6 X 42.5 X 48.3 CM)
CLOSED DIMENSIONS	ONLY 2.65 IN. (6.7 CM) THICK WHEN CLOSED	ONLY 3.75 (9.5 CM) THICK WHEN CLOSED
WEIGHT	18 LB (8.16 KG)	7.2 LB (3.3 KG)
HIGHEST STANDING LEVEL	28.75 IN. (73 CM)	10 IN. (25.4 CM)
STEPS	3 ANTI-SLIP RUBBER COATED	1 ANTI-SLIP RUBBER COATED
STEPLADDER WORKING LOAD	200 LB (90.7 KG)	225 LB (102 KG)
TRAY WORKING LOAD	20 LB (9.1 KG)	N/A
MATERIAL	STEEL AND ABS	STEEL
STANDARDS	ANSI TYPE III AND CSA GRADE 3	ANSI TYPE III AND CSA GRADE 3
MODEL	E-SLT3RD	E-SLS1BK
UPC	778300730025	778300000494

*Direct container order only

*Direct container order only

WORK PLATFORMS



DESCRIPTION	30" PORTABLE WORK PLATFORM	39" PORTABLE WORK PLATFORM
OPEN DIMENSIONS (WXDXH)	42.75 X 15.75 X 19.5 IN. (108.6 X 40 X 49.5 CM)	52.25 X 15.5 X 20.25 IN. (132.7 X 39.4 X 51.4 CM)
CLOSED DIMENSIONS (WXDXH)	31.25 X 15.75 X 6.5 IN. (79.4 X 40 X 16.5 CM)	39.75 X 15.5 X 5.75 IN. (101 X 39.4 X 14.6 CM)
DECK DIMENSIONS (WXD)	30.25 X 11.75 IN. (76.8 X 29.8 CM)	39 X 11.75 IN. (99.1 X 29.8 CM)
LOAD CAPACITY	225 LB (102 KG)	225 LB (102 KG)
WEIGHT	10.2 LB (4.6 KG)	11.4 LB (5.2 KG)
MATERIAL	ALUMINUM	ALUMINUM
MODEL	E-PWP7000AL	E-PWP7100AL
UPC	778300401505	778300000418



ADJUSTABLE HEIGHT

DESCRIPTION	30" ADJUSTABLE WORK PLATFORM
OPEN DIMENSIONS (WXDXH)	51 X 22.25 X 35 IN. (129.5 X 56.5 X 88.9 CM)
CLOSED DIMENSIONS (WXDXH)	35 X 19 X 7 IN. (88.9 X 48.3 X 17.8 CM)
DECK DIMENSIONS (WXD)	30.75 X 11.75 IN. (78.1 X 29.8 CM)
LOAD CAPACITY	300 LB (136 KG)
WEIGHT	15 LB (6.8 KG)
MATERIAL	ALUMINUM
MODEL	E-PWP7101AL
UPC	778300000425



TEMPORARY FENCES

Metaltech's innovative temporary fence & barrier systems are designed with maximum security features and minimum installation cost. Seasonal outdoor businesses, construction sites or special public events deserve to be protected by the most transparent and aesthetically pleasing temporary fences and barriers on the market today.

Made of all-weather and maintenance free galvanized steel components, Metaltech's fences and barriers, offer competitive pricing and superior site protection over chain link, wood or plastic systems.

- **INSTALLS TWICE AS FAST WITH HALF THE STAFF!**
- **DESIGNED FOR JOB SITES SECURITY**
- **ONE MAN INSTALLATION**
- **MAINTENANCE-FREE GALVANIZED STEEL PANELS**



TEMPORARY FENCES

**BUILT TOUGH FOR
SAFETY**

METALTECH

CROWD & TRAFFIC CONTROL

TEMPORARY FENCES



2" X 6"
MESH OPENING

6
GAUGE

GALVANIZED
FINISH

DESCRIPTION	42" SECURIGARD
DIMENSIONS (H X W)	42 X 86 IN.
WEIGHT	36 LB (16.3 KG)
GAUGE	6
MESH OPENING	2 X 6 IN.
FINISH	GALVANIZED
OPTION	3 IN. BASE FOR INTERIOR, TOEBOARD
QTY/PALLET	30
WEIGHT/PALLET	1,410 LB (640 KG)
MODEL	CT-SECGARDGV
UPC	778300084432



3 7/8"
MESH OPENING

GALVANIZED
FINISH

DESCRIPTION	42" SECURICROWD
DIMENSIONS (H X W)	42 X 101 IN.
WEIGHT	58.9 LB (26.7 KG)
TUBE	0.5 IN.
TUBES SPACING	3.875 IN.
FINISH	GALVANIZED
QTY/PALLET	30
WEIGHT/PALLET	2,065 LB (937 KG)
MODEL	CT-SECCTYGV
UPC	778300002665



2" X 4 7/8"
MESH OPENING

6
GAUGE

GALVANIZED
FINISH

DESCRIPTION	PANEL FOR CONCRETE JERSEY
DIMENSIONS (H X W)	52 X 76 IN.
WEIGHT	33.5 LB (15.2 KG)
FINISH	GALVANIZED
MODEL	CT-TFP5276PLUSHS

JOB SITES SECURITY

ADVICE

Add 5/8" per fence panel length to calculate the required linear feet



2" X 6"
MESH OPENING

6
GAUGE

GALVANIZED
FINISH



WITH HOOK



DESCRIPTION	DIMENSIONS (H X W)	WEIGHT	MODELS	QTY/PALLET	WEIGHT/PALLET
6' PROTEC SAFERSTACK	71 X 90 5/16 IN.	46 LB (20.9 KG)	CT-TFP7296S	60	3,608 LB (1,637 KG)
6' PROTEC SAFERSTACK WITH HOOK	71 X 90 5/16 IN.	47 LB (21.3 KG)	CT-TFP7296HS	60	3,668 LB (1,664 KG)
8' PROTEC SAFERSTACK	98 X 90 5/16 IN.	63.5 LB (28.8 KG)	CT-TFP9696S	45	3,473 LB (1,575 KG)
8' PROTEC SAFERSTACK WITH HOOK	98 X 90 5/16 IN.	64.5 LB (29.3 KG)	CT-TFP9696HS	45	3,518 LB (1,596 KG)



2" X 4 7/8"
MESH OPENING

6
GAUGE

GALVANIZED
FINISH



WITH HOOK



DESCRIPTION	DIMENSIONS (H X W)	WEIGHT	MODELS	QTY/PALLET	WEIGHT/PALLET
6'4" PROTEC PLUS SAFERSTACK	76 X 90 5/16 IN.	54 LB (24.5 KG)	CT-TFP7696PLUSS	50	3,418 LB (1,550 KG)
6'4" PROTEC PLUS SAFERSTACK WITH HOOK	76 X 90 5/16 IN.	55 LB (25 KG)	CT-TFP7696PLUSHS	50	3,468 LB (1,573 KG)
8'6" PROTEC PLUS	103 X 90 5/16 IN.	80 LB (36.3 KG)	CT-TFP10396PLUSS	28	2,578 LB (1,169 KG)
8'6" PROTEC PLUS WITH HOOK	103 X 90 5/16 IN.	78 LB (35.4 KG)	CT-TFP10396PLUSHS	28	2,606 LB (1,182 KG)

TEMPORARY FENCES

INFO



CUSTOMIZE IT!

- ✓ PROMOTE YOUR COMPANY WITH A PERSONALIZED NAMEPLATE*
- ✓ INCREASE YOUR VISIBILITY WITH COLORFUL FENCES

OPTIONAL COLORS:



* The identification plates are only sold with a minimum order. Please check with our customer service to get our great rates!



GET THE METALTECH APP



FENCE ACCESSORIES

TEMPORARY FENCES



P



G



G



G

DESCRIPTION	PEDESTRIAN ACCESS GATE	ACCESS GATE BASE	ACCESS GATE TOP ARCH	ACCESS GATE IDENTIFICATION
COMPATIBLE	PROTEC & PROTEC PLUS	PEDESTRIAN ACCESS GATE	PEDESTRIAN ACCESS GATE	ACCESS GATE TOP ARCH
FINISH	GALVANIZED	GALVANIZED	GALVANIZED	N/A
WEIGHT	49 LB (22 KG)	32 LB (14.5 KG)	17 LB (7.7 KG)	0.25 LB (0.1 KG)
MODEL	CT-TAGK	CT-TAGB	CT-TAGT	ETI-TAGTL
UPC	778300094554	N/A	778300000159	N/A



P



P



P



P

DESCRIPTION	FENCE STABILIZER	DOUBLE CLAMP	GATE HINGE KIT	GATE LATCH AND FINGER KIT
COMPATIBLE	PROTEC & PROTEC PLUS	PROTEC & PROTEC PLUS	PROTEC & PROTEC PLUS	PROTEC & PROTEC PLUS
FINISH	GALVANIZED	GALVANIZED	GALVANIZED	GALVANIZED
WEIGHT	5.3 LB (2.4 KG)	0.75 LB (0.3 KG)	4.24 LB (1.9 KG)	2 LB (0.9 KG)
MODEL	CT-STABILGV	CT-TFDCGK	CT-TFHG	CT-TFLGF
UPC	778300000180	778300000128	778300000135	778300000142



P



P

DESCRIPTION	TRANSPORT & STORAGE SYSTEM	PRIVACY FENCE NETTING (90% SHADE)						
		DIMENSIONS	PACKAGE	COLOR	WEIGHT	COMPATIBLE	MODEL	UPC
COMPATIBLE	PROTEC & PROTEC PLUS	72 IN. X 150 FT	72 X 10 IN.	BLACK	37 LB	6' PROTEC & PROTEC PLUS	CT-TFNET6BK	778300084456
INFO	FOR 6 X 8 FT PANELS	72 IN. X 150 FT	72 X 10 IN.	GREEN	37 LB	6' PROTEC & PROTEC PLUS	CT-TFNET6GN	778300084463
FINISH	POWDER COATED	72 IN. X 150 FT	72 X 10 IN.	BLUE	37 LB	6' PROTEC & PROTEC PLUS	CT-TFNET6BL	778300084401
WEIGHT	253 LB (115 KG)	96 IN. X 150 FT	96 X 10 IN.	BLACK	45 LB	8' PROTEC & PROTEC PLUS	CT-TFNET8BK	778300084470
MODEL	CT-SAFERRACK	96 IN. X 150 FT	96 X 10 IN.	GREEN	45 LB	8' PROTEC & PROTEC PLUS	CT-TFNET8GN	778300084487
UPC	778300094547	96 IN. X 150 FT	96 X 10 IN.	BLUE	45 LB	8' PROTEC & PROTEC PLUS	CT-TFNET8BL	778300084494

COMPATIBILITY

- P** PROTEC & PROTEC PLUS
- S** SECURIGARD
- SC** SECURICROWD
- G** ACCESS GATE
- J** PANEL FOR CONCRETE JERSEY



P S



S



S

DESCRIPTION	REINFORCED BASE PLATE	FIXED SQUARE BASE PLATE	TOEBOARD
COMPATIBLE	PROTEC, PROTEC PLUS & SECURIGARD	SECURIGARD	SECURIGARD
DIMENSIONS	34 X 3.5 X 14 IN.	6 X 6 X 4 IN.	85 X 7 IN.
FINISH	GALVANIZED	GALVANIZED	GALVANIZED
WEIGHT	11 LB (5 KG)	2.7 LB (1.2 KG)	10 LB (4.5 KG)
MODEL	CT-TFBPG	CT-SECBPFGV	CT-SGTBGV
UPC	77830000111	778300084449	N/A



SC



SC



P J
S SC

DESCRIPTION	BASE PLATE (HOOK SIDE)	BASE PLATE (RECEIVER SIDE)	IDENTIFICATION PLATE*
COMPATIBLE	SECURICROWD	SECURICROWD	PROTEC, PROTEC PLUS JERSEY, SECURIGARD & SECURICROWDY
DIMENSIONS	N/A	N/A	8.25 X 4.25 IN. (FOLDED)
FINISH	GALVANIZED	GALVANIZED	N/A
WEIGHT	4.7 LB (2.1 KG)	3.2 LB (1.5 KG)	N/A
MODEL	CT-TFBPCTYHGV	CT-TFBPCTYRGV	CT-PLAQUEIDGEN
UPC	778300002085	778300002092	N/A

* The identification plates are only sold with a minimum order. Please check with our customer service to get our great rates!



J



J



J

DESCRIPTION	FENCE CONNECTION	SIDE FENCE BASE	MIDDLE FENCE BASE
COMPATIBLE	PANEL FOR CONCRETE JERSEY	PANEL FOR CONCRETE JERSEY	PANEL FOR CONCRETE JERSEY
FINISH	GALVANIZED	GALVANIZED	GALVANIZED
WEIGHT	2.7 LB (1.2 KG)	2.9 LB (1.3 KG)	3.2 LB (1.5 KG)
MODEL	CT-TFPJSC	CT-TFPJSEBP	CT-TFPJSMBP

TEMPORARY FENCES



EXTERIOR SCAFFOLDING VIEW

VISUALIZATION OF THE COMPONENTS LOCATION
OF A BASIC SCAFFOLDING STRUCTURE.



COUPLING PIN · P.7



FRAME · P.8-14



FRAME LOCKS · P.7



BASE PLATE · P.21



LEVELING JACK · P.20-21



CASTER · P.21



EXTERIOR SCAFFOLDING - VIEW



GUARDRAIL · P.15



GUARDRAIL POST · P.15



TOEBOARD · P.15



PLATFORM · P.19



WALL ATTACHMENT · P.18



LOCK ARM · P.17



PIG TAIL · P.17



OUTRIGGER · P.21



DIAGONAL BRACE · P.16



CROSS BRACE · P.16




EXTERIOR SCAFFOLDING - VIEW

EXTERIOR SCAFFOLDING SET UP INSTRUCTIONS

Scaffolding should be erected by at least two people. One person should be knowledgeable in erecting scaffolding to supervise the work. These step-by-step instructions are only a general guide. The following example is based on building a scaffolding that is 7 x 5 ft. by 1 frame high.

1



Select and prepare the ground area. Place suitable sills and make sure there are no holes under the sills. Select the equipment you need and place it near the work area. Put the adjustable leveling jack plates on the sills in the location that matches your scaffold dimensions. Do not secure the bases to the sills at this step.

2



Adjust the nuts of the leveling jack, starting at the highest point of the ground level. The nuts at the highest ground level should be set to 3-6 inches from the top of the sill, depending on the slope. Place the first frame onto the base at the highest point. Connect the first cross brace to the frame. Allow the frame to lean slightly forward and rest on the sill while you prepare for the next frame to be installed.

3



Install the second frame onto the leveling jack. Secure the first cross brace to the second frame.

4



Install the second cross brace to both frames. Next, you need to level and plumb the scaffolding. Start at the highest point of the scaffolding. If possible, use the leveling jack to bring the highest corner down closer to the sill. Next, bring all four corners up to that point. If the bottom cross braces of each frame are level with each other, then frames should also be plumb. Install the diagonal brace to keep the scaffolding square. Check the level again and plumb if necessary. Fasten the leveling jack to the sills with either nails or screws.

5



Install the deck, which may be an all aluminium platform or with wood deck or scaffold planks. If using wooden planks, they must extend beyond the supporting points at least 6 inches but not more than 12 inches. Secure the deck so it cannot move.

6



Install the guardrail posts onto the coupling pins seated in the top of the frames. Put a pig tail lock through the top and bottom of each coupling pin to avoid any separation.

7



Attach the guardrails to the posts on all the exposed sides.

8



Install toeboards as required. The gap between the bottom of the toeboard and the top of the platform must not be more than 1/2 inches.



EXTERIOR SCAFFOLDING SAFETY GUIDELINES

THE PRODUCT OR ASSEMBLY VARIANTS SHOWN IN THESE INSTRUCTIONS FOR ASSEMBLY AND USE MAY BE SUBJECT TO LOCAL REGULATIONS. THE PRODUCT USER BEARS THE RESPONSIBILITY FOR COMPLIANCE WITH SUCH REGULATIONS, IF THERE IS A CONFLICT BETWEEN THIS GUIDELINES AND THE LOCAL REGULATIONS, LOCAL REGULATIONS SHALL SUPERSEDE THESE GUIDELINES.

REQUIREMENTS FOR ACCESS FRAME SCAFFOLDING

- A scaffold must be erected, altered, and dismantled by qualified workers or under the direct supervision of a qualified person. The qualified person must ensure that the erection is carried out properly, and that the correct components and materials are being used. All equipment must be inspected before use to ensure that it is in good repair and suitable for the intended use.
- The base must be firm and level enough to support the load of scaffolding, workers, and materials. Sills and base plates are required on any soil or unstable ground condition, or where any leveling adjustment is needed. The sill must be sound, rigid, and capable of supporting the maximum loads without settlement or deformation.
- Leveling jack base must be adjusted within the limits specified by the local regulation.
- The frames must be plumb and level and spaced to adequately support the loads.
- If uplift could cause the components to separate, locking pins must be used and the components secured. Uplift might be caused by the action of wind on a secured deck or by the leverage action of a cantilever side bracket on the scaffolding. All joints must be pinned on rolling scaffoldings and free-standing towers.
- With a rolling scaffolding or free-standing tower, the platform height must not exceed three times its smallest base dimension (3 to 1 rule).
- A scaffolding built above the 3 to 1 rule must be effectively guyed or secured to a building or structure to prevent overturning. The guying of a scaffolding may require the direction of a professional engineer.
- Guardrails must be installed on all open sides of the platform where a person could fall a distance of 10 ft. or more. The top rail must be placed 40-44 in. above the work surface. An intermediate rail must be placed halfway between the top rail and the toeboard, if one is provided, or halfway between the top rail and the work surface if no toeboard is provided.

- Toeboards must be installed on all the open sides of a platform where it is possible for tools and or materials to roll off. The top of the toeboard must be at least 4 in. above the platform. If loose materials are to be stacked above the height of the toeboard, then the toeboard must be increased in height or mesh panels must be installed to prevent materials from falling off the scaffolding.

BEFORE ERECTING ACCESS FRAME SCAFFOLDING

- What will the scaffolding be used for? For example, light duty (one or two workers; painting a wall), or heavy duty (several tradespersons, with large and heavy materials on the platform)?
- How high will the scaffolding be? Will it be erected in one operation or as the work progresses?
- Is the ground firm? Can it support the loads from the scaffolding, workers, and materials on it?
- Will the scaffolding need to be tied in? How will this be done? Will the ties be moved as the work progresses?
- Is the scaffolding likely to be covered or enclosed as a protection against the elements? Is there provision for adding additional ties to the adjoining structure?
- What will be the method of access and egress? For example, a sloping ladder, vertical ladder, built-in stairway, or direct from the floors of the building structure?
- On a multi-level scaffolding, how many levels will be loaded with materials at one time? Will an engineer be required to make the calculations for the total anticipated loading and possibly design the scaffolding and the sills?
- If a rolling scaffolding is required, consider ground surface, height restriction (3 to 1 rule) hazards when moving (such as power lines, projections from the building, and potholes).

EQUIPMENT INSPECTION

YOU MUST INSPECT THE EQUIPMENT YOU PLAN TO USE TO MAKE SURE THAT IT IS IN GOOD REPAIR AND SUITABLE FOR THE JOB. CHECK THE FOLLOWING:

- Sills: suitable size and strength for the loads. Not split or rotten.
- Frames: no cracks in the welded joints. No kinks or dents in the top or bottom cross-members. Legs plumb and square with the cross-members. Brace locks in good working order. Coupling pins in place and secured to the frame.
- Cross braces and diagonal braces: straight with no bent ends. Pivot connection in good working order. No excessive rust.
- Scaffold planks: no split ends, saw cuts, notches, protruding nails, excessive warping. No contamination that may affect the integrity of the plank, such as oil, chemicals, and burns. (If you have any doubts about the strength of the plank, you may need to have it load-tested).
- All aluminium or with plywood deck platforms: not mis-shaped or cracked. Locks working. All bolts and screws in place. No burns or broken ends. If upper surface has non-skid coating, no rot or plywood separation on underside.
- Side or end brackets: hook-on attachment not distorted. No cracks in welds. No dents, kinks, or any signs of abuse.
- Guardrails: straight, with no kinks, dents, or excessive rust.
- Casters: same size and from same manufacturer. Wheel rotates well and the swivel below the stem is working. Brake mechanism works properly. Wheel tread has no damage.
- Leveling jacks: no cracks in weld where leveling jack is attached to the top of the caster. No thread damage. No curling or warping of the base plate. Adjusting nut is a tight fit.
- Other equipment: inspect any other equipment in the frame structure. Damaged equipment should be tagged and marked as not fit for use. Inform the supervisor so that others do not use it.



REPLACEMENT PARTS

REPLACEMENT PARTS



JOBSITE SERIES™ 6' BAKER™

I-CISC PARTS

CODE	DESCRIPTION	CODE	DESCRIPTION
I-C1CAS5	ONE 5" CASTER WITH LOCKING PIN	I-CAS5PIN	LOCKING PIN
I-C4CAS5	FOUR 5" CASTERS WITH LOCKING PINS	I-CISP	PLATFORM



JOBSITE SERIES™ 6' BAKER™ (TRAPDOOR)

I-CISCTP PARTS

CODE	DESCRIPTION	CODE	DESCRIPTION
I-C1CAS5	ONE 5" CASTER WITH LOCKING PIN	I-CAS5PIN	LOCKING PIN
I-C4CAS5	FOUR 5" CASTERS WITH LOCKING PINS	I-CISPT	PLATFORM WITH TRAPDOOR



JOBSITE SERIES™ PERRY STYLE™

I-CISCPY PARTS

CODE	DESCRIPTION	CODE	DESCRIPTION
I-C1CAS5PY	ONE 5" CASTER WITH LOCKING PIN	I-CAS5PIN	LOCKING PIN
I-C4CAS5PY	FOUR 5" CASTERS WITH LOCKING PINS	I-CISCPYP	PLATFORM



JOBSITE SERIES™ 6'

I-HRC PARTS

CODE	DESCRIPTION	CODE	DESCRIPTION
I-ICW5	ONE 5" CASTER WITH LOCKING PIN	I-I4CAS5	FOUR 5" CASTERS. 3/4 THREAD
I-I4CW5	FOUR 5" CASTERS WITH LOCKING PINS	I-IRP	PLATFORM
I-I1CAS5	ONE 5" CASTER. 3/4 THREAD	I-IRPP	PLATFORM ANTI-SLIP INSERTS



JOBSITE SERIES™ 5'

I-IMIS PARTS

CODE	DESCRIPTION	CODE	DESCRIPTION
I-ICW5	ONE 5" CASTER WITH LOCKING PIN	I-IMIAPA	STEP BAR
I-I4CW5	FOUR 5" CASTERS WITH LOCKING PINS	I-IMPPN	PLATFORM ANTI-SLIP INSERTS
I-CAS4PIN	LOCKING PIN	I-IMISGRA	SAFETY RAIL
I-IMIPA	PLATFORM		



JOBSITE SERIES™ 4' DELUXE

I-IMCNDX PARTS

CODE	DESCRIPTION	CODE	DESCRIPTION
I-C1CAS4	ONE 4" CASTER WITH LOCKING PIN	I-IMAPN	STEP BAR
I-C4CAS4	FOUR 4" CASTERS WITH LOCKING PINS	I-IMCHOOK	UTILITY HOOK
I-CAS4PIN	LOCKING PIN	I-IMPPN	PLATFORM ANTI-SLIP INSERTS
I-IMPV	PLATFORM	I-IMCGR	SAFETY RAIL



JOBSITE SERIES™ 4'

I-IMCNT PARTS

CODE	DESCRIPTION	CODE	DESCRIPTION
I-C1CAS4	ONE 4" CASTER WITH LOCKING PIN	I-IMPV	PLATFORM
I-C4CAS4	FOUR 4" CASTERS WITH LOCKING PINS	I-IMPPN	PLATFORM ANTI-SLIP INSERTS
I-CAS4PIN	LOCKING PIN	I-IMCGR	SAFETY RAIL

4' HIGH PORTABLE SCAFFOLD



I-IMCN PARTS			
CODE	DESCRIPTION	CODE	DESCRIPTION
I-C1CAS4	ONE 4" CASTER WITH LOCKING PIN	I-IMPIN	PLATFORM
I-C4CAS4	FOUR 4" CASTERS WITH LOCKING PINS	I-IMPIN	PLATFORM ANTI-SLIP INSERTS
I-CAS4PIN	LOCKING PIN		

JOBSITE SERIES™ DRYWALL & PANEL LIFT



I-IDPL PARTS			
CODE	DESCRIPTION	CODE	DESCRIPTION
VB-ESPRG.016X.188X1.5Z	TRIPOD LOCK SPRING	I-IDPL904	MAST HEAD PIN & C-CLIP
I-BMDPL029	BRAKE HANDLE RUBBER CAP	I-IDPL905	OUTRIGGER LOCK KIT
I-IDPL038	TUBE END COVER	I-IDPL906	CRADDLE & OUTRIGGER RUBBER CAPS
I-IDPL901	BIPOD BRAKE FOOT KIT	I-IDPL907	PANEL SUPPORT HOOK KIT
I-IDPL902	TRIPOD PIN & C-CLIP KIT	I-ICW5	ONE 5" CASTER
I-IDPL903	HANDLE KIT	I-CAS4PIN	LOCKING PIN

ALU SERIES™ 6' BAKER™



I-CAISC PARTS			
CODE	DESCRIPTION	CODE	DESCRIPTION
I-I1CAS5SALU	ONE 5" CASTER WITH LOCKING PIN	I-CAS5PIN	LOCKING PIN
I-I4CAS5SALU	FOUR 5" CASTERS WITH LOCKING PINS		

ALU SERIES™ 6'



I-CAIRC PARTS			
CODE	DESCRIPTION	CODE	DESCRIPTION
I-I1CAS5RALU	ONE 5" CASTER WITH LOCKING PIN	I-CAIRP	PLATFORM
I-I4CAS5RALU	FOUR 5" CASTERS WITH LOCKING PINS	I-IMPFA	PLATFORM ANTI-SLIP INSERTS
I-CAS5PIN	LOCKING PIN		

ALU SERIES™ 4'



I-IMAC PARTS			
CODE	DESCRIPTION	CODE	DESCRIPTION
I-C1CAS4	ONE 4" CASTER WITH LOCKING PIN	I-IMPALU	PLATFORM
I-C4CAS4	FOUR 4" CASTERS WITH LOCKING PINS	I-IMPFA	PLATFORM ANTI-SLIP INSERTS
I-CAS4PIN	LOCKING PIN		

REPLACEMENT PARTS

REPLACEMENT PARTS



BUILDMAN™ 6' BAKER™

I-BMSS PARTS

CODE	DESCRIPTION
I-C1CAS6	ONE 6" CASTER WITH LOCKING PIN
I-C4CAS6	FOUR 6" CASTERS WITH LOCKING PINS

CODE	DESCRIPTION
I-CAS5PIN	LOCKING PIN
I-BMSS003	PLATFORM WITH TRAPDOOR



BUILDMAN™ 6'

I-BM6S PARTS

CODE	DESCRIPTION
I-ICW5RD	ONE 5" CASTER WITH LOCKING PIN
I-I4CW5RD	FOUR 5" CASTERS WITH LOCKING PINS
I-CAS5PIN	LOCKING PIN

CODE	DESCRIPTION
I-BM6P	PLATFORM OF 8.75"
I-BM6SP	PLATFORM OF 6.5"
I-IMPNN	PLATFORM ANTI-SLIP INSERTS



BUILDMAN™ 4'

I-BM4S PARTS

CODE	DESCRIPTION
I-ICW5RD	ONE 5" CASTER WITH LOCKING PIN
I-I4CW5RD	FOUR 5" CASTERS WITH LOCKING PINS
I-CAS4PIN	LOCKING PIN

CODE	DESCRIPTION
I-BM4P	PLATFORM
I-IMPNN	PLATFORM ANTI-SLIP INSERTS
I-BM4GR	SAFETY RAIL



WALL HAULER™ SERIES 2000, 3000, 3600 AND H DRYWALL CART

I-BMD3631 / I-BMD3031 / I-BMD3131 / I-BMD2131 / I-BMDHER31 PARTS

CODE	DESCRIPTION
I-DCC8KPL	KINGPINLESS CASTER FRAME FOR 8" CASTER
I-DCCDL	DIRECTIONAL LOCK FOR CASTER
I-DCCWL	CASTER BRAKE
M-MLS	SPRING-LOCK (I-BMD3631)
I-DCC8P	ONE PHENOLIC 8" CASTER
I-DCC8P4	FOUR PHENOLIC 8" CASTERS
I-DCC8R	ONE POLYURETHANE 8" CASTER ON POLYPROPYLENE CORE
I-DCC8R4	FOUR POLYURETHANE 8" CASTERS ON POLYPROPYLENE CORE
I-DCC8YGR	ONE YELLOW POLYURETHANE 8" CASTER ON POLYPROPYLENE CORE
I-DCC8YGR4	FOUR YELLOW POLYURETHANE 8" CASTERS ON POLYPROPYLENE CORE



BUILDMAN™ DRYWALL STILTS

I-BMDS1830 / I-BMDS2440 PARTS

CODE	DESCRIPTION	CODE	DESCRIPTION
I-BMDS1830901	SPRING KIT	VB-HTL1_4X13_4	ADJUSTMENT KNOB
I-BMDS1830902	FOOT STRAP KIT	I-BMDS1830006	LOWER SIDE POLE (I-BMDS1830)
I-BMDS1830903	HEEL CUP KIT	I-BMDS1830005	UPPER SIDE POLE ASSEMBLY (I-BMDS1830)
I-BMDS1830904	FLOOR SOLE KIT	I-BMDS2440006	LOWER SIDE POLE (I-BMDS2440)
I-BMDS1830905	SLEEVE KIT	I-BMDS2440005	UPPER SIDE POLE ASSEMBLY (I-BMDS2440)
I-BMDS1830906	LEG STRAP KIT		



BUILDMAN™ 18"-30" DRYWALL BENCH

I-BMDWB18 PARTS

CODE	DESCRIPTION	CODE	DESCRIPTION
I-BMDWB18902	STEP-UP KIT	I-BMDWB18904	FOOT COVER KIT
I-BMDWB18003	BENCH LEG WITH FOOT	I-BMDWB18905	FINGER LEVERS LOCK KIT
I-BMDWB18903	RUBBER FOOT KIT	I-BMDWB18901	LOCKING BRACE KIT



BUILDMAN™ DRYWALL & PANEL LIFT

I-BMDPL PARTS

CODE	DESCRIPTION	CODE	DESCRIPTION
I-BMDPL901	TRIPOD LOCK KIT	I-BMDPL905	PANEL SUPPORT HOOK KIT
I-BMDPL906	CRADLE & OUTRIGGER RUBBER CAPS	I-CAS5PIN	LOCKING PIN
I-BMDPL903	RUBBER WASHER & NUT KIT	I-C1CAS6	CASTER
I-BMDPL025	HANDLE KIT	I-BMDPL902	BIPOD BRAKE FOOT KIT
I-BMDPL904	OUTRIGGER LOCK KIT	I-BMDPL029	BRAKE HANDLE RUBBER CAP

INDEX

AL-A0000.....	63	AL-K3013.....	62	AL-Q0100.....	66	CT-TFP7696PLUSHS.....	85
AL-A0000.....	65	AL-K3019.....	62	AL-Q0105.....	66	CT-TFP7696PLUSS.....	85
AL-A0001.....	63	AL-K3028.....	62	AL-Q0106.....	66	CT-TFP9696HS.....	85
AL-A0001.....	65	AL-K3034.....	62	AL-Q0107.....	67	CT-TFP9696S.....	85
AL-B0001.....	63	AL-K3040.....	62	AL-Q0108.....	67	CT-TFP10396PLUSHS.....	85
AL-B0001.....	65	AL-K3046.....	62	AL-Q3000.....	63	CT-TFP10396PLUSS.....	85
AL-B0002.....	63	AL-K3052.....	62	AL-Q3001.....	63	CT-TFPJSC.....	87
AL-B0002.....	65	AL-K4007.....	64	AL-Q3004.....	63	CT-TFPJSEBP.....	87
AL-B0003.....	63	AL-K4013.....	64	AL-Q3101.....	63	CT-TFPJSMBP.....	87
AL-B0003.....	65	AL-K4019.....	64	AL-T0100.....	63	E-LAD12T2.....	76
AL-C0000.....	63	AL-K4028.....	64	AL-T0100.....	65	E-LAD15T1.....	77
AL-C0000.....	65	AL-K4034.....	64	AL-T0101.....	63	E-LJ20P.....	79
AL-C0002.....	63	AL-K4040.....	64	AL-T0101.....	65	E-LJ30P.....	79
AL-C0002.....	65	AL-K4046.....	64	AL-T0102.....	63	E-MTL7000AL.....	78
AL-C0002.....	65	AL-K4052.....	64	AL-T0102.....	65	E-MTL7100AL.....	78
AL-D0001.....	63	AL-L0002.....	63	AL-T0103.....	63	E-MTL7200AL.....	78
AL-D0001.....	65	AL-L0002.....	65	AL-T0103.....	65	E-MTL7300AL.....	78
AL-D0002.....	63	AL-O0000.....	63	AL-T0104.....	63	E-PWP7000AL.....	81
AL-D0002.....	65	AL-O0000.....	65	AL-T0104.....	65	E-PWP7100AL.....	81
AL-D0003.....	63	AL-O0001.....	63	AL-T0105.....	63	E-PWP7101AL.....	81
AL-D0003.....	65	AL-O0001.....	65	AL-T0105.....	65	E-PWS7000AL.....	59
AL-F3000.....	63	AL-O0002.....	63	AL-T0105.....	65	E-PWS7100AL.....	59
AL-F3001.....	63	AL-O0002.....	65	C-MART.....	25	E-PWS7200AL.....	59
AL-F3002.....	63	AL-P0001.....	63	CT-PLAQUEIDGEN.....	87	E-PWS7300AL.....	59
AL-F3002.....	65	AL-P0001.....	65	CT-SAFERRACK.....	86	E-SLA2RD.....	80
AL-F3003.....	63	AL-P0002.....	63	CT-SECBPFGV.....	87	E-SLA3RD.....	80
AL-F4000.....	65	AL-P0002.....	65	CT-SECGARDGV.....	84	E-SLS1BK.....	80
AL-F4001.....	65	AL-P0003.....	63	CT-SGTBGV.....	87	E-SLT3RD.....	80
AL-F4002.....	65	AL-P0003.....	65	CT-STABILGV.....	86	ETI-TAGTL.....	86
AL-F4003.....	65	AL-P0100.....	63	CT-TAGB.....	86	F-ADJ200.....	71
AL-F4004.....	65	AL-P0100.....	65	CT-TAGK.....	86	F-BRAD24.....	71
AL-F4005.....	65	AL-P0101.....	63	CT-TAGT.....	86	F-BRAH24.....	71
AL-F4101.....	65	AL-P0101.....	65	CT-TAGT.....	86	F-DH24.....	71
AL-F4103.....	65	AL-P0102.....	63	CT-TFBPCTYHGV.....	87	F-DP24.....	71
AL-G3000.....	63	AL-P0102.....	65	CT-TFBPCTYRGV.....	87	F-FRA0710L.....	70
AL-G3001.....	63	AL-P1000.....	63	CT-TFBPG.....	87	F-FRA0715L.....	70
AL-G4000.....	65	AL-P1000.....	65	CT-TFDCGK.....	86	F-FRA1210L.....	70
AL-G4001.....	65	AL-P1000.....	65	CT-TFHG.....	86	F-FRA1215L.....	70
AL-G4100.....	63	AL-P1001.....	63	CT-TFLGF.....	86	F-ISPC.....	73
AL-G4100.....	65	AL-P1001.....	65	CT-TFNET6BK.....	86	F-KIT0715.....	72
AL-G4101.....	63	AL-P1002.....	63	CT-TFNET6BL.....	86	F-KIT0720.....	72
AL-G4101.....	65	AL-P1002.....	65	CT-TFNET6GN.....	86	F-KIT0725.....	72
AL-G4102.....	63	AL-P1003.....	63	CT-TFNET8BK.....	86	F-KIT0730.....	72
AL-G4102.....	65	AL-P1003.....	65	CT-TFNET8BL.....	86	F-KIT0735.....	72
AL-J0001.....	63	AL-P1004.....	63	CT-TFNET8GN.....	86	F-KIT0740.....	72
AL-J0001.....	65	AL-P1004.....	65	CT-TFP5276PLUSHS.....	84	F-KIT0745.....	72
AL-J0002.....	63	AL-P1005.....	63	CT-TFP7296HS.....	85	F-KIT0750.....	72
AL-J0002.....	65	AL-P1005.....	65	CT-TFP7296S.....	85		
AL-K3007.....	62						



INDEX

F-KIT1215.....	72	I-BMDS1830901	94	I-CISPT	92	I-IMPPA	93
F-KIT1220.....	72	I-BMDS1830902	94	I-CISTR	29,31,33,41	I-IMPPN.....	92,93,94
F-KIT1225.....	72	I-BMDS1830903	94	I-DCC8KPL.....	94	I-IRC.....	32
F-KIT1230.....	72	I-BMDS1830904	94	I-DCC8P.....	94	I-IREX3.....	33
F-KIT1235.....	72	I-BMDS1830905	94	I-DCC8P4.....	94	I-IREX6.....	33
F-KIT1240.....	72	I-BMDS1830906	94	I-DCC8R.....	94	I-IRGR.....	33
F-KIT1245.....	72	I-BMDS2440005	94	I-DCC8R4.....	94	I-IRO4.....	33
F-KIT1250.....	72	I-BMDS2440006	94	I-DCC8YGR.....	94	I-IRP.....	92
F-KIT1255.....	72	I-BMDSP.....	51,52,53	I-DCC8YGR4	94	I-IRPP.....	92
F-KIT1260.....	72	I-BMDWB18.....	58	I-DCCDL.....	94	I-ISEX4PPNCAS.....	29
F-KIT1265.....	72	I-BMDWB18003.....	94	I-DCCWL.....	94	I-ISL.....	29,31,41,47
F-KIT1270.....	72	I-BMDWB18901.....	94	I-EX4PPNCASPY.....	31	LD-LD4848DS.....	14
F-LAD2436.....	71	I-BMDWB18902.....	94	I-I1CAS5.....	92	LD-LD4848PS.....	14
F-OUT20.....	71	I-BMDWB18903.....	94	I-I1CAS5P.....	14	LD-LD7248-4MPS.....	14
F-OUT30.....	71	I-BMDWB18904.....	94	I-I1CAS5RALU.....	93	LD-LD7248DS-4M.....	14
F-PBRA0724.....	71	I-BMDWB18905.....	94	I-I1CAS5SALU.....	93	LD-LDBJP24.....	14
F-PBRA1224.....	71	I-BMS04.....	47	I-I4CAS5.....	92	LD-LDCL.....	14
F-TB07.....	70	I-BMSGRPJ.....	47	I-I4CAS5RALU.....	93	LD-LDCLS.....	14
F-TB12.....	70	I-BMSS.....	46	I-I4CAS5SALU.....	93	LD-LDGPCL.....	14
F-TB24.....	70	I-BMSS003.....	94	I-I4CW5.....	92	LD-LDLA24.....	14
F-TBBRACK.....	70	I-BMSSSEX.....	47	I-I4CW5RD.....	94	LD-LDLS.....	14
F-TCFDU.....	71	I-C1CAS4.....	92,93	I-I4CW5RD.....	94	M-BAA07.....	15
F-TCSDU.....	71	I-C1CAS5.....	92	I-I4CW5RD.....	94	M-BAA08.....	15
I-BM4GR.....	94	I-C1CAS5PY.....	92	I-I4CW5RD.....	94	M-BAA10.....	15
I-BM4P.....	94	I-C1CAS6.....	94	I-IBBF4.....	29,31,41,47	M-FASTBOLT1.5.....	25
I-BM4S.....	50	I-C4CAS4.....	92,93	I-IBSJP12H4.....	29,41,47	M-FASTBOLT2.....	25
I-BM6C4.....	49	I-C4CAS5.....	92	I-ICW5.....	92,93	M-MA7636VLV1PS.....	13
I-BM6GR.....	49	I-C4CAS5PY.....	92	I-ICW5RD.....	94	M-MA7642GVPS.....	13
I-BM604.....	49	I-C4CAS5PYHD.....	31	I-IDPL.....	38	M-MA7642PS.....	13
I-BM6P.....	94	I-C4CAS6.....	94	I-IDPL038.....	93	M-MA7660GVPS.....	12
I-BM6S.....	48	I-CAIRC.....	42	I-IDPL901.....	93	M-MA7660LGVPS.....	11
I-BM6SK.....	49	I-CAIRP.....	93	I-IDPL902.....	93	M-MA7660LPS.....	11
I-BM6SP.....	94	I-CAIS04.....	41	I-IDPL903.....	93	M-MA7660PS.....	12
I-BMDPL.....	56	I-CAIS04.....	41	I-IDPL904.....	93	M-MA7660PS.....	12
I-BMDPL025.....	94	I-CAISC.....	40	I-IDPL905.....	93	M-MA7660PS.....	12
I-BMDPL029.....	93	I-CAISCGR.....	41	I-IDPL906.....	93	M-MA7860GVPS.....	12
I-BMDPL029.....	94	I-CAS4PIN.....	92,93,94	I-IDPL907.....	93	M-MA7860LGVPS.....	11
I-BMDPL901.....	94	I-CAS5PIN.....	92,93,94	I-IMAC.....	43	M-MA7860LPS.....	11
I-BMDPL902.....	94	I-CISC.....	28	I-IMAPN.....	92	M-MA7860PS.....	12
I-BMDPL903.....	94	I-CISCPY.....	30	I-IMCGR.....	92	M-MA8036ATLW1PS.....	13
I-BMDPL904.....	94	I-CISCPYGR.....	31	I-IMCHOOK.....	92	M-MA12078GV.....	13
I-BMDPL905.....	94	I-CISCPYP.....	92	I-IMCNDX.....	35	M-MA12160DEGV.....	13
I-BMDPL905.....	94	I-CISCTP.....	28	I-IMCNT.....	36	M-MBB4UGV.....	21
I-BMDPL906.....	94	I-CISGRPJ.....	29	I-IMIAPA.....	92	M-MBBF.....	21
I-BMDS1830.....	57	I-CIS04.....	29	I-IMIPA.....	92	M-MBBFGV.....	21
I-BMDS2440.....	57	I-CISO4.....	29	I-IMIS.....	34	M-MBBS.....	21
I-BMDS1830005.....	94	I-CISO4PY.....	31	I-IMISGRA.....	92	M-MBBSGV.....	21
I-BMDS1830006.....	94	I-CISO4TT.....	29,31,41	I-IMPALU.....	93	M-MBC8.....	21
		I-CISP.....	92	I-IMPAN.....	92,93	M-MBC8HD.....	21

M-MBSJP8U24	21	M-MF6048PS	10	M-MPA819	19	M-MTWA	18
M-MBSJP24	20	M-MF6060GVPS	9	M-MPA1019	19	M-MTWAEYE	18
M-MBSJP24H	20	M-MF6060PS	9	M-MPP719	19	M-MTWAFDUK	18
M-MBSJP24N	20	M-MF6060PS-A	9	M-MPP719AS	19	M-MTWAGVPL	18
M-MBSJP24NH	20	M-MF7260PS	9	M-MPP719RE	19	M-MTWAK	18
M-MBSJP36	20	M-MF7624VLV1PS	10	M-MPP724	19	M-MW71016	24
M-MBSJPF24	21	M-MF7660GVPS	9	M-MPP724AS	19	M-MW71026	24
M-MBSJPSW24	20	M-MF7660PS	9	M-MPP728	19	M-MWB42	25
M-MBSJPSW24H	20	M-MFL4415	23	M-MPP819	19	M-MWB42GV	25
M-MBSJPSW24N	20	M-MFL7715	23	M-MPP1019	19	M-MWC16FP	24
M-MBSJPSW24NH	20	M-MFLBR	23	M-MPP1019AS	19	M-MWC26	24
M-MBSJS24	20	M-MFRACKGV	24	M-MPP1019RE	19	M-PA4B	25
M-MBSJS24H	20	M-MFRSLING	24	M-MPP1024	19	M-PA5B	25
M-MBSJS36	20	M-MGPUSL	15	M-MPP1024AS	19	M-PA6B	25
M-MBT11	24	M-MGPUSLGV	15	M-MPP1028	19	M-PA8B	25
M-MC27.7584	16	M-MGR4	15	M-MRBF	25	M-PA10B	25
M-MC27.75120	16	M-MGR5	15	M-MS20	16	M-PA12B	25
M-MC2484	16	M-MGR7	15	M-MS20GV	16	M-PA14B	25
M-MC2496	16	M-MGR8	15	M-MS30	16	M-PA16B	25
M-MC3684	16	M-MGR10	15	M-MS40	16	M-PA18B	25
M-MC3696	16	M-MGR30	15	M-MST760	22	M-PA20B	25
M-MC4884	16	M-MGRMAEX	15	M-MST760IR	22	M-PA21B	25
M-MC4896	16	M-MGRMAEXGV	15	M-MST760OR	22	M-PA24B	25
M-MC24120	16	M-MGT30	15	M-MST760RDE	22	M-PA28B	25
M-MC36120	16	M-MGT60	15	M-MST760RFN	22	M-PA32B	25
M-MC48120	16	M-MGT84	15	M-MST776US	22	M-PEP7000AL	79
M-MC364884AN	16	M-MGT120	15	M-MST776USIR	22	M-PEP7100AL	79
M-MC364896AN	16	M-MHA	23	M-MST776USNR	22	M-PEP7200AL	79
M-MDB3084	16	M-MHAGV	23	M-MST776USOR	22	M-SHOREPOST0	25
M-MDB6084	16	M-MHAP	23	M-MSTB	22	M-SHOREPOST1	25
M-MDB30120	16	M-MHP	23	M-MSTBGV	22	M-SHOREPOST2	25
M-MDB60120	16	M-MLA13	17	M-MSTGR6060	22	M-SHOREPOST3	25
M-MDNET10BK	24	M-MLA13GV	17	M-MTA120	18	M-SHOREPOST4	25
M-MDNET10GN	24	M-MLA2931	17	M-MTA240	18	M-TGRUS	23
M-ME20	16	M-MLA2931GV	17	M-MTCFDU	18	M-THUS	23
M-MF60EPS	8	M-MLB	17	M-MTCFW1	18	M-TRDUS	23
M-MF2460VLV1PS	8	M-MLC1	17	M-MTCFW2	18	M-TUFSTUD18	25
M-MF3660GVPS	8	M-MLC1S	17	M-MTCFW3	18	M-TUFSTUD36	25
M-MF3660PS	8	M-MLC1U	17	M-MTCSDU	18	M-TUFSTUD72	25
M-MF4860GVPS	8	M-MLC1US	17	M-MTCSW1	18	M-TUFSTUD144	25
M-MF4860PS	8	M-MLG	17	M-MTCSW2	18	M-TYWUS	23
M-MF6024VLV1PS	10	M-MLS	17,94	M-MTCSW3	18	VB-ESPRG.016X	
M-MF6030GVPS	10	M-M032	21	M-MTE13100	24	188X1.5Z	93
M-MF6030PS	10	M-M032GV	21	M-MTESCREW	24	VB-HTL1_4x13_4	94
M-MF6048GVPS	10	M-MPA719	19	M-MTOGGLE	17		



NOTES

BUILT TOUGH FOR SAFETY

Our mission at Metaltech is to develop, manufacture and sell safe, reliable, innovative products that make work easier and faster to execute with built in safety and sturdiness.

We have been building safety into our scaffolding for over 58 years. Innovation, design and great packaging drive us.

We strive to develop and design products specifically suited for each of our market segments; residential and commercial construction, rental and industrial.



**BUILT TOUGH FOR
SAFETY**



CUSTOMER SERVICE

T : **1 800 363-7587** (TOLL FREE NUMBER)

F : **1 866 517-7585**

@ : **CS@METALTECH.CO**



FOR THE LATEST ADDITIONS TO THE METALTECH PRODUCTS CATALOG, VISIT OUR ON-LINE CATALOG AT **WWW.METALTECH.CO**

FREE

GET THE METALTECH APP!

SCAFFOLDING CALCULATOR AND MORE!



Download on the **App Store**

GET IT ON **Google Play**



OSHA

ANSI

METALTECH IS A REGISTERED TRADEMARK OF METALTECH-OMEGA INC. PRINTED IN CANADA ©METALTECH-OMEGA INC. C-MTECH-NA-EN11

