

FULL PRODUCT LINE

METALTECH

METALTECH

BETTER SELL THROUGH WITH RETAIL READY PACKAGING



Consumers and contractors can easily find all the visual information to compare products and make the best purchase decision for their needs, right on the box. Without having to open the packaging.



Convenient QR code on each box, customers can get up to date information on their mobile devices, instruction manuals and assembly videos.



Creative merchandising solutions for any format retailers.

**JOBSITE
SERIES**™

ALTHOUGH THE METALTECH PRODUCTS SHOWN IN THIS CATALOG ARE IN LINE WITH THE MARKET REQUIREMENTS FOR CANADA AND USA, METALTECH IS NOT RESPONSIBLE FOR ANY MODEL OR PRODUCT SPECIFICATIONS THAT MIGHT CHANGE THROUGHOUT THE YEAR. SOME PRODUCTS MAY NOT BE EXACTLY AS SHOWN IN THE PHOTOS. RESERVING OUR RIGHTS FOR PRINTER'S ERROR OR DISCONTINUED PRODUCTS.

DO NOT HESITATE TO CONSULT METALTECH CUSTOMER SERVICE FOR MORE INFORMATION OR ADVICE.

METALTECH
1735 St-Elzear Blvd. West
Laval (Quebec) Canada H7L 3N6

Toll Free Customer Service Number
1 800 363-7587

Customer Service Fax Number
1 866 517-7585

Customer Service Email
cs@metaltech.co



WE RESERVE THE RIGHT TO CHANGE OR MODIFY CONTENT, SPECIFICATIONS, FEATURES, PRODUCTS, OPTIONS, DIMENSIONS AND MATERIALS AT ANY TIME WITHOUT NOTICE OR OBLIGATION. ALL DIMENSIONS AND MEASUREMENTS ARE APPROXIMATE AND MAY VARY FROM ACTUAL PRODUCTS.

METALTECH IS A REGISTERED TRADEMARK OF METALTECH-OMEGA INC.

- EXTERIOR SCAFFOLDING COMPONENTS - SAFERSTACK®**
 - STANDARD FRAMES..... 8-10
 - LADDER ARCH FRAMES..... 11
 - WALK-THRU ARCH FRAMES..... 12-13
 - LIGHT DUTY FRAMES & ACCESSORIES..... 14
 - GUARDRAILS, TOEBOARDS & TIE-OFF BARS..... 15
 - BRACES & SIDE BRACKETS..... 16
 - COUPLING PINS & LOCKS..... 17
 - WALL ATTACHMENTS & CLAMPS..... 18
 - PLATFORMS..... 19
 - BASES..... 20-21
 - STAIRWAYS..... 22
 - ACCESS LADDERS, TAG, HOIST POSTS & PULLEY..... 23
 - RACK, NETTING, TARP & WAGON..... 24
- SHORING POSTS, WALL BRACKETS & BEAMS**
 - SHORING POST..... 25
 - WALL BRACKETS..... 25
 - POST DRIVER..... 25
 - BEAMS..... 25
- JOBSITE SERIES™**
 - JOBSITE SERIES™ 6' BAKER..... 28-29
 - JOBSITE SERIES™ SAFECLIMB™ 6' BAKER..... 30-31
 - JOBSITE SERIES™ 6' BAKER WITH TRAPDOOR..... 32-33
 - JOBSITE SERIES™ PERRY STYLE™..... 34-35
 - SCAFFOLDBENCH SYSTEM™ 6' BAKER..... 36-37
 - SCAFFOLDBENCH SYSTEM™ WORKBENCH..... 38-39
 - JOBSITE SERIES™ 6'..... 40-41
 - JOBSITE SERIES™ 5'..... 42
 - JOBSITE SERIES™ 4' DELUXE..... 43
 - JOBSITE SERIES™ 4' WITH SAFETY RAIL & TOOL SHELF..... 44
 - JOBSITE SERIES™ 4' WITH TOOL SHELF..... 45
 - JOBSITE SERIES™ 4' HIGH PORTABLE BASIC MINI..... 46
 - JOBSITE SERIES™ DRYWALL & PANEL HOIST..... 47
- ALU SERIES™**
 - ALU SERIES™ 6' BAKER..... 48-49
 - ALU SERIES™ 6'..... 50
 - ALU SERIES™ 4'..... 51
- BUILDMAN™ GRADE**
 - BUILDMAN™ 6' DRYWALL BAKER..... 54-55
 - BUILDMAN™ 6'..... 56-57
 - BUILDMAN™ 4'..... 58
 - BUILDMAN™ JAWCLAW™ PANEL GRIPPER..... 59
 - BUILDMAN™ WALL HAULER™ SERIES H..... 59
 - BUILDMAN™ WALL HAULER™ SERIES 2000 RESIDENTIAL WELDED..... 60
 - BUILDMAN™ WALL HAULER™ SERIES 2000 RESIDENTIAL WELDED..... 61
 - BUILDMAN™ WALL HAULER™ SERIES 3000 PERMAQUICK™..... 62
 - BUILDMAN™ WALL HAULER™ SERIES 3000 WELDED..... 63
 - BUILDMAN™ WALL HAULER™ SERIES 3600 REMOVABLE HANDLE..... 64
 - BUILDMAN™ WALL HAULER™ SERIES 4000 COMMERCIAL WELDED..... 65
 - BUILDMAN™ DRYWALL & PANEL HOIST..... 66
 - BUILDMAN™ DRYWALL STILTS..... 67
 - BUILDMAN™ 18"-30" DRYWALL BENCH..... 68
 - BUILDMAN™ WORK STAND..... 69
- ALUMINUM SCAFFOLDING**
 - ALUMINUM SCAFFOLDING SPAN 300 KIT..... 72-73
 - ALUMINUM SCAFFOLDING SPAN 400 KITS..... 74-75
- EASY-SET SCAFFOLD TOWER™**
 - EASY-SET SCAFFOLD TOWER™..... 76-77
- FIBERGLASS SERIES™ SCAFFOLDING**
 - FIBERGLASS SCAFFOLDING..... 80-81
 - FIBERGLASS TOWER KITS..... 82
 - SPEEDY™ SCAFFOLDING..... 83
- SAFETY GUARDRAIL SYSTEMS**
 - SAFETY GUARDRAIL SYSTEMS..... 86-87
- LADDERS, STEPLADDERS, WORK PLATFORMS AND RAMPS**
 - 12.5' TELESCOPIC LADDER..... 90
 - 15.5' TELESCOPIC LADDER..... 91
 - TELESCOPING MULTI-POSITION LADDER..... 92
 - TELESCOPING WORK PLANK AND LADDER JACK..... 93
 - STEPLADDERS..... 94
 - WORK PLATFORMS & LOADING RAMPS..... 95
- TEMPORARY FENCES**
 - CROWD & TRAFFIC CONTROL..... 98
 - JOB SITES SECURITY..... 99
 - FENCE ACCESSORIES..... 100-101
- SET UP AND SAFETY GUIDELINES**
 - EXTERIOR SCAFFOLDING - VIEW..... 102-103
 - EXTERIOR SCAFFOLDING - SET UP INSTRUCTIONS..... 104
 - EXTERIOR SCAFFOLDING - SAFETY GUIDELINES..... 105
- REPLACEMENT PARTS..... 106-108**
- INDEX (BY PRODUCT CODES)..... 110-111**



EXTERIOR SCAFFOLDING COMPONENTS SAFERSTACK®

Metaltech's exterior scaffolding systems and accessories are built to help make your work easier and safer. Safety is key when working in heights. Quality control, testing procedures, precision of the welding process, correct installation are key when assembling a scaffold structure to minimize liability and worker risk of injury. Our SaferStack® design brings safety to another level by nesting each frame into one another when stacked for storage and transport by locking them one onto another. Our scaffolding systems meet or exceed OSHA, ANSI and CSA requirements.

- **SAFERSTACK®**
- **ANTI-SLIP POWDER-COAT FINISH**
- **OSHA, ANSI AND CSA**



EXTERIOR SCAFFOLDING COMPONENTS - SAFERSTACK®

**BUILT TOUGH FOR
SAFETY**

METALTECH

LESS IS BEST



**STACKS IN 30%
LESS SPACE THAN
REGULAR FRAMES**

**FRAMES INTERLOCK
FOR SAFER STORAGE
AND TRANSPORT**

**SAFERSTACK®
HELPS PREVENT STACKED
FRAMES FROM SLIDING**

**TESTED TO MEET
ANSI, CSA AND
OSHA STANDARDS**

**100% COMPATIBLE
WITH ANY STANDARD
METALTECH® FRAME**



**WITH SAFERSTACK, STACK
100 FRAMES WHERE
YOU CURRENTLY STACK ONLY
70 STANDARD FRAMES**


SAFERSTACK®
A METALTECH INNOVATION

GO ONLINE TO SEE
THE INNOVATION
WWW.METALTECH.CO

CUSTOM MANUFACTURING

COUPLING PINS

Connect & secure your coupling pin to any scaffold frame legs with our choice of spring-lock, clevis or roll pins. Ask our customer service for more details.

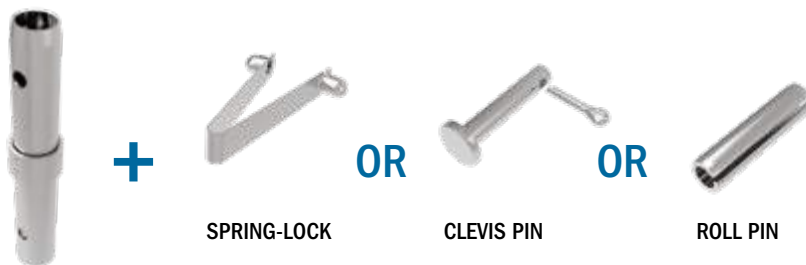

FRAME LOCKS*

Metaltech offers a wide range of frame locks to meet your needs. Order your choice through our customer service for either one of our Gravity-Lock, T-Lock, F-Lock, C-Lock, U-Lock, V-Lock or K-Lock locking systems.



CUSTOM FRAMES*

With our 60 years of experience, supported by our manufacturing facility and engineering team, we can match your needs by developing custom frames. They can be compatible with brands such as Vanguard, Bill Jax and Safway, we fit them all. Contact our customer service for more information.†

† All trademarks and registered trademarks listed above are the property of their respective owners.

SPECIAL COLORS*

Customize your frames with your color choice. Please inquire with customer service for our competitive prices.

*Minimum order quantity applies






BUILT TOUGH FOR SAFETY




METALTECH

EXTERIOR SCAFFOLDING COMPONENTS - SAFERSTACK®

STANDARD FRAMES




DIMENSIONS (H X W)	24" X 60"	36" X 60"	36" X 60"
LOCK SPACING	12 IN.	24 IN.	24 IN.
WEIGHT	26.2 LB	31.8 LB	35.8 LB
INTERIOR TUBES	OUTSIDE DIAMETER 1 IN. - 16 GAUGE	OUTSIDE DIAMETER 1 IN. - 16 GAUGE	OUTSIDE DIAMETER 1 IN. - 16 GAUGE
PERIMETER TUBES	OUTSIDE DIAMETER 1.69 IN. - 13 GAUGE	OUTSIDE DIAMETER 1.69 IN. - 13 GAUGE	OUTSIDE DIAMETER 1.69 IN. - 13 GAUGE
FINISH	POWDER COATED	POWDER COATED	GALVANIZED
COUPLING PIN	SPRING-LOCK	SPRING-LOCK	SPRING-LOCK
FRAME LOCK	V-LOCK	GRAVITY-LOCK	GRAVITY-LOCK
STANDARDS	ANSI AND OSHA	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA
MODEL	M-MF2460VLV1PS	M-MF3660PS	M-MF3660GVPS
UPC	778300003808	778300800353	778300801350




* Not Saferstack

DIMENSIONS (H X W)	48" X 60"	48" X 60"	60" X 36"/60" (ADJUSTABLE FRAME)*
LOCK SPACING	36 IN.	36 IN.	48 IN.
WEIGHT	36.8 LB	37 LB	49.8 LB
INTERIOR TUBES	OUTSIDE DIAMETER 1 IN. - 16 GAUGE	OUTSIDE DIAMETER 1 IN. - 16 GAUGE	OUTSIDE DIAMETER 1 IN. - 16 GAUGE
PERIMETER TUBES	OUTSIDE DIAMETER 1.69 IN. - 13 GAUGE	OUTSIDE DIAMETER 1.69 IN. - 13 GAUGE	OUTSIDE DIAMETER 1.69 IN. - 13 GAUGE
FINISH	POWDER COATED	GALVANIZED	POWDER COATED
COUPLING PIN	SPRING-LOCK	SPRING-LOCK	SPRING-LOCK
FRAME LOCK	GRAVITY-LOCK	GRAVITY-LOCK	GRAVITY-LOCK
STANDARDS	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA
MODEL	M-MF4860PS	M-MF4860GVPS	M-MF60EPS
UPC	778300800452	778300003815	778300805563


NEW

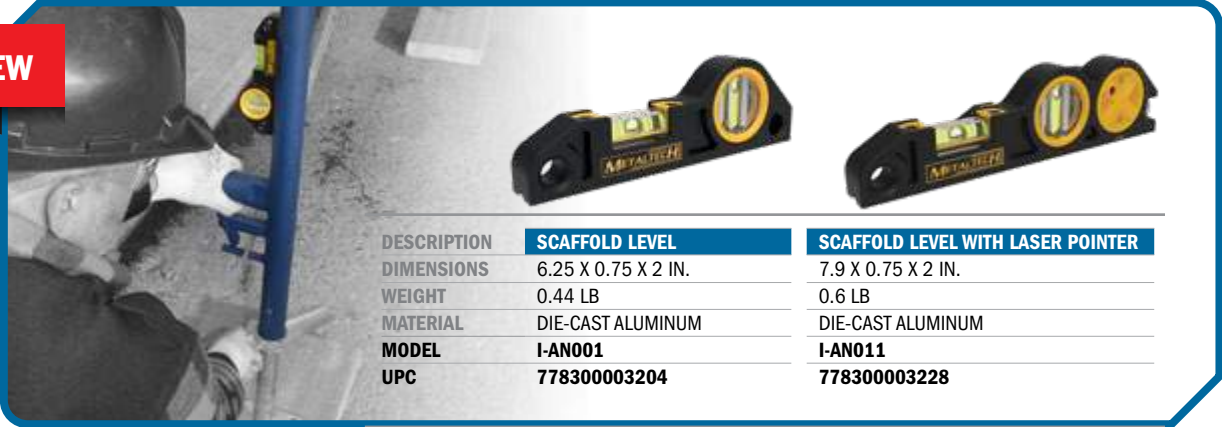

DESCRIPTION	SCAFFOLD LEVEL	SCAFFOLD LEVEL WITH LASER POINTER
DIMENSIONS	6.25 X 0.75 X 2 IN.	7.9 X 0.75 X 2 IN.
WEIGHT	0.44 LB	0.6 LB
MATERIAL	DIE-CAST ALUMINUM	DIE-CAST ALUMINUM
MODEL	I-AN001	I-AN011
UPC	778300003204	778300003228

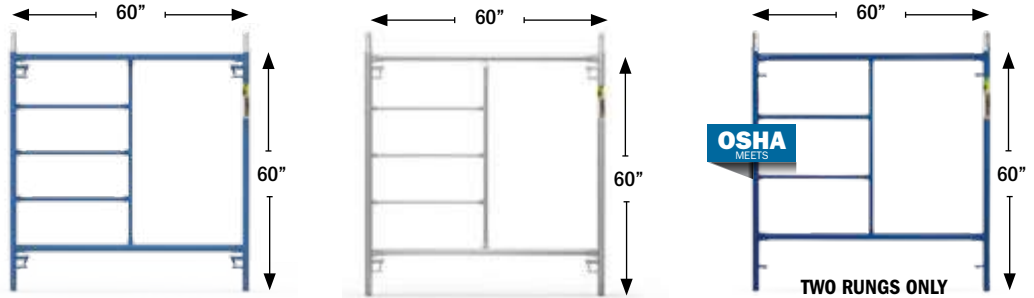




DIMENSIONS (H X W)	60" X 60"	60" X 60"	60" X 60"
LOCK SPACING	48 IN.	48 IN.	48 IN.
WEIGHT	40.8 LB	43.8 LB	38 LB
INTERIOR TUBES	OUTSIDE DIAMETER 1 IN. - 16 GAUGE	OUTSIDE DIAMETER 1 IN. - 16 GAUGE	OUTSIDE DIAMETER 1 IN. - 16 GAUGE
PERIMETER TUBES	OUTSIDE DIAMETER 1.69 IN. - 13 GAUGE	OUTSIDE DIAMETER 1.69 IN. - 13 GAUGE	OUTSIDE DIAMETER 1.625 IN. - 13 GAUGE
FINISH	POWDER COATED	GALVANIZED	POWDER COATED - AVAILABLE IN GALVANIZED
COUPLING PIN	SPRING-LOCK	SPRING-LOCK	SPRING-LOCK
FRAME LOCK	GRAVITY-LOCK	GRAVITY-LOCK	T-LOCK
STANDARDS	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA	ANSI AND OSHA
MODEL	M-MF6060PS	M-MF6060GVPS	M-MF6060PS-A
UPC	778300800551	778300801558	778300800575

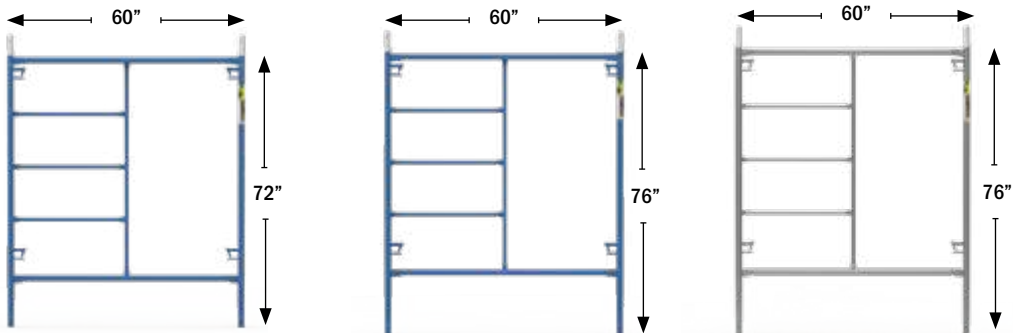




DIMENSIONS (H X W)	72" X 60"	76" X 60"	76" X 60"
LOCK SPACING	48 IN.	48 IN.	48 IN.
WEIGHT	42.8 LB	45.8 LB	48 LB
INTERIOR TUBES	OUTSIDE DIAMETER 1 IN. - 16 GAUGE	OUTSIDE DIAMETER 1 IN. - 16 GAUGE	OUTSIDE DIAMETER 1 IN. - 16 GAUGE
PERIMETER TUBES	OUTSIDE DIAMETER 1.69 IN. - 13 GAUGE	OUTSIDE DIAMETER 1.69 IN. - 13 GAUGE	OUTSIDE DIAMETER 1.69 IN. - 13 GAUGE
FINISH	POWDER COATED	POWDER COATED	GALVANIZED
COUPLING PIN	SPRING-LOCK	SPRING-LOCK	SPRING-LOCK
FRAME LOCK	GRAVITY-LOCK	GRAVITY-LOCK	GRAVITY-LOCK
STANDARDS	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA
MODEL	M-MF7260PS	M-MF7660PS	M-MF7660GVPS
UPC	778300800650	778300807659	778300827657

EXTERIOR SCAFFOLDING COMPONENTS - SAFERSTACK®







DIMENSIONS (H X W)	60" X 48"	60" X 48"	76" X 24"
LOCK SPACING	48 IN.	48 IN.	48 IN.
WEIGHT	37.8 LB	38.7 LB	29.2 LB
INTERIOR TUBES	OUTSIDE DIAMETER 1 IN. - 16 GAUGE	OUTSIDE DIAMETER 1 IN. - 16 GAUGE	OUTSIDE DIAMETER 1 IN. - 16 GAUGE
PERIMETER TUBES	OUTSIDE DIAMETER 1.69 IN. - 13 GAUGE	OUTSIDE DIAMETER 1.69 IN. - 13 GAUGE	OUTSIDE DIAMETER 1.69 IN. - 13 GAUGE
FINISH	POWDER COATED	GALVANIZED	POWDER COATED
COUPLING PIN	SPRING-LOCK	SPRING-LOCK	SPRING-LOCK
FRAME LOCK	GRAVITY-LOCK	GRAVITY-LOCK	V-LOCK
STANDARDS	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA	ANSI AND OSHA
MODEL	M-MF6048PS	M-MF6048GVPS	M-MF7624VLV1PS
UPC	778300800544	778300801459	778300001835





DIMENSIONS (H X W)	60" X 30"	60" X 30"	60" X 24"
LOCK SPACING	48 IN.	48 IN.	48 IN.
WEIGHT	30 LB	31.8 LB	49.8 LB
INTERIOR TUBES	OUTSIDE DIAMETER 1 IN. - 16 GAUGE	OUTSIDE DIAMETER 1 IN. - 16 GAUGE	OUTSIDE DIAMETER 1 IN. - 16 GAUGE
PERIMETER TUBES	OUTSIDE DIAMETER 1.69 IN. - 13 GAUGE	OUTSIDE DIAMETER 1.69 IN. - 13 GAUGE	OUTSIDE DIAMETER 1.69 IN. - 13 GAUGE
FINISH	POWDER COATED	GALVANIZED	POWDER COATED
COUPLING PIN	SPRING-LOCK	SPRING-LOCK	SPRING-LOCK
FRAME LOCK	GRAVITY-LOCK	GRAVITY-LOCK	V-LOCK
STANDARDS	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA	ANSI AND OSHA
MODEL	M-MF6030PS	M-MF6030GVPS	M-MF6024VLV1PS
UPC	778300800537	778300801534	778300001842

LADDER ARCH FRAMES



DIMENSIONS (H X W)	76" X 60"	76" X 60"
LOCK SPACING	48 IN.	48 IN.
WEIGHT	52.8 LB	55.8 LB
INTERIOR TUBES	OUTSIDE DIAMETER 1.25 IN. - 16 GAUGE	OUTSIDE DIAMETER 1.25 IN. - 16 GAUGE
PERIMETER TUBES	OUTSIDE DIAMETER 1.69 IN. - 13 GAUGE	OUTSIDE DIAMETER 1.69 IN. - 13 GAUGE
FINISH	POWDER COATED	GALVANIZED
COUPLING PIN	SPRING-LOCK	SPRING-LOCK
FRAME LOCK	GRAVITY-LOCK	GRAVITY-LOCK
STANDARDS	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA
MODEL	M-MA7660LPS	M-MA7660LGVPS
UPC	778300806461	778300816460





DIMENSIONS (H X W)	78" X 60"	78" X 60"
LOCK SPACING	48 IN.	48 IN.
WEIGHT	53.5 LB	56.5 LB
INTERIOR TUBES	OUTSIDE DIAMETER 1.25 IN. - 16 GAUGE	OUTSIDE DIAMETER 1.25 IN. - 16 GAUGE
PERIMETER TUBES	OUTSIDE DIAMETER 1.69 IN. - 13 GAUGE	OUTSIDE DIAMETER 1.69 IN. - 13 GAUGE
FINISH	POWDER COATED	GALVANIZED
COUPLING PIN	SPRING-LOCK	SPRING-LOCK
FRAME LOCK	GRAVITY-LOCK	GRAVITY-LOCK
STANDARDS	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA
MODEL	M-MA7860LPS	M-MA7860LGVPS
UPC	778300816477	778300816668





WALK-THRU ARCH FRAMES


EXTERIOR SCAFFOLDING COMPONENTS - SAFERSTACK®



DIMENSIONS (H X W)	76" X 60"	76" X 60"
LOCK SPACING	48 IN.	48 IN.
WEIGHT	46.8 LB	48.8 LB
INTERIOR TUBES	OUTSIDE DIAMETER 1.25 IN. - 16 GAUGE	OUTSIDE DIAMETER 1.25 IN. - 16 GAUGE
PERIMETER TUBES	OUTSIDE DIAMETER 1.69 IN. - 13 GAUGE	OUTSIDE DIAMETER 1.69 IN. - 13 GAUGE
FINISH	POWDER COATED	GALVANIZED
COUPLING PIN	SPRING-LOCK	SPRING-LOCK
FRAME LOCK	GRAVITY-LOCK	GRAVITY-LOCK
STANDARDS	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA
MODEL	M-MA7660PS	M-MA7660GVPS
UPC	778300806454	778300816453




DIMENSIONS (H X W)	78" X 60"	78" X 60"
LOCK SPACING	48 IN.	48 IN.
WEIGHT	47.3 LB	49.3 LB
INTERIOR TUBES	OUTSIDE DIAMETER 1.25 IN. - 16 GAUGE	OUTSIDE DIAMETER 1.25 IN. - 16 GAUGE
PERIMETER TUBES	OUTSIDE DIAMETER 1.69 IN. - 13 GAUGE	OUTSIDE DIAMETER 1.69 IN. - 13 GAUGE
FINISH	POWDER COATED	GALVANIZED
COUPLING PIN	SPRING-LOCK	SPRING-LOCK
FRAME LOCK	GRAVITY-LOCK	GRAVITY-LOCK
STANDARDS	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA
MODEL	M-MA7860PS	M-MA7860GVPS
UPC	778300806652	778300816651

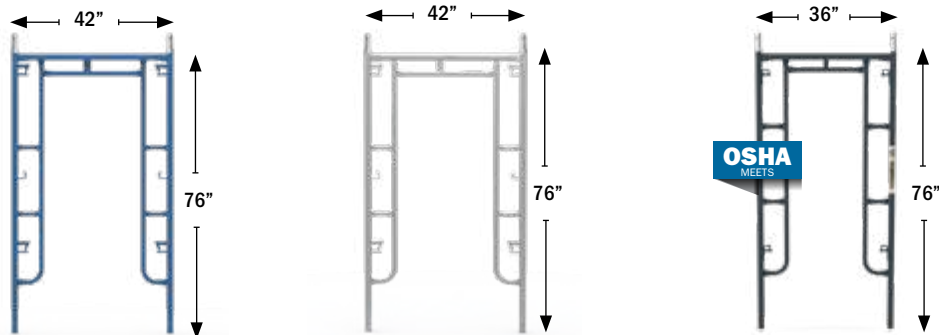

DIMENSIONS (H X W)	76" X 42"	76" X 42"	76" X 36"
LOCK SPACING	48 IN.	48 IN.	48 IN.
WEIGHT	41.1 LB	41.4 LB	40.9 LB
INTERIOR TUBES	OUTSIDE DIAMETER 1.25 IN. - 16 GAUGE	OUTSIDE DIAMETER 1.25 IN. - 16 GAUGE	OUTSIDE DIAMETER 1.25 IN. - 16 GAUGE
PERIMETER TUBES	OUTSIDE DIAMETER 1.69 IN. - 13 GAUGE	OUTSIDE DIAMETER 1.69 IN. - 13 GAUGE	OUTSIDE DIAMETER 1.69 IN. - 13 GAUGE
FINISH	POWDER COATED	GALVANIZED	POWDER COATED
COUPLING PIN	SPRING-LOCK	SPRING-LOCK	SPRING-LOCK
FRAME LOCK	GRAVITY-LOCK	GRAVITY-LOCK	V-LOCK
STANDARDS	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA	ANSI AND OSHA
MODEL	M-MA7642PS	M-MA7642GVPS	M-MA7636VL1PS
UPC	778300806409	778300806416	778300003822

Find other Stairways parts on page 22

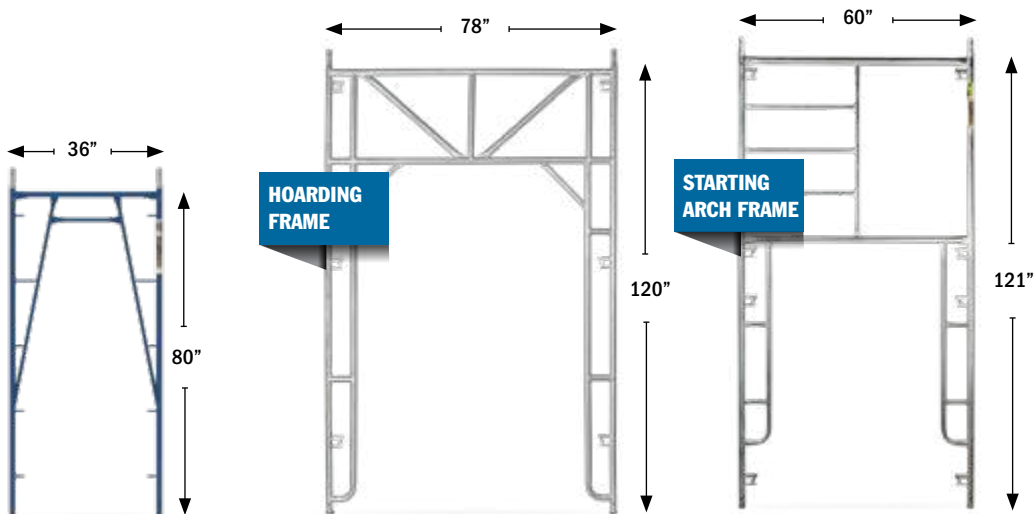


DIMENSIONS (H X W)	80" X 36"	120" X 78"	121" X 60"
LOCK SPACING	16 OR 48 IN.	N/A	N/A
WEIGHT	35.1 LB	101 LB	66.9 LB
INTERIOR TUBES	OUTSIDE DIAMETER 1.25 IN. - 16 GAUGE	OUTSIDE DIAMETER 1.25 IN. - 16 GAUGE	OUTSIDE DIAMETER 1.25 IN. - 16 GAUGE
PERIMETER TUBES	OUTSIDE DIAMETER 1.625 IN. - 13 GAUGE	OUTSIDE DIAMETER 1.69 IN. - 13 GAUGE	OUTSIDE DIAMETER 1.69 IN. - 13 GAUGE
FINISH	POWDER COATED	GALVANIZED	GALVANIZED
COUPLING PIN	SPRING-LOCK	SPRING-LOCK	SPRING-LOCK
FRAME LOCK	GRAVITY-LOCK	GRAVITY-LOCK	GRAVITY-LOCK
STANDARDS	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA
MODEL	M-MA8036ATLW1PS	M-MA12078GV	M-MA12160DEGV
UPC	778300002313	778300806102	778300950195




LIGHT DUTY FRAMES


EXTERIOR SCAFFOLDING COMPONENTS - SAFERSTACK®

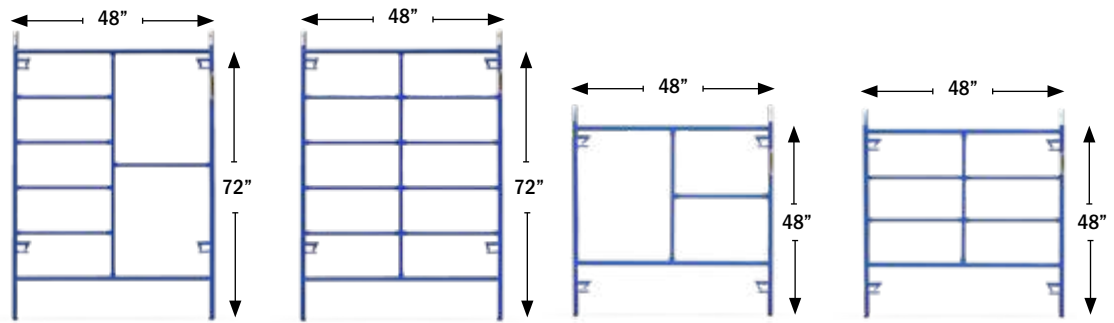

DIMENSIONS (H X W)	72" X 48"	72" X 48"	48" X 48"	48" X 48"
LOCK SPACING	48 IN.	48 IN.	36 IN.	36 IN.
WEIGHT	29.8 LB	37.1 LB	21.8 LB	26.5 LB
INTERIOR TUBES	OUTSIDE DIAMETER 1 IN.	OUTSIDE DIAMETER 1 IN.	OUTSIDE DIAMETER 1 IN.	OUTSIDE DIAMETER 1 IN.
PERIMETER TUBES	OUTSIDE DIAMETER 1.25 IN.	OUTSIDE DIAMETER 1.25 IN.	OUTSIDE DIAMETER 1.25 IN.	OUTSIDE DIAMETER 1.25 IN.
FINISH	POWDER COATED	POWDER COATED	POWDER COATED	POWDER COATED
COUPLING PIN	SPRING-LOCK	SPRING-LOCK	SPRING-LOCK	SPRING-LOCK
FRAME LOCK	GRAVITY-LOCK	GRAVITY-LOCK	GRAVITY-LOCK	GRAVITY-LOCK
STANDARDS	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA	ANSI AND OSHA	ANSI, CSA AND OSHA
MODEL	LD-LD7248-4MPS	LD-LD7248DS-4MPS	LD-LD4848PS	LD-LD4848DSPS
UPC	778300814473	778300003082	778300814442	778300003099



DESCRIPTION	LOCK ARM	GUARDRAIL POST WITH HALF CLAMP	CASTER (WITH 1" STEM)	GALVANIZED LEVELING JACK
DIMENSIONS	24 IN.	56.5 IN.	5 IN.	24 IN.
WEIGHT	1.5 LB	11 LB	3 LB	1 LB
LOAD CAPACITY	N/A	N/A	330 LB	N/A
COMPATIBLE	LIGHT FRAMES ONLY	LIGHT FRAMES ONLY	LIGHT FRAMES ONLY	LIGHT FRAMES ONLY
STANDARDS	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA
MODEL	LD-LDLA24	LD-LDGPCL	I-11CAS5P	LD-LDBJP24
UPC	778300880249	N/A	778300211555	778300920129



DESCRIPTION	COUPLING PIN & SPRING-LOCK	COUPLING PIN	SPRING-LOCK
DIMENSIONS	9.5 IN.	8 IN.	N/A
WEIGHT	0.48 LB	0.44 LB	0.05 LB
COMPATIBLE	LIGHT FRAMES ONLY	LIGHT FRAMES ONLY	LIGHT FRAMES ONLY
STANDARDS	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA
MODEL	LD-LDCLS	LD-LDCL	LD-LDLS
UPC	778300001545	778300881345	778300883004

INFO

Our light frames have different dimensions than the other categories of frames and they come with their own assembly components. The lock arms, leveling jacks, casters, coupling pins and spring locks are specifically designed to be used with the light frames only.

GUARDRAILS, TOEBOARDS & TIE-OFF BARS




GUARDRAIL POST WITH WEDGE CLAMP			
FINISH	WEIGHT	MODEL	UPC
POWDER COATED	10.8 LB	M-MGPUSL	778300950089
GALVANIZED	11.1 LB	M-MGPUSLGV	778300950096

STANDARDS: ANSI, CSA AND OSHA

GALVANIZED GUARDRAIL			
DIMENSIONS	WEIGHT	MODEL	UPC
30 IN.	1.73 LB	M-MGR30	778300950065
48 IN.	2.71 LB	M-MGR4	778300950485
60 IN.	3 LB	M-MGR5	778300950058
84 IN.	4.36 LB	M-MGR7	778300950072
96 IN.	5.19 LB	M-MGR8	778300003839
120 IN.	8.22 LB	M-MGR10	778300950102

STANDARDS: ANSI, CSA AND OSHA

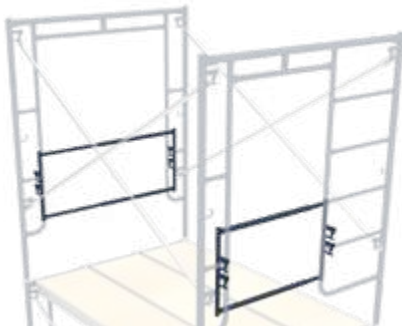

DESCRIPTION	ADJUSTABLE END-STOP GUARDRAIL
COMPATIBLE	ALL ARCH FRAMES
DIMENSIONS	31 UP TO 49 X 21 IN.
WEIGHT	10.6 LB
FINISH	POWDER COATED
STANDARDS	ANSI, CSA AND OSHA
MODEL	M-MGRMAEX
UPC	778300003747

DESCRIPTION	ADJUSTABLE END-STOP GUARDRAIL
COMPATIBLE	ALL ARCH FRAMES
DIMENSIONS	31 UP TO 49 X 21 IN.
WEIGHT	10.8 LB
FINISH	GALVANIZED
STANDARDS	ANSI, CSA AND OSHA
MODEL	M-MGRMAEXGV
UPC	778300003754

Toggle Pins are required in order to install and secure toeboards to the scaffolding (page 17)




GALVANIZED TOEBOARD			
DIMENSIONS	WEIGHT	MODEL	UPC
30 IN.	3.49 LB	M-MGT30	778300712304
60 IN.	6.47 LB	M-MGT60	778300712007
84 IN.	8.33 LB	M-MGT84	778300710690
120 IN.	12.20 LB	M-MGT120	778300712052

STANDARDS: ANSI, CSA AND OSHA

ALUMINUM TIE-OFF BAR			
DIMENSIONS	WEIGHT	MODEL	UPC
7 FT	31.7 LB	M-BAA07	778300000364
8 FT	35.2 LB	M-BAA08	778300001354
10 FT	42.2 LB	M-BAA10	778300000371

STANDARDS: SCCI, CSA AND OSHA




GET THE METALTECH APP



EXTERIOR SCAFFOLDING COMPONENTS - SAFERSTACK®

BRACES & SIDE BRACKETS

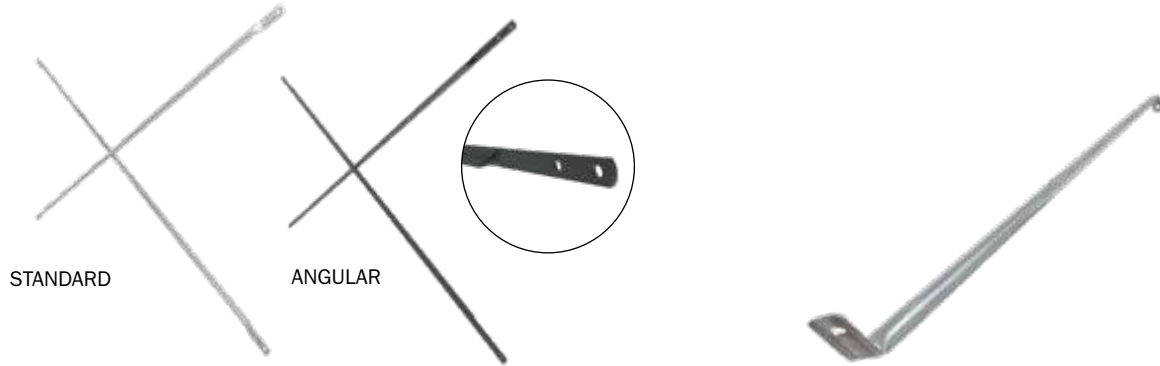

GALVANIZED STANDARD CROSS BRACE				GALVANIZED DIAGONAL BRACE				
DIMENSIONS (H X W)	WEIGHT	MODEL	UPC	DIMENSIONS	FRAME	WEIGHT	MODEL	UPC
2 X 7 FT	9.7 LB	M-MC2484	778300820726	7 FT SPAN	30 IN.	4.89 LB	M-MDB3084	778300930845
27.75 IN. X 7 FT	9.8 LB	M-MC27.7584	778300820757	7 FT SPAN	60 IN.	5.65 LB	M-MDB6084	778300950706
3 X 7 FT	10.1 LB	M-MC3684	778300820733	10 FT SPAN	30 IN.	6.78 LB	M-MDB30120	778300930104
4 X 7 FT	10.7 LB	M-MC4884	778300820740	10 FT SPAN	60 IN.	7.10 LB	M-MDB60120	778300951000
2 X 8 FT	11 LB	M-MC2496	778300820825					
3 X 8 FT	11.3 LB	M-MC3696	N/A					
4 X 8 FT	11.9 LB	M-MC4896	778300820849					
2 X 10 FT	13.5 LB	M-MC24120	778300821020					
27.75 IN. X 10 FT	13.6 LB	M-MC27.75120	778300821051					
3 X 10 FT	13.8 LB	M-MC36120	778300821037					
4 X 10 FT	14.2 LB	M-MC48120	778300821044					
POWDER COATED ANGULAR CROSS BRACE								
3 OR 4 X 7 FT	13 LB	M-MC364884AN	778300004188					
3 OR 4 X 8 FT	15 LB	M-MC364896AN	778300004195					

STANDARDS: ANSI, CSA AND OSHA

STANDARDS: ANSI, CSA AND OSHA



DESCRIPTION	END BRACKET*	SIDE BRACKET	SIDE BRACKET
DIMENSIONS	20 IN.	20 IN.	20 IN.
WEIGHT	10 LB	9.16 LB	9.45 LB
FINISH	POWDER COATED	POWDER COATED	GALVANIZED
NORMES	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA
MODEL	M-ME20	M-MS20	M-MS20GV
UPC	778300892419	778300892402	778300892433


* Galvanized finish available on special order.



DESCRIPTION	SIDE BRACKET*	SIDE BRACKET*
DIMENSIONS	30 IN.	40 IN.
WEIGHT	12.44 LB	15.5 LB
FINISH	POWDER COATED	POWDER COATED
NORMES	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA
MODEL	M-MS30	M-MS40
UPC	778300893003	778300894000

*Galvanized finish available on special order. *Galvanized finish available on special order.


COUPLING PINS & LOCKS

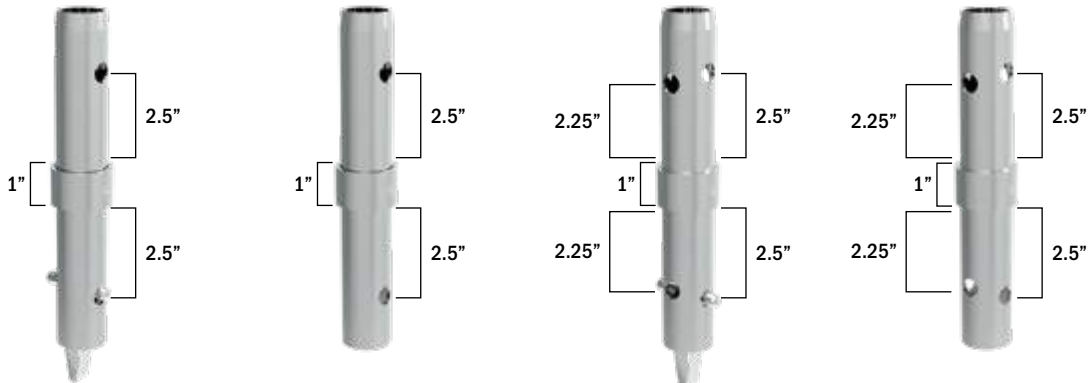

DESCRIPTION	COUPLING PIN & SPRING-LOCK	COUPLING PIN	COUPLING PIN & SPRING-LOCK	COUPLING PIN
HOLE SPACING	2.5 IN.	2.5 IN.	2.5 / 2.25 IN.	2.5 / 2.25 IN.
COLLAR	1 IN.	1 IN.	1 IN.	1 IN.
WEIGHT	0.9 LB	0.86 LB	0.9 LB	0.86 LB
FINISH	GALVANIZED	GALVANIZED	GALVANIZED	GALVANIZED
STANDARDS	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA
MODEL	M-MLC1S	M-MLC1	M-MLC1US	M-MLC1U
UPC	778300882014	778300880348	778300002290	N/A




DESCRIPTION	SPRING-LOCK	PIG TAIL	TOGGLE PIN	BOLT & NUT
DIMENSIONS	FOR HOLE Ø 0.5 IN.	1.5 X 3 IN.	3,5 IN.	0.375 X 2.25 IN.
WEIGHT	0.04 LB	0.1 LB	0.15 LB	0.08 LB
FINISH	GALVANIZED	GALVANIZED	GALVANIZED	GALVANIZED
STANDARDS	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA
MODEL	M-MLS	M-MLG	M-MTOGGLE	M-MLB
UPC	778300882007	778300950300	778300880416	778300950393

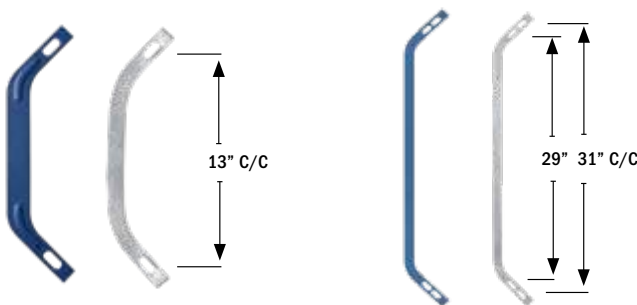

LOCK ARM				
DIMENSIONS	FRAME	WEIGHT	MODEL	UPC
13 IN.	POWDER COATED	0.71 LB	M-MLA13	778300950157
13 IN.	GALVANIZED	0.9 LB	M-MLA13GV	778300951154
29 / 31 IN.	POWDER COATED	1.86 LB	M-MLA2931	778300952939
29 / 31 IN.	GALVANIZED	1.9 LB	M-MLA2931GV	778300952946

STANDARDS: ANSI, CSA AND OSHA

EXTERIOR SCAFFOLDING COMPONENTS - SAFERSTACK®



WALL ATTACHMENTS & CLAMPS



ALUMINUM TUBE				WALL ATTACHMENT					
DIMENSIONS	WEIGHT	MODEL	UPC	4 FT TUBE	EYE BOLT (1)	CLAMP(2)	WEIGHT	MODEL	UPC
10 FT SCHEDULE 40 (Ø 1.9 IN.)	9.31 LB	M-MTA120	778300871209	✓	-	-	5.86 LB	M-MTWA	778300872008
20 FT SCHEDULE 40 (Ø 1.9 IN.)	18.62 LB	M-MTA240	778300872404	✓	✓	-	6 LB	M-MTWAK	778300872015
				✓	✓	✓	9.22 LB	M-MTWAFDUK	778300000913

STANDARDS: ANSI, CSA AND OSHA

STANDARDS: ANSI, CSA AND OSHA



DESCRIPTION	EYE BOLT	WALL ATTACHMENT & PLATE	BOLTED 90° FIXED CLAMP	BOLTED SWIVEL CLAMP
DIMENSIONS	0.375 X 2.5 IN.	4 FT TUBE (MTA)	Ø 1.625 / 1.9 IN.	Ø 1.625 / 1.9 IN.
WEIGHT	0.11 LB	7.6 LB	3.25 LB	3.75 LB
FINISH	GALVANIZED	GALVANIZED AND ALUMINUM	GALVANIZED	GALVANIZED
STANDARDS	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA
MODEL	M-MTWA EYE	M-MTWAGVPL	M-MTCF DU	M-MTCS DU
UPC	778300872107	778300872022	778300862108	778300862115



GALVANIZED WEDGE CLAMPS 90°				GALVANIZED SWIVEL WEDGE CLAMPS			
DIMENSIONS	WEIGHT	MODEL	UPC	DIMENSIONS	WEIGHT	MODEL	UPC
Ø 1.9 / 1.9 IN.	3.3 LB	M-MTCFW1	778300862009	Ø 1.9 / 1.9 IN.	3.7 LB	M-MTCSW1	778300862030
Ø 1.625 / 1.9 IN.	2.32 LB	M-MTCFW2	778300862016	Ø 1.625 / 1.9 IN.	3.62 LB	M-MTCSW2	778300862047
Ø 1.625 / 1.625 IN.	2.3 LB	M-MTCFW3	778300862023	Ø 1.625 / 1.625 IN.	3.5 LB	M-MTCSW3	778300862054

STANDARDS: ANSI, CSA AND OSHA

STANDARDS: ANSI, CSA AND OSHA

PLATFORMS



ALUMINUM PLATFORM WITH 5/8" PLYWOOD DECK

DIMENSIONS	LOAD CAPACITY	WEIGHT	MODEL	UPC
7 FT X 19 IN.	75 LB/FT ²	33.2 LB	M-MPP719	778300900077
7 FT X 24 IN.	75 LB/FT ²	38 LB	M-MPP724	778300900725
7 FT X 28 IN.	25 LB/FT ²	40 LB	M-MPP728	778300002146
8 FT X 19 IN.	75 LB/FT ²	41.5 LB	M-MPP819	778300003969
10 FT X 19 IN.	75 LB/FT ²	46 LB	M-MPP1019	778300900107
10 FT X 24 IN.	50 LB/FT ²	62 LB	M-MPP1024	778300900121
10 FT X 28 IN.	25 LB/FT ²	72.5 LB	M-MPP1028	778300900145

ALUMINUM PLATFORM WITH 5/8" PLYWOOD DECK WITH EDGE CAPPING

DIMENSIONS	LOAD CAPACITY	WEIGHT	MODEL	UPC
7 FT X 19 IN.	75 LB/FT ²	34.2 LB	M-MPP719RE	778300000579
10 FT X 19 IN.	75 LB/FT ²	47 LB	M-MPP1019RE	778300000562

STANDARDS: ANSI, CSA AND OSHA

STANDARDS: ANSI, CSA AND OSHA



ALUMINUM PLATFORM WITH 5/8" ANTI-SLIP PLYWOOD DECK WITH EDGE CAPPING

DIMENSIONS	LOAD CAPACITY	WEIGHT	MODEL	UPC
7 FT X 19 IN.	75 LB/FT ²	36 LB	M-MPP719AS	778300900015
10 FT X 19 IN.	75 LB/FT ²	53 LB	M-MPP1019AS	778300900022

ALUMINUM PLATFORM WITH 5/8" ANTI-SLIP PLYWOOD DECK

DIMENSIONS	LOAD CAPACITY	WEIGHT	MODEL	UPC
7 FT X 24 IN.	75 LB/FT ²	38 LB	M-MPP724AS	778300900039
10 FT X 24 IN.	50 LB/FT ²	62 LB	M-MPP1024AS	778300900046

STANDARDS: ANSI, CSA AND OSHA



ALL ALUMINUM PLATFORM

DIMENSIONS	LOAD CAPACITY	WEIGHT	MODEL	UPC
7 FT X 19 IN.	75 LB/FT ²	27.5 LB	M-MPA719	778300901074
8 FT X 19 IN.	75 LB/FT ²	35 LB	M-MPA819	778300000906
10 FT X 19 IN.	75 LB/FT ²	42.46 LB	M-MPA1019	778300901104

PLATFORM WITH TRAPDOOR AND LADDER

DIMENSIONS	LOAD CAPACITY	WEIGHT	MODEL	UPC
7 FT X 28 IN.	25 LB/FT ²	45 LB	M-MPP728DL	778300002894
8 FT X 28 IN.	25 LB/FT ²	55.5 LB	M-MPP828DL	778300900114
10 FT X 28 IN.	25 LB/FT ²	74 LB	M-MPP1028DL	778300900152

STANDARDS: ANSI, CSA AND OSHA

STANDARDS: ANSI, CSA AND OSHA

EXTERIOR SCAFFOLDING COMPONENTS - SAFERSTACK®



BASES



GALVANIZED LEVELING JACK WITH PLATE					GALVANIZED LEVELING JACK WITH SWIVEL BASE				
DIMENSIONS	WEIGHT	TUBE	MODEL	UPC	DIMENSIONS	WEIGHT	TUBE	MODEL	UPC
24 IN.	6 LB	HOLLOW	M-MBSJP24H	778300920112	24 IN.	7.32 LB	HOLLOW	M-MBSJPSW24H	778300000227
24 IN.	11 LB	SOLID	M-MBSJP24	778300920105	24 IN.	13 LB	SOLID	M-MBSJPSW24	778300000210
36 IN.	16 LB	SOLID	M-MBSJP36	778300920310					

STANDARDS: ANSI, CSA AND OSHA

STANDARDS: ANSI, CSA AND OSHA



INFO Perfect for pedestrian crossings



INFO Perfect for pedestrian crossings

GALVANIZED LEVELING JACK WITH PLATE - SHORT HANDLE					GALVANIZED LEVELING JACK WITH SWIVEL PLATE - SHORT HANDLE				
DIMENSIONS	WEIGHT	TUBE	MODEL	UPC	DIMENSIONS	WEIGHT	TUBE	MODEL	UPC
24 IN.	5.46 LB	HOLLOW	M-MBSJP24NH	778300002689	24 IN.	8.67 LB	HOLLOW	M-MBSJPSW24NH	778300002702
24 IN.	11 LB	SOLID	M-MBSJP24N	778300002672	24 IN.	13 LB	SOLID	M-MBSJPSW24N	778300002696

STANDARDS: ANSI, CSA AND OSHA

STANDARDS: ANSI, CSA AND OSHA



GALVANIZED LEVELING JACK					PROTECTION PAD FOR LEVELING JACKS	
DIMENSIONS	WEIGHT	TUBE	MODEL	UPC	DIMENSIONS	
24 IN.	7 LB	HOLLOW	M-MBSJS24H	778300920020	8.5 X 8.5 IN.	
24 IN.	11 LB	SOLID	M-MBSJS24	778300920013	MATERIAL	POLYETHYLENE (HDPE)
36 IN.	15 LB	SOLID	M-MBSJS36	778300920037	WEIGHT	1.9 LB
					MODEL	F-BBFP
					UPC	778300004355

STANDARDS: ANSI, CSA AND OSHA




DESCRIPTION	LEVELING JACK WITH 8" U-HEAD	LEVELING JACK WITH 4" AND 8" FORK HEAD	GALVANIZED U-HEAD
DIMENSIONS	24 IN.	24 IN.	4 IN.
TUBE	SOLID	SOLID	N/A
WEIGHT	16.67 LB	15.94 LB	5.18 LB
STANDARDS	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA
MODEL	M-MBSJP8U24	M-MBSJPF24	M-MBB4UGV
UPC	778300002481	778300002412	N/A



6 X 6 IN. BASE PLATE				6 X 6 IN. SWIVEL BASE PLATE			
WEIGHT	FINISH	MODEL	UPC	WEIGHT	FINISH	MODEL	UPC
2 LB	POWDER COATED	M-MBBF	778300920273	2.92 LB	POWDER COATED	M-MBBS	778300920280
2.2 LB	GALVANIZED	M-MBBFGV	778300920297	4 LB	GALVANIZED	M-MBBSGV	778300920266


STANDARDS: ANSI, CSA AND OSHA

STANDARDS: ANSI, CSA AND OSHA

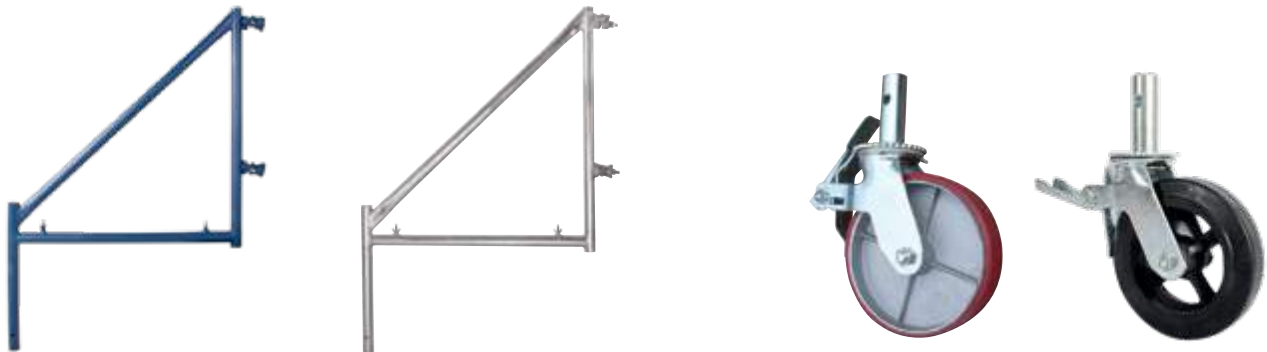

OUTRIGGER					DESCRIPTION	HEAVY-DUTY CASTER	CASTER
DIMENSIONS	WEIGHT	FINISH	MODEL	UPC	LOAD CAPACITY		
32 IN.	22 LB	POWDER COATED	M-M032	778300890101		1,100 LB	750 LB
32 IN.	22.3 LB	GALVANIZED	M-M032GV	778300890118	DIMENSIONS	8 IN.	8 IN.
					WEIGHT	10.65 LB	9.8 LB
					STANDARDS	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA
					MODEL	M-MBC8HD	M-MBC8
					UPC	778300930098	778300930081

STANDARDS: ANSI, CSA AND OSHA




STAIRWAYS

INFO

Find Starting Stairways Frames on page 13


EXTERIOR SCAFFOLDING COMPONENTS - SAFERSTACK®



DESCRIPTION	60" STEEL STAIR WITH HANDRAILS (7' X 60") FOR 60" FRAME	OUTER HANDRAIL (7' X 60") FOR 60" FRAME	INNER HANDRAIL (7' X 60") FOR 60" FRAME	SHORT END OUTER HANDRAIL (7' X 60") FOR 60" FRAME
DIMENSIONS	84 X 60 IN.	103.25 X 78 IN.	103.25 X 61 IN.	103.25 X 61 IN.
WEIGHT	110 LB	19 LB	21 LB	21 LB
FINISH	GALVANIZED	GALVANIZED	GALVANIZED	GALVANIZED
STANDARDS	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA
MODEL	M-MST760	M-MST760OR	M-MST760RFN	M-MST760RDE
UPC	778300961009	778300002238	778300002269	778300002245



DESCRIPTION	SHORT END INNER HANDRAIL (7' X 60") FOR 60" FRAME	STAIRWAY GUARDRAIL FOR 60" FRAME	STAIR STARTING TUBE	STAIR STARTING TUBE
DIMENSIONS	103.25 X 78 IN.	33.5 X 20 IN.	60 IN.	60 IN.
WEIGHT	11 LB	1 LB	8.5 LB	8.8 LB
FINISH	GALVANIZED	GALVANIZED	POWDER COATED	GALVANIZED
STANDARDS	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA
MODEL	M-MST760IR	M-MSTGR6060	M-MSTB	M-MSTBGV
UPC	778300002252	778300950188	778300002276	778300002283



COMPATIBLE WITH:
STEP UP BILJAX,
SCAFFOLD TODAY,
VANGUARD AND
METALTECH*


DESCRIPTION	76" STEEL STAIR & HANDRAILS (7' X 76") FOR 76" FRAME	76" STEEL STAIR (7' X 76") FOR 76" FRAME	OUTER HANDRAIL (7' X 76") FOR 76" FRAME	INNER HANDRAIL (7' X 76") FOR 76" FRAME
DIMENSIONS	84 X 76 IN.	84 X 76 IN.	101 X 74 IN.	91 X 45 IN.
WEIGHT	117.2 LB (53.1 KG)	83 LB (37.6 KG)	20 LB (9.1 KG)	14.2 LB (6.4 KG)
FINISH	POWDER COATED	POWDER COATED	POWDER COATED	POWDER COATED
STANDARDS	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA
MODEL	M-MST776US	M-MST776USNR	M-MST776USOR	M-MST776USIR
UPC	778300002221	778300002191	778300002214	778300002207

* All trademarks and registered trademarks listed above are the property of their respective owners.

ACCESS LADDERS, TAGS, HOIST POSTS & PULLEY



DESCRIPTION	48" ACCESS LADDER	81" ACCESS LADDER	STARTER BRACKET
DIMENSIONS	48 X 16 IN. (15 IN. C/C)	81 X 16 IN. (15 IN. C/C)	12 X 16.5 IN. (15 IN. C/C)
WEIGHT	11 LB (5 KG)	16.5 LB (7.5 KG)	7.1 LB (3.2 KG)
STANDARDS	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA
MODEL	M-MFL4415	M-MFL7715	M-MFLBR
UPC	778300001903	778300001774	778300001781

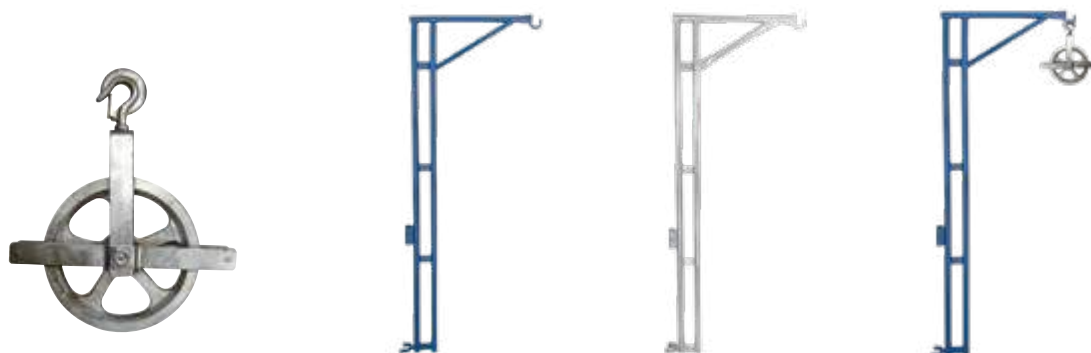

DESCRIPTION	GIN BLOCK PULLEY	HOIST POST	HOIST POST	HOIST POST & GIN BLOCK PULLEY KIT
LOAD CAPACITY	250 LB	250 LB	250 LB	250 LB
WEIGHT	14.4 LB	32.17 LB	43 LB	46.57 LB
FINISH	GALVANIZED	POWDER COATED	GALVANIZED	POWDER COATED
STANDARDS	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA
MODEL	M-MHP	M-MHA	M-MHAGV	M-MHAP
UPC	778300959204	778300959006	778300959105	778300959402



SCAFFOLD INSPECTION SAFETY TAGS

DESCRIPTION	COLOR	PACKAGE	MODEL	UPC
TAG HOLDER	WHITE	BAG OF 20	M-THUS	778300002153
COMPLETE SCAFFOLD TAG	GREEN	BAG OF 500	M-TGRUS	778300002160
PRE-SHIFT INSPECTION TAG	YELLOW	BAG OF 500	M-TYWUS	778300002177
INCOMPLETE SCAFFOLD TAG	RED	BAG OF 500	M-TRDUS	778300002184

EXTERIOR SCAFFOLDING COMPONENTS - SAFERSTACK®



GET THE METALTECH APP



RACK, NETTING, TARP & WAGON

EXTERIOR SCAFFOLDING COMPONENTS - SAFERSTACK®



DESCRIPTION	SCAFFOLDING RACK	LIFTING SLING	DESCRIPTION	DEBRIS NETTING	DEBRIS NETTING
DIMENSIONS	63 X 47 X 9 IN.	48 X 5 X 9 IN.	DIMENSIONS	10 X 164 FT	10 X 164 FT
COMPATIBLE	60" WIDE FRAME	M-MFRACK	PACKAGE	66 X 11.5 IN.	66 X 11.5 IN.
CAPACITY	24 FRAMES	1,500 LB	COLOR	BLACK	GREEN
WEIGHT	140 LB	21 LB	WEIGHT	46.2 LB	46.2 LB
FINISH	GALVANIZED	ALUMINUM	MODEL	M-MDNET10BK	M-MDNET10GN
MODELS	M-MFRACKGV	M-MFRSLING	UPC	778300000623	778300000616



DESCRIPTION	SCAFFOLD TARP	DESCRIPTION	BUNGEE TIES	SCREW CONNECTORS
DIMENSIONS	13 FT X 100 FT X 10 MIL	DIMENSIONS	11 IN.	1.25 IN. DIAM.
PACKAGE	78 X 9 IN.	PACKAGE	BAG OF 100	BAG OF 250
MATERIAL	FLAME RETARDANT	MODEL	M-MBT11	M-MTESCREW
WEIGHT	69 LB / 250 GSM	UPC	778300000593	778300001347
MODEL	M-MTE13100			
UPC	778300000586			



DESCRIPTION	WAGON WITH 16" WHEELS	WAGON WITH 26" WHEELS	YELLOW FLATPROOF WHEEL	RECYCLED WHEEL *
DIMENSIONS	ADJUSTABLE 7 - 10 FT	ADJUSTABLE 7 - 10 FT	16 IN.	26 IN.
LOAD CAPACITY	1,800 LB	1,800 LB	450 LB	450 LB
WEIGHT	184 LB	312 LB	7 LB	39 LB
STANDARDS	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA
MODEL	M-MW71016	M-MW71026	M-MWC16FP	M-MWC26
UPC	778300940301	778300940400	778300940318	778300940417

* The measurement can vary.
For information purposes only.

SHORING POSTS, WALL BRACKETS & BEAMS



HEAVY DUTY ADJUSTABLE SHORING POST


DIMENSIONS		SAFE LOAD - SAFETY FACTOR 3:1		WEIGHT	MODEL	UPC
CLOSED	EXTENDED	CLOSED	EXTENDED			
3'6" (1.07 M)	6' (1.83 M)	14980 LB (66.6 kN)	9910 LB (44 kN)	28.2 LB	M-SHPH0	778300003891
5'9" (1.75 M)	10'3" (3.12 M)	14980 LB (66.6 kN)	5970 LB (26.5 kN)	40.3 LB	M-SHPH1	778300003907
6'6" (1.98 M)	11' (3.35 M)	13890 LB (61.7 kN)	5650 LB (25.1 kN)	42.5 LB	M-SHPH2	778300003914
8'6" (2.59 M)	13' (3.96 M)	10390 LB (46.2 kN)	4400 LB (19.5 kN)	48.5 LB	M-SHPH3	778300003921
10'6" (3.20 M)	15'6" (4.72 M)	8150 LB (36.2 kN)	3430 LB (15.2 kN)	58 LB	M-SHPH4	778300003938

Tested by a third party laboratory and conforms to standard : -CAN/CSA S269.2-16 & ANSI/SSFI SH300-2007.


M SERIES ADJUSTABLE SHORING POST*

DIMENSIONS		SAFE LOAD - SAFETY FACTOR 3:1		WEIGHT	MODEL	UPC
CLOSED	EXTENDED	CLOSED	EXTENDED			
5'6" (1.68 M)	10' (3.05 M)	8850 LB (39.3 kN)	4100 LB (18.2 kN)	25.8 LB	M-SHPM1	778300004713
6'6" (1.98 M)	11' (3.35 M)	8850 LB (39.3 kN)	2900 LB (12.8 kN)	26.8 LB	M-SHPM2	778300004720
8'6" (2.59 M)	13' (3.96 M)	5850 LB (26 kN)	2900 LB (12.8 kN)	31.6 LB	M-SHPM3	778300003846
10'6" (3.2 M)	15'6" (4.72 M)	4850 LB (21.5 kN)	1850 LB (8.2 kN)	38.1 LB	M-SHPM4	778300004737

***M-SHPM1, M-SHPM2** and **M-SHPM4**: direct 40' container order only (mixed load accepted).
M-SHPM3 : available in the South-East USA area or direct 20' container.

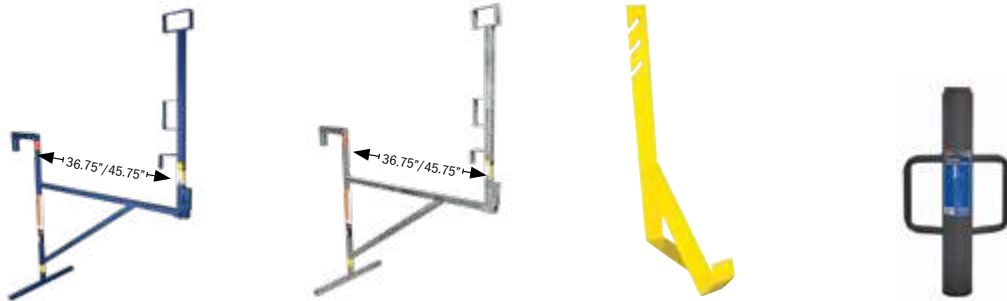

DESCRIPTION	WALL BRACKET	WALL BRACKET	ROOF BRACKET (FIXED)	POST DRIVER
DIMENSIONS	50.25 X 79 X 27.5 IN.	50.25 X 79 X 27.5 IN.	9.25 X 1.5 X 18.25 IN.	24.75 X 12.5 IN. (Ø 3 IN.)
LOAD CAPACITY	1,000 LB	1,000 LB	290 LB	N/A
ADJUSTABLE	36.75 OR 45.75 IN.	36.75 OR 45.75 IN.	N/A	N/A
WEIGHT	67 LB	71 LB	2.5 LB	17.6 LB
FINISH	POWDER COATED	GALVANIZED	POWDER COATED	POWDER COATED
STANDARDS	OSHA, ANSI, CWB AND CSA	OSHA, ANSI, CWB AND CSA	ANSI, CSA AND OSHA	N/A
MODEL	M-MWB42	M-MWB42GV	M-MRBF	C-MART
UPC	778300940516	778300940523	778300890057	778300976270

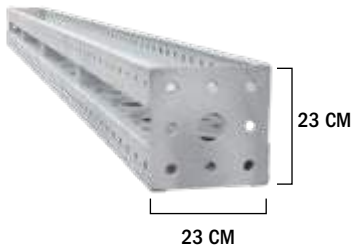

TUFSTUD™ (GALVANIZED STEEL)*			ALUMINUM BEAM					
DIMENSIONS	WEIGHT	MODEL	DIMENSIONS	WEIGHT	MODEL	DIMENSIONS	WEIGHT	MODEL
360 X 23 CM (12 FT X 9 IN.)	162 LB	M-TUF9144GV	4 FT X 6.5 IN.	15 LB	M-PA4B	16 FT X 6.5 IN.	60 LB	M-PA16B
180 X 23 CM (6 FT X 9 IN.)	94 LB	M-TUF9072GV	5 FT X 6.5 IN.	19 LB	M-PA5B	18 FT X 6.5 IN.	68 LB	M-PA18B
90 X 23 CM (3 FT X 9 IN.)	55 LB	M-TUF9036GV	6 FT X 6.5 IN.	23 LB	M-PA6B	20 FT X 6.5 IN.	73 LB	M-PA20B
45 X 23 CM (1.5 FT X 9 IN.)	36 LB	M-TUF9018GV	8 FT X 6.5 IN.	30 LB	M-PA8B	21 FT X 6.5 IN.	79 LB	M-PA21B
FASTBOLT FOR TUFSTUD™			10 FT X 6.5 IN.	38 LB	M-PA10B	24 FT X 6.5 IN.	90 LB	M-PA24B
0.75 X 1.5 IN.	N/A	M-FASTBOLT1.5	12 FT X 6.5 IN.	45 LB	M-PA12B	28 FT X 6.5 IN.	105 LB	M-PA28B
0.75 X 2 IN.	N/A	M-FASTBOLT2	14 FT X 6.5 IN.	53 LB	M-PA14B	32 FT X 6.5 IN.	122 LB	M-PA32B

*Imperial unit for approximate reference



MOBILE SCAFFOLDING JOBSITE SERIES™



Discover Metaltech's fresh, new product and packaging design with our innovative mobile scaffold work platform offering. Innovative safety rail, foldaway tool shelf, locking mechanisms are only a few of the features included in this category. These quick and easy to assemble work platforms offer consumers and contractors affordability, safety and ease of use, all in easy to merchandise packages.

- **SAFETY RAILS**
- **FOLDAWAY TOOL SHELF**
- **GREAT PACKAGING**



JOBSITE SERIES™

**BUILT TOUGH FOR
SAFETY**

METALTECH®

JOBSITE SERIES™ 6' BAKER



INFO

MULTI PURPOSE

Suitable and safe for all types of interior work. Each end can adjust separately to be used on both level surfaces and stairways.



QUICK AND EASY HEIGHT ADJUSTMENT

Platform height adjusts at 2" (5 cm) increments from 27" to 73" (68.6 to 185 cm). Double prong spring-loaded locking mechanism.



STACKABLE UP TO 18' (5.5 M)

Easily stackable up to three units high in order to reach a range of 24' (7.4 m).

1,000 lb
LOAD CAPACITY


12'
REACH



COMPATIBLE WITH:
BILJAX, BUFFALO, WERNER,
JUST AND BUILDMAN 6'
DRYWALL BAKER*

ASSEMBLED DIMENSIONS (WDXH)	74.75 X 29.75 X 75 IN. (189.9 X 75.6 X 190.5 CM)
PACKAGE DIMENSIONS (WDXH)	75 X 30.5 X 5.25 IN. (190.5 X 77.5 X 13.3 CM)
WEIGHT	119 LB (54 KG)
LOAD CAPACITY	1,000 LB (454 KG). Combined weight of user + materials
WORKING HEIGHTS	FROM 27 TO 73 IN. (68.6 TO 185 CM). 2 in. (5 cm) increment adjustable heights
REACH	12 FT (3.7 M). Stackable up to 3 units high for 24 ft (7.4 m) reach
FINISH	POWDER COATED
PLATFORM	PLYWOOD DECK WITH PROTECTIVE STEEL EDGE BANDING
STRUCTURE	1.5 IN. (3.8 CM) SQUARE TUBE. 16 GAUGE STEEL
CASTERS	5 IN. (13 CM) DOUBLE LOCKING HEAVY DUTY
REPLACEMENT PARTS	SEE PAGE 106
STANDARDS AND COMPLIANCE	ANSI, CSA AND OSHA – STATEMENT OF TSCA TITLE VI COMPLIANCE
MODEL	I-CISC
UPC	778300200108

* All trademarks and registered trademarks listed above are the property of their respective owners.

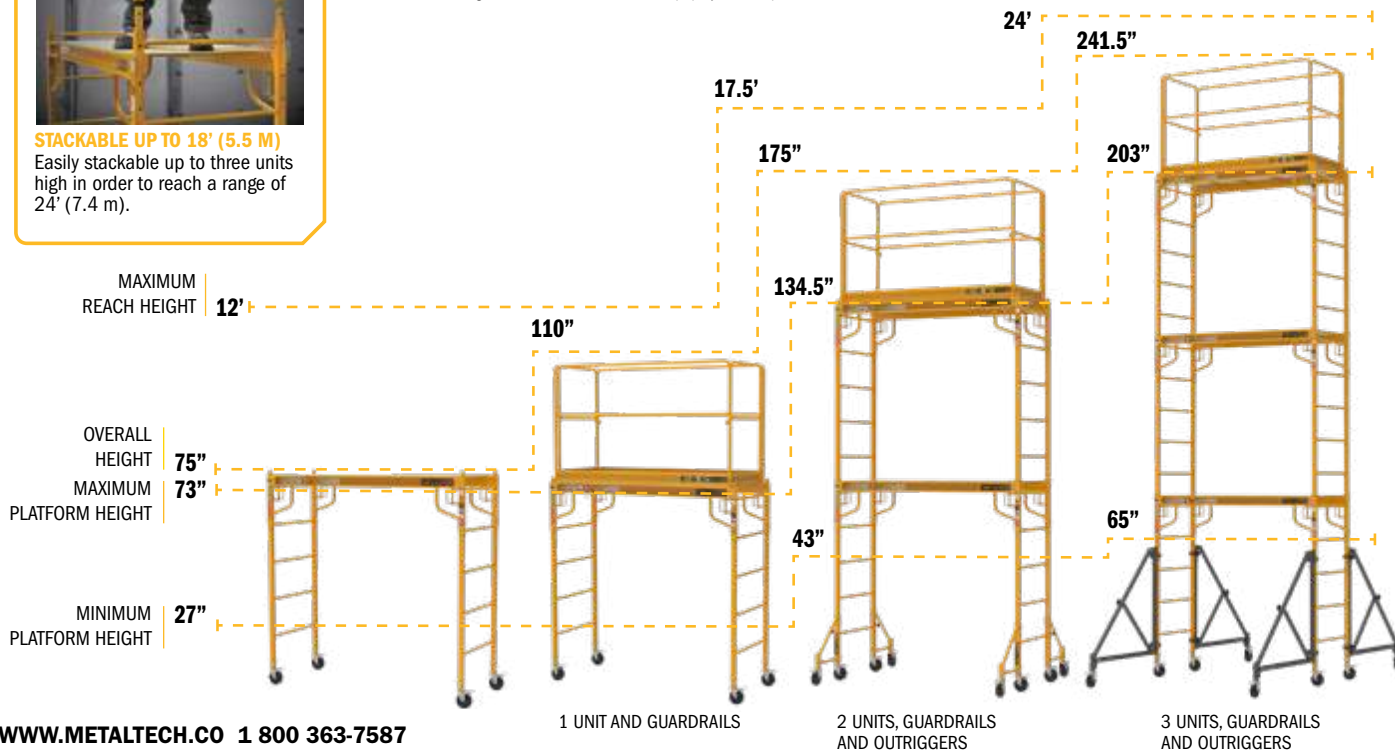




DESCRIPTION	GUARDRAILS SYSTEM	39" HIGH EXTENSION	TOOL SHELF	SCAFFLOCK™ SAFETY BRAKES
ASSEMBLED DIMENSIONS (W X D X H)	69.75 X 29.25 X 44.5 IN. (177.2 X 74.3 X 113 CM)	73.75 X 29 X 42.5 IN. (187.3 X 73.7 X 108 CM)	30.25 X 20 X 2.75 IN. (76.8 X 50.8 X 6.7 CM)	29.25 X 7.5 X 72 IN. (74.3 X 19.2 X 188.9 CM)
PACKAGE DIMENSIONS (W X D X H)	46 X 31.25 X 4.5 IN. (116.8 X 79.4 X 11.4 CM)	83.5 X 30.75 X 3.75 IN. (212.1 X 78.1 X 9.5 CM)	31.25 X 20.75 X 9.25 IN. (79.4 X 52.7 X 23.5 CM)	36 X 5.25 X 5.25 IN. (91.4 X 13.3 X 13.3 CM)
WEIGHT	55.4 LB (25.2 KG)	60.2 LB (27.3 KG)	5.5 LB (2.5 KG)	31.1 LB (14.1 KG)
INCLUDED IN THE BOX	2 GUARDRAILS WITH GATES, 4 TOGGLE PINS	2 SIDE FRAMES, 2 BRACES, 8 LOCKING PINS	1 TOOL SHELF	2 SAFETY BRAKES
COMPATIBLE WITH	I-CISC, I-CAISC, I-CISCTP, I-CISCH1, I-CISCAS, I-CISCSDW, I-CISCMT AND I-BMSS	I-CISC, I-CISCTP I-CISCH1, I-CISCAS, I-CISCSDW, I-CISCMT AND I-BMSS	I-CISC, I-CISCTP, I-CISCPY, I-CAISC, I-CISCH1, I-CISCAS, I-CISCSDW, I-CISCMT AND I-IRC	I-CISC, I-CISCTP, I-CAISC, I-CISCPY, I-CISCH1, I-CISCAS, I-CISCSDW, I-CISCMT AND I-BMSS
MODEL	I-CISGRJP	I-ISEX4PPNCAS	I-CISTR	I-ISL
UPC	778300001316	778300200405	778300000463	778300001552




DESCRIPTION	SET OF 4 BASE PLATES	SET OF 4 LEVELING JACKS	SET OF 14" OUTRIGGERS	SET OF 46" OUTRIGGERS
ASSEMBLED DIMENSIONS (W X D X H)	4.75 X 4.75 X 4.75 IN. (12 X 12 X 12 CM)	9.5 X 5.5 X 12.25 IN. (23.6 X 13.5 X 31 CM)	16 X 3.75 X 24.25 IN. (40.6 X 9.5 X 61.6 CM)	51.5 X 4 X 52.25 IN. (130.81 X 101.6 X 132.72 CM)
PACKAGE DIMENSIONS (W X D X H)	11 X 5.25 X 5.5 IN. (27.8 X 13.3 X 13.8 CM)	13 X 13 X 8 IN. (33.6 X 33.2 X 20.4 CM)	24 X 16.5 X 5 IN. (61 X 41.9 X 12.7 CM)	64 X 15.5 X 6 IN. (162.56 X 39.4 X 15.2 CM)
WEIGHT	10.1 LB (4.6 KG)	24.2 LB (11 KG)	34 LB (15.9 KG)	104 LB (47.3 KG)
INCLUDED IN THE BOX	4 BASE PLATES, 4 LOCKING PINS	4 LEVELING JACKS	4 OUTRIGGERS, 4 CASTERS*, 12 LOCKING PINS	4 OUTRIGGERS, 4 CASTERS*, 8 LOCKING PINS
COMPATIBLE WITH	I-CISC, I-CISCTP, I-CAISC, I-CISCPY, I-CISCH1, I-CISCAS, I-CISCSDW, I-CISCMT, I-CISCWB AND I-BMSS	I-CISC, I-CISCTP, I-CAISC, I-CISCH1, I-CISCAS, I-CISCSDW, I-CISCMT, I-CISCWB AND I-BMSS	I-CISC, I-CISCTP I-CISCH1, I-CISCAS, I-CISCMT AND I-CAISC	I-CISC, I-CISCTP, I-CAISC, I-CISCH1, I-CISCAS, I-CISCSDW, I-CISCMT, I-CISCPY AND I-BMSS
MODEL	I-IBBF4	I-IBSJP12H4	I-CIS04	I-BMS04TT
UPC	778300001699	778300001644	778300613151	778300003792

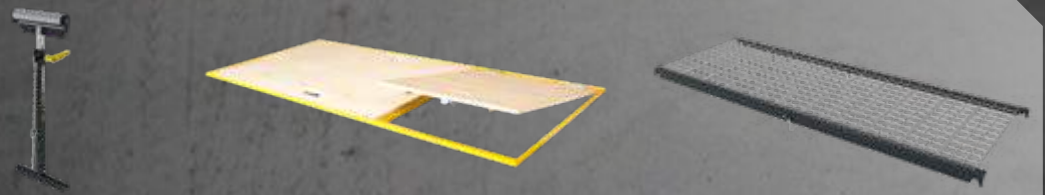

DESCRIPTION	SUPPORT ROLLER	PLATFORM WITH TRAPDOOR	ADD-ON STORAGE SHELF
ASSEMBLED DIMENSIONS (W X D X H)	12.25 X 2 X 28.25 IN. (31 X 5 X 71.8 CM)	67 X 29 X 1.5 IN. (170.2 X 73.7 X 3.8 CM)	74.25 X 25.5 X 2 IN. (188.6 X 64.8 X 5 CM)
PACKAGE DIMENSIONS (W X D X H)	25 X 3.75 X 2.25 IN. (63.6 X 9.5 X 5.7 CM)	68.5 X 30.5 X 2 IN. (174 X 77.5 X 5.1 CM)	40.25 X 18.25 X 2.5 IN. (102.2 X 46.4 X 6.4 CM)
WEIGHT	75 LB (34 KG)	38 LB (17.3 KG)	27.6 LB (12.5 KG)
INCLUDED IN THE BOX	1 SUPPORT ROLLER	1 PLATFORM	1 SHELF
COMPATIBLE WITH	I-CISC, I-CISCTP, I-CISCPY, I-CISCAS, I-CISCSDW, I-CISCWB AND I-CISCMT	I-CISC, I-CISCTP, I-CISCAS, I-CISCSDW AND I-CISCMT	I-CISC, I-CISCTP, I-CISCPY, I-CISCAS, I-CISCSDW, I-CISCWB AND I-CISCMT
MODEL	I-CISRL	I-CISPT	I-CISSU
UPC	778300003013	778300000203	778300003020

STATEMENT OF TSCA TITLE VI COMPLIANCE

*5 IN. (13 CM) DOUBLE LOCKING HEAVY DUTY



JOBSITE SERIES™ 6' BAKER SAFECLIMB™


SAFECLIMB™
PLATFORM



INFO

ANTI-SLIP RUNGS

Nonslip rungs help with moisture issues on footwear.



CLIMB THROUGH PLATFORM

Keeps your weight in the center of the unit for safer climbing.



ANTI-SLIP DECK

Made of 1/2" anti-slip film coated plywood

1,100 lb
LOAD CAPACITY


12'
REACH



COMPATIBLE WITH:
BILJAX, BUFFALO, WERNER,
UST AND BUILDMAN 6'
DRYWALL BAKER*


ASSEMBLED DIMENSIONS (W X D X H)	74.75 X 29.75 X 75 IN. (189.9 X 75.6 X 190.5 CM)
PACKAGE DIMENSIONS (W X D X H)	75 X 30.5 X 5.25 IN. (190.5 X 76.2 X 13.3 CM)
WEIGHT	127.6 LB (57.9 KG)
LOAD CAPACITY	1,100 LB (499 KG). Combined weight of user + materials
WORKING HEIGHTS	FROM 27 TO 73 IN. (68.6 TO 185 CM). 2 in. (5 cm) increment adjustable heights
REACH	12 FT (3.7 M). Stackable up to 3 units high for 24 ft (7.4 m) reach
FINISH	POWDER COATED
PLATFORM	SLIP-RESISTANT PLYWOOD DECK WITH TRAPDOOR
STRUCTURE	1.5 IN. (3.8 CM) SQUARE TUBE. 16 GAUGE STEEL
CASTERS	5 IN. (13 CM) DOUBLE LOCKING HEAVY DUTY
REPLACEMENT PARTS	SEE PAGE 106
STANDARDS AND COMPLIANCE	ANSI, CSA AND OSHA – STATEMENT OF TSCA TITLE VI COMPLIANCE
MODEL	I-CISCH1
UPC	778300001804

* All trademarks and registered trademarks listed above are the property of their respective owners.

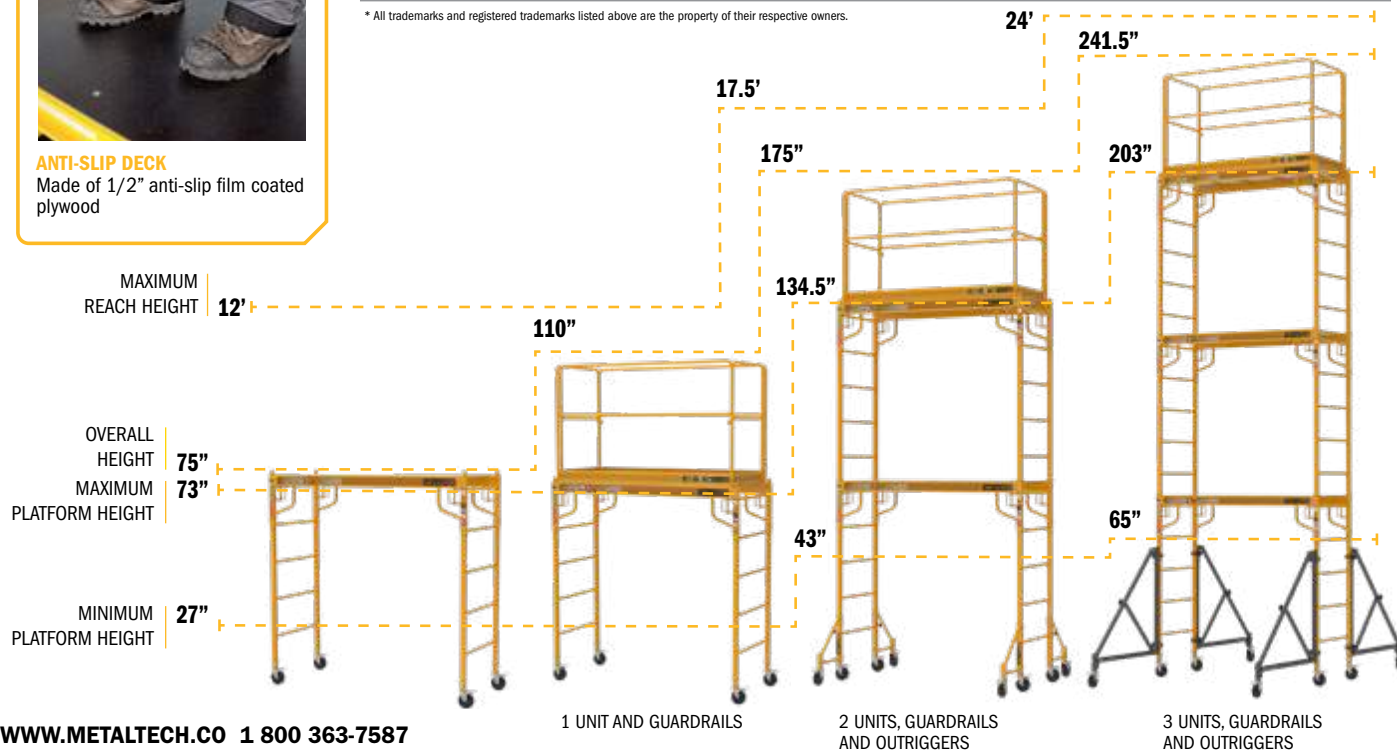



DESCRIPTION	GUARDRAILS SYSTEM	39" HIGH EXTENSION	TOOL SHELF	SCAFFLOCK™ SAFETY BRAKES
ASSEMBLED DIMENSIONS (W X D X H)	69.75 X 29.25 X 44.5 IN. (177.2 X 74.3 X 113 CM)	73.75 X 29 X 42.5 IN. (187.3 X 73.7 X 108 CM)	30.25 X 20 X 2.75 IN. (76.8 X 50.8 X 6.7 CM)	29.25 X 7.5 X 72 IN. (74.3 X 19.2 X 188.9 CM)
PACKAGE DIMENSIONS (W X D X H)	46 X 31.25 X 4.5 IN. (116.8 X 79.4 X 11.4 CM)	83.5 X 30.75 X 3.75 IN. (212.1 X 78.1 X 9.5 CM)	31.25 X 20.75 X 9.25 IN. (79.4 X 52.7 X 23.5 CM)	36 X 5.25 X 5.25 IN. (91.4 X 13.3 X 13.3 CM)
WEIGHT	55.4 LB (25.2 KG)	60.2 LB (27.3 KG)	5.5 LB (2.5 KG)	31.1 LB (14.1 KG)
INCLUDED IN THE BOX	2 GUARDRAILS WITH GATES, 4 TOGGLE PINS	2 SIDE FRAMES, 2 BRACES, 8 LOCKING PINS	1 TOOL SHELF	2 SAFETY BRAKES
COMPATIBLE WITH	I-CISC, I-CAISC, I-CISCTP, I-CISCH1, I-CISCAS, I-CISCOW, I-CISCMT AND I-BMSS	I-CISC, I-CISCTP, I-CISCH1, I-CISCAS, I-CISCOW, I-CISCMT AND I-BMSS	I-CISC, I-CISCTP, I-CISCPY, I-CAISC, I-CISCH1, I-CISCAS, I-CISCOW, I-CISCMT AND I-IRC	I-CISC, I-CISCTP, I-CAISC, I-CISCPY, I-CISCH1, I-CISCAS, I-CISCOW, I-CISCMT AND I-BMSS
MODEL	I-CISGRJP	I-ISEX4PPNCAS	I-CISTR	I-ISL
UPC	778300001316	778300200405	7783000000463	778300001552

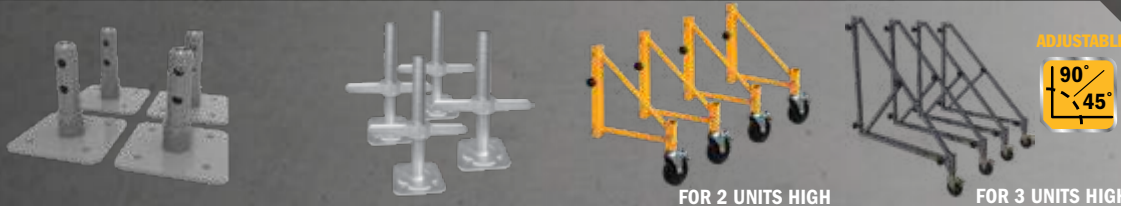

DESCRIPTION	SET OF 4 BASE PLATES	SET OF 4 LEVELING JACKS	SET OF 14" OUTRIGGERS	SET OF 46" OUTRIGGERS
ASSEMBLED DIMENSIONS (W X D X H)	4.75 X 4.75 X 4.75 IN. (12 X 12 X 12 CM)	9.5 X 5.5 X 12.25 IN. (23.6 X 13.5 X 31 CM)	16 X 3.75 X 24.25 IN. (40.6 X 9.5 X 61.6 CM)	51.5 X 4 X 52.25 IN. (130.81 X 101.6 X 132.72 CM)
PACKAGE DIMENSIONS (W X D X H)	11 X 5.25 X 5.5 IN. (27.8 X 13.3 X 13.8 CM)	13 X 13 X 8 IN. (33.6 X 33.2 X 20.4 CM)	24 X 16.5 X 5 IN. (61 X 41.9 X 12.7 CM)	64 X 15.5 X 6 IN. (162.56 X 39.4 X 15.2 CM)
WEIGHT	10.1 LB (4.6 KG)	24.2 LB (11 KG)	34 LB (15.9 KG)	104 LB (47.3 KG)
INCLUDED IN THE BOX	4 BASE PLATES, 4 LOCKING PINS	4 LEVELING JACKS	4 OUTRIGGERS, 4 CASTERS*, 12 LOCKING PINS	4 OUTRIGGERS, 4 CASTERS*, 8 LOCKING PINS
COMPATIBLE WITH	I-CISC, I-CISCTP, I-CAISC, I-CISCPY, I-CISCH1, I-CISCAS, I-CISCOW, I-CISCMT, I-CISCWB AND I-BMSS	I-CISC, I-CISCTP, I-CAISC, I-CISCH1, I-CISCAS, I-CISCOW, I-CISCMT, I-CISCWB AND I-BMSS	I-CISC, I-CISCTP, I-CISCH1, I-CISCAS, I-CISCMT AND I-CAISC	I-CISC, I-CISCTP, I-CAISC, I-CISCH1, I-CISCAS, I-CISCOW, I-CISCMT, I-CISCPY AND I-BMSS
MODEL	I-IBBF4	I-IBSJP12H4	I-CIS04	I-BMS04TT
UPC	778300001699	778300001644	7783000613151	778300003792

*5 IN. (13 CM) DOUBLE LOCKING HEAVY DUTY

JOBSITE SERIES™

JOBSITE SERIES™

6' BAKER

TRAPDOOR

SAFECLIMB™
PLATFORM



INFO

CLIMB THROUGH PLATFORM

Keeps your weight in the center of the unit for safer climbing.



MULTI PURPOSE

Suitable and safe for all types of interior work. Each end can adjust separately to be used on both level surfaces and stairways.



QUICK AND EASY HEIGHT ADJUSTMENT

Platform height adjusts at 2" (5 cm) increments from 27" to 73" (68.6 to 185 cm). Double prong spring-loaded locking mechanism.

1,000 lb
LOAD CAPACITY


12'
REACH



COMPATIBLE WITH:
BILJAX, BUFFALO, WERNER,
UST AND BUILDMAN 6'
DRYWALL BAKER*


ASSEMBLED DIMENSIONS (W X D X H)	74.75 X 29.75 X 75 IN. (189.9 X 75.6 X 190.5 CM)
PACKAGE DIMENSIONS (W X D X H)	75 X 30.5 X 5.25 IN. (190.5 X 77.5 X 13.3 CM)
WEIGHT	131 LB (59.4 KG)
LOAD CAPACITY	1,000 LB (454 KG). Combined weight of user + materials
WORKING HEIGHTS	FROM 27 TO 73 IN. (68.6 TO 185 CM). 2 in. (5 cm) increment adjustable heights
REACH	12 FT (3.7 M). Stackable up to 3 units high for 24 ft (7.4 m) reach
FINISH	POWDER COATED
PLATFORM	PLYWOOD DECK WITH PROTECTIVE STEEL EDGE BANDING WITH TRAPDOOR
STRUCTURE	1.5 IN. (3.8 CM) SQUARE TUBE. 16 GAUGE STEEL
CASTERS	5 IN. (13 CM) DOUBLE LOCKING HEAVY DUTY
REPLACEMENT PARTS	SEE PAGE 106
STANDARDS AND COMPLIANCE	ANSI, CSA AND OSHA — STATEMENT OF TSCA TITLE VI COMPLIANCE
MODEL	I-CISCTP
UPC	778300200122

* All trademarks and registered trademarks listed above are the property of their respective owners.

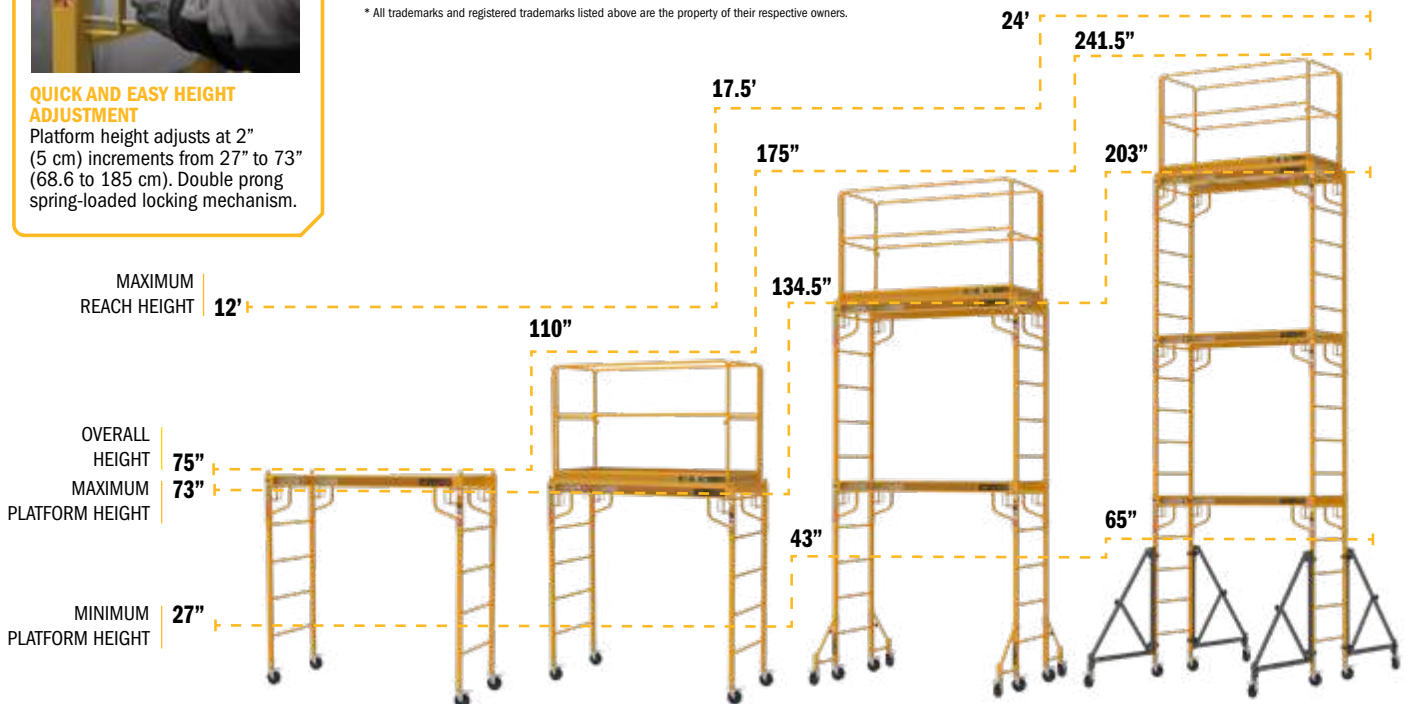




DESCRIPTION	GUARDRAILS SYSTEM	39" HIGH EXTENSION	TOOL SHELF	SCAFFLOCK™ SAFETY BRAKES
ASSEMBLED DIMENSIONS (W X D X H)	69.75 X 29.25 X 44.5 IN. (177.2 X 74.3 X 113 CM)	73.75 X 29 X 42.5 IN. (187.3 X 73.7 X 108 CM)	30.25 X 20 X 2.75 IN. (76.8 X 50.8 X 6.7 CM)	29.25 X 7.5 X 72 IN. (74.3 X 19.2 X 188.9 CM)
PACKAGE DIMENSIONS (W X D X H)	46 X 31.25 X 4.5 IN. (116.8 X 79.4 X 11.4 CM)	83.5 X 30.75 X 3.75 IN. (212.1 X 78.1 X 9.5 CM)	31.25 X 20.75 X 9.25 IN. (79.4 X 52.7 X 23.5 CM)	36 X 5.25 X 5.25 IN. (91.4 X 13.3 X 13.3 CM)
WEIGHT	55.4 LB (25.2 KG)	60.2 LB (27.3 KG)	5.5 LB (2.5 KG)	31.1 LB (14.1 KG)
INCLUDED IN THE BOX	2 GUARDRAILS WITH GATES, 4 TOGGLE PINS	2 SIDE FRAMES, 2 BRACES, 8 LOCKING PINS	1 TOOL SHELF	2 SAFETY BRAKES
COMPATIBLE WITH	I-CISC, I-CAISC, I-CISCTP, I-CISCH1, I-CISCAS, I-CISCWD, I-CISCMT AND I-BMSS	I-CISC, I-CISCTP I-CISCH1, I-CISCAS, I-CISCWD, I-CISCMT AND I-BMSS	I-CISC, I-CISCTP, I-CISCPY, I-CAISC, I-CISCH1, I-CISCAS, I-CISCWD, I-CISCMT AND I-IRC	I-CISC, I-CISCTP, I-CAISC, I-CISCPY, I-CISCH1, I-CISCAS, I-CISCWD, I-CISCMT AND I-BMSS
MODEL	I-CISGRJP	I-ISEX4PPNCAS	I-CISTR	I-ISL
UPC	778300001316	778300200405	778300000463	778300001552

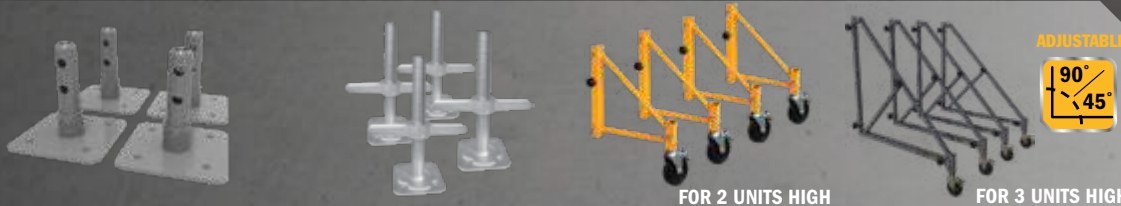


DESCRIPTION	SET OF 4 BASE PLATES	SET OF 4 LEVELING JACKS	SET OF 14" OUTRIGGERS	SET OF 46" OUTRIGGERS
ASSEMBLED DIMENSIONS (W X D X H)	4.75 X 4.75 X 4.75 IN. (12 X 12 X 12 CM)	9.5 X 5.5 X 12.25 IN. (23.6 X 13.5 X 31 CM)	16 X 3.75 X 24.25 IN. (40.6 X 9.5 X 61.6 CM)	51.5 X 4 X 52.25 IN. (130.81 X 101.6 X 132.72 CM)
PACKAGE DIMENSIONS (W X D X H)	11 X 5.25 X 5.5 IN. (27.8 X 13.3 X 13.8 CM)	13 X 13 X 8 IN. (33.6 X 33.2 X 20.4 CM)	24 X 16.5 X 5 IN. (61 X 41.9 X 12.7 CM)	64 X 15.5 X 6 IN. (162.56 X 39.4 X 15.2 CM)
WEIGHT	10.1 LB (4.6 KG)	24.2 LB (11 KG)	34 LB (15.9 KG)	104 LB (47.3 KG)
INCLUDED IN THE BOX	4 BASE PLATES, 4 LOCKING PINS	4 LEVELING JACKS	4 OUTRIGGERS, 4 CASTERS*, 12 LOCKING PINS	4 OUTRIGGERS, 4 CASTERS*, 8 LOCKING PINS
COMPATIBLE WITH	I-CISC, I-CISCTP, I-CAISC, I-CISCPY, I-CISCH1, I-CISCAS, I-CISCWD, I-CISCWB, I-CISCMT AND I-BMSS	I-CISC, I-CISCTP, I-CAISC, I-CISCH1, I-CISCAS, I-CISCWD, I-CISCMT, I-CISCWB AND I-BMSS	I-CISC, I-CISCTP I-CISCH1, I-CISCAS, I-CISCMT AND I-CAISC	I-CISC, I-CISCTP, I-CAISC, I-CISCH1, I-CISCAS, I-CISCWD, I-CISCMT, I-CISCPY AND I-BMSS
MODEL	I-IBBF4	I-IBSJP12H4	I-CIS04	I-BMS04TT
UPC	778300001699	778300001644	778300613151	778300003792

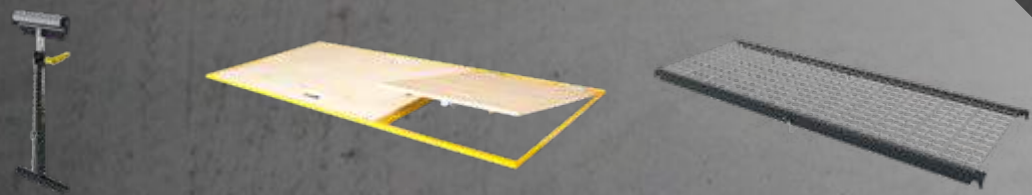

DESCRIPTION	SUPPORT ROLLER	PLATFORM WITH TRAPDOOR	ADD-ON STORAGE SHELF
ASSEMBLED DIMENSIONS (W X D X H)	12.25 X 2 X 28.25 IN. (31 X 5 X 71.8 CM)	67 X 29 X 1.5 IN. (170.2 X 73.7 X 3.8 CM)	74.25 X 25.5 X 2 IN. (188.6 X 64.8 X 5 CM)
PACKAGE DIMENSIONS (W X D X H)	25 X 3.75 X 2.25 IN. (63.6 X 9.5 X 5.7 CM)	68.5 X 30.5 X 2 IN. (174 X 77.5 X 5.1 CM)	40.25 X 18.25 X 2.5 IN. (102.2 X 46.4 X 6.4 CM)
WEIGHT	75 LB (34 KG)	38 LB (17.3 KG)	27.6 LB (12.5 KG)
INCLUDED IN THE BOX	1 SUPPORT ROLLER	1 PLATFORM	1 SHELF
COMPATIBLE WITH	I-CISC, I-CISCTP, I-CISCPY, I-CISCAS, I-CISCWD, I-CISCWB AND I-CISCMT	I-CISC, I-CISCTP, I-CISCAS, I-CISCWD AND I-CISCMT	I-CISC, I-CISCTP, I-CISCPY, I-CISCAS, I-CISCWD, I-CISCWB AND I-CISCMT
MODEL	I-CISRL	I-CISPT	I-CISSU
UPC	778300003013	778300000203	778300003020


STATEMENT OF TSCA TITLE VI COMPLIANCE

*5 IN. (13 CM) DOUBLE LOCKING HEAVY DUTY



JOBSITE SERIES™ PERRY STYLE™

JOBSITE SERIES™



INFO

ANTI-SLIP DECK
5/8" (16 mm) plywood,
slip-resistant.



MULTI PURPOSE
Suitable and safe for all types of
interior work. Each end can adjust
separately to be used on both
level surfaces and stairways.



PERRY STYLE COMPATIBLE
All components are 100% fully
compatible with Nu-Wave Perry
Model 660*.



1,250 lb
LOAD CAPACITY


12'
REACH




COMPATIBLE WITH:
NU-WAVE PERRY 660*

ASSEMBLED DIMENSIONS (WXDXH)	73.75 X 29.25 X 79 IN. (187.3 X 74.3 X 200.7 CM)
PACKAGE DIMENSIONS (WXDXH)	75.25 X 30 X 5.25 IN. (191.2 X 76.2 X 13.3 CM)
WEIGHT	134.6 LB (61 KG)
COMPATIBLE WITH	NU-WAVE PERRY MODEL 660*
LOAD CAPACITY	1,250 LB (567 KG). Combined weight of user + materials
WORKING HEIGHTS	FROM 28.5 TO 78.75 IN. (72.4 TO 200 CM). 2 in. (5 cm) increment adjustable heights
REACH	12 FT (3.7 M). Stackable up to 3 units high for 24 ft (7.4 m) reach
FINISH	POWDER COATED
PLATFORM	SLIP-RESISTANT PLYWOOD DECK WITH PROTECTIVE STEEL EDGE BANDING
STRUCTURE	1.5 IN. (3.8 CM) SQUARE TUBE. 16 GAUGE STEEL
CASTERS	5 IN. (13 CM) DOUBLE LOCKING HEAVY DUTY
REPLACEMENT PARTS	SEE PAGE 106
STANDARDS AND COMPLIANCE	ANSI AND OSHA – STATEMENT OF TSCA TITLE VI COMPLIANCE
MODEL	I-CISCPY
UPC	778300200115


* Nu-Wave Model 660 is a trademark owned by Nu-Wave Manufacturing, LLC.

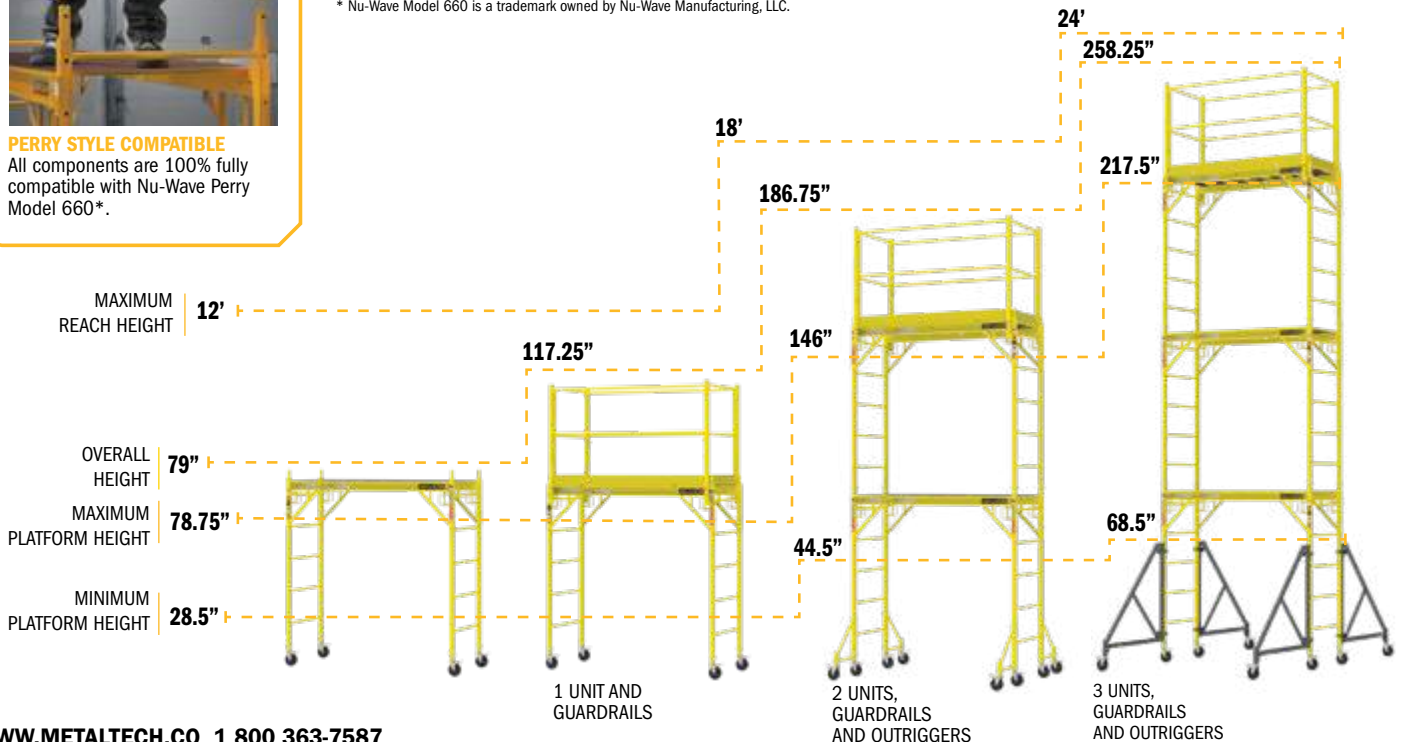



SCAFFLOCK

DESCRIPTION	GUARDRAILS SYSTEM	40" HIGH EXTENSION	TOOL SHELF	SCAFFLOCK™ SAFETY BRAKES
ASSEMBLED DIMENSIONS (W X D X H)	70 X 33.5 X 48.5 IN. (177.8 X 83.8 X 121.9 CM)	73.75 X 30.5 X 43.5 IN. (187.3 X 77.5 X 110.5 CM)	30.25 X 20 X 2.75 IN. (76.8 X 50.8 X 6.7 CM)	29.25 X 7.5 X 72 IN. (74.3 X 19.2 X 188.9 CM)
PACKAGE DIMENSIONS (W X D X H)	72.25 X 7.25 X 50.5 IN. (182.9 X 17.8 X 127 CM)	83.5 X 30.75 X 3.75 IN. (211.1 X 78.1 X 9.5 CM)	31.25 X 20.75 X 9.25 IN. (79.4 X 52.7 X 23.5 CM)	36 X 5.25 X 5.25 IN. (91.4 X 13.3 X 13.3 CM)
WEIGHT	89 LB (40.4 KG)	63 LB (28.5 KG)	5.5 LB (2.5 KG)	31.1 LB (14.1 KG)
INCLUDED IN THE BOX	2 GUARDRAILS WITH GATES	2 SIDE FRAMES, 2 BRACES, 8 LOCKING PINS	1 TOOL SHELF	2 SAFETY BRAKES
COMPATIBLE WITH	I-CISCPY & NU-WAVE / PERRY MODEL 660*	I-CISCPY & NU-WAVE / PERRY MODEL 660*	I-CISC, I-CISCTP, I-CISCPY, I-CAISC, I-CISCH1, I-CISCAS, I-CISCSDW, I-CISCMT AND I-IRC	I-CISC, I-CISCTP, I-CAISC, I-CISCPY, I-CISCH1, I-CISCAS, I-CISCSDW, I-CISCMT AND I-BMSS
MODEL	I-CISCPYGR	I-EX4PPNCASPY	I-CISTR	I-ISL
UPC	778300610037	778300000357	778300000463	778300001552



ADJUSTABLE




FOR 2 UNITS HIGH


FOR 3 UNITS HIGH

DESCRIPTION	SET OF 4 BASE PLATES	SET OF FOUR 5" HEAVY DUTY CASTERS	SET OF 14" OUTRIGGERS	SET OF 46" OUTRIGGERS
ASSEMBLED DIMENSIONS (W X D X H)	4.75 X 4.75 X 4.75 IN. (12 X 12 X 12 CM)	5 IN. (12.7 CM)	19.25 X 4.5 X 24 IN. (48.7 X 11 X 61 CM)	51.5 X 4 X 52.25 IN. (130.81 X 101.6 X 132.72 CM)
PACKAGE DIMENSIONS (W X D X H)	11 X 5.25 X 5.5 IN. (27.8 X 13.3 X 13.8 CM)	15.75 X 13.75 X 3.25 IN. (40 X 34.9 X 8.3 CM)	24 X 16.5 X 5 IN. (61 X 41.9 X 12.7 CM)	64 X 15.5 X 6 IN. (162.56 X 39.4 X 15.2 CM)
WEIGHT	10.1 LB (4.6 KG)	21.2 LB (9.6 KG)	45 LB (20.4 KG)	104 LB (47.3 KG)
INCLUDED IN THE BOX	4 BASE PLATES, 4 LOCKING PINS	4 HEAVY DUTY 5" CASTERS, 4 LOCKING PINS	4 OUTRIGGERS, 4 CASTERS**, 12 LOCKING PINS	4 OUTRIGGERS, 4 CASTERS*, 8 LOCKING PINS
COMPATIBLE WITH	I-CISC, I-CISCTP, I-CAISC, I-CISCPY, I-CISCH1, I-CISCAS, I-CISCSDW, I-CISCWB, I-CISCMT AND I-BMSS	I-CISCPY	I-CISCPY & NU-WAVE / PERRY MODEL 660*	I-CISC, I-CISCTP, I-CAISC, I-CISCH1, I-CISCAS, I-CISCSDW, I-CISCMT, I-CISCPY AND I-BMSS
MODEL	I-IBBF4	I-C4CAS5PYHD	I-CIS04PY	I-BMS04TT
UPC	778300001699	778300001668	778300613137	778300003792

**5 IN. (13 CM) DOUBLE LOCKING HEAVY DUTY

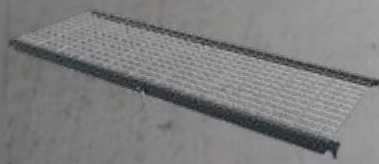

DESCRIPTION	SUPPORT ROLLER	ADD-ON STORAGE SHELF
ASSEMBLED DIMENSIONS (W X D X H)	12.25 X 2 X 28.25 IN. (31 X 5 X 71.8 CM)	74.25 X 25.5 X 2 IN. (188.6 X 64.8 X 5 CM)
PACKAGE DIMENSIONS (W X D X H)	25 X 3.75 X 2.25 IN. (63.6 X 9.5 X 5.7 CM)	40.25 X 18.25 X 2.5 IN. (102.2 X 46.4 X 6.4 CM)
WEIGHT	75 LB (34 KG)	27.6 LB (12.5 KG)
INCLUDED IN THE BOX	1 SUPPORT ROLLER	1 SHELF
COMPATIBLE WITH	I-CISC, I-CISCTP, I-CISCPY, I-CISCAS, I-CISCSDW, I-CISCWB AND I-CISCMT	I-CISC, I-CISCTP, I-CISCPY, I-CISCAS, I-CISCSDW, I-CISCWB AND I-CISCMT
MODEL	I-CISRL	I-CISSU
UPC	778300003013	778300003020



GET THE METALTECH APP



SCAFFOLD BENCH SYSTEM

6' BAKER SYSTEM 4 IN 1

SCAFFOLD BENCH SYSTEM™

1 MITER SAW STAND



4 IN 1



REVERSIBLE PLATFORM; DECK ON ONE SIDE, UNIVERSAL MITER SAW STAND ON THE OTHER

2 SCAFFOLDING



3 STORAGE RACK



4 UTILITY CART



1,100 lb
LOAD CAPACITY


12'
REACH



COMPATIBLE WITH:
BILJAX, BUFFALO, WERNER,
UST AND BUILDMAN 6'
DRYWALL BAKER*

ASSEMBLED DIMENSIONS (W X D X H)	74.75 X 29.75 X 75 IN. (189.9 X 75.6 X 190.5 CM)
PACKAGE DIMENSIONS (W X D X H)	75.75 X 30 X 7 IN. (192.4 X 76.2 X 17.8 CM)
WEIGHT	160 LB (72.6 KG)
LOAD CAPACITY	SCAFFOLDING: 1,100 LB (500 KG). Combined weight of user + materials. STORAGE SHELF: 200 LB (90.7 KG) distributed weight.
WORKING HEIGHTS	27 TO 73 IN. (69 TO 185 CM). 2 in. (5 cm) increment adjustable heights
REACH	12 FT (3.7 M). Stackable up to 3 units high for 24 ft (7.4 m) reach
FINISH	POWDER COATED
REVERSIBLE PLATFORM	PLYWOOD DECK ON ONE SIDE, MITER SAW STAND ON THE OTHER
STRUCTURE	1.5 IN. (3.8 CM) SQUARE TUBE. 16 GAUGE STEEL
CASTERS	5 IN. (13 CM) DOUBLE LOCKING HEAVY DUTY
REPLACEMENT PARTS	SEE PAGE 106
STANDARDS AND COMPLIANCE	ANSI, CSA AND OSHA – STATEMENT OF TSCA TITLE VI COMPLIANCE
MODEL	I-CISCMT
UPC	778300003006

* All trademarks and registered trademarks listed above are the property of their respective owners.

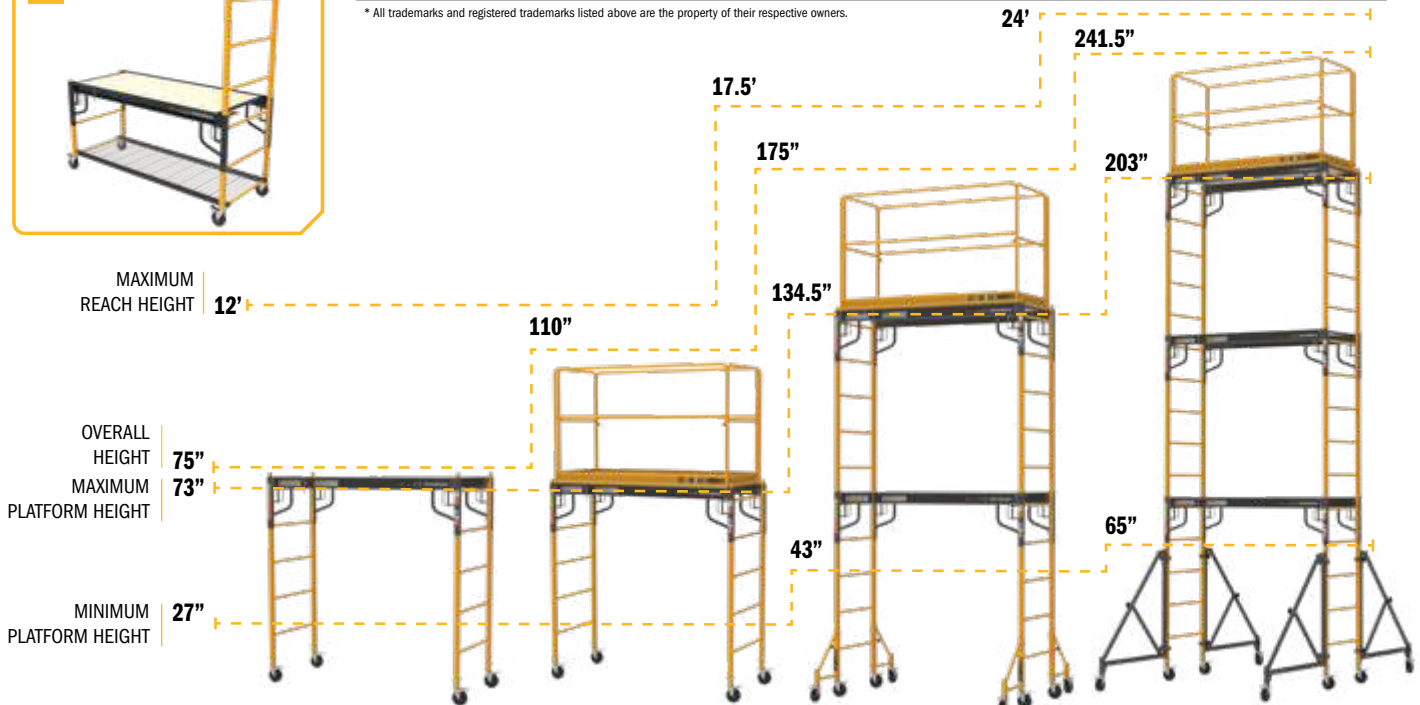


OPTIONS



DESCRIPTION	GUARDRAILS SYSTEM	39" HIGH EXTENSION	TOOL SHELF	SCAFFLOCK™ SAFETY BRAKES
ASSEMBLED DIMENSIONS (W X D X H)	69.75 X 29.25 X 44.5 IN. (177.2 X 74.3 X 113 CM)	73.75 X 29 X 42.5 IN. (187.3 X 73.7 X 108 CM)	30.25 X 20 X 2.75 IN. (76.8 X 50.8 X 6.7 CM)	29.25 X 7.5 X 72 IN. (74.3 X 19.2 X 188.9 CM)
PACKAGE DIMENSIONS (W X D X H)	46 X 31.25 X 4.5 IN. (116.8 X 79.4 X 11.4 CM)	83.5 X 30.75 X 3.75 IN. (212.1 X 78.1 X 9.5 CM)	31.25 X 20.75 X 9.25 IN. (79.4 X 52.7 X 23.5 CM)	36 X 5.25 X 5.25 IN. (91.4 X 13.3 X 13.3 CM)
WEIGHT	55.4 LB (25.2 KG)	60.2 LB (27.3 KG)	5.5 LB (2.5 KG)	31.1 LB (14.1 KG)
INCLUDED IN THE BOX	2 GUARDRAILS WITH GATES, 4 TOGGLE PINS	2 SIDE FRAMES, 2 BRACES, 8 LOCKING PINS	1 TOOL SHELF	2 SAFETY BRAKES
COMPATIBLE WITH	I-CISC, I-CAISC, I-CISCTP, I-CISCH1, I-CISCAS, I-CISCWD, I-CISCMT AND I-BMSS	I-CISC, I-CISCTP I-CISCH1, I-CISCAS, I-CISCWD, I-CISCMT AND I-BMSS	I-CISC, I-CISCTP, I-CISCPY, I-CAISC, I-CISCH1, I-CISCAS, I-CISCWD, I-CISCMT AND I-IRC	I-CISC, I-CISCTP, I-CAISC, I-CISCPY, I-CISCH1, I-CISCAS, I-CISCWD, I-CISCMT AND I-BMSS
MODEL	I-CISGRJP	I-ISEX4PPNCAS	I-CISTR	I-ISL
UPC	778300001316	778300200405	778300000463	778300001552




DESCRIPTION	SET OF 4 BASE PLATES	SET OF 4 LEVELING JACKS	SET OF 14" OUTRIGGERS	SET OF 46" OUTRIGGERS
ASSEMBLED DIMENSIONS (W X D X H)	4.75 X 4.75 X 4.75 IN. (12 X 12 X 12 CM)	9.5 X 5.5 X 12.25 IN. (23.6 X 13.5 X 31 CM)	16 X 3.75 X 24.25 IN. (40.6 X 9.5 X 61.6 CM)	51.5 X 4 X 52.25 IN. (130.81 X 101.6 X 132.72 CM)
PACKAGE DIMENSIONS (W X D X H)	11 X 5.25 X 5.5 IN. (27.8 X 13.3 X 13.8 CM)	13 X 13 X 8 IN. (33.6 X 33.2 X 20.4 CM)	24 X 16.5 X 5 IN. (61 X 41.9 X 12.7 CM)	64 X 15.5 X 6 IN. (162.56 X 39.4 X 15.2 CM)
WEIGHT	10.1 LB (4.6 KG)	24.2 LB (11 KG)	34 LB (15.9 KG)	104 LB (47.3 KG)
INCLUDED IN THE BOX	4 BASE PLATES, 4 LOCKING PINS	4 LEVELING JACKS	4 OUTRIGGERS, 4 CASTERS*, 12 LOCKING PINS	4 OUTRIGGERS, 4 CASTERS*, 8 LOCKING PINS
COMPATIBLE WITH	I-CISC, I-CISCTP, I-CAISC, I-CISCPY, I-CISCH1, I-CISCAS, I-CISCWD, I-CISCMT, I-CISCWB AND I-BMSS	I-CISC, I-CISCTP, I-CAISC, I-CISCH1, I-CISCAS, I-CISCWD, I-CISCMT, I-CISCWB AND I-BMSS	I-CISC, I-CISCTP I-CISCH1, I-CISCAS, I-CISCMT AND I-CAISC	I-CISC, I-CISCTP, I-CAISC, I-CISCH1, I-CISCAS, I-CISCWD, I-CISCMT, I-CISCPY AND I-BMSS
MODEL	I-IBBF4	I-IBSJP12H4	I-CIS04	I-BMS04TT
UPC	778300001699	778300001644	778300613151	778300003792

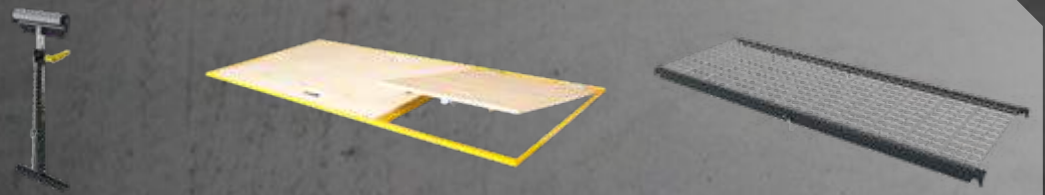

DESCRIPTION	SUPPORT ROLLER	PLATFORM WITH TRAPDOOR	ADD-ON STORAGE SHELF
ASSEMBLED DIMENSIONS (W X D X H)	12.25 X 2 X 28.25 IN. (31 X 5 X 71.8 CM)	67 X 29 X 1.5 IN. (170.2 X 73.7 X 3.8 CM)	74.25 X 25.5 X 2 IN. (188.6 X 64.8 X 5 CM)
PACKAGE DIMENSIONS (W X D X H)	25 X 3.75 X 2.25 IN. (63.6 X 9.5 X 5.7 CM)	68.5 X 30.5 X 2 IN. (174 X 77.5 X 5.1 CM)	40.25 X 18.25 X 2.5 IN. (102.2 X 46.4 X 6.4 CM)
WEIGHT	75 LB (34 KG)	38 LB (17.3 KG)	27.6 LB (12.5 KG)
INCLUDED IN THE BOX	1 SUPPORT ROLLER	1 PLATFORM	1 SHELF
COMPATIBLE WITH	I-CISC, I-CISCTP, I-CISCPY, I-CISCAS, I-CISCWD, I-CISCWB AND I-CISCMT	I-CISC, I-CISCTP, I-CISCAS, I-CISCWD AND I-CISCMT	I-CISC, I-CISCTP, I-CISCPY, I-CISCAS, I-CISCWD, I-CISCWB AND I-CISCMT
MODEL	I-CISRL	I-CISPT	I-CISSU
UPC	778300003013	778300000203	778300003020


STATEMENT OF TSCA TITLE VI COMPLIANCE

*5 IN. (13 CM) DOUBLE LOCKING HEAVY DUTY



SCAFFOLD BENCH SYSTEM™

WORKBENCH

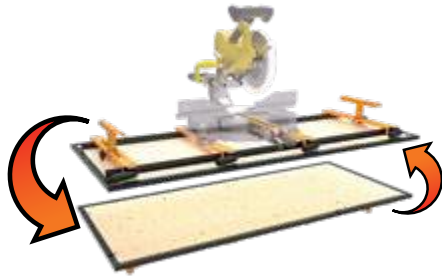

REVERSIBLE PLATFORM; DECK ON ONE SIDE, UNIVERSAL MITER SAW STAND ON THE OTHER



1,100 lb
LOAD CAPACITY

9.9'
REACH

ASSEMBLED DIMENSIONS (WXDXH)	74.75 X 29.75 X 39.25 IN. (189.9 X 75.6 X 99.7 CM)
PACKAGE DIMENSIONS (WXDXH)	75.75 X 30 X 6.75 IN. (192.4 X 76.2 X 17.2 CM)
WEIGHT	150 LB (68.2 KG)
LOAD CAPACITY	SCAFFOLDING: 1,100 LB (500 KG). Combined weight of user + materials. STORAGE SHELF: 200 LB (90.7 KG) distributed weight.
WORKING HEIGHTS	25.5 TO 37.5 IN. (64.8 TO 95.3 CM). 2 in. (5 cm) increment adjustable heights
REACH	9.9 FT (3.01 M)
FINISH	POWDER COATED
REVERSIBLE PLATFORM	PLYWOOD DECK ON ONE SIDE, MITER SAW STAND ON THE OTHER
STRUCTURE	1.5 IN. (3.8 CM) SQUARE TUBE. 16 GAUGE STEEL
CASTERS	5 IN. (13 CM) DOUBLE LOCKING HEAVY DUTY
REPLACEMENT PARTS	SEE PAGE 106
STANDARDS AND COMPLIANCE	ANSI, CSA AND OSHA – STATEMENT OF TSCA TITLE VI COMPLIANCE
MODEL	I-CISWB
UPC	778300003129

SCAFFOLD BENCH SYSTEM™

INFO



MITER SAW STAND



USE IT AS A WORK TABLE ON WHEELS




OPTION (I-CISRL)

OPTIONAL SUPPORT ROLLER

STANDARDS:

ANSI OSHA CSA

OPTIONS

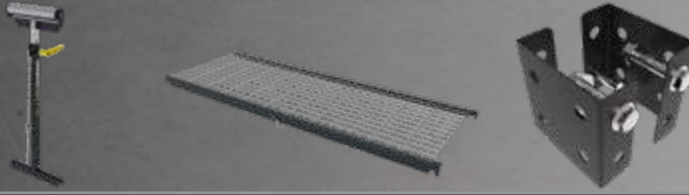

DESCRIPTION	SUPPORT ROLLER	ADD-ON STORAGE SHELF	MULTI-UNIT CONNECTOR
ASSEMBLED DIMENSIONS (WXDXH)	12.25 X 2 X 28.25 IN. (31 X 5 X 71.8 CM)	74.25 X 25.5 X 2 IN. (188.6 X 64.8 X 5 CM)	N/D
PACKAGE DIMENSIONS (WXDXH)	25 X 3.75 X 2.25 IN. (63.6 X 9.5 X 5.7 CM)	40.25 X 18.25 X 2.5 IN. (102.2 X 46.4 X 6.4 CM)	N/D
WEIGHT	75 LB (34 KG)	27.6 LB (12.5 KG)	2 LB (0.91 KG)
INCLUDED IN THE BOX	1 SUPPORT ROLLER	1 SHELF	2 CONNECTORS, 4 BOLTS, 4 NUTS AND 8 WASHERS
COMPATIBLE WITH	I-CISC, I-CISCTP, I-CISCPY, I-CISCAS, I-CISCOW, I-CISCWB AND I-CISCMT	I-CISC, I-CISCTP, I-CISCPY, I-CISCAS, I-CISCOW, I-CISCWB AND I-CISCMT	I-CISCWB
MODEL	I-CISRL	I-CISSU	I-SBC
UPC	778300003013	778300003020	778300003136


SCAFFOLD BENCH SYSTEM MULTI-UNIT CONNECTOR



Made to work great with your workbench

- ☑ Connect many workbench's together and create a larger worktable area, on wheels!

SCAFFOLD BENCH SYSTEM™



JOBSITE SERIES™ 6'



850 lb
LOAD CAPACITY

12'
REACH

ASSEMBLED DIMENSIONS (WXDXH)	75 X 30.5 X 78.25 IN. (190.5 X 77.5 X 198.8 CM)
PACKAGE DIMENSIONS (WXDXH)	76.75 X 31 X 6.75 IN. (195 X 78.7 X 17.2 CM)
WEIGHT	151 LB (68.5 KG)
LOAD CAPACITY	850 LB (385 KG) Combined weight of user + materials. 300 lb (136 kg) per platform
WORKING HEIGHTS	13 - 25 - 37 - 49 - 61 - 73 IN. (33 - 63.5 - 94 - 124.5 - 155 - 185.5 CM)
REACH	12 FT (3.7 M). Stackable up to 2 units high for 18 ft (5.5 m) reach
FINISH	POWDER COATED
PLATFORMS	3 ANTI-SLIP. 14 GAUGE STEEL.
STRUCTURE	1.5 IN. (3.8 CM) ROUND TUBE. 16 GAUGE STEEL
CASTERS	5 IN. (13 CM) DOUBLE LOCKING HEAVY DUTY
REPLACEMENT PARTS	SEE PAGE 106
STANDARDS	ANSI, CSA AND OSHA
MODEL	I-IRC
UPC	778300400157

JOBSITE SERIES™

INFO




STACKABLE UP TO 12' (3.7 M)
Easily stackable up to two units high in order to reach a range of 18' (5.5 m).



EASY STORAGE
Folds flat for compact storage and transport



TWO-MINUTE ASSEMBLY
No tools required.




DESCRIPTION	SET OF 4 OUTRIGGERS WITH CASTERS	GUARDRAILS SYSTEM	36" HIGH EXTENSION
ASSEMBLED DIMENSIONS (W X D X H)	25 X 3.5 X 23 IN. (63.5 X 8.9 X 58.4 CM)	70.5 X 30.5 X 44.25 IN. (179.1 X 77.5 X 112.4 CM)	75 X 30.5 X 36 IN. (190.5 X 77.5 X 91.4 CM)
PACKAGE DIMENSIONS (W X D X H)	27 X 26.25 X 4.5 IN. (66.6 X 66.8 X 11.4 CM)	N/A	76.75 X 31 X 6.75 IN. (195 X 78.7 X 17.2 CM)
WEIGHT	39.76 LB (18 KG)	50 LB (22.7 KG)	114 LB (51.7 KG)
INCLUDED IN THE BOX	4 OUTRIGGERS, 4 CASTERS*	2 GUARDRAILS, 4 CHAINS, 4 ADAPTERS	3 ANTI-SLIP PLATFORMS, 1 SCAFFOLDING STRUCTURE
COMPATIBLE WITH	I-IRC	I-IRC	I-IRC
MODEL	I-IR04	I-IRGR	I-IREX3
UPC	778300411153	778300410101	778300412938

*5 IN. (13 CM) DOUBLE LOCKING HEAVY DUTY



DESCRIPTION	TOOL SHELF
ASSEMBLED DIMENSIONS (W X D X H)	30.25 X 20 X 2.75 IN. (76.8 X 50.8 X 6.7 CM)
PACKAGE DIMENSIONS (W X D X H)	31.25 X 20.75 X 9.25 IN. (79.4 X 52.7 X 23.5 CM)
WEIGHT	5.5 LB (2.5 KG)
INCLUDED IN THE BOX	1 TOOL SHELF
COMPATIBLE WITH	I-CISC, I-CISCPT, I-CISCPY, I-CAISC, I-CISCH1, I-CISCAS I-CISCDW, AND I-IRC
MODEL	I-CISTR
UPC	778300000463

JOBSITE SERIES™

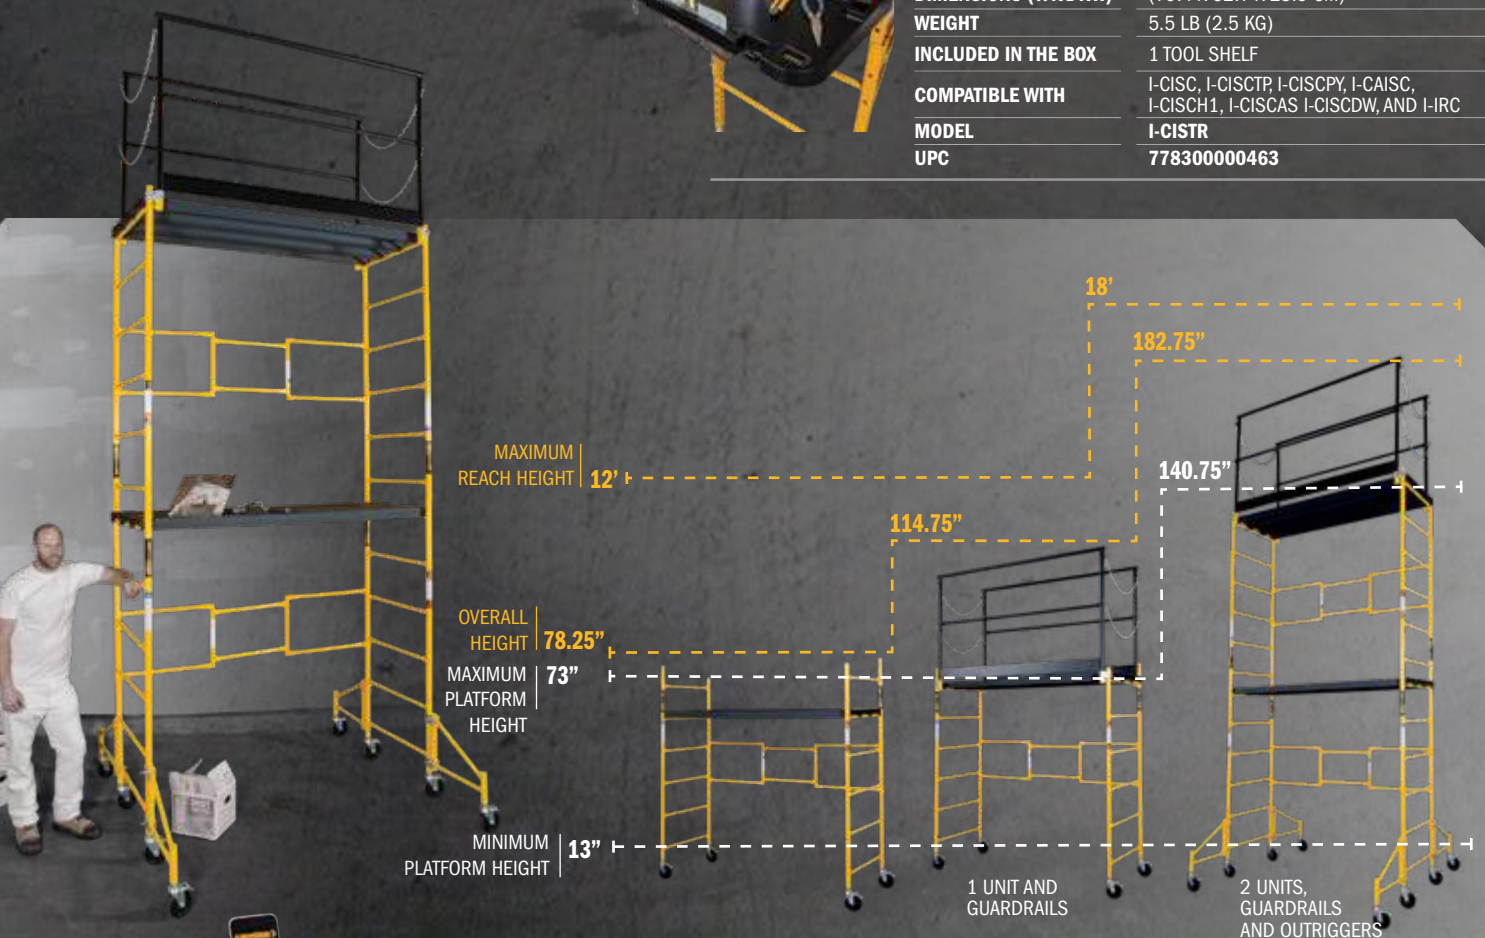

MAXIMUM REACH HEIGHT | 12'

OVERALL HEIGHT | 78.25"

MAXIMUM PLATFORM HEIGHT | 73"

MINIMUM PLATFORM HEIGHT | 13"

1 UNIT AND GUARDRAILS

2 UNITS, GUARDRAILS AND OUTRIGGERS



GET THE METALTECH APP

BUILT TOUGH FOR SAFETY

METALTECH

JOBSITE SERIES™ 5'

JOBSITE SERIES™



FOLD AWAY TOOL SHELF



900 lb
LOAD CAPACITY

10'
REACH


ASSEMBLED DIMENSIONS (WxDXH)	50.5 X 31 X 76.5 IN. (128.3 X 78.7 X 194.3 CM)
PACKAGE DIMENSIONS (WxDXH)	44 X 23 X 7.5 IN. (111.8 X 58.4 X 19.1 CM)
WEIGHT	77 LB (35 KG)
LOAD CAPACITY	900 LB (408 KG) Combined weight of user + materials. 450 lb (204 kg) per platform
WORKING HEIGHTS	11.5 - 25 - 36.5 - 48 IN. (29 - 64 - 93 - 122 CM)
REACH	10 FT (3 M)
FINISH	POWDER COATED
PLATFORM	2 ANTI-SLIP AND 1 STEP BAR. 14 GAUGE STEEL.
STRUCTURE	1.25 IN. (3.2 CM) OUTSIDE DIAMETER. 16 GAUGE STEEL
CASTERS	5 IN. (13 CM) DOUBLE LOCKING HEAVY DUTY
REPLACEMENT PARTS	SEE PAGE 106
STANDARDS	ANSI, CSA AND OSHA
MODEL	I-IMIS
UPC	778300100019

INFO



TRANSPORT

Use it as a cart to haul your equipment and heavy loads to and from job sites. 900 lb (408 kg) capacity.

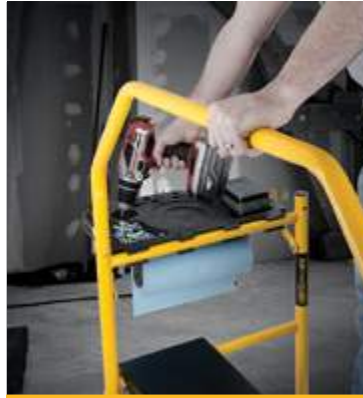

TOOL SHELF & SAFETY RAIL

Safety rail to hold on to, for stability. Convenient fold away tool shelf for paint can, bucket, screws, nails and tools.



WORKBENCH

Multi-level working area. Adjust platforms up to the desired level for a comfortable workplace.

JOBSITE SERIES™ 4' DELUXE



9'
REACH

500 lb
LOAD CAPACITY

ASSEMBLED DIMENSIONS (W X D X H)	49.5 X 22.5 X 57.75 IN. (125.7 X 57.2 X 146.7 CM)
PACKAGE DIMENSIONS (W X D X H)	43.25 X 24 X 4.5 IN. (109.9 X 61 X 11.4 CM)
WEIGHT	65 LB (29.5 KG)
LOAD CAPACITY	500 LB (227 KG) Combined weight of user + materials. 250 lb (113 kg) per platform
WORKING HEIGHTS	10 - 21.5 - 33 IN. (25 - 55 - 84 CM)
REACH	9 FT (2.75 M)
FINISH	POWDER COATED
PLATFORMS	2 ANTI-SLIP AND 1 STEP BAR. 14 GAUGE STEEL.
STRUCTURE	1 IN. (2.5 CM) OUTSIDE DIAMETER. 16 GAUGE STEEL
CASTERS	4 IN. (10 CM) DOUBLE LOCKING HEAVY DUTY
REPLACEMENT PARTS	SEE PAGE 106
STANDARDS	ANSI, CSA AND OSHA
MODEL	I-IMCNDX
UPC	778300100392

JOBSITE SERIES™



TOOL SHELF & SAFETY RAIL
Safety rail to hold on to, for stability. Convenient fold away tool shelf for paint can, bucket, screws, nails and tools.



RUNNING BOARD
Easy access to decks.



UTILITY HOOKS
Great to hang extensions and hoses.

INFO

JOBSITE SERIES™ 4' SAFETY RAIL & TOOL SHELF

JOBSITE SERIES™

FOLD AWAY TOOL SHELF



500lb
LOAD CAPACITY

9'
REACH



ASSEMBLED DIMENSIONS (WXDXH)	49.5 X 22.5 X 57.75 IN. (125.7 X 57.2 X 146.7 CM)
PACKAGE DIMENSIONS (WXDXH)	43.25 X 24 X 4.5 IN. (109.9 X 61 X 11.4 CM)
WEIGHT	59 LB (26.8 KG)
LOAD CAPACITY	500 LB (227 KG) Combined weight of user + materials. 250 lb (113 kg) per platform
WORKING HEIGHTS	10 - 21.5 - 33 IN. (25 - 55 - 84 CM)
REACH	9 FT (2.75 M)
FINISH	POWDER COATED
PLATFORM	2 ANTI-SLIP. 14 GAUGE STEEL.
STRUCTURE	1 IN. (2.5 CM) OUTSIDE DIAMETER. 16 GAUGE STEEL
CASTERS	4 IN. (10 CM) DOUBLE LOCKING HEAVY DUTY
REPLACEMENT PARTS	SEE PAGE 107
STANDARDS	ANSI, CSA AND OSHA
MODEL	I-IMCNT
UPC	778300100224

INFO



TOOL SHELF & SAFETY RAIL

Safety rail to hold on to, for stability. Convenient fold away tool shelf for paint can, bucket, screws, nails and tools.



TRANSPORT

Use it as a cart to haul your equipment and heavy loads to and from job sites. 500 lb (227 kg) capacity.



WORKBENCH

Multi-level working area. Adjust platforms up to the desired level for a comfortable workplace.

JOBSITE SERIES™ 4'

TOOL SHELF



FOLD AWAY TOOL SHELF



9'
REACH

500 lb
LOAD CAPACITY

ASSEMBLED DIMENSIONS (W X D X H)	49.5 X 22.5 X 45.75 IN. (125.7 X 57.2 X 116.2 CM)
PACKAGE DIMENSIONS (W X D X H)	43.25 X 24 X 3.75 IN. (109.9 X 61 X 9.5 CM)
WEIGHT	48.5 LB (22 KG)
LOAD CAPACITY	500 LB (227 KG) Combined weight of user + materials. 250 lb (113 kg) per platform
WORKING HEIGHTS	10 - 21.5 - 33 IN. (25 - 55 - 84 CM)
REACH	9 FT (2.75 M)
FINISH	POWDER COATED
PLATFORMS	2 ANTI-SLIP 14 GAUGE STEEL.
STRUCTURE	1 IN. (2.5 CM) OUTSIDE DIAMETER. 16 GAUGE STEEL
CASTERS	4 IN. (10 CM) DOUBLE LOCKING HEAVY DUTY
REPLACEMENT PARTS	SEE PAGE 107
STANDARDS	ANSI, CSA AND OSHA
MODEL	I-IMCNAT
UPC	778300100385

JOBSITE SERIES™




TRANSPORT

Use it as a cart to haul your equipment and heavy loads to and from job sites. 500 lb (227 kg) capacity.



WORKBENCH

Multi-level working area. Adjust platforms up to the desired level for a comfortable workplace

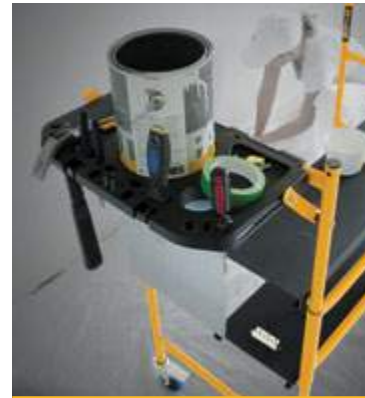

TOOL SHELF

Convenient fold away tool shelf for paint can, bucket, screws, nails and tools.

INFO



GET THE METALTECH APP



JOBSITE SERIES™ 4'

BASIC MINI



500 lb
LOAD CAPACITY

9'
REACH

ASSEMBLED DIMENSIONS (WXDXH)	41 X 22.5 X 45.75 IN. (104.1 X 57.2 X 116.2 CM)
PACKAGE DIMENSIONS (WXDXH)	43.25 X 24 X 3.75 IN. (109.9 X 61 X 9.5 CM)
WEIGHT	50 LB (22.7 KG)
LOAD CAPACITY	500 LB (227 KG) Combined weight of user + materials. 250 lb (113 kg) per platform
WORKING HEIGHTS	10 - 21.5 - 33 IN. (25 - 55 - 84 CM)
REACH	9 FT (2.75 M)
FINISH	POWDER COATED
PLATFORMS	2 ANTI-SLIP 14 GAUGE STEEL
STRUCTURE	1 IN. (2.5 CM) OUTSIDE DIAMETER. 16 GAUGE STEEL
CASTERS	4 IN. (10 CM) DOUBLE LOCKING HEAVY DUTY
REPLACEMENT PARTS	SEE PAGE 107
STANDARDS	ANSI, CSA AND OSHA
MODEL	I-IMCN
UPC	778300100200

JOBSITE SERIES™

INFO



TRANSPORT

Use it as a cart to haul your equipment and heavy loads to and from job sites. 500 lb (227 kg) capacity.



WORKBENCH

Multi-level working area. Adjust platforms up to the desired level for a comfortable workplace



EASY STORAGE

Folds flat for compact storage and transport


JOBSITE SERIES™ DRYWALL & PANEL HOIST



11'
MAX HEIGHT

150 lb
LOAD CAPACITY

INFO



CRADLE TILTS

Cradle tilts for sloped ceiling or vertical wall installations. 34" (86 cm) loading height.



CASTERS

Three 5" (13 cm) double lock heavy duty swivel casters.



FAST ACTION WINCH

Fast action single stage winch with silent cam lock brake.


ASSEMBLED DIMENSIONS (W X D X H)	58 X 48.5 X 57 IN. (147.3 X 123.2 X 144.7 CM)
PACKAGE DIMENSIONS (W X D X H)	51 X 21.5 X 6.5 IN. (129.5 X 54.5 X 16.5 CM)
WEIGHT	97 LB (44 KG)
LOAD CAPACITY	150 LB (68 KG)
MAXIMUM HEIGHT	11 FT (3.35 M)
LOADING HEIGHT	34 IN. (86 CM)
MAXIMUM PANEL SIZE	4 X 16 FT (1.22 X 4.87 M)
CABLE	HIGH TENSILE 1/8" CABLE (0.3 CM)
CASTERS	5 IN. (13 CM) DOUBLE LOCKING HEAVY DUTY
REPLACEMENT PARTS	SEE PAGE 107
MODEL	I-IDPL
UPC	778300002061



INFO

* Made-to-order. The product is currently not a stocked item.

DESCRIPTION	STORAGE & TRANSPORT CART*	DESCRIPTION	PANEL HOIST WITH TRANSPORT CART*
DIMENSIONS	23.25 X 18.75 X 47.75 IN. (59.1 X 47.6 X 121.9 CM)	DIMENSIONS	48.75 X 25.25 X 25.75 IN. (123.8 X 64.1 X 65.4 CM)
WEIGHT	48.6 LB (22.1 KG)	WEIGHT	142.9 LB (64.8 KG)
FINISH	POWDER COATED	FINISH	POWDER COATED
COMPATIBLE	I-IDPL, I-BMDPL	INCLUDED	I-IDPL, I-SCDPL
MODEL	I-SCDPL	MODEL	I-IDPLK
UPC	778300003723	UPC	778300003785



GET THE METALTECH APP

BUILT TOUGH FOR
SAFETY

METALTECH™

JOBSITE SERIES™

ALU SERIES™ 6' BAKER

ALU SERIES™



INFO

MULTI PURPOSE

Suitable and safe for all types of interior work. Each end can adjust separately to be used on both level surfaces and stairways.



STACKABLE UP TO 12' (3.7 M)

Easily stackable up to two units high in order to reach a range of 18' (5.5 m).



QUICK AND EASY HEIGHT ADJUSTMENT


Platform height adjusts at 2" (5 cm) increments from 26.75 to 73 in. (67.9 to 185 m). Double prong spring-loaded locking mechanism.



700 lb
LOAD CAPACITY

12'
REACH

ASSEMBLED DIMENSIONS (WXDXH)	74 X 30.75 X 74.5 IN. (187.7 X 78.2 X 189.5 CM)
PACKAGE DIMENSIONS (WXDXH)	74.75 X 30.25 X 6.25 IN. (189.7 X 76.9 X 16 CM)
WEIGHT	85 LB (38.6 KG)
LOAD CAPACITY	700 LB (318 KG). Combined weight of user + materials
WORKING HEIGHTS	FROM 26.75 TO 73 IN. (67.9 TO 185 CM). 2 in. (5 cm) increment adjustable heights
REACH	12 FT (3.7 M). Stackable up to 3 units high for 24 ft (7.4 m) reach
FINISH	ANODIZED ALUMINUM
PLATFORM	ANTI-SLIP AIRCRAFT GRADE ALUMINUM ALLOY 6063
STRUCTURE	1.5 IN. (3.8 CM) SQUARE TUBE. AIRCRAFT GRADE ALUMINUM ALLOY 6063
CASTERS	5 IN. (13 CM) DOUBLE LOCKING HEAVY DUTY
REPLACEMENT PARTS	SEE PAGE 107
STANDARDS	ANSI, CSA AND OSHA
MODEL	I-CAISC
UPC	778300220106

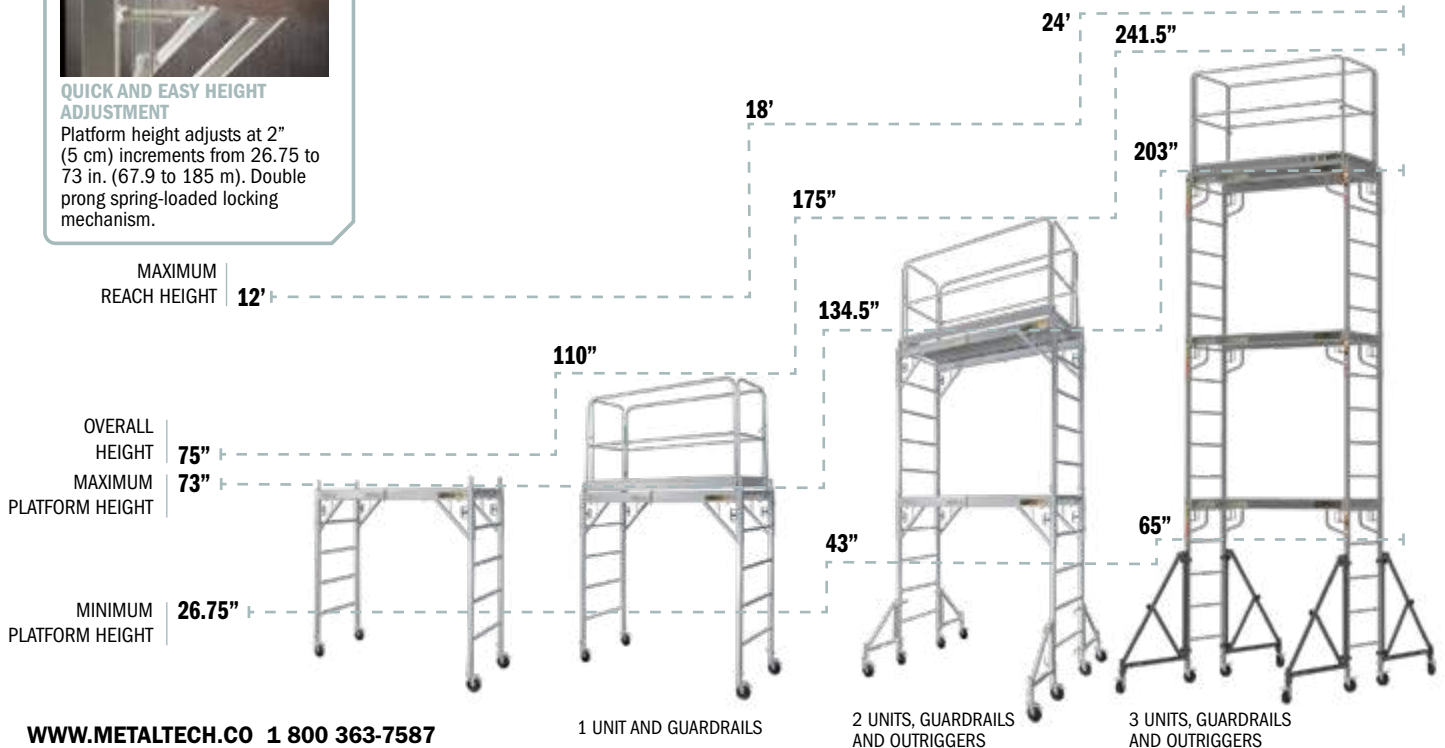



SCAFFLOCK

DESCRIPTION	ALUMINUM GUARDRAILS SYSTEM	TOOL SHELF	SCAFFLOCK™ SAFETY BRAKES
ASSEMBLED DIMENSIONS (W X D X H)	69.75 X 28.75 X 43.75 IN. (177.3 X 73.5 X 111.3 CM)	30.25 X 20 X 2.75 IN. (76.8 X 50.8 X 6.7 CM)	29.25 X 7.5 X 72 IN. (74.3 X 19.2 X 188.9 CM)
PACKAGE DIMENSIONS (W X D X H)	46 X 31.5 X 5 IN. (116.8 X 80 X 11.4 CM)	31.25 X 20.75 X 9.25 IN. (79.4 X 52.7 X 23.5 CM)	36 X 5.25 X 5.25 IN. (91.4 X 13.3 X 13.3 CM)
WEIGHT	26.5 LB (12 KG)	5.5 LB (2.5 KG)	31.1 LB (14.1 KG)
INCLUDED IN THE BOX	2 GUARDRAILS WITH GATES, 4 TOGGLE PINS	1 TOOL SHELF	2 SAFETY BRAKES
COMPATIBLE WITH	I-CAISC, I-CISC, I-CISCTP, I-CISCH1, I-CISCAS, I-CISCDW, I-CISCMT AND I-BMSS	I-CISC, I-CISCTP, I-CISCPY, I-CAISC, I-CISCH1, I-CISCAS, I-CISCDW, I-CISCMT AND I-IRC	I-CISC, I-CISCTP, I-CAISC, I-CISCPY, I-CISCH1, I-CISCAS, I-CISCDW, I-CISCMT AND I-BMSS
MODEL	I-CAISGR	I-CISTR	I-ISL
UPC	778300620012	778300000463	778300001552



FOR 2 UNITS HIGH



ADJUSTABLE




FOR 3 UNITS HIGH

DESCRIPTION	SET OF 4 BASE PLATES	SET OF 4 LEVELING JACKS	SET OF 14" OUTRIGGERS	SET OF 46" OUTRIGGERS
ASSEMBLED DIMENSIONS (W X D X H)	4.75 X 4.75 X 4.75 IN. (12 X 12 X 12 CM)	9.5 X 5.5 X 12.25 IN. (23.6 X 13.5 X 31 CM)	24 X 4.5 X 27.25 IN. (61 X 11.4 X 69.2 CM)	51.5 X 4 X 52.25 IN. (130.81 X 101.6 X 132.72 CM)
PACKAGE DIMENSIONS (W X D X H)	11 X 5.25 X 5.5 IN. (27.8 X 13.3 X 13.8 CM)	13 X 13 X 8 IN. (33.6 X 33.2 X 20.4 CM)	27 X 27 X 4 IN. (68.9 X 68.9 X 10.2 CM)	64 X 15.5 X 6 IN. (162.56 X 39.4 X 15.2 CM)
WEIGHT	10.1 LB (4.6 KG)	24.2 LB (11 KG)	32 LB (14.5 KG)	104 LB (47.3 KG)
INCLUDED IN THE BOX	4 BASE PLATES, 4 LOCKING PINS	4 LEVELING JACKS	4 OUTRIGGERS, 4 CASTERS*, 4 LOCKING PINS	4 OUTRIGGERS, 4 CASTERS*, 8 LOCKING PINS
COMPATIBLE WITH	I-CISC, I-CISCTP, I-CAISC, I-CISCPY, I-CISCH1, I-CISCAS, I-CISCDW, I-CISCMT, I-CISCWB AND I-BMSSS	I-CISC, I-CISCTP, I-CAISC, I-CISCH1, I-CISCAS, I-CISCDW, I-CISCMT, I-CISCWB AND I-BMSS	I-CAISC	I-CISC, I-CISCTP, I-CAISC, I-CISCH1, I-CISCAS, I-CISCDW, I-CISCMT, I-CISCPY AND I-BMSS
MODEL	I-IBBF4	I-IBSJP12H4	I-CAIS04	I-BMS04TT
UPC	778300001699	778300001644	778300620166	778300003792

*5 IN. (13 CM) DOUBLE LOCKING HEAVY DUTY

ALU SERIES™



GET THE METALTECH APP

BUILT TOUGH FOR SAFETY

METALTECH

ALU SERIES™ 6'

ALU SERIES™



700 lb
LOAD CAPACITY

12'
REACH

ASSEMBLED DIMENSIONS (WxDXH)	56.5 X 29 X 72 IN. (143.5 X 73.7 X 182.9 CM)
PACKAGE DIMENSIONS (WxDXH)	67.5 X 30.5 X 6.5 IN. (171.5 X 77.5 X 16.5 CM)
WEIGHT	60 LB (27 KG)
LOAD CAPACITY	700 LB (318 KG). Combined weight of user + materials
WORKING HEIGHTS	11.75 - 23.5 - 35.25 - 47 - 59 - 70.75 IN. (30 - 60 - 90 - 119 - 150 - 180 CM)
REACH	12 FT (3.7 M)
FINISH	ANODIZED ALUMINUM
PLATFORMS	3 ANTI-SLIP AIRCRAFT GRADE ALUMINUM ALLOY 6063
STRUCTURE	1.5 IN. (3.8 CM) OUTSIDE DIAMETER. AIRCRAFT GRADE ALUMINUM ALLOY 6063
CASTERS	5 IN. (13 CM) DOUBLE LOCKING HEAVY DUTY
REPLACEMENT PARTS	SEE PAGE 107
STANDARDS	ANSI, CSA AND OSHA
MODEL	I-CAIRC
UPC	778300420155

INFO



LIGHTWEIGHT
This aluminum scaffolding offers all the benefits of our steel models, but is lighter and corrosion resistant.



TRANSPORT
Use it as a cart to haul your equipment and heavy loads to and from job sites. 700 lb (318 KG) capacity.



EASY STORAGE
Folds flat for compact storage and transport

ALU SERIES™ 4'



9'
REACH

600 lb
LOAD CAPACITY

ALU SERIES™

ASSEMBLED DIMENSIONS (W X D X H)	42.25 X 22.25 X 47.75 IN. (107.3 X 56.5 X 121.4 CM)
PACKAGE DIMENSIONS (W X D X H)	43.75 X 22.5 X 4.75 IN. (111 X 57.2 X 12.1 CM)
WEIGHT	35.2 LB (16 KG)
LOAD CAPACITY	600 LB (272 KG). Combined weight of user + materials
WORKING HEIGHTS	9.5 - 21.25 - 33 IN. (24 - 54 - 84 CM)
REACH	9 FT (2.75 M)
FINISH	ANODIZED ALUMINUM
PLATFORMS	2 ANTI-SLIP. 14 GAUGE STEEL
STRUCTURE	1.2 IN. (3.05 CM) OUTSIDE DIAMETER. AIRCRAFT GRADE ALUMINUM ALLOY 6063
CASTERS	4 IN. (10 CM) DOUBLE LOCKING HEAVY DUTY
REPLACEMENT PARTS	SEE PAGE 107
STANDARDS	ANSI, CSA AND OSHA
MODEL	I-IMAC
UPC	778300100408



TRANSPORT

Use it as a cart to haul your equipment and heavy loads to and from job sites. 600 lb (272 KG) capacity.



LIGHTWEIGHT

This aluminum scaffolding offers all the benefits of our steel models, but is lighter and corrosion resistant.



EASY STORAGE

Folds flat for compact storage and transport

INFO



GET THE METALTECH APP


BUILT TOUGH FOR
SAFETY

METALTECH

INDUSTRIAL AND DRYWALL BUILDMAN™ GRADE

BuildMan™ Grade Scaffold work platforms and panel carts boast higher capacities and more stability than other brands on the market. With larger and higher capacity casters, bigger and thicker steel components and more features, BuildMan™ grade is the choice for professional and industrial users that require more stability, ease of use and larger casters to easily roll over obstacles.

- **HEAVY DUTY**
- **HIGHER CAPACITY**
- **BIGGER CASTERS**

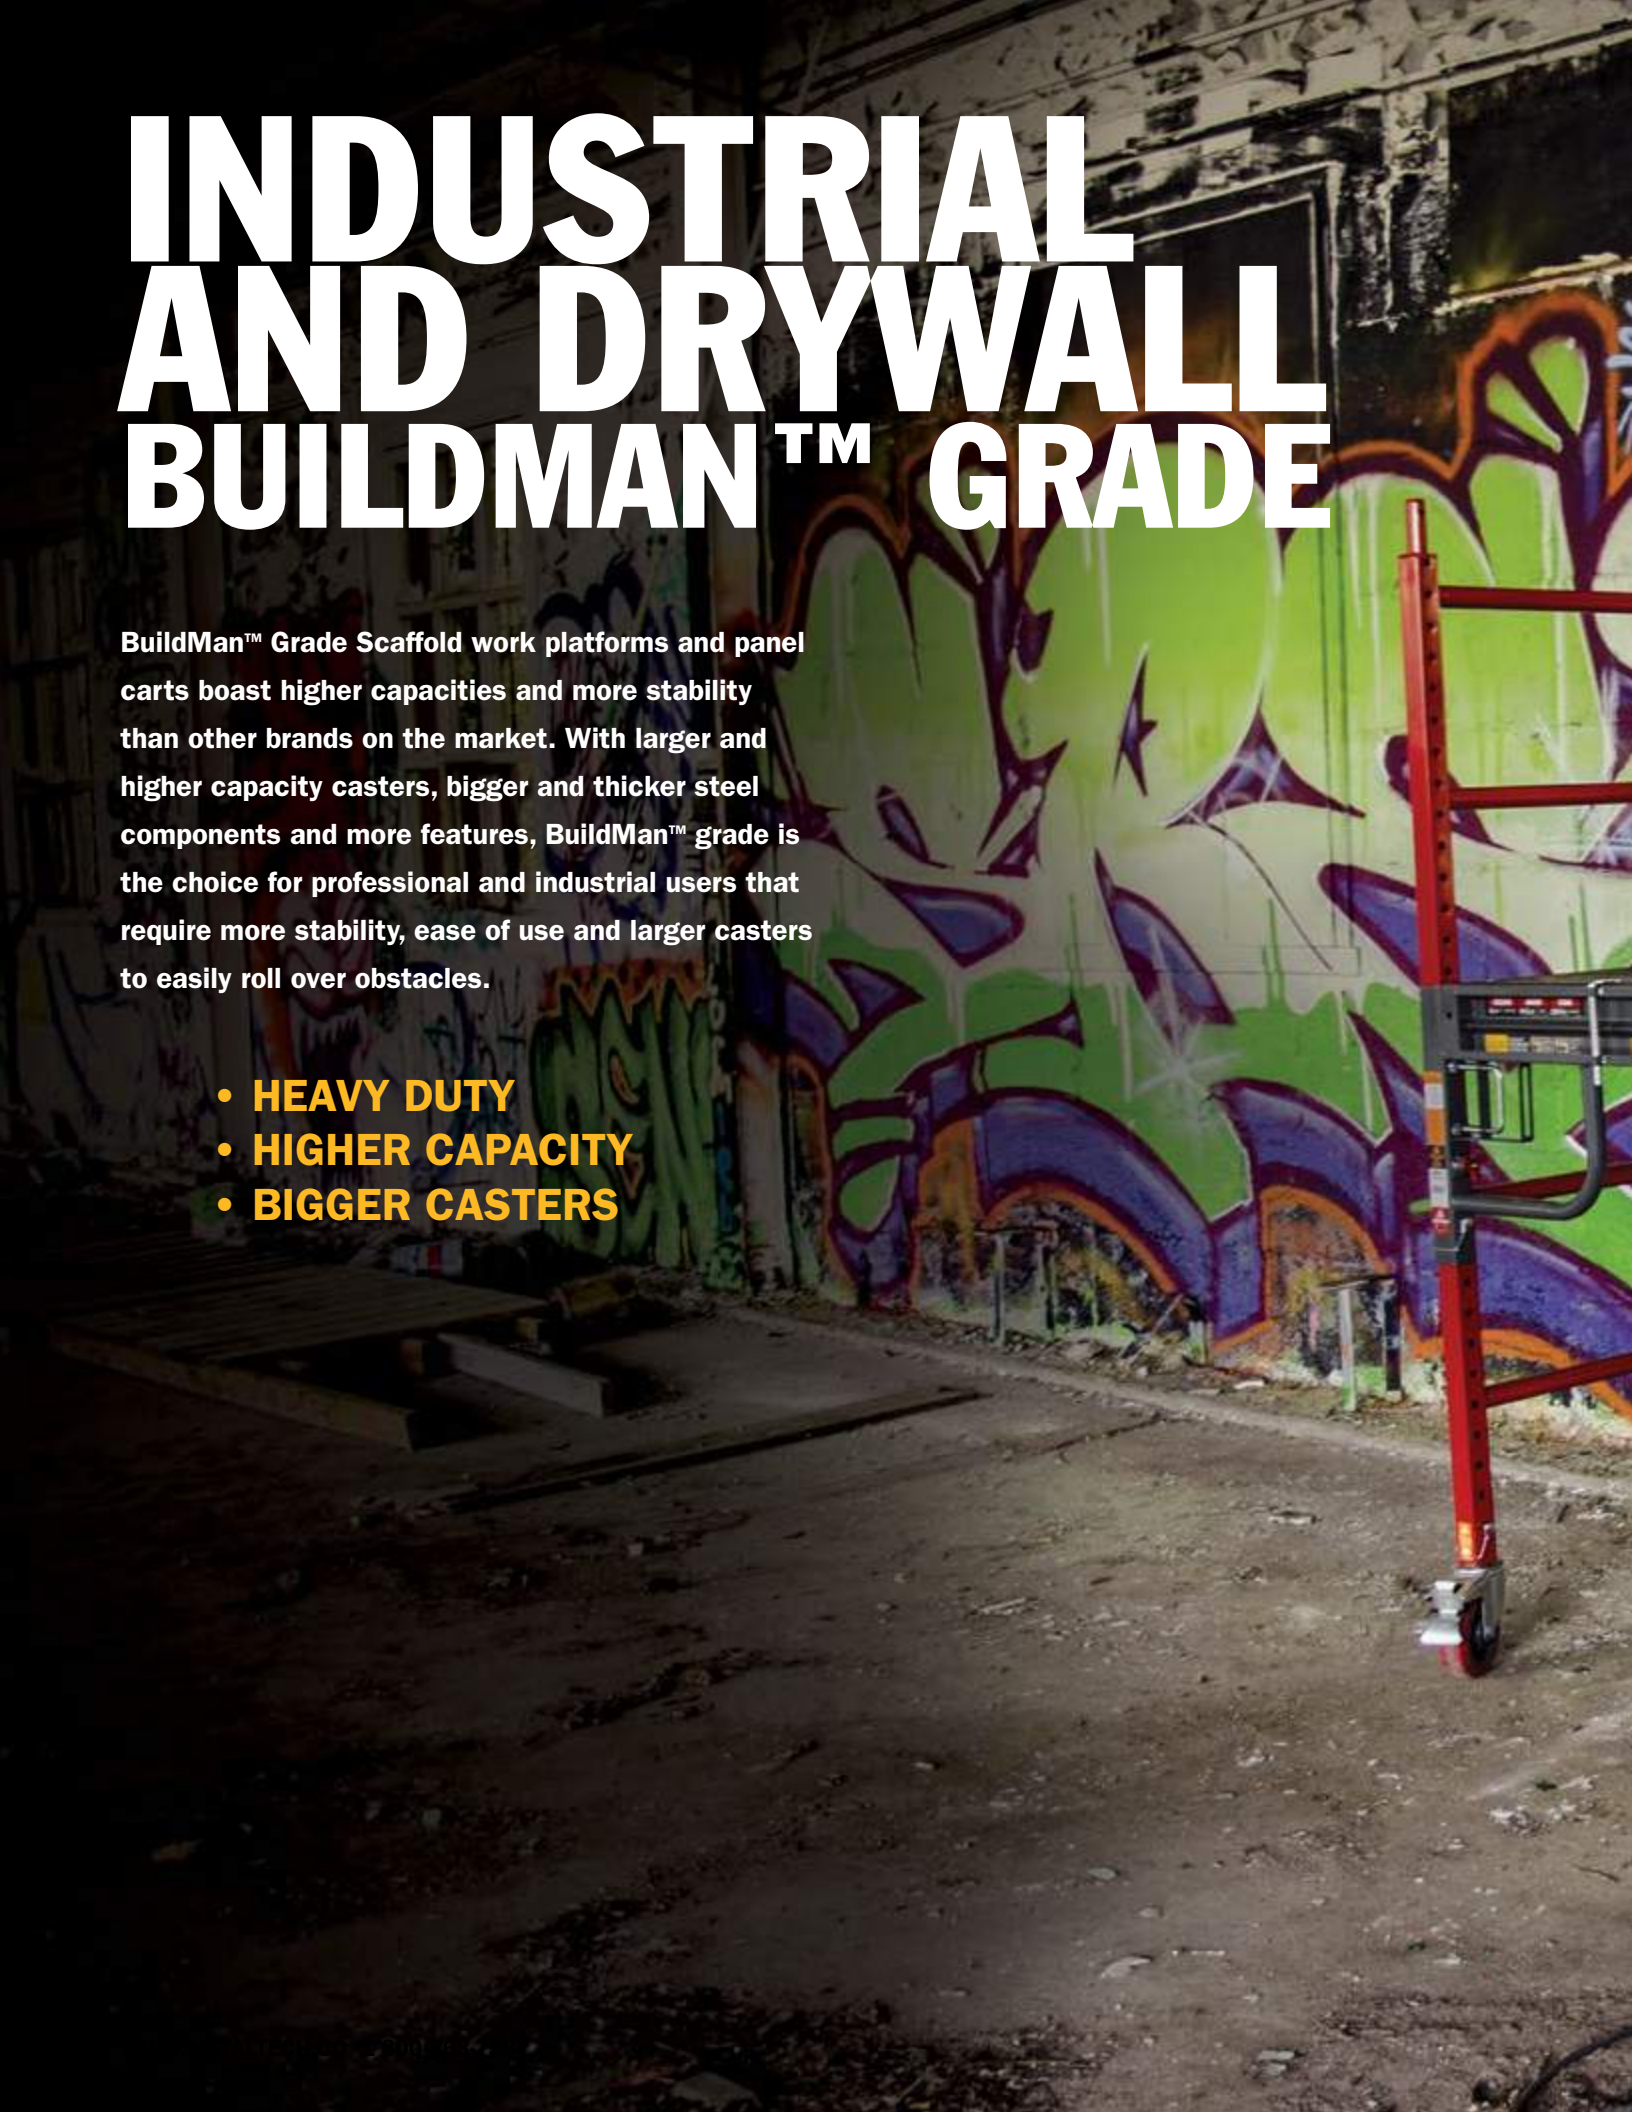




BUILDMAN™ GRADE

**BUILT TOUGH FOR
SAFETY**

METALTECH®

BUILDMAN™ 6' DRYWALL BAKER™

SAFECLIMB™
PLATFORM



INFO

MULTI PURPOSE

Suitable and safe for all types of interior work. Each end can adjust separately to be used on both level surfaces and stairways.



QUICK AND EASY HEIGHT ADJUSTMENT

Platform height adjusts at 2" (5 cm) increments from 29" to 71.5" (73.7 to 181.6 cm). Double prong spring-loaded locking mechanism.



STACKABLE UP TO 18' (5.5 M)

Easily stackable up to three units high in order to reach a range of 24' (7.4 m).

1,500 lb
LOAD CAPACITY


12'
REACH




COMPATIBLE WITH:
BILJAX, BUFFALO, WERNER,
UST AND METALTECH
BAKER*

ASSEMBLED DIMENSIONS (W X D X H)	75.75 X 31 X 76 IN. (192.4 X 78.7 X 193 CM)
PACKAGE DIMENSIONS (W X D X H)	76.25 X 34.5 X 7 IN. (193.7 X 87.6 X 17.8 CM)
WEIGHT	180 LB (81.6 KG)
LOAD CAPACITY	1,500 LB (680 KG). Combined weight of user + materials
WORKING HEIGHTS	FROM 29 TO 71.5 IN. (73.7 TO 181.6 CM). 2 in. (5 cm) increment adjustable heights
REACH	12 FT (3.7 M). Stackable up to 3 units high for 24 ft (7.4 m) reach
FINISH	POWDER COATED
PLATFORM	SLIP-RESISTANT PLYWOOD DECK WITH TRAPDOOR
STRUCTURE	1.75 IN. (4.5 CM) SQUARE TUBE. 16 GAUGE STEEL
CASTERS	6 IN. (15 CM) DOUBLE LOCKING HEAVY DUTY
REPLACEMENT PARTS	SEE PAGE 108
STANDARDS AND COMPLIANCE	ANSI, CSA AND OSHA – STATEMENT OF TSCA TITLE VI COMPLIANCE
MODEL	I-BMSS
UPC	778300100057

* All trademarks and registered trademarks listed above are the property of their respective owners.

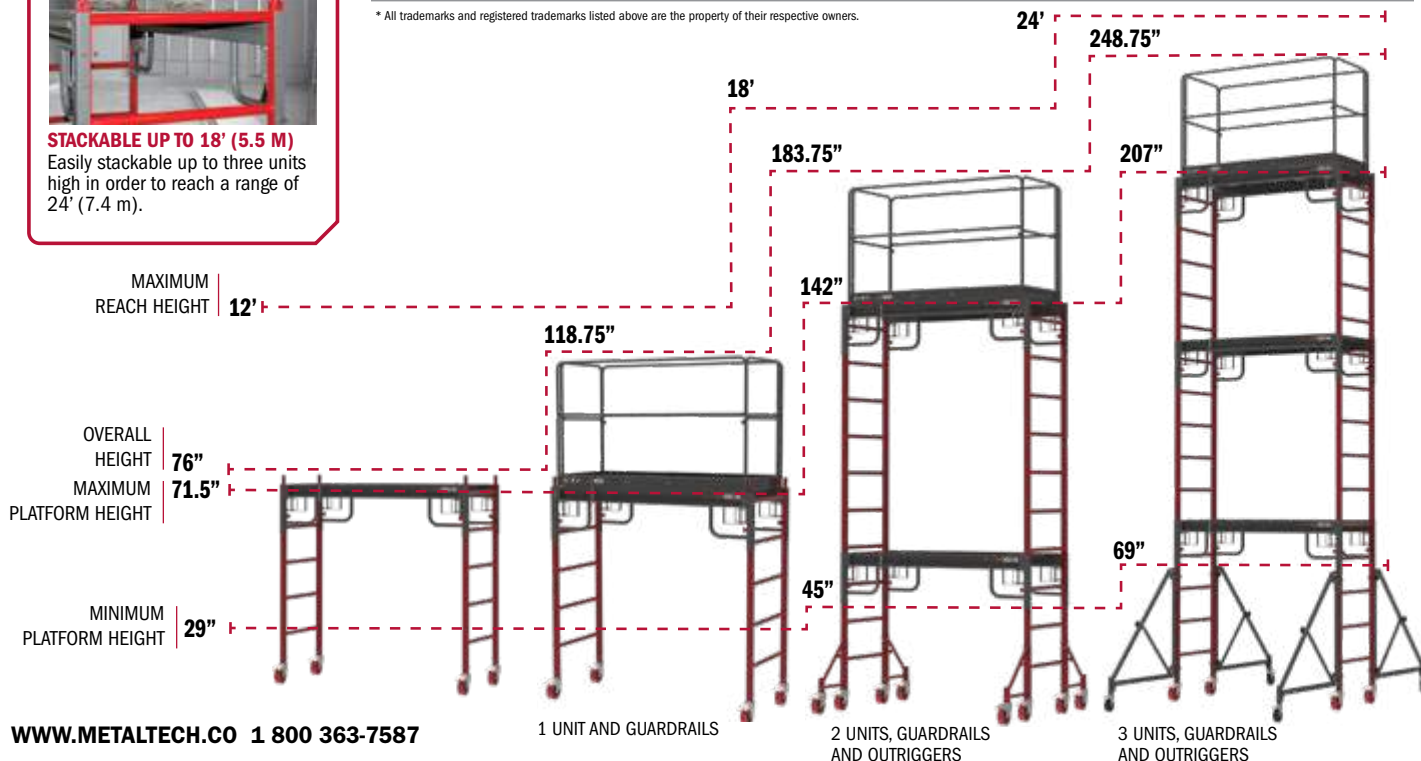



SCAFFLOCK

DESCRIPTION	GUARDRAILS SYSTEM	39" HIGH EXTENSION	SCAFFLOCK™ SAFETY BRAKES
ASSEMBLED DIMENSIONS (W X D X H)	69.75 X 29.25 X 44.5 IN. (177.2 X 74.3 X 113 CM)	74.25 X 30.75 X 39.75 IN. (188.6 X 78.1 X 101 CM)	29.25 X 7.5 X 72 IN. (74.3 X 19.2 X 188.9 CM)
PACKAGE DIMENSIONS (W X D X H)	46 X 31.25 X 4.5 IN. (116.8 X 79.4 X 11.4 CM)	78 X 34.25 X 4.5 IN. (198.1 X 87 X 11.4 CM)	36 X 5.25 X 5.25 IN. (91.4 X 13.3 X 13.3 CM)
WEIGHT	59 LB (26.8 KG)	88.8 LB (40.3 KG)	31.1 LB (14.1 KG)
INCLUDED IN THE BOX	2 GUARDRAILS WITH GATES, 4 TOGGLE PINS	2 SIDE FRAMES, 2 BRACES, 8 LOCKING PINS	2 SAFETY BRAKES
COMPATIBLE WITH	I-CISC, I-CAISC, I-CISCTP, I-CISCH1, I-CISCAS, I-CISCDW AND I-BMSS	I-CISC, I-CISCTP, I-CISCH1, I-CISCAS, I-CISCDW AND I-BMSS	I-CISC, I-CISCTP, I-CAISC, I-CISCPY, I-CISCH1, I-CISCAS, I-CISCDW AND I-BMSS
MODEL	I-BMSGRJP	I-BMSSEX	I-ISL
UPC	778300001828	778300001323	778300001552



FOR 2 UNITS HIGH




ADJUSTABLE



FOR 3 UNITS HIGH

DESCRIPTION	SET OF 4 BASE PLATES	SET OF 4 LEVELING JACKS	SET OF 14" OUTRIGGERS	SET OF 46" OUTRIGGERS
ASSEMBLED DIMENSIONS (W X D X H)	4.75 X 4.75 X 4.75 IN. (12 X 12 X 12 CM)	9.5 X 5.5 X 12.25 IN. (23.6 X 13.5 X 31 CM)	21.5 X 4 X 26.5 IN. (54.6 X 10.2 X 67.3 CM)	51.5 X 4 X 52.25 IN. (130.81 X 101.6 X 132.72 CM)
PACKAGE DIMENSIONS (W X D X H)	11 X 5.25 X 5.5 IN. (27.8 X 13.3 X 13.8 CM)	13 X 13 X 8 IN. (33.6 X 33.2 X 20.4 CM)	23.5 X 16.75 X 8.25 IN. (59.7 X 42.5 X 21 CM)	64 X 15.5 X 6 IN. (162.56 X 39.4 X 15.2 CM)
WEIGHT	10.1 LB (4.6 KG)	24.2 LB (11 KG)	52 LB (23.6 KG)	104 LB (47.3 KG)
INCLUDED IN THE BOX	4 BASE PLATES, 4 LOCKING PINS	4 LEVELING JACKS	4 OUTRIGGERS, 4 CASTERS*, 12 LOCKING PINS	4 OUTRIGGERS, 4 CASTERS*, 8 LOCKING PINS
COMPATIBLE WITH	I-CISC, I-CISCTP, I-CAISC, I-CISCPY, I-CISCWB, I-CISCH1, I-CISCAS, I-CISCDW AND I-BMSS	I-CISC, I-CISCTP, I-CAISC, I-CISCH1, I-CISCWB, I-CISCAS, I-CISCDW AND I-BMSS	I-BMSS	I-CISC, I-CISCTP, I-CAISC, I-CISCH1, I-CISCAS, I-CISCDW, I-CISCTP, I-CISCPY AND I-BMSS
MODEL	I-IBBF4	I-IBSJP12H4	I-BMS04	I-BMS04TT
UPC	778300001699	778300001644	778300100262	778300003792

*5 IN. (13 CM) DOUBLE LOCKING HEAVY DUTY



BUILDMAN™ 6'

BUILDMAN™
GRADE



1,000 lb
LOAD CAPACITY

12'
REACH

ASSEMBLED DIMENSIONS (WxDXH)	59.25 X 30 X 74 IN. (150.5 X 76.2 X 188 CM)
PACKAGE DIMENSIONS (WxDXH)	70 X 31.25 X 6 IN. (177.8 X 79.4 X 15.2 CM)
WEIGHT	115 LB (52.3 KG)
LOAD CAPACITY	1,000 LB (454 KG) Combined weight of user + materials. Large platforms: MAX. 375 lb (170 kg) / Small platform: MAX. 250 lb (113 kg)
WORKING HEIGHTS	11.75 - 23.75 - 35.75 - 47.75 - 59.75 - 71.75 PO (29.9 - 60.3 - 90.8 - 121.3 - 151.8 - 182.3 CM)
REACH	12 FT (3.7 M). Stackable up to 2 units high for 18 ft (5.5 m) reach
FINISH	POWDER COATED
PLATFORMS	3 ANTI-SLIP. 14 GAUGE STEEL
STRUCTURE	1.5 IN. (3.8 CM) ROUND TUBE. 16 GAUGE STEEL
REPLACEMENT PARTS	SEE PAGE 108
CASTERS	5 IN. (13 CM) DOUBLE LOCKING HEAVY DUTY
STANDARDS	ANSI, CSA AND OSHA
MODEL	I-BM6S
UPC	778300100064

INFO



TWO-MINUTE ASSEMBLY
No tools required.



EASY STORAGE
Folds flat for compact storage and transport



TRANSPORT
Use it as a cart to haul your equipment and heavy loads to and from job sites. 1,000 lb (454 kg) capacity.

OPTIONS




BUILDMAN™ GUARDRAILS AND OUTRIGGERS COMPLETE SYSTEM

PACKAGE DIMENSIONS (W X D X H)	55.5 X 43.5 X 3.5 IN. (140.5 X 110.5 X 9 CM)
WEIGHT	114.6 LB (52 KG)
INCLUDED IN THE BOX	2 GUARDRAIL PANELS, 4 OUTRIGGERS, 4 CASTERS, 4 COUPLING PINS, 20 LOCKING PINS, 8 KNOBS, 4 PIG TAILS
COMPATIBLE WITH	I-BM6S
STANDARDS	ANSI, CSA AND OSHA
MODEL	I-BM6SK
UPC	778300100361

DESCRIPTION	GUARDRAILS SYSTEM
ASSEMBLED DIMENSIONS (W X D X H)	54.5 X 23.5 X 42 IN. (138.4 X 59.4 X 107 CM)
PACKAGE DIMENSIONS (W X D X H)	55.5 X 43.5 X 2.75 IN. (140.5 X 110.5 X 6.9 CM)
WEIGHT	43.2 LB (19.6 KG)
MODEL	I-BM6GR
UPC	778300100491

DESCRIPTION	SET OF 4 OUTRIGGERS WITH CASTERS
ASSEMBLED DIMENSIONS (W X D X H)	21.25 X 4 X 23.75 IN. (54 X 10.2 X 60.1 CM)
PACKAGE DIMENSIONS (W X D X H)	22.75 X 19.75 X 6 IN. (57.6 X 50.2 X 15.5 CM)
WEIGHT	52 LB (23.6 KG)
CASTERS	5 IN. (13 CM) DOUBLE LOCKING HEAVY DUTY
MODEL	I-BM604
UPC	778300100477

DESCRIPTION	SET OF 4 COUPLING PINS
ASSEMBLED DIMENSIONS (H X DIAM.)	6.5 X 2 IN. (16.5 X 5.1 CM)
PACKAGE DIMENSIONS (W X D X H)	11 X 6.5 X 2.5 IN. (28 X 16 X 6.5 CM)
WEIGHT	7.2 LB (3.3 KG)
MODEL	I-BM6C4
UPC	778300100538

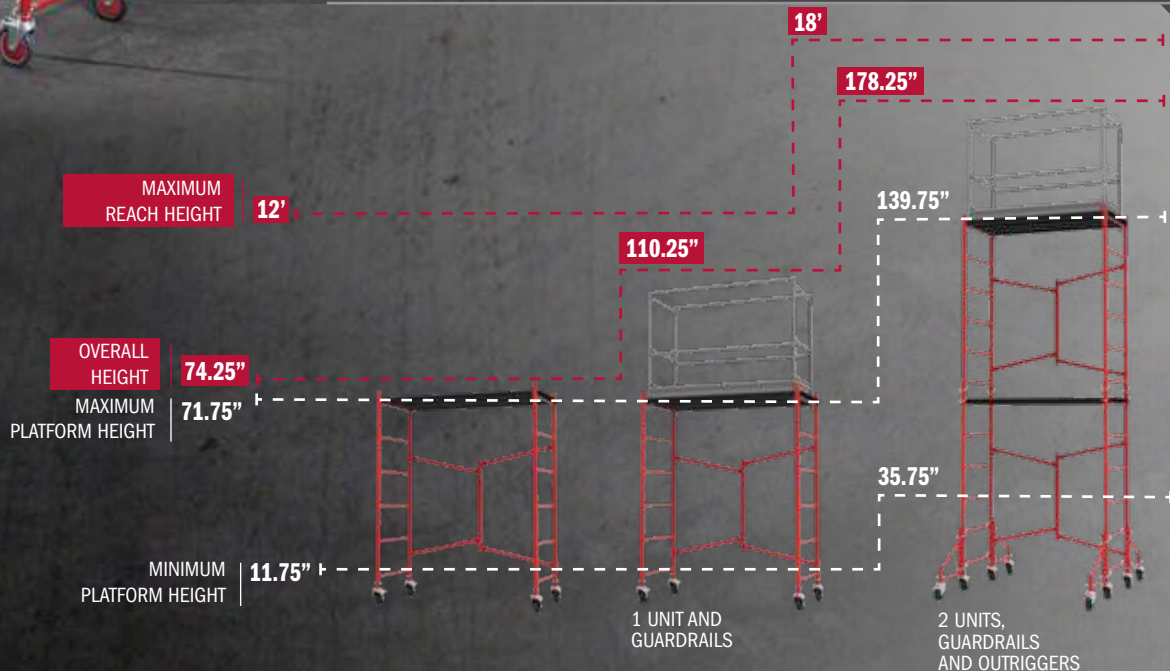

BUILDMAN™ GRADE



GET THE METALTECH APP



BUILDMAN™ 4'

BUILDMAN™
GRADE



FOLD AWAY TOOL SHELF




750 lb
LOAD CAPACITY

9'
REACH

ASSEMBLED DIMENSIONS (WxDxH)	50.5 X 23.75 X 61.5 IN. (128.3 X 60.3 X 156.2 CM)
PACKAGE DIMENSIONS (WxDxH)	44 X 23.25 X 6.25 IN. (111.8 X 59 X 15.9 CM)
WEIGHT	69 LB (31.3 KG)
LOAD CAPACITY	750 LB (340 KG) Combined weight of user + materials. 450 lb (204 kg) per platform
WORKING HEIGHTS	10 - 21.5 - 33 IN. (25 - 55 - 84 CM)
REACH	9 FT (2.75 M)
FINISH	POWDER COATED
PLATFORMS	2 ANTI-SLIP. 14 GAUGE STEEL
STRUCTURE	1.25 IN. (3.2 CM) OUTSIDE DIAMETER. 16 GAUGE STEEL
REPLACEMENT PARTS	SEE PAGE 108
CASTERS	5 IN. (13 CM) DOUBLE LOCKING HEAVY DUTY
STANDARDS	ANSI, CSA AND OSHA
MODEL	I-BM4S
UPC	778300100040

INFO

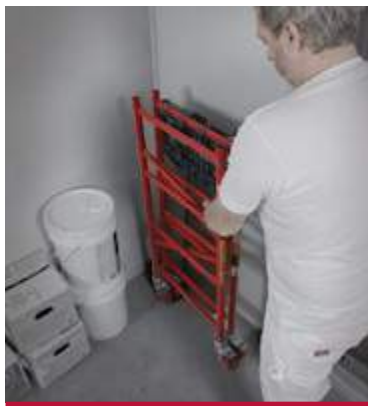

EASY STORAGE
Folds flat for compact storage and transport



TOOL SHELF & SAFETY RAIL
Safety rail to hold on to, for stability. Convenient fold away tool shelf for paint can, bucket, screws, nails and tools.



TRANSPORT
Use it as a cart to haul your equipment and heavy loads to and from job sites. 750 lb (340 kg) capacity.

JAWCLAW™ PANEL GRIPPER & WALL HAULER™ SERIES H


200 lb
LOAD CAPACITY



DESCRIPTION	JAWCLAW™ PANEL GRIPPER
GRIPPER CLAMP	ADJUSTS TO PANEL UP TO 1-1/8 IN.
MATERIAL	AIRCRAFT GRADE ALUMINUM AND ABS POLYMER
WEIGHT	1.95 LB (0.88 KG)
LOAD CAPACITY	200 LB (90.7 KG)
MODEL	I-JC
UPC	778300003297



ONE HAND; 2 SHEETS



EASY ON YOUR BACK

INFO

BUILDMAN™ GRADE

3,000 lb
LOAD CAPACITY



DESCRIPTION	WALL HAULER™ SERIES H
ASSEMBLED DIMENSIONS (W X D X H)	50.75 X 27.25 X 45.75 IN. (128.9 X 69.2 X 116.2 CM)
PACKAGE DIMENSIONS (W X D X H)	50.75 X 27.25 X 6.75 IN. (128.9 X 69.2 X 17.1 CM)
PLATFORM DIMENSIONS	15.5 X 48 IN. (39.4 X 121.9 CM). Can carry up to 24 gypsum boards of 1/2 in. (13 mm).
WEIGHT	87 LB (39.5 KG)
LOAD CAPACITY	3,000 LB (1,361 KG)
FINISH	POWDER COATED
CASTERS	8 IN. (20 CM). 4 SWIVEL CASTERS, 1 DIRECTIONAL LOCK AND 1 CASTER BRAKE
HANDLE BAR	2 IN. (5 CM) OUTSIDE DIAMETER. 9 GAUGE STEEL
REPLACEMENT PARTS	SEE PAGE 108

INFO



KINGPINLESS




POLYURETHANE CASTER



PHENOLIC CASTER

MODELS	UPC	CASTERS		
		POLYURETHANE*	PHENOLIC	KINGPINLESS
I-BMDHER31YGR	778300000548	•		
I-BMDHER31YGP	778300002832		•	
I-BMDHER31YGRK	778300002849	•		•
I-BMDHER31YGPK	778300002856		•	•

*POLYPROPYLENE CORE



GET THE METALTECH APP



WALL HAULER™

SERIES 2000 DRYWALL CART

RESIDENTIAL WELDED



INFO



KINGPINLESS



POLYURETHANE CASTER



PHENOLIC CASTER

3,000 lb
LOAD CAPACITY

ASSEMBLED DIMENSIONS (W X D X H)	38 X 19.75 X 44.5 IN. (96.5 X 48.3 X 113 CM)
PACKAGE DIMENSIONS (W X D X H)	38 X 19.75 X 34.25 IN. (96.5 X 48.3 X 87 CM)
PLATFORM DIMENSIONS	10.5 X 38 IN. (26.7 X 96.5 CM). Can carry up to 20 gypsum boards of 1/2 in. (13 mm).
WEIGHT	81.5 LB (37 KG)
LOAD CAPACITY	3,000 LB (1,361 KG)
FINISH	POWDER COATED
CASTERS	8 IN. (20 CM). 4 SWIVEL CASTERS, 1 DIRECTIONAL LOCK AND 1 CASTER BRAKE
HANDLE BAR	1.125 IN. (2.9 CM) OUTSIDE DIAMETER. 13 GAUGE STEEL
SLIDING COATING	STANDARD
REPLACEMENT PARTS	SEE PAGE 108

YELLOW COLOR		CASTERS		
MODELS	UPC	POLYURETHANE*	PHENOLIC	KINGPINLESS
I-BMD2131YGR	778300000098	•		
I-BMD2131YGP	778300002771		•	
I-BMD2131YGRK	778300002788	•		•
I-BMD2131YGPK	778300002795		•	•

RED COLOR		CASTERS		
MODELS	UPC	POLYURETHANE*	PHENOLIC	KINGPINLESS
I-BMD2131R	778300100354	•		
I-BMD2131P	778300002801		•	
I-BMD2131RK	778300002818	•		•
I-BMD2131PK	778300002825		•	•

*POLYPROPYLENE CORE

INFO



SLIDING COATING

Sliding coating protects the surface against abrasion.



HIGH CAPACITY CASTERS

Four 8 in. (20 cm) high capacity casters for ease of movement in straight lines.

WALL HAULER™ SERIES 2000 DRYWALL CART RESIDENTIAL WELDED



2,000 lb
LOAD CAPACITY

INFO



KINGPINLESS



POLYURETHANE CASTER



PHENOLIC CASTER

ASSEMBLED DIMENSIONS (W X D X H)	40 X 16.75 X 44.25 IN. (101.6 X 42.6 X 112.4 CM)
PACKAGE DIMENSIONS (W X D X H)	40 X 16.75 X 34 IN. (101.6 X 42.6 X 86.4 CM)
PLATFORM DIMENSIONS	9.5 X 40 IN. (24.1 X 101.6 CM). Can carry up to 19 gypsum boards of 1/2 in. (13 mm).
WEIGHT	70.3 LB (37 KG)
LOAD CAPACITY	2,000 LB (907 KG)
FINISH	POWDER COATED
CASTERS	8 IN. (20 CM), 4 SWIVEL CASTERS, 1 DIRECTIONAL LOCK AND 1 CASTER BRAKE
HANDLE BAR	1.125 IN. (2.9 CM) OUTSIDE DIAMETER, 13 GAUGE STEEL
SLIDING COATING	STANDARD
REPLACEMENT PARTS	SEE PAGE 108

MODELS	UPC	CASTERS		
		POLYURETHANE*	PHENOLIC	KINGPINLESS
I-BMD1931YGR	778300004201	•		
I-BMD1931YGP	N/A		•	
I-BMD1931YGRK	N/A	•		•
I-BMD1931YGPK	N/A		•	•

*POLYPROPYLENE CORE

BUILDMAN™ GRADE



BOOM TRUCK

Perfectly sized to carry on a boom truck



SLIDING COATING


Sliding coating protects the surface against abrasion.



HIGH CAPACITY CASTERS

Four 8 in. (20 cm) high capacity casters for ease of movement in straight lines.

INFO



GET THE METALTECH APP




WALL HAULER™

SERIES 3000 DRYWALL CART

PERMAQUICK™



3,000 lb
LOAD CAPACITY

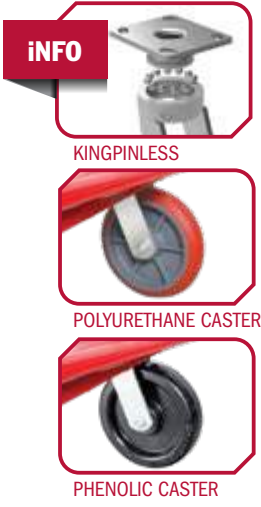

INFO

KINGPINLESS

POLYURETHANE CASTER

PHENOLIC CASTER

ASSEMBLED DIMENSIONS (WxDxH)	43.5 X 24 X 48.75 IN. (110.5 X 61 X 123.8 CM)
PACKAGE DIMENSIONS (WxDxH)	45 X 37.75 X 6.25 IN. (114.3 X 95.9 X 15.9 CM)
PLATFORM DIMENSIONS	12 X 42 IN. (30.5 X 106.7 CM). Can carry up to 24 gypsum boards of 1/2 in. (13 mm).
WEIGHT	107.8 LB (48.9 KG)
LOAD CAPACITY	3,000 LB (1,361 KG)
FINISH	POWDER COATED
CASTERS	8 IN. (20 CM). 4 SWIVEL CASTERS, 1 DIRECTIONAL LOCK AND 1 CASTER BRAKE
HANDLE BAR	1.25 IN. (3.2 CM) OUTSIDE DIAMETER. 14 GAUGE STEEL
OPTION	SLIDING COATING, PROTECTS THE SURFACE AGAINST ABRASION (MODEL: I-BMDSP)
REPLACEMENT PARTS	SEE PAGE 108

MODELS	UPC	CASTERS		
		POLYURETHANE*	PHENOLIC	KINGPINLESS
I-BMD3031R	778300100071	•		
I-BMD3031P	778300100194		•	
I-BMD3031RK	778300100255	•		•
I-BMD3031PK	778300100316		•	•

*POLYPROPYLENE CORE

BUILDMAN™
GRADE

INFO



HIGH CAPACITY CASTERS

Four 8 in. (20 cm) high capacity casters for ease of movement in straight lines.



**AS TOUGH
AS WELDED**

PERMAQUICK CONNECT™

PermaQuick Connect™ handle system, once assembled, it is as strong as welded.



OPTION (I-BMDSP)

SLIDING COATING


Optional sliding coating protects the surface against abrasion.

WALL HAULER™ SERIES 3000 DRYWALL CART WELDED



3,000 lb
LOAD CAPACITY

BUILDMAN™ GRADE

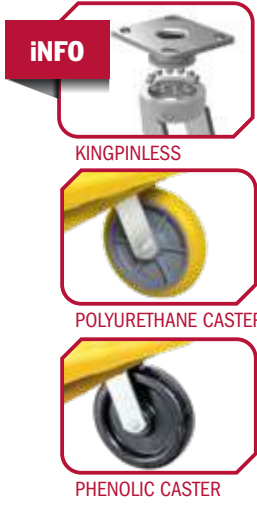

KINGPINLESS
POLYURETHANE CASTER
PHENOLIC CASTER

ASSEMBLED DIMENSIONS (W X D X H)	49.25 X 22.25 X 48.5 IN. (125.1 X 56.5 X 123.2 CM)
PACKAGE DIMENSIONS (W X D X H)	49.25 X 22.25 X 38.25 IN. (125.1 X 56.5 X 97.2 CM)
PLATFORM DIMENSIONS	11.5 X 42 IN. (29.2 X 106.7 CM). Can carry up to 22 gypsum boards of 1/2 in. (13 mm).
WEIGHT	80 LB (36.3 KG)
LOAD CAPACITY	3,000 LB (1,361 KG)
FINISH	POWDER COATED
CASTERS	8 IN. (20 CM), 4 SWIVEL CASTERS, 1 DIRECTIONAL LOCK AND 1 CASTER BRAKE
HANDLE BAR	1.25 IN. (3.2 CM) OUTSIDE DIAMETER, 14 GAUGE STEEL
OPTION	SLIDING COATING, PROTECTS THE SURFACE AGAINST ABRASION (MODEL: I-BMDSP)
REPLACEMENT PARTS	SEE PAGE 108


MODELS	UPC	CASTERS		
		POLYURETHANE*	PHENOLIC	KINGPINLESS
I-BMD3131YGR	778300000104	•		
I-BMD3131YGP	778300002719		•	
I-BMD3131YGRK	778300002726	•		•
I-BMD3131YGPK	778300002733		•	•

*POLYPROPYLENE CORE

OPTION (I-BMDSP)

SLIDING COATING
Optional sliding coating protects the surface against abrasion.


HIGH CAPACITY CASTERS
Four 8 in. (20 cm) high capacity casters for ease of movement in straight lines.



WALL HAULER™

SERIES 3600 DRYWALL CART

REMOVABLE HANDLE

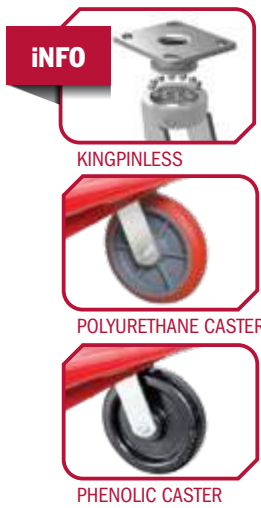

3,600 lb
LOAD CAPACITY

BUILDMAN™ GRADE

ASSEMBLED DIMENSIONS (W X D X H)	44.25 X 22 X 47.25 IN. (112.4 X 55.9 X 120 CM)
PACKAGE DIMENSIONS (W X D X H)	46.25 X 38.75 X 4.75 IN. (117.5 X 98.4 X 12.1 CM)
PLATFORM DIMENSIONS	11.5 X 44.25 IN. (29.2 X 112.4 CM). Can carry up to 22 gypsum boards of 1/2 in. (13 mm).
WEIGHT	90 LB (40.8 KG)
LOAD CAPACITY	3,600 LB (1,633 KG)
FINISH	POWDER COATED
CASTERS	8 IN. (20 CM). 4 SWIVEL CASTERS, 1 DIRECTIONAL LOCK AND 1 CASTER BRAKE
HANDLE BAR	1.65 IN. (4.2 CM) OUTSIDE DIAMETER. 13 GAUGE STEEL
OPTION	SLIDING COATING, PROTECTS THE SURFACE AGAINST ABRASION (MODEL: I-BMDSP)
REPLACEMENT PARTS	SEE PAGE 108

MODELS	UPC	CASTERS		
		POLYURETHANE*	PHENOLIC	KINGPINLESS
I-BMD3631R	778300100170	•		
I-BMD3631P	778300100002		•	
I-BMD3631RK	778300100187	•		•
I-BMD3631PK	778300100096		•	•

*POLYPROPYLENE CORE

INFO



HIGH CAPACITY CASTERS
Four 8 in. (20 cm) high capacity casters for ease of movement in straight lines.



REMOVABLE HANDLE
With its removable support handle, it can easily be transported and stored flat.



FLAT CART
Can also be used as a flat cart to carry bulky loads.

WALL HAULER™ SERIES 4000 DRYWALL CART COMMERCIAL WELDED



3,600 lb
LOAD CAPACITY

ASSEMBLED DIMENSIONS (W X D X H)	60 X 29.5 X 48 IN. (152.4 X 74.9 X 121.9 CM)
PACKAGE DIMENSIONS (W X D X H)	60 X 29.5 X 37.75 IN. (152.4 X 74.9 X 95.9 CM)
PLATFORM DIMENSIONS	19 X 50 IN. (48.2 X 127 CM). Can carry up to 36 gypsum boards of 1/2 in. (13 mm).
WEIGHT	151 LB (68.5 KG)
LOAD CAPACITY	3,600 LB (1,633 KG)
FINISH	POWDER COATED
CASTERS	8 IN. (20 CM) - 4 SWIVEL CASTERS WITH STEEL CORE, 1 DIRECTIONAL LOCK AND 1 CASTER BRAKE
HANDLE BAR	1.5 IN. (3.8 CM) OUTSIDE DIAMETER. 13 GAUGE STEEL
REPLACEMENT PARTS	SEE PAGE 108

MODELS	UPC	CASTERS	
		POLYURETHANE*	KINGPINLESS
I-BMD4031YGR	778300004218	•	
I-BMD4031YGP	N/A	•	•

*STEEL CORE

BUILDMAN™ GRADE



EXTRA LARGE DECK
Ideal for oversized loads.



HIGH CAPACITY CASTERS
Four 8 in. (20 cm) high capacity casters with steel core.

INFO



BUILT TOUGH FOR SAFETY

METALTECH

BUILDMAN™ DRYWALL & PANEL HOIST

BUILDMAN™
GRADE



INFO

CRADLE TILTS

Cradle tilts for sloped ceiling or vertical wall installations. 37" (94 cm) loading height.



CASTERS

Three 6" (15 cm) double lock heavy duty swivel casters.



FAST ACTION WINCH

Fast action single stage winch with silent cam lock brake.

200 lb
LOAD CAPACITY

14'-5"
MAX HEIGHT

ASSEMBLED DIMENSIONS (W X D X H)	60.25 X 48.75 X 58.25 IN. (153.3 X 124.1 X 148.1 CM)
PACKAGE DIMENSIONS (W X D X H)	BOX ONE: 49.5 X 14.25 X 7 IN. (125.9 X 36.3 X 17.5 CM) BOX TWO: 50.5 X 21.25 X 6 IN. (128.4 X 54.2 X 15.5 CM)
WEIGHT	146.6 LB (66.6 KG)
LOAD CAPACITY	200 lb (90.7 kg)
MAXIMUM HEIGHT	14 FT 5 IN. (4.39 M)
LOADING HEIGHT	37 IN. (94 CM)
MAXIMUM PANEL SIZE	4 X 16 FT (1.22 X 4.87 M)
CHAINS	COMMERCIAL GRADE
CASTERS	6 IN. (15 CM) DOUBLE LOCKING HEAVY DUTY.
REPLACEMENT PARTS	SEE PAGE 108
MODEL	I-BMDPL
UPC	778300002078

INFO

* Made-to-order. The product is currently not a stocked item.



DESCRIPTION	STORAGE & TRANSPORT CART*	DESCRIPTION	PANEL HOIST WITH TRANSPORT CART*
DIMENSIONS	23.25 X 18.75 X 47.75 IN. (59.1 X 47.6 X 121.9 CM)	DIMENSIONS	48.75 X 26.25 X 28.5 IN. (123.8 X 64.1 X 72.4 CM)
WEIGHT	48.6 LB (22.1 KG)	WEIGHT	195.1 LB (88.5 KG)
FINISH	POWDER COATED	FINISH	POWDER COATED
COMPATIBLE	I-IDPL, I-BMDPL	INCLUDED	I-BMDPL, I-SCDPL
MODEL	I-SCDPL	MODEL	I-BMDPLK
UPC	778300003723	UPC	778300003778

BUILDMAN™ DRYWALL STILTS

BUILDMAN™ GRADE

225 lb
LOAD CAPACITY



	18-30 IN. DRYWALL STILTS	24-40 IN. DRYWALL STILTS
ASSEMBLED DIMENSIONS (1 STILT) (WXDXH)	12.5 X 6 X 38 IN. (31.8 X 15.2 X 96.5 CM)	12.5 X 6 X 44 IN. (31.8 X 15.2 X 111.8 CM)
PACKAGE DIMENSIONS (2 STILTS) (WXDXH)	13.25 X 8 X 25 IN. (33.7 X 20.3 X 63.5 CM)	13.25 X 8 X 31 IN. (33.7 X 20.3 X 63.5 CM)
ADJUSTABLE HEIGHTS	18 UP TO 30 IN. (46 up to 76 cm) 2 in. (5 cm) increment adjustable heights.	24 UP TO 40 IN. (61 cm up to 1.02 m) 2 in. (5 cm) increment adjustable heights.
MAXIMUM REACH*	9 FT 3 IN. (2.82 M)	10 FT (3.5 M)
MATERIAL	ANODIZED ALUMINUM	ANODIZED ALUMINUM
WEIGHT (1 STILT)	7.1 LB (3.2 KG)	8.1 LB (3.7 KG)
LOAD CAPACITY	225 LB (102 KG)	225 LB (102 KG)
REPLACEMENT PARTS	SEE PAGE 108	SEE PAGE 108
MODEL	I-BMDS1830	I-BMDS2440
UPC	778300001989	778300001996

*Calculated with a 5'9" (1.75 m) person with a vertical 12" (30 cm) reach



ADJUSTABLE
Adjustable heights.




DUAL SPRING ACTION
For more flexibility and natural walking feel



CONTACT GRIP
One piece rubber outsole

INFO



BUILT TOUGH FOR
SAFETY

METALTECH

BUILDMAN™ 18"-30" DRYWALL BENCH



500 lb
LOAD CAPACITY

9'-3"
REACH

BUILDMAN™
GRADE

OPEN BENCH (W X D X H)	48 X 17.5 X 18 UP TO 30 IN. (121.9 X 44.5 X 46 UP TO 76 CM)
CLOSED BENCH (W X D X H)	48 X 17.5 X 6.25 IN. (121.9 X 44.5 X 15.9 CM)
PACKAGE DIMENSIONS (W X D X H)	16.5 X 7 X 49.25 IN. (42 X 18 X 125 CM)
WORK SURFACE (W X D)	48 X 9.5 IN. (121.9 X 24.1 CM)
WORKING HEIGHT	18 up to 30 in. (46 up to 76 cm) 2 in. (5 cm) increment adjustable heights.
MAXIMUM REACH*	9 FT 3 IN. (2.82 M)
MATERIAL	ALUMINUM 6061-T6
WEIGHT	29.3 LB (13.3 KG)
LOAD CAPACITY	500 LB (227 KG)
REPLACEMENT PARTS	SEE PAGE 108
MODEL	I-BMDWB18
UPC	778300002009

*Calculated with a 5'9" (1.75 m) person with a vertical 12" (30 cm) reach

INFO



ADJUSTABLE
18" to 30" (46 to 76 CM) adjustable heights. Auto-locking system with lock indicator device



STEP-UP
Extra-wide step-up



FOOTING
Anti-slip heavy-duty footing

BUILDMAN™ WORK STAND



300 lb
LOAD CAPACITY



300 lb
LOAD CAPACITY

DESCRIPTION	2' ALUMINUM WORK STAND	3' ALUMINUM WORK STAND
OPEN DIMENSIONS (WxDxH)	26.25 X 28.25 X 23.75 IN. (66.5 X 71.9 X 60.1 CM)	27.25 X 36.25 X 35 IN. (69.5 X 91.9 X 89.2 CM)
CLOSED DIMENSIONS (WxDxH)	26.25 X 11.5 X 27.5 IN. (66.5 X 29 X 69.8 CM)	27.25 X 11.5 X 39.5 IN. (69.5 X 29.4 X 100.5 CM)
DECK DIMENSIONS (WxD)	23.75 X 12.25 IN. (60.3 X 31.1 CM)	23.75 X 12.25 IN. (60.3 X 31.1 CM)
LOAD CAPACITY	300 LB (136 KG)	300 LB (136 KG)
WEIGHT	13.2 LB (6 KG)	17.4 LB (7.9 KG)
MATERIAL	ALUMINUM	ALUMINUM
MODEL	E-PWS7000AL	E-PWS7100AL
UPC	778300002030	778300002047




300 lb
LOAD CAPACITY



300 lb
LOAD CAPACITY

DESCRIPTION	4' ALUMINUM WORK STAND	5' ALUMINUM WORK STAND
OPEN DIMENSIONS (WxDxH)	28.5 X 45 X 46.5 IN. (72.4 X 114.5 X 118 CM)	29.5 X 53.5 X 58 IN. (75.1 X 135.8 X 147.3 CM)
CLOSED DIMENSIONS (WxDxH)	28.5 X 11.75 X 51.75 IN. (72.4 X 29.6 X 131.5 CM)	29.5 X 11.75 X 64 IN. (75.1 X 29.7 X 162.4 CM)
DECK DIMENSIONS (WxD)	23.75 X 12.25 IN. (60.3 X 31.1 CM)	23.75 X 12.25 IN. (60.3 X 31.1 CM)
LOAD CAPACITY	300 LB (136 KG)	300 LB (136 KG)
WEIGHT	21.9 LB (9.9 KG)	26 LB (11.8 KG)
MATERIAL	ALUMINUM	ALUMINUM
MODEL	E-PWS7200AL	E-PWS7300AL
UPC	778300002054	778300000494

BUILDMAN™ GRADE



ALUMINUM SCAFFOLDING



Metaltech's Aluminum scaffolds are our lightest range of scaffolding. It is a high strength system, designed for quick and easy assembly. The Aluminum is a flexible and low maintenance solution used for all jobsites work. Our Span 300 and 400 towers are available in narrow and wide width and in heights ranging from 6' to 41'. They are compatible with Instant Upright, Alufase and Vault scaffolding.†

- **LIGHT WEIGHT**
- **HIGH STRENGTH SYSTEM**
- **QUICK & EASY ASSEMBLY**
- **HIGH DURABILITY**
- **HIGHLY VERSATILE**

†All trademarks and registered trademarks listed above are the property of their respective owners.



ALUMINUM SCAFFOLDING

**BUILT TOUGH FOR
SAFETY**

METALTECH®

ALUMINUM TOWER SPAN 300 KITS

INFO

Compatible with Instant Upright, Alufase and Vault scaffolding.†

STANDARDS

MEETS ANSI/ASSE A10.8 - 2011
OSHA 29CFR PART 1926
CAN/CSA S269.2



The kits shown below are for 8'-2 1/4" (2.5 m) platform lengths. They give an example of the quantity of items required for assembly. Equivalent kits for 6'-6 3/4" and 10' platform lengths are also available. Please refer to the next page to obtain the item number corresponding to the desired platform length.

SPAN 300 NARROW TOWER KITS

MODEL	MAXIMUM PLATFORM HEIGHT	WEIGHT	LOAD CAPACITY	TOWER KIT DIMENSIONS (W x D x H)	NARROW FRAME AL-F3001	NARROW GUARDRAIL AL-G3000	GUARDRAIL BRACING AL-G4101	DIAGONAL BRACE AL-D0002	HORIZONTAL BRACE AL-H0002	TRAPDOOR BRACE AL-P0002	NARROW PLATFORM AL-T0102	POLYURETHANE SET AL-C0002	SCREW JACK AL-J0001	ADJUSTABLE OUTRIGGER AL-O0000	OUTRIGGER AL-O0002
AL-K3007	13'-1 1/2" (4 M)	364 LB (166 KG)	1,587 LB (720 KG)	8'-2 1/4" X 26 5/8" X 16'-8 1/2" (2.496 X 0.677 X 5.092 M)	4	2	2	4	5	2	1	4	4	4	0
AL-K3013	19'-8 1/4" (6 M)	472 LB (215 KG)	1,587 LB (720 KG)	8'-2 1/4" X 26 5/8" X 23'-8 1/4" (2.496 X 0.677 X 7.092 M)	6	2	2	7	9	3	1	4	4	4	0
AL-K3019	26'-3" (8 M)	589 LB (268 KG)	1,587 LB (720 KG)	8'-2 1/4" X 26 5/8" X 29'-10" (2.496 X 0.677 X 9.092 M)	8	2	2	9	13	4	1	4	4	0	4

SPAN 300 WIDE TOWER KITS

MODEL	MAXIMUM PLATFORM HEIGHT	WEIGHT	LOAD CAPACITY	TOWER KIT DIMENSIONS (W x D x H)	WIDE FRAME AL-F3003	WIDE GUARDRAIL AL-G3001	GUARDRAIL BRACING AL-G4101	DIAGONAL BRACE AL-D0002	HORIZONTAL BRACE AL-H0002	PLATFORM AL-P0101	TRAPDOOR PLATFORM AL-P0002	WIDE PLATFORM AL-T0103	POLYURETHANE SET AL-C0002	SCREW JACK AL-J0001	ADJUSTABLE OUTRIGGER AL-O0000	OUTRIGGER AL-O0002
AL-K3028	13'-1 1/2" (4 M)	496 LB (225 KG)	1,587 LB (720 KG)	8'-2 1/4" X 50 3/4" X 16'-8 1/2" (2.496 X 1.290 X 5.092 M)	4	2	2	8	5	2	2	1	4	4	4	0
AL-K3034	19'-8 1/4" (6 M)	658 LB (300 KG)	1,587 LB (720 KG)	8'-2 1/4" X 50 3/4" X 23'-8 1/4" (2.496 X 1.290 X 7.092 M)	6	2	2	12	9	3	3	1	4	4	4	0
AL-K3040	26'-3" (8 M)	821 LB (373 KG)	1,587 LB (720 KG)	8'-2 1/4" X 50 3/4" X 29'-10" (2.496 X 1.290 X 9.092 M)	8	2	2	16	13	4	4	1	4	4	4	0
AL-K3046	32'-9 3/4" (10 M)	997 LB (453 KG)	1,587 LB (720 KG)	8'-2 1/4" X 50 3/4" X 36'-4 3/4" (2.496 X 1.290 X 11.092 M)	10	2	2	20	17	5	5	1	4	4	0	4
AL-K3052	39'-4 1/2" (12 M)	1160 LB (527 KG)	1,587 LB (720 KG)	8'-2 1/4" X 50 3/4" X 42'-11 3/8" (2.496 X 1.290 X 13.092 M)	12	2	2	24	21	6	6	1	4	4	0	4

† All trademarks and registered trademarks listed above are the property of their respective owners.

SPAN 300 PARTS

DESCRIPTION	DIMENSIONS	WEIGHT	MODEL
FRAME			
A NARROW	26 5/8" X 43 1/2" (0.677 X 1.106 M)	12.5 LB (5.7 KG)	AL-F3000
	26 5/8" X 76 1/8" (0.677 X 1.934 M)	18.7 LB (8.5 KG)	AL-F3001
B WIDE	50 3/4" X 43 1/2" (1.290 X 1.106 M)	18.7 LB (8.5 KG)	AL-F3002
	50 3/4" X 76 1/8" (1.290 X 1.934 M)	24.6 LB (11.2 KG)	AL-F3003
C 6-STEPS LADDER WITH LATCH	78.7" (2 M)	14 LB (6.4 KG)	AL-L0002
GUARDRAIL FRAME			
D NARROW	UPPER PIN SYSTEM 26 5/8" X 32 1/4" (0.677 X 0.818 M)	6 LB (2.7 KG)	AL-G3000
	LOWER PIN SYSTEM 26 5/8" X 44" (0.677 X 1.117 M)	6.2 LB (2.8 KG)	AL-G3002
E WIDE	UPPER PIN SYSTEM 50 3/4" X 32 1/4" (1.290 X 0.818 M)	8.8 LB (4 KG)	AL-G3001
	LOWER PIN SYSTEM 50 3/4" X 44" (1.290 X 1.117 M)	9 LB (4.1 KG)	AL-G3003

SPAN 300 NARROW FOLDABLE SCAFFOLD KIT

DESCRIPTION	DIMENSIONS	WEIGHT	MODEL
F WITH CASTERS AND TRAPDOOR PLATFORM	6' 3 3/4" X 26 5/8" X 78" (1.912 X 0.677 X 1.980 M)	82.9 LB (37.6 KG)	AL-Q3101

COMPONENTS

DESCRIPTION	DIMENSIONS	COMPATIBLE			WEIGHT	MODEL
		2 M	2.5 M	3 M		
GUARDRAIL AND BRACE						
G GUARDRAIL	6'3 1/4" (1.912 M) (C/C)	•			11.3 LB (5.1 KG)	AL-G4100
	8'2 1/4" (2.496 M) (C/C)		•		13 LB (5.9 KG)	AL-G4101
	10' (3.048 M) (C/C)			•	14.5 LB (6.6 KG)	AL-G4102
H BRACE DIAGONAL	6'10" (2.084 M) (C/C)	•			4 LB (1.8 KG)	AL-D0001
	8'7 1/2" (2.630 M) (C/C)		•		4.8 LB (2.2 KG)	AL-D0002
	10' 4 3/8" (3.158 M) (C/C)			•	5.5 LB (2.5 KG)	AL-D0003
	6'3 1/4" (1.912 M) (C/C)	•			3.7 LB (1.7 KG)	AL-B0001
I BRACE HORIZONTAL	8'2 1/4" (2.496 M) (C/C)		•		4.4 LB (2 KG)	AL-B0002
	10' (3.048 M) (C/C)			•	5.3 LB (2.4 KG)	AL-B0003

ALUMINUM PLATFORM

J WITH ANTI-SLIP PLYWOOD DECK*	6'3 1/4" X 24" (1.912 X 0.609 M)	•			30.4 LB (13.8 KG)	AL-P0100
	8'2 1/4" X 24" (2.496 X 0.609 M)		•		37.9 LB (17.2 KG)	AL-P0101
	10' X 24" (3.048 X 0.609 M)			•	43.3 LB (19.7 KG)	AL-P0102
K WITH TRAPDOOR AND ANTI-SLIP PLYWOOD DECK*	6'3 1/4" X 24" (1.912 X 0.609 M)	•			31 LB (14.1 KG)	AL-P0001
	8'2 1/4" X 24" (2.496 X 0.609 M)		•		38.5 LB (17.5 KG)	AL-P0002
	10' X 24" (3.048 X 0.609 M)			•	44 LB (20 KG)	AL-P0003
L WITH CHECKER PLATE DECK	6'3 1/4" X 24" (1.912 X 0.609 M)	•			30.4 LB (13.8 KG)	AL-P1001
	8'2 1/4" X 24" (2.496 X 0.609 M)		•		38.5 LB (17.5 KG)	AL-P1003
	10' X 24" (3.048 X 0.609 M)			•	43.3 LB (19.7 KG)	AL-P1005
M WITH TRAPDOOR AND CHECKER PLATE DECK	6'3 1/4" X 24" (1.912 X 0.609 M)	•			31 LB (14.1 KG)	AL-P1000
	8'2 1/4" X 24" (2.496 X 0.609 M)		•		38.5 LB (17.5 KG)	AL-P1002
	10' X 24" (3.048 X 0.609 M)			•	44 LB (20 KG)	AL-P1004

WOODEN TOEBOARD SET



N NARROW	6'3 1/4" X 27 1/8" (1.912 X 0.689 M)	•			15 LB (6.8 KG)	AL-T0100
	8'2 1/4" X 27 1/8" (2.496 X 0.689 M)		•		18.8 LB (8.4 KG)	AL-T0102
	10' X 27 1/8" (3.048 X 0.689 M)			•	21.6 LB (9.8 KG)	AL-T0104
N WIDE	6'3 1/4" X 51 1/8" (1.912 X 1.298 M)	•			19.1 LB (8.7 KG)	AL-T0101
	8'2 1/4" X 51 1/8" (2.496 X 1.298 M)		•		25.3 LB (11.5 KG)	AL-T0103
	10' X 51 1/8" (3.048 X 1.298 M)			•	31.7 LB (14.4 KG)	AL-T0105

FOLDABLE BASE WITH LOWER PINS SYSTEM

O NARROW WITH ADJUSTABLE LEGS (W X D X H)	6'3 1/4" X 26 5/8" X 71" (1.912 X 0.677 X 1.803 M)	•			55.4 LB (25.2 KG)	AL-Q3000
	8'2 1/4" X 26 5/8" X 71" (2.496 X 0.677 X 1.803 M)		•		57.6 LB (26.2 KG)	AL-Q3001
	10' X 26 5/8" X 71" (3.048 X 0.677 X 1.803 M)			•	59.8 LB (27.2 KG)	AL-Q3002
O WIDE WITH ADJUSTABLE LEGS (W X D X H)	6'3 1/4" X 50 3/4" X 71" (1.912 X 1.290 X 1.803 M)	•			73.8 LB (33.5 KG)	AL-Q3003
	8'2 1/4" X 50 3/4" X 71" (2.496 X 1.290 X 1.803 M)		•		76.1 LB (34.6 KG)	AL-Q3004
	10' X 50 3/4" X 71" (3.048 X 1.290 X 1.803 M)			•	78.8 LB (35.8 KG)	AL-Q3005


UNIVERSAL COMPONENTS

P SWIVEL POLYURETHANE CASTER	Ø 5" (0.125 M)	•	•	•	5 LB (2.3 KG)	AL-C0000
	Ø 8" (0.200 M)	•	•	•	9.6 LB (4.4 KG)	AL-C0002
Q SCREW JACK	MAX. HEIGHT OF 16" (0.406 M)	•	•	•	2.4 LB (1.1 KG)	AL-J0001
	MAX. HEIGHT OF 24 1/4" (0.615 M)	•	•	•	3.1 LB (1.4 KG)	AL-J0002
R SWIVEL BASE PLATE	6" X 6" (0.152 X 0.152 M)	•	•	•	1.42 LB (0.6 KG)	AL-A0000
	ADJUSTABLE OUTRIGGER 5'8 1/8" TO 8'1/8" (1.730 TO 2.440 M)	•	•	•	11.4 LB (5.2 KG)	AL-O0000
S OUTRIGGER	6'3/4" (1.849 M)	•	•	•	8.8 LB (4 KG)	AL-O0001
	10' 6" (3.200 M)	•	•	•	15 LB (6.8 KG)	AL-O0002
T IN-LINE CLAMP	Ø 1.99" (0.505 M) (C/C 2 5/8")	•	•	•	1.2 LB (0.5 KG)	AL-A0001

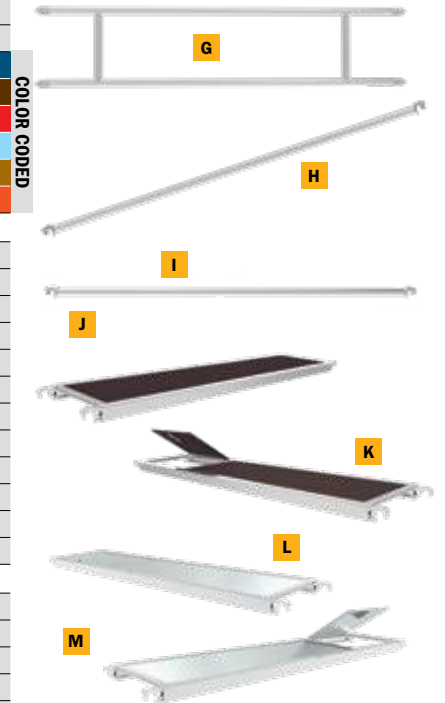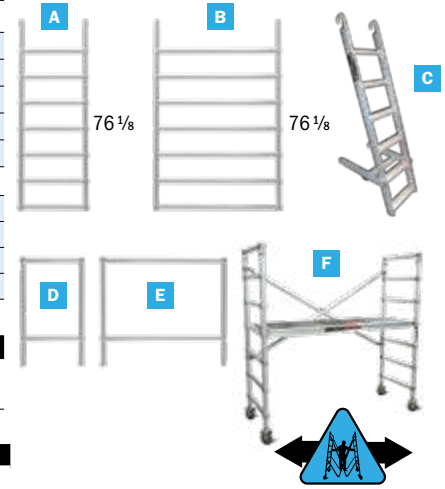

ALUMINUM SCAFFOLDING

*Maximum load capacity: 25 lb/sq.ft. (122 kg/m²)



ALUMINUM TOWER SPAN 400 KITS

INFO

Compatible with Instant Upright, Alufase and Vault scaffolding.[†]

STANDARDS

MEETS ANSI/ASSE A10.8 - 2011
OSHA 29CFR PART 1926
CAN/CSA S269.2



The kits shown below are for 8'-2 1/4" (2.5 m) platform lengths. They give an example of the quantity of items required for assembly. Equivalent kits for 6'-6 3/4" and 10' platform lengths are also available. Please refer to the next page to obtain the item number corresponding to the desired platform length.

SPAN 400 NARROW TOWER KITS

MODEL	MAXIMUM PLATFORM HEIGHT	WEIGHT	LOAD CAPACITY	TOWER KIT DIMENSIONS (W x D x H)	NARROW FRAME AL-F4002	NARROW GUARDRAIL AL-G4000	GUARDRAIL BRACING AL-G4101	DIAGONAL BRACE AL-D0002	HORIZONTAL BRACE AL-B0002	TRAPDOOR PLATFORM AL-P0002	NARROW TOEBOARD AL-T0102	POLYURETHANE CASTER AL-C0002	SCREW JACK AL-J0001	ADJUSTABLE OUTRIGGER AL-O0000	OUTRIGGER AL-O0002
AL-K4007	13'-9 3/8" (4.2 M)	321 LB (146 KG)	1,587 LB (720 KG)	8'-2 1/4" X 26 5/8" X 17'-4 3/8" (2.496 X 0.677 X 5.292 M)	4	2	2	4	5	2	1	4	4	4	0
AL-K4013	20'-8" (6.3 M)	451 LB (205 KG)	1,587 LB (720 KG)	8'-2 1/4" X 26 5/8" X 24'-3" (2.496 X 0.677 X 7.392 M)	6	2	2	7	9	3	1	4	4	4	0
AL-K4019	27'-2 3/4" (8.3 M)	521 LB (237 KG)	1,587 LB (720 KG)	8'-2 1/4" X 26 5/8" X 30'-9 3/4" (2.496 X 0.677 X 9.392 M)	8	2	2	9	13	4	1	4	4	0	4

SPAN 400 WIDE TOWER KITS

MODEL	MAXIMUM PLATFORM HEIGHT	WEIGHT	LOAD CAPACITY	TOWER KIT DIMENSIONS (W x D x H)	WIDE FRAME AL-F4005	WIDE GUARDRAIL AL-G4001	GUARDRAIL BRACING AL-G4101	DIAGONAL BRACE AL-D0002	HORIZONTAL BRACE AL-B0002	PLATFORM AL-P0101	TRAPDOOR PLATFORM AL-P0002	WIDE TOEBOARD SET AL-T0103	POLYURETHANE CASTER AL-C0002	SCREW JACK AL-J0001	ADJUSTABLE OUTRIGGER AL-O0000	OUTRIGGER AL-O0002
AL-K4028	13'-9 3/8" (4.2 M)	477 LB (217 KG)	1,587 LB (720 KG)	8'-2 1/4" X 50 3/4" X 17'-4 3/8" (2.496 X 1.290 X 5.292 M)	4	2	2	8	5	2	2	1	4	4	4	0
AL-K4034	20'-8" (6.3 M)	631 LB (287 KG)	1,587 LB (720 KG)	8'-2 1/4" X 50 3/4" X 24'-3" (2.496 X 1.290 X 7.392 M)	6	2	2	12	9	3	3	1	4	4	4	0
AL-K4040	27'-2 3/4" (8.3 M)	786 LB (375 KG)	1,587 LB (720 KG)	8'-2 1/4" X 50 3/4" X 30'-9 3/4" (2.496 X 1.290 X 9.392 M)	8	2	2	15	13	4	4	1	4	4	4	0
AL-K4046	34'-1 1/2" (10.4 M)	954 LB (434 KG)	1,587 LB (720 KG)	8'-2 1/4" X 50 3/4" X 37'-8 1/2" (2.496 X 1.290 X 11.492 M)	10	2	2	20	17	5	5	1	4	4	0	4
AL-K4052	41'-0 1/8" (12.5 M)	1108 LB (503 KG)	1,587 LB (720 KG)	8'-2 1/4" X 50 3/4" X 44'-7 1/8" (2.496 X 1.290 X 13.592 M)	12	2	2	24	21	6	6	1	4	4	0	4



[†]All trademarks and registered trademarks listed above are the property of their respective owners.

SPAN 400 KITS

	DESCRIPTION	DIMENSIONS	WEIGHT	MODEL
FRAME				
A	NARROW	26 5/8" X 48 7/8" (0.677 X 1.243 M)	8.8 LB (4 KG)	AL-F4000
		26 5/8" X 65 1/4" (0.677 X 1.657 M)	18.6 LB (8.4 KG)	AL-F4001
		26 5/8" X 81 5/8" (0.677 X 2.072 M)	16.4 LB (7.4 KG)	AL-F4002
B	WIDE	50 3/4" X 48 7/8" (1.290 X 1.243 M)	13 LB (5.9 KG)	AL-F4003
		50 3/4" X 65 1/4" (1.290 X 1.657 M)	16.7 LB (7.6 KG)	AL-F4004
		50 3/4" X 81 5/8" (1.290 X 2.072 M)	20.6 LB (9.3 KG)	AL-F4005
C	6-STEPS LADDER WITH LATCH	78.7" (2 M)	14 LB (6.4 KG)	AL-L0002
D	NARROW WITH LADDER SPAN	26 5/8" X 81 5/8" (0.677 X 2.072 M)	23.3 LB (10.6 KG)	AL-F4101
E	WIDE WITH LADDER SPAN	50 3/4" X 81 5/8" (1.290 X 2.072 M)	27.7 LB (12.6 KG)	AL-F4103
GUARDRAIL FRAME				
F	NARROW WITH UPPER PIN SYSTEM	26 5/8" X 27 5/8" (0.677 X 0.703 M)	6.4 LB (2.9 KG)	AL-G4000
G	WIDE WITH UPPER PIN SYSTEM	50 3/4" X 27 5/8" (1.290 X 0.703 M)	8 LB (3.6 KG)	AL-G4001

COMPONENTS

	DESCRIPTION	DIMENSIONS	COMPATIBLE			WEIGHT	MODEL
			2 M	2.5 M	3 M		
GUARDRAIL AND BRACE							
H	GUARDRAIL	6'3 1/4" (1.912 M) (C/C)	•			11.3 LB (5.1 KG)	AL-G4100
		8'2 1/4" (2.496 M) (C/C)		•		13 LB (5.9 KG)	AL-G4101
		10' (3.048 M) (C/C)			•	14.5 LB (6.6 KG)	AL-G4102
I	BRACE DIAGONAL	6'10" (2.084 M) (C/C)	•			4 LB (1.8 KG)	AL-D0001
		8'7 1/2" (2.630 M) (C/C)		•		4.8 LB (2.2 KG)	AL-D0002
		10'4 3/8" (3.158 M) (C/C)			•	5.5 LB (2.5 KG)	AL-D0003
J	BRACE HORIZONTAL	6'3 1/4" (1.912 M) (C/C)	•			3.7 LB (1.7 KG)	AL-B0001
		8'2 1/4" (2.496 M) (C/C)		•		4.4 LB (2 KG)	AL-B0002
		10' (3.048 M) (C/C)			•	5.3 LB (2.4 KG)	AL-B0003

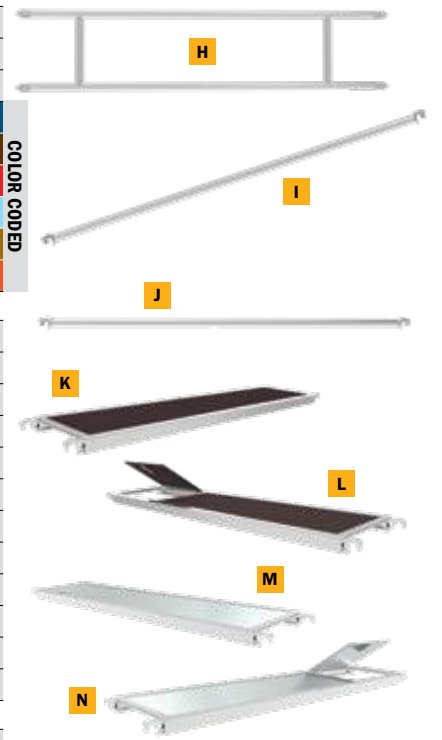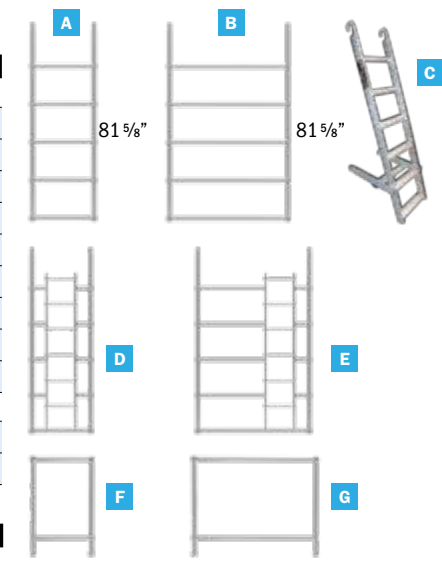

ALUMINUM PLATFORM

K	WITH ANTI-SLIP PLYWOOD DECK*	6'3 1/4" X 24" (1.912 X 0.609 M)	•			30.4 LB (13.8 KG)	AL-P0100
		8'2 1/4" X 24" (2.496 X 0.609 M)		•		37.9 LB (17.2 KG)	AL-P0101
		10' X 24" (3.048 X 0.609 M)			•	43.3 LB (19.7 KG)	AL-P0102
L	WITH TRAPDOOR AND ANTI-SLIP PLYWOOD DECK*	6'3 1/4" X 24" (1.912 X 0.609 M)	•			31 LB (14.1 KG)	AL-P0001
		8'2 1/4" X 24" (2.496 X 0.609 M)		•		38.5 LB (17.5 KG)	AL-P0002
		10' X 24" (3.048 X 0.609 M)			•	44 LB (20 KG)	AL-P0003
M	WITH CHECKER PLATE DECK	6'3 1/4" X 24" (1.912 X 0.609 M)	•			30.4 LB (13.8 KG)	AL-P1001
		8'2 1/4" X 24" (2.496 X 0.609 M)		•		38.5 LB (17.5 KG)	AL-P1003
		10' X 24" (3.048 X 0.609 M)			•	43.3 LB (19.7 KG)	AL-P1005
N	WITH TRAPDOOR AND CHECKER PLATE DECK	6'3 1/4" X 24" (1.912 X 0.609 M)	•			31 LB (14.1 KG)	AL-P1000
		8'2 1/4" X 24" (2.496 X 0.609 M)		•		38.5 LB (17.5 KG)	AL-P1002
		10' X 24" (3.048 X 0.609 M)			•	44 LB (20 KG)	AL-P1004

COLOR CODED

WOODEN TOEBOARD SET

O	NARROW	6'3 1/4" X 27 1/8" (1.912 X 0.689 M)	•			15 LB (6.8 KG)	AL-T0100
		8'2 1/4" X 27 1/8" (2.496 X 0.689 M)		•		18.8 LB (8.4 KG)	AL-T0102
		10' X 27 1/8" (3.048 X 0.689 M)			•	21.6 LB (9.8 KG)	AL-T0104
	WIDE	6'3 1/4" X 51 1/8" (1.912 X 1.298 M)	•			19.1 LB (8.7 KG)	AL-T0101
8'2 1/4" X 51 1/8" (2.496 X 1.298 M)			•		25.3 LB (11.5 KG)	AL-T0103	
10' X 51 1/8" (3.048 X 1.298 M)				•	31.7 LB (14.4 KG)	AL-T0105	

UNIVERSAL COMPONENTS

P	SWIVEL POLYURETHANE CASTER	Ø 5" (0.125 M)	•	•	•	5 LB (2.3 KG)	AL-C0000
		Ø 8" (0.200 M)	•	•	•	9.6 LB (4.4 KG)	AL-C0002
Q	SCREW JACK	16" (0.406 M)	•	•	•	2.4 LB (1.1 KG)	AL-J0001
		24 1/4" (0.615 M)	•	•	•	3.1 LB (1.4 KG)	AL-J0002
R	SWIVEL BASE PLATE	6" X 6" (0.152 X 0.152 M)	•	•	•	1.42 LB (0.6 KG)	AL-A0000
S	ADJUSTABLE OUTRIGGER	5'8 1/8" TO 8'1 1/8" (1.730 TO 2.440 M)	•	•	•	11.4 LB (5.2 KG)	AL-O0000
S	OUTRIGGER	6'3/4" (1.849 M)	•	•	•	8.8 LB (4 KG)	AL-O0001
		10'6" (3.200 M)	•	•	•	15 LB (6.8 KG)	AL-O0002
T	IN-LINE CLAMP	Ø 1.99" (0.505 M) (C/C 2 5/8")	•	•	•	1.2 LB (0.5 KG)	AL-A0001



*Maximum load capacity: 25 lb/sq.ft. (122 kg/m²)

ALUMINUM SCAFFOLDING



EASY-SET SCAFFOLD TOWER™

EASY-SET SCAFFOLD TOWER™



800 lb
LOAD CAPACITY

12'
REACH



12'
REACH



18'
REACH

	6' EASY-SET SCAFFOLD TOWER™	6' EASY-SET SCAFFOLD TOWER™ WITH GUARDRAILS	12' EASY-SET SCAFFOLD TOWER™ WITH GUARDRAILS AND OUTRIGGERS
DIMENSIONS (W X D X H)	65 X 31 X 72 IN. (165 X 78 X 185 CM)	65 X 31 X 108 IN. (165 X 78 X 275 CM)	65 X 31 X 180 IN. (165 X 78 X 455 CM)
STANDING HEIGHT	6 FT (1.8M)	6 FT (1.8M)	12 FT (3.5M)
REACH HEIGHT	12 FT (3.5M)	12 FT (3.5M)	18 FT (5.3M)
PACKAGE DIMENSIONS (W X D X H)	75 X 32 1/2 X 11 1/2 IN. (190 X 82 X 29 CM)	75 X 32 1/2 X 21 1/4 IN. (190 X 82 X 54 CM)	75 X 32 1/2 X 28 3/4 IN. (190 X 82 X 73 CM)
PACKAGING WEIGHT	72.9 LB (33.1 KG)	159.2 LB (72.2 KG)	268 LB (121.5 KG)
LOAD CAPACITY	800 LB (363 KG)	800 LB (363 KG)	800 LB (363 KG)
STANDARDS	MEETS ANSI/ASSE A10.8 - 2011 OSHA 29CFR PART 1926 CAN/CSA S269.2	MEETS ANSI/ASSE A10.8 - 2011 OSHA 29CFR PART 1926 CAN/CSA S269.2	MEETS ANSI/ASSE A10.8 - 2011 OSHA 29CFR PART 1926 CAN/CSA S269.2
MODEL	AL-Q0100	AL-Q0105	AL-Q0106
UPC	778300001460	778300001477	778300001484

INCLUDED IN PACK		INCLUDED IN PACK		INCLUDED IN PACK	
QTY.		QTY.		QTY.	
1	FOLDABLE BASE	1	FOLDABLE BASE	1	FOLDABLE BASE
1	TRAPDOOR PLATFORM	1	TRAPDOOR PLATFORM	2	TRAPDOOR PLATFORM
1	DIAGONAL BRACE	2	DIAGONAL BRACE	4	DIAGONAL BRACE
4	CASTER	4	CASTER	4	CASTER
		5	HORIZONTAL BRACE	9	HORIZONTAL BRACE
		2	4 RUNG EXTENSION FRAME	2	4 RUNG EXTENSION FRAME
				4	OUTRIGGER
				1	TOE BOARD SET
				2	7 RUNG EXTENSION FRAME

INFO



**BRACE HOOK
FRAME LOCKING PIN**



**ADJUSTABLE LEG AND
CASTER**



OUTRIGGER EXTENSION



24'
REACH



30'
REACH

**18' EASY-SET SCAFFOLD TOWER™
WITH GUARDRAILS AND OUTRIGGERS**

DIMENSIONS (W X D X H)	65 X 31 X 252 IN. (165 X 78 X 640 CM)
STANDING HEIGHT	18 FT (5.3M)
REACH HEIGHT	24 FT (7.1M)
PACKAGE DIMENSIONS (W X D X H)	75 X 32 1/2 X 33 1/2 IN. (190 X 82 X 85 CM)
PACKAGING WEIGHT	322.6 LB (146.3 KG)
LOAD CAPACITY	800 LB (363 KG)
STANDARDS	MEETS ANSI/ASSE A10.8 - 2011 OSHA 29CFR PART 1926 CAN/CSA S269.2
MODEL	AL-Q0107
UPC	778300001491

**24' EASY-SET SCAFFOLD TOWER™
WITH GUARDRAILS AND OUTRIGGERS**


DIMENSIONS (W X D X H)	65 X 31 X 324 IN. (165 X 78 X 823 CM)
STANDING HEIGHT	24 FT (7.1M)
REACH HEIGHT	30 FT (8.9M)
PACKAGE DIMENSIONS (W X D X H)	88 1/2 X 32 1/2 X 42 IN. (225 X 82 X 107 CM)
PACKAGING WEIGHT	431.5 LB (195.7 KG)
LOAD CAPACITY	800 LB (363 KG)
STANDARDS	MEETS ANSI/ASSE A10.8 - 2011 OSHA 29CFR PART 1926 CAN/CSA S269.2
MODEL	AL-Q0108
UPC	778300001729

INCLUDED IN PACK

QTY.	
1	FOLDABLE BASE
2	TRAPDOOR PLATFORM
8	DIAGONAL BRACE
4	ADJUSTABLE LEG WITH CASTER
9	HORIZONTAL BRACE
2	4 RUNG EXTENSION FRAME
4	OUTRIGGER
1	TOE BOARD SET
4	7 RUNG EXTENSION FRAME

INCLUDED IN PACK

QTY.	
1	FOLDABLE BASE
3	TRAPDOOR PLATFORM
10	DIAGONAL BRACE
4	ADJUSTABLE LEG WITH CASTER
13	HORIZONTAL BRACE
2	4 RUNG EXTENSION FRAME
4	JUMBO OUTRIGGER
1	TOE BOARD SET
6	7 RUNG EXTENSION FRAME



PLATFORM HOOK



FOLDING BASE UNIT



FIBERGLASS SERIES™ SCAFFOLDING



The Fiberglass Series™ scaffolding offering is designed for uses when non-conductive, static free or chemical resistance is required. Easy to set up and lighter than steel or aluminum scaffold types, it can quickly be assembled and moved into position.

- **NON-CONDUCTIVE**
- **CHEMICAL ENVIRONMENTS**
- **VERY LIGHT**



FIBERGLASS SERIES™ SCAFFOLDING

**BUILT TOUGH FOR
SAFETY**

METALTECH

FIBERGLASS SCAFFOLDING


TESTED IN CONFORMITY TO CSA STANDARD S269.2-M87

INFO

Imperial units for reference only.



FIBERGLASS SERIES™ SCAFFOLDING

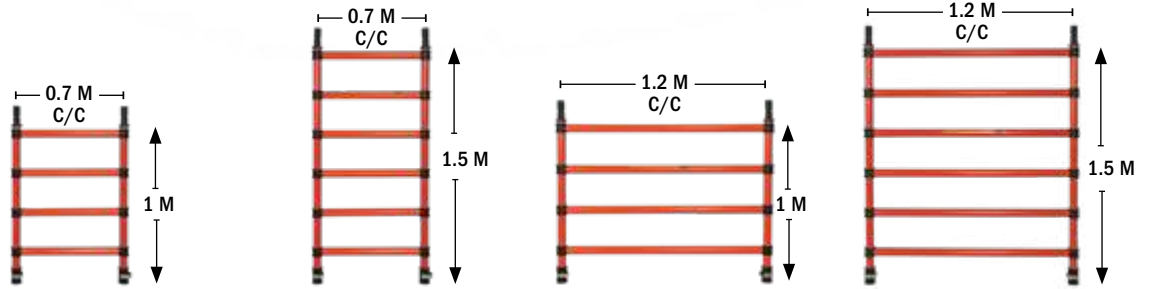

DESCRIPTION	1 X 0.7 M FRAME	1.5 X 0.7 M FRAME	1 X 1.2 M FRAME	1.5 X 1.2 M FRAME
DIMENSIONS (H X W)	1 X 0.7 M (3'-3 3/8" X 2'-3 9/16")	1.5 X 0.7 M (4'-11 1/16" X 2'-3 9/16")	1 X 1.2 M (3'-3 3/8" X 3'-11 1/4")	1.5 X 1.2 M (4'-11 1/16" X 3'-11 1/4")
WEIGHT	5.2 KG (11.4 LB)	7.4 KG (16.4 LB)	6.9 KG (15.3 LB)	10.1 KG (22.2 LB)
STANDARDS	CSA - S269.2-M87	CSA - S269.2-M87	CSA - S269.2-M87	CSA - S269.2-M87
MODEL	F-FRA0710L	F-FRA0715L	F-FRA1210L	F-FRA1215L



WOOD TOEBOARD			DESCRIPTION	TOEBOARD BRACKET
DIMENSIONS	WEIGHT	MODEL	WEIGHT	0.4 KG (0.86 LB)
0.7 M (2'-3 9/16")	0.7 KG (1.64 LB)	F-TB07	STANDARD	CSA - S269.2-M87
1.2 M (3'-11 1/4")	1.5 KG (3.28 LB)	F-TB12	MODEL	F-TBBRACK
2.4 M (7'-10 1/2")	3 KG (6.64 LB)	F-TB24		

STANDARD: CSA - S269.2-M87



BRACE					OUTRIGGER		
DESCRIPTION	DIMENSIONS	WEIGHT	COLOR ID	MODEL	DIMENSIONS	WEIGHT	MODEL
HORIZONTAL	2.4 M (7'-10 1/2")	2.5 KG (5.5 LB)	YELLOW	F-BRAH24	2 M (6'-6 3/4")	3.8 KG (8.3 LB)	F-OUT20
DIAGONAL	2.6 M (8'-6")	2.6 KG (5.7LB)	BLUE	F-BRAD24	3 M (9'-10 1/8")	4.7 KG (10.3 LB)	F-OUT30
0.7 M BRACE PLAN	0.7 X 2.4 M (2' X 7'-10 1/2")	2.5 KG (5.5 LB)	RED	F-PBRA0724	STANDARD: CSA - S269.2-M87		
1.2 M BRACE PLAN	1.2 X 2.4 M (4' X 7'-10 1/2")	2.7 KG (5.9 LB)	RED	F-PBRA1224			

STANDARD: CSA - S269.2-M87



DESCRIPTION	8" CASTER WITH LEVELING JACK	90° FIXED CLAMP	SWIVEL CLAMP	ACCESS LADDER
DIMENSIONS	85 CM (2'-9 15/32")	Ø 5.05 CM (Ø 1.99")	Ø 5.05 CM (Ø 1.99")	2.4 - 3.65 M (7'-10 1/2" X 11'-11 11/16")
CAPACITY	N / A	N / A	N / A	149.69 KG (330 LB)
WEIGHT	5.9 KG (13.1 LB)	0.73 KG (1.6 LB)	0.77 KG (1.7 LB)	16.6 KG (36.66 LB)
STANDARD	CSA - S269.2-M87	CSA - S269.2-M87	CSA - S269.2-M87	CSA - S269.2-M87
MODEL	F-ADJ200	F-TCFDU	F-TCSDU	F-LAD2436



DESCRIPTION	PLATFORM ANTI-SLIP	PLATFORM ANTI-SLIP WITH TRAPDOOR
DIMENSIONS	2.4 M (7'-10 1/2")	2.4 M (7'-10 1/2")
CAPACITY	225 KG (496 LB)	225 KG (496 LB)
WEIGHT	22.6 KG (49.8 LB)	22.4 KG (49.3 LB)
STANDARD	CSA - S269.2-M87	CSA - S269.2-M87
MODEL	F-DP24	F-DH24



GET THE METALTECH APP



FIBERGLASS TOWER KITS

TESTED IN CONFORMITY TO CSA STANDARD CSA - S269.2-M87

UP TO 20 TOWER KITS


0.7 M WIDE FIBERGLASS TOWER KITS

MODEL	MAXIMUM PLATFORM HEIGHT	WEIGHT	Accessories																			
			F-FRA0710L	F-FRA0715L	F-FRA1210L	F-FRA1215L	F-BRAN24	F-BRAD24	F-PBRA0724	F-PBRA1224	F-DP24	F-DH24	F-ADJ200	F-OUT20	F-OUT30	F-LAD2436	F-TB07	F-TB12	F-TB24	F-TBRACK		
F-KIT0715	1.5 M (4'-11 1/16")	208 LB (95 KG)	2	2		6	2	1			1	4										
F-KIT0720	2 M (6'-6 3/4")	283 LB (129 KG)		4		6	4	1			1	4	4			2		2		4		
F-KIT0725	2.5 M (8'-2 7/16")	333 LB (151 KG)	4	2		6	4	1			2	4	4		1	2		2		4		
F-KIT0730	3 M (9'-10 1/8")	354 LB (161 KG)	2	4		6	6	1		1	2	4	4		1	2		2		4		
F-KIT0735	3.5 M (11'-5 25/32")	444 LB (202 KG)		6		10	6	1			2	4		4	1	2		2		4		
F-KIT0740	4 M (13'-1 15/32")	468 LB (213 KG)	4	4		10	8	1			2	4		4	1	2		2		4		
F-KIT0745	4.5 M (14'-9 5/32")	478 LB (217 KG)	2	6		10	8	1			2	4		4	1	2		2		4		
F-KIT0750	5 M (16'-4 27/32")	597 LB (271 KG)		8		10	8	1			3	4		4	2	2		2		4		

1.2 M WIDE FIBERGLASS TOWER KITS

F-KIT1215	1.5 M (4'-11 1/16")	282 LB (128 KG)			2	2	6	2		1	1	1	4									
F-KIT1220	2 M (6'-6 3/4")	303 LB (138 KG)			4	6	4			1	1	1	4				2	2	4			
F-KIT1225	2.5 M (8'-2 7/16")	364 LB (166 KG)			4	2	6	6		1	1	1	4			1	2	2	4			
F-KIT1230	3 M (9'-10 1/8")	488 LB (222 KG)			2	4	10	6		1	1	2	4		4	1		2	2	4		
F-KIT1235	3.5 M (11'-5 25/32")	509 LB (231 KG)				6	10	8		1	1	2	4		4	1		2	2	4		
F-KIT1240	4 M (13'-1 15/32")	572 LB (260 KG)			4	4	10	8		1	2	2	4		4	1		2	2	4		
F-KIT1245	4.5 M (14'-9 5/32")	604 LB (275 KG)			2	6	12	10		1	2	2	4		4	2		2	2	4		
F-KIT1250	5 M (16'-4 27/32")	711 LB (323 KG)				8	14	10		1	3	2	4		4	2		2	2	4		
F-KIT1255	5.5 M (18' 17/32")	736 LB (334 KG)			4	6	14	12		1	3	2	4		4	2		2	2	4		
F-KIT1260	6 M (19'-8 7/32")	796 LB (362 KG)			2	8	14	12		1	3	3	4		4	2		2	2	4		
F-KIT1265	6.5 M (21'-3 29/32")	817 LB (371 KG)			6	6	14	14		1	3	3	4		4	2		2	2	4		
F-KIT1270	7 M (22'-11 19/32")	853 LB (388 KG)			4	8	16	16		1	3	3	4		4	2		2	2	4		

Imperial unit for approximate reference

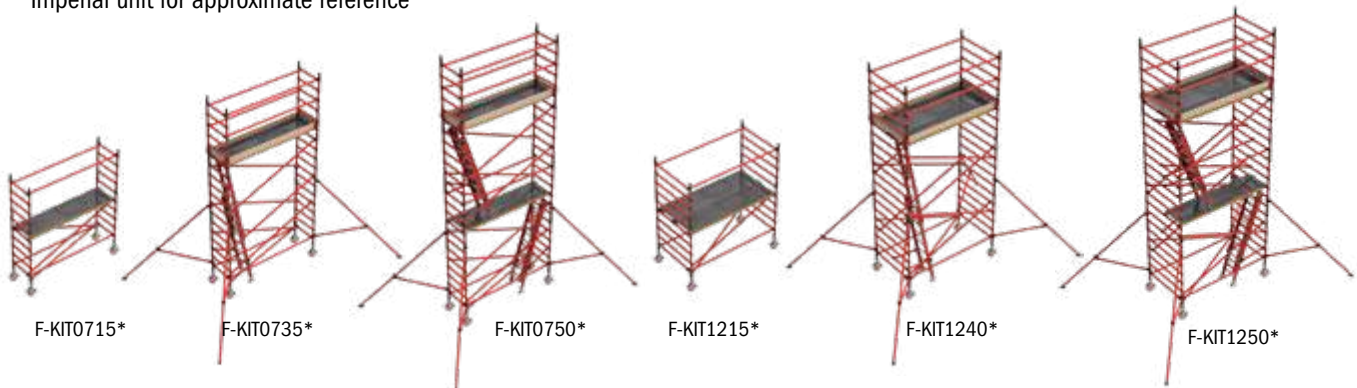

FIBERGLASS SERIES™ SCAFFOLDING

SPEEDY™ SCAFFOLDING

TESTED IN CONFORMITY TO CSA STANDARD S269.2



INFO

Imperial units for reference only.

3 m
REACH

227 kg
LOAD CAPACITY

ASSEMBLED DIMENSIONS (W X D X H)	196 X 74 X 196 CM (77 3/16 X 29 1/8 X 77 3/16 IN.)
PACKAGE DIMENSIONS (W X D X H)	78 X 206 X 27 CM (30 3/4 X 81 1/8 X 10 5/8 IN.)
WEIGHT	43.5 KG (96 LB)
LOAD CAPACITY	227 KG (500 LB)
REACH	3 M (9' 10 1/8")
PLATFORMS	ANTI-SLIP WITH TRAPDOOR ACCESS
STRUCTURE	5 CM (2 IN.) TUBULAR FIBERGLASS
CASTERS	13 CM (5 IN.) DOUBLE LOCKING HEAVY DUTY
STANDARDS	ANSI, CSA AND OSHA
MODEL	F-ISPC
UPC	778300700660

FIBERGLASS SERIES™ SCAFFOLDING



- » Compact storage
- » Easily assembled
- » Trapdoor access



- » Light weight
- » Corrosion resistant



- » Non conductive
- » Prevent static electricity

INFO



GET THE METALTECH APP



SAFETY GUARDRAIL SYSTEMS

Versatile installation systems to meet your needs. Metaltech offers two systems with multiple advantages! The Standard and the Stackable installations can also be combined to provide the best solution for your needs. The "Standard" installation offers a linear configuration. It is your best solution to protect a wide perimeter temporarily or permanently. The "Stackable" installation allows for a more compact installation when there is limited space or to secure a workspace for short distances since bases can be stacked on top of one another.

- **AVOID FALLING HAZARDS**
- **PROTECT YOUR ROOF**
- **SAVE TIME AND MONEY**



SAFETY GUARDRAIL SYSTEMS

**BUILT TOUGH FOR
SAFETY**

METALTECH

SAFETY GUARDRAIL SYSTEMS


SAFETY GUARDRAIL SYSTEMS

REGULATIONS/STANDARDS

- ✓ NBC
- ✓ CSTC
- ✓ CNESST
- ✓ ANSI
- ✓ RSST
- ✓ OBC
- ✓ OSHA
- ✓ WORKSAFE BC



STANDARD SYSTEM

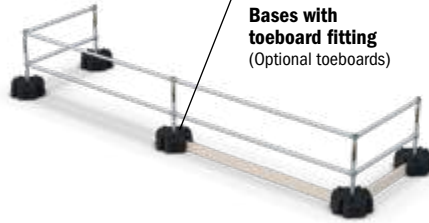

Bases with toeboard fitting
(Optional toeboards)

STACKABLE SYSTEM



WARNING LINE



TUBE

DIMENSIONS	COMPATIBLE	WEIGHT	USE WITH	MODEL
Ø 1.9 / 45 IN.	STANDARD/ STACKABLE	3.49 LB (1.58 KG)	1 BASE	M-MTA45
Ø 1.9 / 60 IN.	STANDARD/ STACKABLE	4.66 LB (2.11 KG)	2 BASES	M-MTA60
Ø 1.9 / 75 IN.	STANDARD/ STACKABLE	5.82 LB (2.64 KG)	3 BASES	M-MTA75
Ø 1.9 / 120 IN.	STANDARD/ STACKABLE	9.31 LB (4.22 KG)	-	M-MTA120
Ø 1.9 / 240 IN.	STANDARD/ STACKABLE	18.62 LB (8.45 KG)	-	M-MTA240



DESCRIPTION	GUARDRAIL POST	GUARDRAIL POST	END TUBE	BASE
DIMENSIONS	Ø 1.9 / 42 IN.	Ø 1.9 / 36.5 IN.	Ø 1.9 / 18 IN.	21 X 21 IN.
COMPATIBLE	STANDARD	STACKABLE & WARNING LINE	STANDARD / STACKABLE & WARNING LINE	STANDARD / STACKABLE & WARNING LINE
WEIGHT	3.26 LB (1.48 KG)	2.85 LB (1.29 KG)	1.4 LB (0.64 KG)	46 LB (20.86 KG)
MODEL	M-MTS04	M-MTS01	M-MTA18	M-MTB



DESCRIPTION	BASE SUPPORT	BASE PLATE	FOOT CLAMP	TUBE CLAMP
COMPATIBLE	STACKABLE & WARNING LINE	STACKABLE & WARNING LINE	STANDARD	STANDARD
WEIGHT	4.47 LB (2.03 KG)	1.5 LB (0.68 KG)	5.9 LB (2.68 KG)	1.7 LB (0.77 KG)
MODEL	M-MTS02	M-MTS03	M-MTCF	M-MTCC



DESCRIPTION	HOOK CLAMP	ELBOW	JOINT	T-CLAMP
COMPATIBLE	STANDARD / STACKABLE & WARNING LINE	STANDARD / STACKABLE & WARNING LINE	STANDARD / STACKABLE & WARNING LINE	STANDARD / STACKABLE & WARNING LINE
WEIGHT	2.4 LB (1.09 KG)	2.2 LB (1 KG)	1.4 LB (0.64 KG)	1.5 LB (0.68 KG)
MODEL	M-MTCH	M-MTCE	M-MTCL	M-MTCT



DESCRIPTION	PIVOT CLAMP	4-WAY LINE CLAMP	4-WAY FLANGE	WALL JOINT	END CAP
COMPATIBLE	STANDARD / STACKABLE & WARNING LINE	STANDARD / STACKABLE & WARNING LINE	STANDARD / STACKABLE & WARNING LINE	STANDARD / STACKABLE & WARNING LINE	STANDARD / STACKABLE & WARNING LINE
WEIGHT	2.4 LB (1.09 KG)	2.2 LB (1 KG)	2 LB (0.91 KG)	1.7 LB (0.77 KG)	0.03 LB (0.01 KG)
MODEL	M-MTCP	M-MTC4L	M-MTC4E	M-MTCW	AL-A0050



DESCRIPTION	1/2" CLAMPING SCREW	7/8" CLAMPING SCREW	20 MM NUT	LOCKING-PIN	SPRING-LOCK
COMPATIBLE	STANDARD / STACKABLE & WARNING LINE	STANDARD / STACKABLE & WARNING LINE	STACKABLE & WARNING LINE	STACKABLE & WARNING LINE	STACKABLE & WARNING LINE
WEIGHT	0.02 LB (0.01 KG)	0.05 LB (0.02 KG)	0.01 LB (0.005 KG)	0.12 LB (0.05 KG)	0.04 LB (0.02 KG)
MODEL	VB-BSSC3/8-BSPX1/2Z	VB-BSSC3/8-BSPX7/8Z	VB-NM20Z	I-CAS5PIN	M-MLS



DESCRIPTION	NYLON ROPE WITH PENNANTS	PENNANT WITH EYELETS	NYLON COATED STEEL WIRE WITH CARBINERS
DIMENSIONS	98 FT 5 IN. (30 M)	7 X 9.75 IN. (17.8 X 24.8 CM)	8 FT (2.438 M)
COMPATIBLE	WARNING LINE	WARNING LINE	WARNING LINE
WEIGHT	1.58 LB (0.72 KG)	0.02 LB (0.008 KG)	0.9 LB (0.41 KG)
MODEL	M-MTWLR	M-MTWLF	M-MTWLCC



DESCRIPTION	HOOK CLAMP	STEEL CARABINER	CABLE CLIP	BLACK CABLE TIES FOR PENNANT
COMPATIBLE	WARNING LINE	WARNING LINE	WARNING LINE	WARNING LINE
WEIGHT	0.6 LB (0.27 KG)	0.2 LB (0.09 KG)	0.1 LB (0.045 KG)	0.01 LB (0.005 KG)
MODEL	M-MTCWL	VB-CAC023/4Z	M-MTWLCC	M-MTWLTIE



LADDERS, STEPLADDERS AND WORK PLATFORMS

Metaltech provides a range of ladders and stepladders to complete its work at heights products category, they are designed for specific and multi-purpose use, for interior or exterior applications. Most are built to include aluminum in their construction, they are lightweight, safe, versatile and easy to store.

- **LIGHTWEIGHT**
- **VERSATILITY**
- **EASE AND SAFE TO USE**





LADDERS, STEPLADDERS AND WORK PLATFORMS

**BUILT TOUGH FOR
SAFETY**

METALTECH

12.5' TELESCOPIC LADDER

250 lb
LOAD CAPACITY

16'
REACH

SAFETY GRADE 1

OPEN (W X D X H)	19 X 4.5 X 150 IN. (48.3 X 11.4 X 381 CM)
CLOSED (W X D X H)	19 X 4.5 X 32 IN. (48.3 X 11.4 X 81.3 CM)
PACKAGE DIMENSIONS (W X D X H)	21 X 5.25 X 33.5 IN. (53.3 X 13.3 X 85 CM)
REACH	16 FT (4.9 M)
WEIGHT	25 LB (11 KG)
LOAD CAPACITY	250 LB (113 KG)
OPTION	CARRYING BAG
STANDARD	CSA GRADE 1
MATERIAL	AIRCRAFT GRADE ALUMINUM ALLOY 6061-T6
MODEL	E-LAD12T2
UPC	778300401222

LADDERS, STEPLADDERS AND RAMPS

INFO



SAFE AND COMPACT



ADJUSTABLE TO REQUIRED HEIGHT



LIGHTWEIGHT



15.5' TELESCOPIC LADDER

SAFETY GRADE 1

19'
REACH

250 lb
LOAD CAPACITY

OPEN (W X D X H)	19.5 X 4.5 X 188.5 IN. (49.5 X 11.4 X 478.8 CM)
CLOSED (W X D X H)	19.5 X 4.5 X 36 IN. (49.5 X 11.4 X 91.4 CM)
PACKAGE DIMENSIONS (W X D X H)	21.5 X 6 X 38 IN. (54.6 X 15.2 X 96.5 CM)
REACH	19 FT (5.8 M)
WEIGHT	40.5 LB (18.4 KG)
LOAD CAPACITY	250 LB (113 KG)
STANDARD	CSA GRADE 1
MATERIAL	AIRCRAFT GRADE ALUMINUM ALLOY 6061-T6
MODEL	E-LAD15T1
UPC	778300401512



LADDERS, STEPLADDERS AND RAMPS

INFO



SAFE AND COMPACT



ADJUSTABLE TO REQUIRED HEIGHT



LIGHTWEIGHT



BUILT TOUGH FOR SAFETY

METALTECH

TELESCOPING MULTI-POSITION LADDER

5 IN 1

300 lb
LOAD CAPACITY

LADDERS, STEPLADDERS AND RAMPS



DESCRIPTION	13' MULTI-POSITION LADDER	17' MULTI-POSITION LADDER	21' MULTI-POSITION LADDER	25' MULTI-POSITION LADDER
CLOSED DIMENSIONS (W X D X H)	22.25 X 7.75 X 42.75 IN. (56.5 X 19.7 X 108.6 CM)	23.5 X 8 X 54.5 IN. (59.7 X 20.3 X 138.4 CM)	26.75 X 8.75 X 66.5 IN. (67.9 X 22.2 X 168.9 CM)	29.5 X 8 X 78.5 IN. (74.9 X 20.3 X 199.4 CM)
LADDER HEIGHT	13 FT (4 M)	17 FT (5.2 M)	21 FT (6.4 M)	25 FT (7.6 M)
MAXIMUM REACH*	14 FT 4 IN. (4.4 M)	18 FT 1 IN. (5.5 M)	22 FT (6.7 M)	26 FT (7.9 M)
WEIGHT	27.6 LB (12.5 KG)	34.5 LB (15.6 KG)	42.3 LB (19.2 KG)	53.1 LB (24.1 KG)
NUMBER OF POSITIONS	19	28	38	49
LOAD CAPACITY	300 LB (136 KG)	300 LB (136 KG)	300 LB (136 KG)	300 LB (136 KG)
MATERIAL	ALUMINUM	ALUMINUM	ALUMINUM	ALUMINUM
STANDARD	ANSI TYPE IA, CSA GRADE 1A AND OSHA	ANSI TYPE IA, CSA GRADE 1A AND OSHA	ANSI TYPE IA, CSA GRADE 1A AND OSHA	ANSI TYPE IA
MODEL	E-MTL7000AL	E-MTL7100AL	E-MTL7200AL	E-MTL7300AL
UPC	778300001590	778300001606	778300001613	778300000937
HIGHEST STANDING LEVEL				
STEPLADDER	2 FT 11 IN. (0.89 M)	4 FT 9 IN. (1.4 M)	6 FT 9 IN. (2.1 M)	8 FT 7 IN. (2.6 M)
EXTENSION LADDER	7 FT 9 IN. (2.4 M)	11 FT 7 IN. (3.5 M)	15 FT 5 IN. (3.5 M)	20 FT (6.1 M)
SCAFFOLD SUPPORTS	1 FT 11 IN. (0.58 M)	2 FT 11 IN. (0.89 M)	3 FT 10 IN. (1.2 M)	4 FT 9 IN. (1.4 M)

*Calculated with a 5'9" (1.75 m) person with a vertical 12" (30 cm) reach.

INFO



EXTENSION LADDER




TWO-PERSON STEPLADDER




SCAFFOLD SUPPORTS


TELESCOPING WORK PLANK AND LADDER JACK

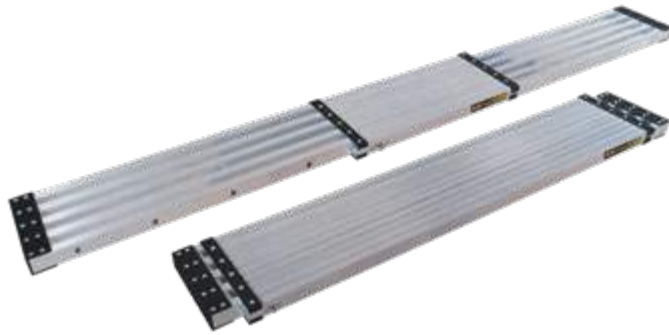

DESCRIPTION	9' TELESCOPING WORK PLANK	13' TELESCOPING WORK PLANK	17' TELESCOPING WORK PLANK
CLOSED DIMENSIONS (WXDXH)	72 X 12 X 2 IN. (183.2 X 30.2 X 5 CM)	96 X 12 X 2 IN. (244.2 X 30.2 X 5 CM)	120 X 12 X 2 IN. (305.2 X 30.2 X 5 CM)
OPEN DIMENSIONS (WXDXH)	107.75 X 12 X 2 IN. (273.8 X 30.2 X 5 CM)	156 X 12 X 2 IN. (396 X 30.2 X 5 CM)	204 X 12 X 2 IN. (518 X 30.2 X 5 CM)
EXTEND	6 UP TO 9 FT (1.8 UP TO 2.7 M)	8 UP TO 13 FT (2.4 UP TO 4 M)	10 UP TO 17 FT (3 UP TO 5.2 M)
LOAD CAPACITY	250 LB (113 KG)	250 LB (113 KG)	250 LB (113 KG)
WEIGHT	31.1 LB (14.1 KG)	41 LB (18.6 KG)	50.7 LB (23 KG)
MATERIAL	ALUMINUM	ALUMINUM	ALUMINUM
STANDARD	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA
MODEL	M-PEP7000AL	M-PEP7100AL	M-PEP7200AL
UPC	778300000241	778300000258	778300000265

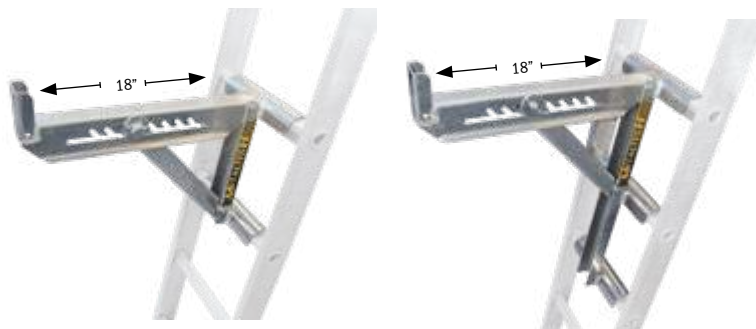

DESCRIPTION	2 RUNGS LADDER JACK (18 IN.)	3 RUNGS LADDER JACK (18 IN.)
DIMENSIONS (WXDXH)	21.75 X 10 X 16.75 IN. (55.3 X 25.4 X 42.6 CM)	21.75 X 10 X 29 IN. (55.3 X 25.4 X 73.7 CM)
QTY PER BOX	2	2
LOAD CAPACITY	250 LB	250 LB
ADJUSTABLE	8 NOTCHES OF ANGLE ADJUSTMENT	8 NOTCHES OF ANGLE ADJUSTMENT
WEIGHT	12 LB	15 LB
FINISH	ALUMINUM	ALUMINUM
STANDARDS	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA
MODEL	E-LJ20P	E-LJ30P
UPC	778300000005	778300000067



STEPLADDERS



DIRECT
CONTAINER
ORDER ONLY



DIRECT
CONTAINER
ORDER ONLY

DESCRIPTION	FOLDING STEPLADDER ULTRA-LIGHT 2 STEPS*	FOLDING STEPLADDER ULTRA-LIGHT 3 STEPS*
OPEN DIMENSIONS (W X D X H)	17.5 X 17.75 X 35.25 IN. (44.5 X 45.1 X 89.5 CM)	18.75 X 24 X 44.5 IN. (47.6 X 61 X 113 CM)
CLOSED DIMENSIONS	2 IN. (5 CM) THICK WHEN CLOSED	2 IN. (5 CM) THICK WHEN CLOSED
WEIGHT	5.1 LB (2.3 KG)	6.8 LB (3.1 KG)
HIGHEST STANDING LEVEL	19 IN. (48.3 CM)	28.75 IN. (73 CM)
STEPS	2 WITH ANTI-SLIP GROOVES	3 WITH ANTI-SLIP GROOVES
LOAD CAPACITY	200 LB (90.7 KG)	200 LB (90.7 KG)
MATERIAL	AIRCRAFT GRADE ALUMINUM, STEEL AND ABS	AIRCRAFT GRADE ALUMINUM, STEEL AND ABS
COLOR	CUSTOM COLORS AVAILABLE	CUSTOM COLORS AVAILABLE
STANDARDS	ANSI TYPE III AND CSA GRADE 3	ANSI TYPE III AND CSA GRADE 3
4 UNITS SHIPPING BOX	40.2 X 50.8 X 114.3 IN. (102 X 20 X 45 CM)	51.2 X 7.7 X 20.1 IN. (130.1 X 19.6 X 51.1 CM)
MODEL	E-SLA2RD	E-SLA3RD
UPC	778300730001	778300000432

*Direct container order only

*Direct container order only



DIRECT
CONTAINER
ORDER ONLY



DIRECT
CONTAINER
ORDER ONLY

DESCRIPTION	FOLDING STEPLADDER WITH UTILITY TRAY*	FOLDING STEPLADDER 1 STEP*
OPEN DIMENSIONS (W X D X H)	18.5 X 36.5 X 50.75 IN. (47 X 92.7 X 128.9 CM)	18.75 X 16.75 X 19 IN. (47.6 X 42.5 X 48.3 CM)
CLOSED DIMENSIONS	ONLY 2.65 IN. (6.7 CM) THICK WHEN CLOSED	ONLY 3.75 (9.5 CM) THICK WHEN CLOSED
WEIGHT	18 LB (8.16 KG)	7.2 LB (3.3 KG)
HIGHEST STANDING LEVEL	28.75 IN. (73 CM)	10 IN. (25.4 CM)
STEPS	3 ANTI-SLIP RUBBER COATED	1 ANTI-SLIP RUBBER COATED
STEPLADDER WORKING LOAD	200 LB (90.7 KG)	225 LB (102 KG)
TRAY WORKING LOAD	20 LB (9.1 KG)	N/A
MATERIAL	STEEL AND ABS	STEEL
STANDARDS	ANSI TYPE III AND CSA GRADE 3	ANSI TYPE III AND CSA GRADE 3
MODEL	E-SLT3RD	E-SLS1BK
UPC	778300730025	778300000494

*Direct container order only

*Direct container order only

WORK PLATFORMS & LOADING RAMPS



DESCRIPTION	30" PORTABLE WORK PLATFORM	39" PORTABLE WORK PLATFORM	30" ADJUSTABLE WORK PLATFORM
OPEN DIMENSIONS (WXDXH)	42.75 X 15.75 X 19.5 IN. (108.6 X 40 X 49.5 CM)	52.25 X 15.5 X 20.25 IN. (132.7 X 39.4 X 51.4 CM)	51 X 22.25 X 35 IN. (129.5 X 56.5 X 88.9 CM)
CLOSED DIMENSIONS (WXDXH)	31.25 X 15.75 X 6.5 IN. (79.4 X 40 X 16.5 CM)	39.75 X 15.5 X 5.75 IN. (101 X 39.4 X 14.6 CM)	35 X 19 X 7 IN. (88.9 X 48.3 X 17.8 CM)
DECK DIMENSIONS (WXD)	30.25 X 11.75 IN. (76.8 X 29.8 CM)	39 X 11.75 IN. (99.1 X 29.8 CM)	30.75 X 11.75 IN. (78.1 X 29.8 CM)
LOAD CAPACITY	350 LB (158.8 KG)	500 LB (226.8 KG)	300 LB (136 KG)
WEIGHT	10.2 LB (4.6 KG)	11.4 LB (5.2 KG)	15 LB (6.8 KG)
MATERIAL	ALUMINUM	ALUMINUM	ALUMINUM
MODEL	E-PWP7000AL	E-PWP7100AL	E-PWP7101AL
UPC	778300401505	778300000418	778300000425




DESCRIPTION	LOADING RAMPS
OPEN DIMENSIONS (WXDXH)	1 RAMP : 8 FT X 10 IN. (2.4 M X 25 CM)
CLOSED DIMENSIONS (WXDXH)	1 RAMP : 4 FT X 10 IN. (1.2 M X 25 CM)
PACKAGE DIMENSIONS (WXDXH)	2 RAMPS : 10 X 51.5 X 14 IN. (25 X 130.8 X 35.6 CM)
LOAD CAPACITY	1 RAMP : 1,200 LB (544 KG)* 2 RAMPS : 2,400 LB (1088 KG)*
WEIGHT	1 RAMP : 32.2 LB (14.6 KG) 2 RAMPS : 64.4 LB (29.2 KG)
MATERIAL	ALUMINUM
MODEL	M-AR008
UPC	778300003105

*Distributed weight

INFO



LADDERS, STEPLADDERS AND RAMPS



GET THE METALTECH APP

BUILT TOUGH FOR SAFETY

METALTECH


TEMPORARY FENCES



Metaltech's innovative temporary fence & barrier systems are designed with maximum security features and minimum installation cost. Seasonal outdoor businesses, construction sites or special public events deserve to be protected by the most transparent and aesthetically pleasing temporary fences and barriers on the market today.

Made of all-weather and maintenance free galvanized steel components, Metaltech's fences and barriers, offer competitive pricing and superior site protection over chain link, wood or plastic systems.

- **INSTALLS TWICE AS FAST WITH HALF THE STAFF!**
- **DESIGNED FOR JOB SITES SECURITY**
- **ONE MAN INSTALLATION**
- **MAINTENANCE-FREE GALVANIZED STEEL PANELS**

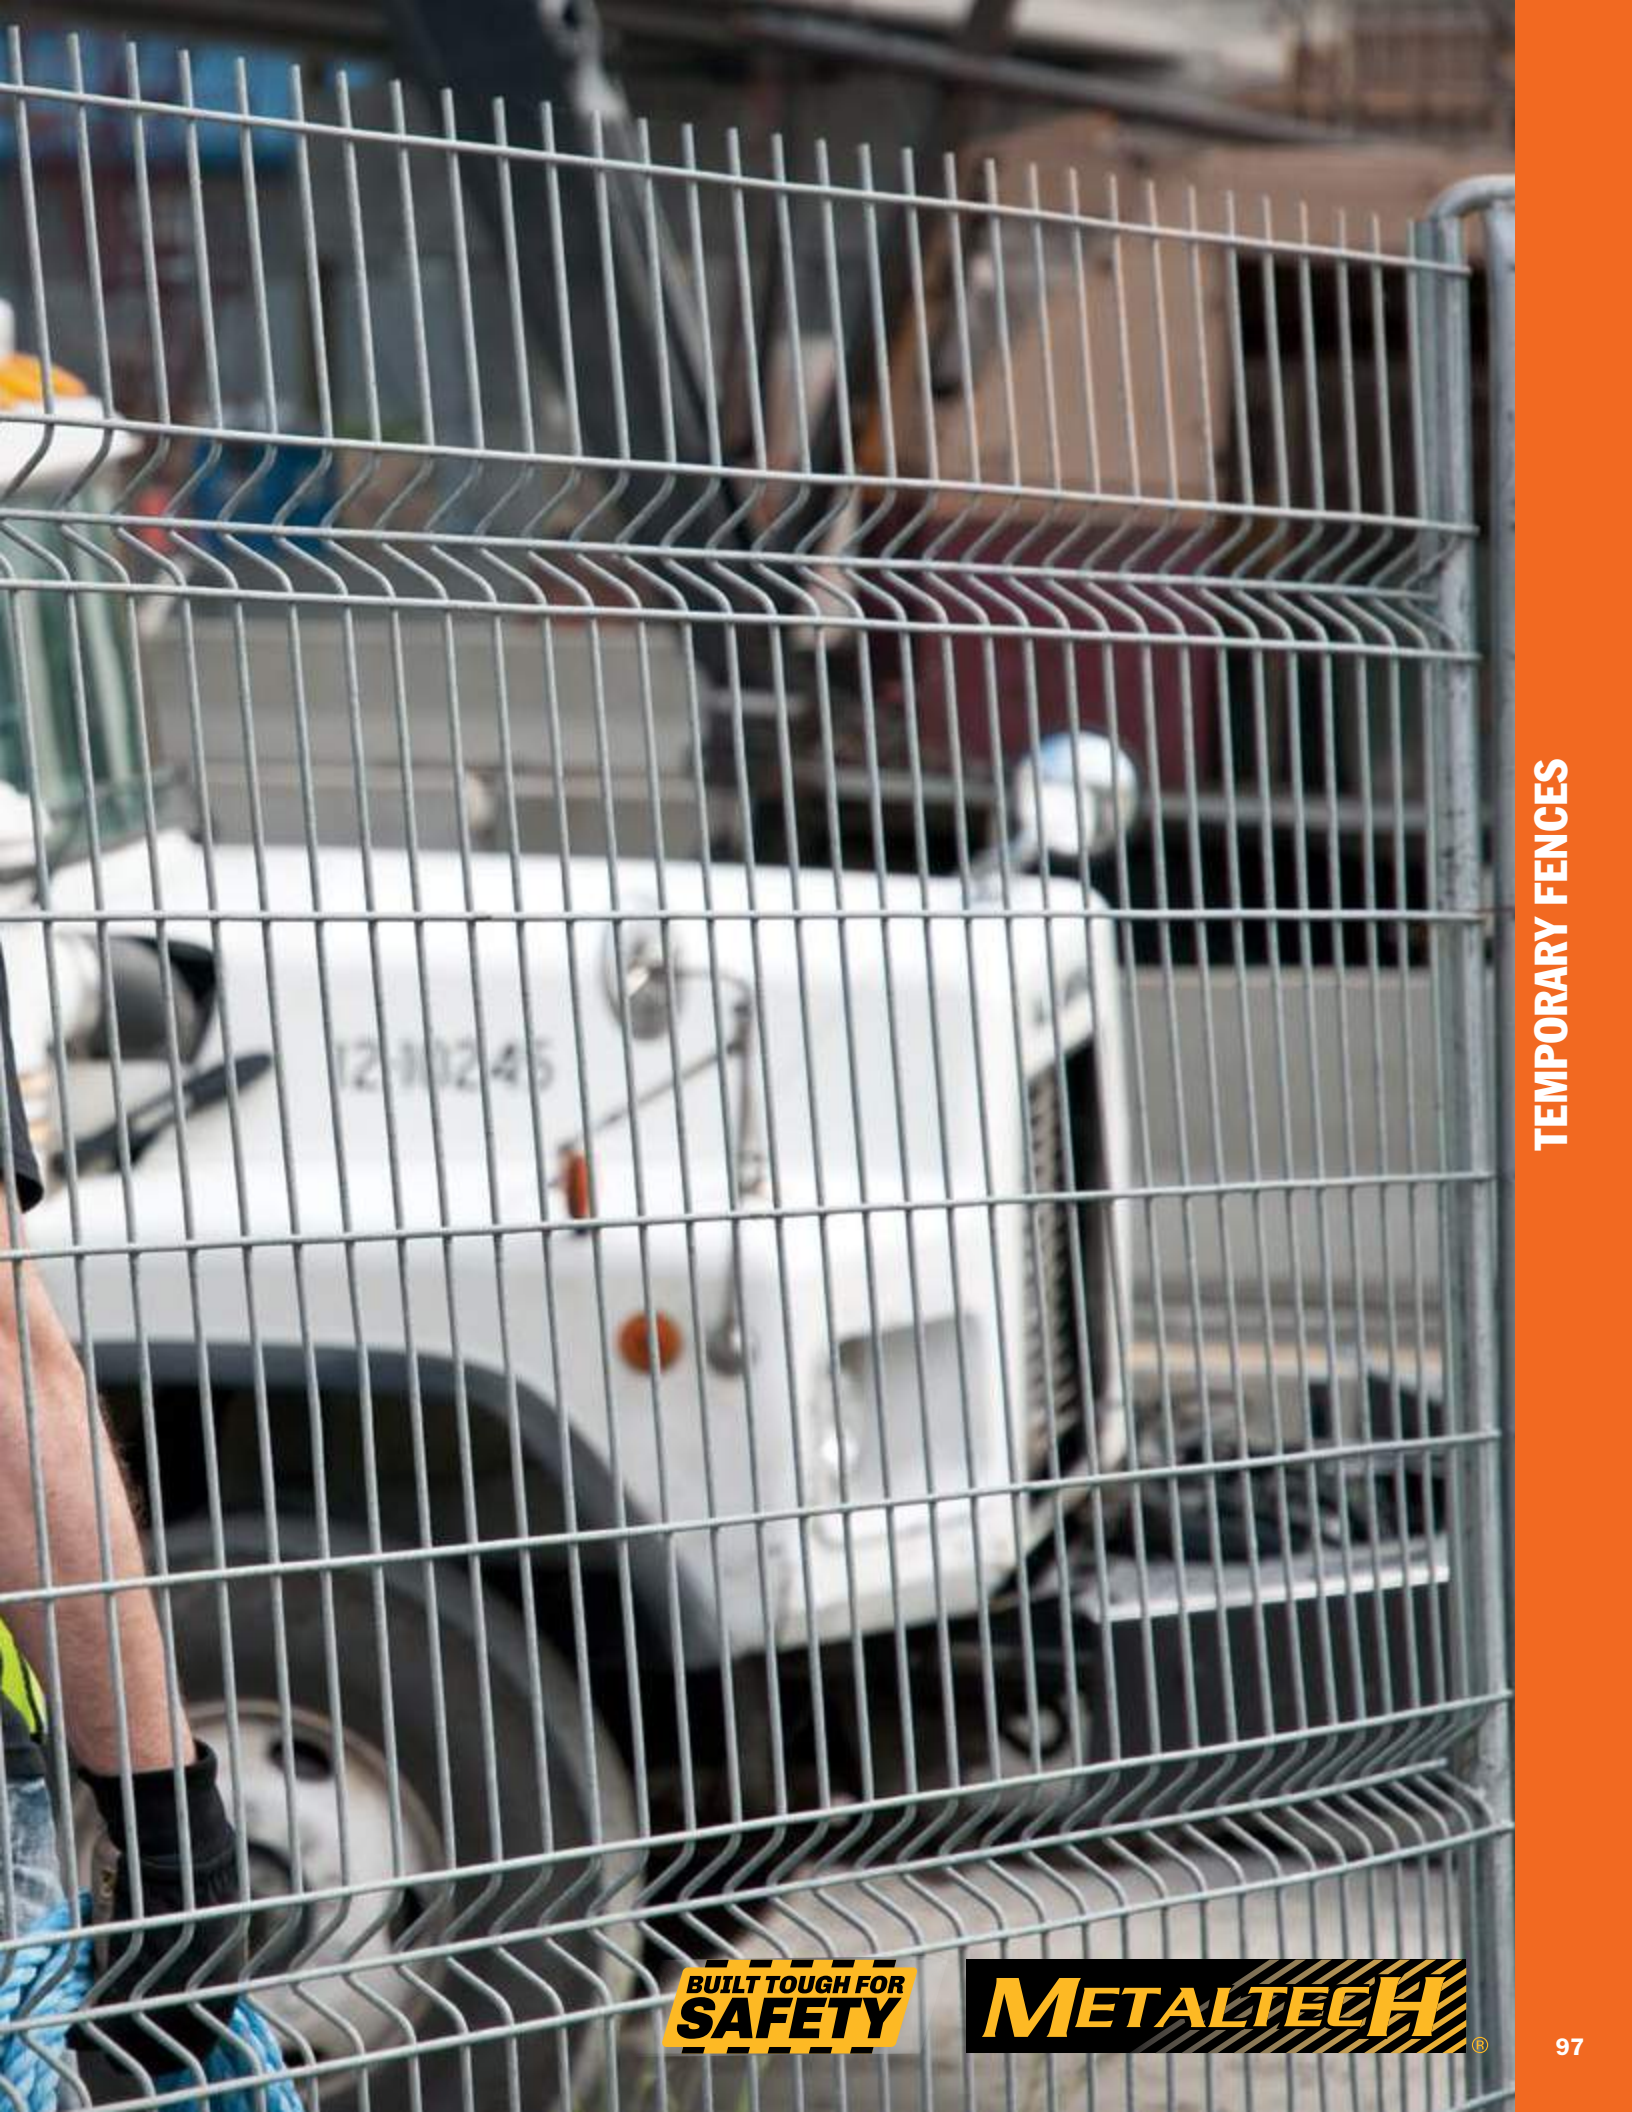

TEMPORARY FENCES

**BUILT TOUGH FOR
SAFETY**

METALTECH®

CROWD & TRAFFIC CONTROL

TEMPORARY FENCES



2" X 6"
MESH OPENING

6
GAUGE

GALVANIZED
FINISH

DESCRIPTION	42" SECURIGARD
DIMENSIONS (H X W)	42 X 86 IN.
WEIGHT	36 LB (16.3 KG)
GAUGE	6
MESH OPENING	2 X 6 IN.
FINISH	GALVANIZED
OPTION	3 IN. BASE FOR INTERIOR, TOEBOARD
QTY/PALLET	30
WEIGHT/PALLET	1,410 LB (640 KG)
MODEL	CT-SECGARDGV
UPC	778300084432



3 7/8"
MESH OPENING

GALVANIZED
FINISH

DESCRIPTION	42" SECURICROWD
DIMENSIONS (H X W)	42 X 101 IN.
WEIGHT	58.9 LB (26.7 KG)
TUBE	0.5 IN.
TUBES SPACING	3.875 IN.
FINISH	GALVANIZED
QTY/PALLET	30
WEIGHT/PALLET	2,065 LB (937 KG)
MODEL	CT-SECCTYGV
UPC	778300002665



2" X 4 7/8"
MESH OPENING

6
GAUGE

GALVANIZED
FINISH

DESCRIPTION	PANEL FOR CONCRETE JERSEY
DIMENSIONS (H X W)	52 X 76 IN.
WEIGHT	33.5 LB (15.2 KG)
FINISH	GALVANIZED
QTY/PALLET	50
WEIGHT/PALLET	1,885 LB (855 KG)
MODEL	CT-TFP5276PLUSHS

JOB SITES SECURITY

ADVICE

Add 5/8" per fence panel length to calculate the required linear feet



2" X 6"
MESH OPENING

6
GAUGE

GALVANIZED
FINISH



WITH HOOK




DESCRIPTION	DIMENSIONS (H X W)	WEIGHT	MODELS	QTY/PALLET	WEIGHT/PALLET
6' PROTEC SAFERSTACK	71 X 90 5/16 IN.	46 LB (20.9 KG)	CT-TFP7296S	60	3,608 LB (1,637 KG)
6' PROTEC SAFERSTACK WITH HOOK	71 X 90 5/16 IN.	47 LB (21.3 KG)	CT-TFP7296HS	60	3,668 LB (1,664 KG)
8' PROTEC SAFERSTACK	98 X 90 5/16 IN.	63.5 LB (28.8 KG)	CT-TFP9696S	45	3,473 LB (1,575 KG)
8' PROTEC SAFERSTACK WITH HOOK	98 X 90 5/16 IN.	64.5 LB (29.3 KG)	CT-TFP9696HS	45	3,518 LB (1,596 KG)



2" X 4 7/8"
MESH OPENING

6
GAUGE

GALVANIZED
FINISH

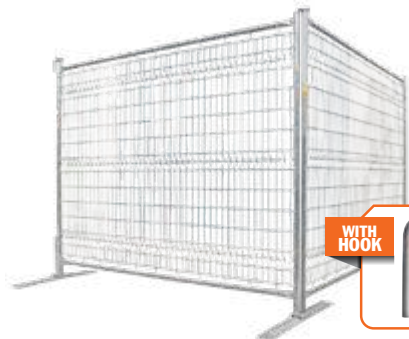

WITH HOOK



DESCRIPTION	DIMENSIONS (H X W)	WEIGHT	MODELS	QTY/PALLET	WEIGHT/PALLET
6'4" PROTEC PLUS SAFERSTACK	76 X 90 5/16 IN.	54 LB (24.5 KG)	CT-TFP7696PLUSS	50	3,418 LB (1,550 KG)
6'4" PROTEC PLUS SAFERSTACK WITH HOOK	76 X 90 5/16 IN.	55 LB (25 KG)	CT-TFP7696PLUSHS	50	3,468 LB (1,573 KG)
8'6" PROTEC PLUS SAFERSTACK	103 X 90 5/16 IN.	80 LB (36.3 KG)	CT-TFP10396PLUSS	30	2,760 LB (1,252 KG)
8'6" PROTEC PLUS SAFERSTACK WITH HOOK	103 X 90 5/16 IN.	78 LB (35.4 KG)	CT-TFP10396PLUSHS	30	2,784 LB (1,263 KG)

TEMPORARY FENCES

INFO



CUSTOMIZE IT!

- ✓ PROMOTE YOUR COMPANY WITH A PERSONALIZED NAMEPLATE*
- ✓ INCREASE YOUR VISIBILITY WITH COLORFUL FENCES

OPTIONAL COLORS:



* The identification plates are only sold with a minimum order. Please check with our customer service to get our great rates!



GET THE METALTECH APP



FENCE ACCESSORIES

TEMPORARY FENCES



P



G



G



G

DESCRIPTION	PEDESTRIAN ACCESS GATE	ACCESS GATE BASE	ACCESS GATE TOP ARCH	ACCESS GATE IDENTIFICATION
COMPATIBLE	PROTEC & PROTEC PLUS	PEDESTRIAN ACCESS GATE	PEDESTRIAN ACCESS GATE	ACCESS GATE TOP ARCH
FINISH	GALVANIZED	GALVANIZED	GALVANIZED	N/A
WEIGHT	49 LB (22 KG)	32 LB (14.5 KG)	17 LB (7.7 KG)	0.25 LB (0.1 KG)
MODEL	CT-TAGK	CT-TAGB	CT-TAGT	ETI-TAGTL
UPC	778300094554	N/A	778300000159	N/A



P



P



P



P

DESCRIPTION	FENCE STABILIZER	DOUBLE CLAMP	GATE HINGE KIT	GATE LATCH AND FINGER KIT
COMPATIBLE	PROTEC & PROTEC PLUS	PROTEC & PROTEC PLUS	PROTEC & PROTEC PLUS	PROTEC & PROTEC PLUS
FINISH	GALVANIZED	GALVANIZED	GALVANIZED	GALVANIZED
WEIGHT	5.3 LB (2.4 KG)	0.75 LB (0.3 KG)	4.24 LB (1.9 KG)	2 LB (0.9 KG)
MODEL	CT-STABILGV	CT-TFDCGK	CT-TFHG	CT-TFLGF
UPC	778300000180	778300000128	778300000135	778300000142



P



P

DESCRIPTION	TRANSPORT & STORAGE SYSTEM	PRIVACY FENCE NETTING (90% SHADE)						
		DIMENSIONS	PACKAGE	COLOR	WEIGHT	COMPATIBLE	MODEL	UPC
COMPATIBLE	PROTEC & PROTEC PLUS	72 IN. X 150 FT	72 X 10 IN.	BLACK	37 LB	6' PROTEC & PROTEC PLUS	CT-TFNET6BK	778300084456
INFO	FOR 6 X 8 FT PANELS	72 IN. X 150 FT	72 X 10 IN.	GREEN	37 LB	6' PROTEC & PROTEC PLUS	CT-TFNET6GN	778300084463
FINISH	POWDER COATED	72 IN. X 150 FT	72 X 10 IN.	BLUE	37 LB	6' PROTEC & PROTEC PLUS	CT-TFNET6BL	778300084401
WEIGHT	253 LB (115 KG)	96 IN. X 150 FT	96 X 10 IN.	BLACK	45 LB	8' PROTEC & PROTEC PLUS	CT-TFNET8BK	778300084470
MODEL	CT-SAFERRACK	96 IN. X 150 FT	96 X 10 IN.	GREEN	45 LB	8' PROTEC & PROTEC PLUS	CT-TFNET8GN	778300084487
UPC	778300094547	96 IN. X 150 FT	96 X 10 IN.	BLUE	45 LB	8' PROTEC & PROTEC PLUS	CT-TFNET8BL	778300084494

COMPATIBILITY

- P** PROTEC & PROTEC PLUS
- S** SECURIGARD
- SC** SECURICROWD
- G** ACCESS GATE
- J** PANEL FOR CONCRETE JERSEY

NEW



NEW FOOT RAMP
CUSTOMIZE IT WITH YOUR COMPANY LOGO!*

*Sold with a minimum order. Ask our customer service.




P



P S



P S



S

DESCRIPTION	SWIVEL GATE CASTER*	REINFORCED BASE PLATE	FENCE PANEL FOOT RAMP	FIXED SQUARE BASE PLATE
COMPATIBLE	PROTEC & PROTEC PLUS	PROTEC, PROTEC PLUS & SECURIGARD	BASE PLATE: CT-TFBPG	SECURIGARD
DIMENSIONS	5 IN.	34 X 3.5 X 14 IN.	20 X 14 IN. (50,8 X 35,6 CM)	6 X 6 X 4 IN.
FINISH	N/A	GALVANIZED	POLYPROPYLENE PLASTIC	GALVANIZED
WEIGHT	3 LB (1.4 KG)	11 LB (5 KG)	2.4 LB (1.1 KG)	2.7 LB (1.2 KG)
MODEL	I-11CAS5P	CT-TFBPG	CT-TFC	CT-SECBPFGV
UPC	778300211555	778300000111	N/A	778300084449

* NOTE: To secure the caster to the fence, you must drill a hole at the same height as the one on the caster and the same diameter. Secure the caster at the fence with a locking-pin (I-CAS5PIN, M-MLG or M-MTOGGLE).



P S



SC



SC



S

DESCRIPTION	FENCE COUNTERWEIGHT	BASE PLATE (HOOK SIDE)	BASE PLATE (RECEIVER SIDE)	TOEBOARD
COMPATIBLE	PROTEC, PROTEC PLUS & SECURIGARD	SECURICROWD	SECURICROWD	SECURIGARD
DIMENSIONS	21 X 21 IN.	26 X 11.5 IN.	20 X 7.75	85 X 7 IN.
MATERIAL/FINISH	RECYCLED RUBBER	GALVANIZED	GALVANIZED	GALVANIZED
WEIGHT	46 LB (20.86 KG)	4.7 LB (2.1 KG)	3.2 LB (1.5 KG)	10 LB (4.5 KG)
MODEL	M-MTB	CT-TFBPCTYHGV	CT-TFBPCTYRGV	CT-SGTBGV
UPC	N/A	778300002085	778300002092	N/A



J



J



J




P J S SC

DESCRIPTION	FENCE CONNECTION	SIDE FENCE BASE	MIDDLE FENCE BASE	IDENTIFICATION PLATE*
COMPATIBLE	PANEL FOR CONCRETE JERSEY	PANEL FOR CONCRETE JERSEY	PANEL FOR CONCRETE JERSEY	PROTEC, PROTEC PLUS JERSEY, SECURIGARD & SECURICROWDY
DIMENSIONS	9.25 X 2 IN.	11.5 X 4 X 7.75 IN.	11.5 X 4 X 7.75 IN.	8.25 X 4.25 IN. (FOLDED)
FINISH	GALVANIZED	GALVANIZED	GALVANIZED	N/A
WEIGHT	2.7 LB (1.2 KG)	2.9 LB (1.3 KG)	3.2 LB (1.5 KG)	N/A
MODEL	CT-TFPJSC	CT-TFPJSEBP	CT-TFPJSMBP	CT-PLAQUEIDGEN

* The identification plates are only sold with a minimum order. Please check with our customer service to get our great rates!

TEMPORARY FENCES



GET THE METALTECH APP



EXTERIOR SCAFFOLDING VIEW

VISUALIZATION OF THE COMPONENTS LOCATION
OF A BASIC SCAFFOLDING STRUCTURE.



COUPLING PIN · P.7



FRAME · P.8-14



FRAME LOCKS · P.7



BASE PLATE · P.21




LEVELING JACK · P.20-21



CASTER · P.21

EXTERIOR SCAFFOLDING - VIEW




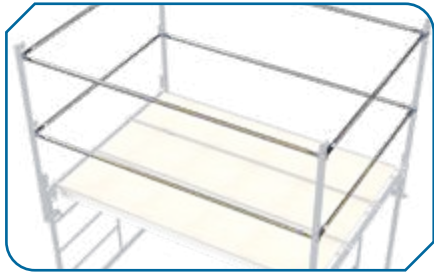

GUARDRAIL · P.15



GUARDRAIL POST · P.15

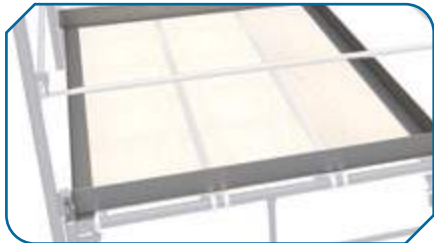

TOEBOARD · P.15



PLATFORM · P.19



WALL ATTACHMENT · P.18



LOCK ARM · P.17



PIG TAIL · P.17



OUTRIGGER · P.21



DIAGONAL BRACE · P.16



CROSS BRACE · P.16



GET THE METALTECH APP



EXTERIOR SCAFFOLDING SET UP INSTRUCTIONS

Scaffolding should be erected by at least two people. One person should be knowledgeable in erecting scaffolding to supervise the work. These step-by-step instructions are only a general guide. The following example is based on building a scaffolding that is 7 x 5 ft. by 1 frame high.

1



Select and prepare the ground area. Place suitable sills and make sure there are no holes under the sills. Select the equipment you need and place it near the work area. Put the adjustable leveling jack plates on the sills in the location that matches your scaffold dimensions. Do not secure the bases to the sills at this step.

2



Adjust the nuts of the leveling jack, starting at the highest point of the ground level. The nuts at the highest ground level should be set to 3-6 inches from the top of the sill, depending on the slope. Place the first frame onto the base at the highest point. Connect the first cross brace to the frame. Allow the frame to lean slightly forward and rest on the sill while you prepare for the next frame to be installed.

3



Install the second frame onto the leveling jack. Secure the first cross brace to the second frame.

4



Install the second cross brace to both frames. Next, you need to level and plumb the scaffolding. Start at the highest point of the scaffolding. If possible, use the leveling jack to bring the highest corner down closer to the sill. Next, bring all four corners up to that point. If the bottom cross braces of each frame are level with each other, then frames should also be plumb. Install the diagonal brace to keep the scaffolding square. Check the level again and plumb if necessary. Fasten the leveling jack to the sills with either nails or screws.

5



Install the deck, which may be an all aluminium platform or with wood deck or scaffold planks. If using wooden planks, they must extend beyond the supporting points at least 6 inches but not more than 12 inches. Secure the deck so it cannot move.

6



Install the guardrail posts onto the coupling pins seated in the top of the frames. Put a pig tail lock through the top and bottom of each coupling pin to avoid any separation.

7



Attach the guardrails to the posts on all the exposed sides.

8



Install toeboards as required. The gap between the bottom of the toeboard and the top of the platform must not be more than 1/2 inches.



EXTERIOR SCAFFOLDING SAFETY GUIDELINES

THE PRODUCT OR ASSEMBLY VARIANTS SHOWN IN THESE INSTRUCTIONS FOR ASSEMBLY AND USE MAY BE SUBJECT TO LOCAL REGULATIONS. THE PRODUCT USER BEARS THE RESPONSIBILITY FOR COMPLIANCE WITH SUCH REGULATIONS, IF THERE IS A CONFLICT BETWEEN THIS GUIDELINES AND THE LOCAL REGULATIONS, LOCAL REGULATIONS SHALL SUPERSEDE THESE GUIDELINES.

REQUIREMENTS FOR ACCESS FRAME SCAFFOLDING

- A scaffold must be erected, altered, and dismantled by qualified workers or under the direct supervision of a qualified person. The qualified person must ensure that the erection is carried out properly, and that the correct components and materials are being used. All equipment must be inspected before use to ensure that it is in good repair and suitable for the intended use.
- The base must be firm and level enough to support the load of scaffolding, workers, and materials. Sills and base plates are required on any soil or unstable ground condition, or where any leveling adjustment is needed. The sill must be sound, rigid, and capable of supporting the maximum loads without settlement or deformation.
- Leveling jack base must be adjusted within the limits specified by the local regulation.
- The frames must be plumb and level and spaced to adequately support the loads.
- If uplift could cause the components to separate, locking pins must be used and the components secured. Uplift might be caused by the action of wind on a secured deck or by the leverage action of a cantilever side bracket on the scaffolding. All joints must be pinned on rolling scaffoldings and free-standing towers.
- With a rolling scaffolding or free-standing tower, the platform height must not exceed three times its smallest base dimension (3 to 1 rule).
- A scaffolding built above the 3 to 1 rule must be effectively guyed or secured to a building or structure to prevent overturning. The guying of a scaffolding may require the direction of a professional engineer.
- Guardrails must be installed on all open sides of the platform where a person could fall a distance of 10 ft. or more. The top rail must be placed 40-44 in. above the work surface. An intermediate rail must be placed halfway between the top rail and the toeboard, if one is provided, or halfway between the top rail and the work surface if no toeboard is provided.

- Toeboards must be installed on all the open sides of a platform where it is possible for tools and or materials to roll off. The top of the toeboard must be at least 4 in. above the platform. If loose materials are to be stacked above the height of the toeboard, then the toeboard must be increased in height or mesh panels must be installed to prevent materials from falling off the scaffolding.


BEFORE ERECTING ACCESS FRAME SCAFFOLDING

- What will the scaffolding be used for? For example, light duty (one or two workers; painting a wall), or heavy duty (several tradespersons, with large and heavy materials on the platform)?
- How high will the scaffolding be? Will it be erected in one operation or as the work progresses?
- Is the ground firm? Can it support the loads from the scaffolding, workers, and materials on it?
- Will the scaffolding need to be tied in? How will this be done? Will the ties be moved as the work progresses?
- Is the scaffolding likely to be covered or enclosed as a protection against the elements? Is there provision for adding additional ties to the adjoining structure?
- What will be the method of access and egress? For example, a sloping ladder, vertical ladder, built-in stairway, or direct from the floors of the building structure?
- On a multi-level scaffolding, how many levels will be loaded with materials at one time? Will an engineer be required to make the calculations for the total anticipated loading and possibly design the scaffolding and the sills?
- If a rolling scaffolding is required, consider ground surface, height restriction (3 to 1 rule) hazards when moving (such as power lines, projections from the building, and potholes).

EQUIPMENT INSPECTION

YOU MUST INSPECT THE EQUIPMENT YOU PLAN TO USE TO MAKE SURE THAT IT IS IN GOOD REPAIR AND SUITABLE FOR THE JOB. CHECK THE FOLLOWING:

- Sills: suitable size and strength for the loads. Not split or rotten.
- Frames: no cracks in the welded joints. No kinks or dents in the top or bottom cross-members. Legs plumb and square with the cross-members. Brace locks in good working order. Coupling pins in place and secured to the frame.
- Cross braces and diagonal braces: straight with no bent ends. Pivot connection in good working order. No excessive rust.
- Scaffold planks: no split ends, saw cuts, notches, protruding nails, excessive warping. No contamination that may affect the integrity of the plank, such as oil, chemicals, and burns. (If you have any doubts about the strength of the plank, you may need to have it load-tested).
- All aluminium or with plywood deck platforms: not mis-shaped or cracked. Locks working. All bolts and screws in place. No burns or broken ends. If upper surface has non-skid coating, no rot or plywood separation on underside.
- Side or end brackets: hook-on attachment not distorted. No cracks in welds. No dents, kinks, or any signs of abuse.
- Guardrails: straight, with no kinks, dents, or excessive rust.
- Casters: same size and from same manufacturer. Wheel rotates well and the swivel below the stem is working. Brake mechanism works properly. Wheel tread has no damage.
- Leveling jacks: no cracks in weld where leveling jack is attached to the top of the caster. No thread damage. No curling or warping of the base plate. Adjusting nut is a tight fit.
- Other equipment: inspect any other equipment in the frame structure. Damaged equipment should be tagged and marked as not fit for use. Inform the supervisor so that others do not use it.



REPLACEMENT PARTS



JOBSITE SERIES™ 6' BAKER™

I-CISC PARTS

CODE	DESCRIPTION
I-C1CAS5	ONE 5" CASTER WITH LOCKING PIN
I-C4CAS5	FOUR 5" CASTERS WITH LOCKING PINS

CODE	DESCRIPTION
I-CAS5PIN	LOCKING PIN
I-CISP	PLATFORM



JOBSITE SERIES™ SAFECLIMB™ 6' BAKER™

I-CISCH1 PARTS

CODE	DESCRIPTION
I-C1CAS5	ONE 5" CASTER WITH LOCKING PIN
I-C4CAS5	FOUR 5" CASTERS WITH LOCKING PINS

CODE	DESCRIPTION
I-CAS5PIN	LOCKING PIN
I-CISCH1003	PLATFORM WITH TRAPDOOR



JOBSITE SERIES™ 6' BAKER™ WITH TRAPDOOR

I-CISCTP PARTS

CODE	DESCRIPTION
I-C1CAS5	ONE 5" CASTER WITH LOCKING PIN
I-C4CAS5	FOUR 5" CASTERS WITH LOCKING PINS

CODE	DESCRIPTION
I-CAS5PIN	LOCKING PIN
I-CISPT	PLATFORM WITH TRAPDOOR



JOBSITE SERIES™ PERRY STYLE™

I-CISCPY PARTS

CODE	DESCRIPTION
I-C1CAS5PY	ONE 5" CASTER WITH LOCKING PIN
I-C4CAS5PY	FOUR 5" CASTERS WITH LOCKING PINS

CODE	DESCRIPTION
I-CAS5PIN	LOCKING PIN
I-CISCPYP	PLATFORM



SCAFFOLDBENCH SYSTEM™ 6' BAKER

I-CISCMT PARTS

CODE	DESCRIPTION
I-CISC902	PLATFORM SECURITY LATCH KIT
I-CAS5PIN	LOCKING PIN
I-C1CAS5	CASTER WITH LOCKING PIN
I-CISC901	U-LOCK KIT
I-CISCMT901	TIGHTENING HANDLE KIT

CODE	DESCRIPTION
I-CISCMT902	REAR SUPPORT KIT
I-CISCMT903	TIGHTENING KNOB KIT
I-CISCMT904	SPRING CLIP KIT
I-CISCMT905	WING NUT AND CARRIAGE BOLT KIT
I-CISSU901	ANTI-TIP ASSEMBLY & LOCKING PIN KIT



SCAFFOLDBENCH SYSTEM™ WORKBENCH

I-CISCWB PARTS

CODE	DESCRIPTION
I-CISC902	PLATFORM SECURITY LATCH KIT
I-CAS5PIN	LOCKING PIN
I-C1CAS5	CASTER WITH LOCKING PIN
I-CISC901	U-LOCK KIT
I-CISCMT901	TIGHTENING HANDLE KIT

CODE	DESCRIPTION
I-CISCMT902	REAR SUPPORT KIT
I-CISCMT903	TIGHTENING KNOB KIT
I-CISCMT904	SPRING CLIP KIT
I-CISCMT905	WING NUT AND CARRIAGE BOLT KIT
I-CISSU901	ANTI-TIP ASSEMBLY & LOCKING PIN KIT



JOBSITE SERIES™ 6'

I-IRC PARTS

CODE	DESCRIPTION
I-ICW5	ONE 5" CASTER WITH LOCKING PIN
I-I4CW5	FOUR 5" CASTERS WITH LOCKING PINS
I-I1CAS5	ONE 5" CASTER. 3/4 THREAD

CODE	DESCRIPTION
I-I4CAS5	FOUR 5" CASTERS. 3/4 THREAD
I-IRP	PLATFORM
I-IRPP	PLATFORM ANTI-SLIP INSERTS



JOBSITE SERIES™ 5'

I-IMIS PARTS

CODE	DESCRIPTION
I-ICW5	ONE 5" CASTER WITH LOCKING PIN
I-I4CW5	FOUR 5" CASTERS WITH LOCKING PINS
I-CAS4PIN	LOCKING PIN
I-IMIPA	PLATFORM

CODE	DESCRIPTION
I-IMIAPA	STEP BAR
I-IMP PN	PLATFORM ANTI-SLIP INSERTS
I-IMISGRA	SAFETY RAIL



JOBSITE SERIES™ 4' DELUXE

I-IMCNDX PARTS

CODE	DESCRIPTION
I-C1CAS4	ONE 4" CASTER WITH LOCKING PIN
I-C4CAS4	FOUR 4" CASTERS WITH LOCKING PINS
I-CAS4PIN	LOCKING PIN
I-IMP N	PLATFORM

CODE	DESCRIPTION
I-IMAPN	STEP BAR
I-IMCHOOK	UTILITY HOOK
I-IMP PN	PLATFORM ANTI-SLIP INSERTS
I-IMCGR	SAFETY RAIL



JOBSITE SERIES™ 4' WITH SAFETY RAIL & TOOL SHELF

I-IMCNT PARTS			
CODE	DESCRIPTION	CODE	DESCRIPTION
I-C1CAS4	ONE 4" CASTER WITH LOCKING PIN	I-IMPIN	PLATFORM
I-C4CAS4	FOUR 4" CASTERS WITH LOCKING PINS	I-IMPNN	PLATFORM ANTI-SLIP INSERTS
I-CAS4PIN	LOCKING PIN	I-IMCGR	SAFETY RAIL



JOBSITE SERIES™ 4' WITH TOOL SHELF

I-IMCNAT PARTS			
CODE	DESCRIPTION	CODE	DESCRIPTION
I-C1CAS4	ONE 4" CASTER WITH LOCKING PIN	I-IMPIN	PLATFORM
I-C4CAS4	FOUR 4" CASTERS WITH LOCKING PINS	I-IMPNN	PLATFORM ANTI-SLIP INSERTS
I-CAS4PIN	LOCKING PIN		



4' HIGH PORTABLE BASIC MINI

I-IMCN PARTS			
CODE	DESCRIPTION	CODE	DESCRIPTION
I-C1CAS4	ONE 4" CASTER WITH LOCKING PIN	I-IMPIN	PLATFORM
I-C4CAS4	FOUR 4" CASTERS WITH LOCKING PINS	I-IMPNN	PLATFORM ANTI-SLIP INSERTS
I-CAS4PIN	LOCKING PIN		



JOBSITE SERIES™ DRYWALL & PANEL HOIST

I-IDPL PARTS			
CODE	DESCRIPTION	CODE	DESCRIPTION
VB-ESPRG.016X.188X1.5Z	TRIPOD LOCK SPRING	I-IDPL904	MAST HEAD PIN & C-CLIP
I-BMDPL029	BRAKE HANDLE RUBBER CAP	I-IDPL905	OUTRIGGER LOCK KIT
I-IDPL038	TUBE END COVER	I-IDPL906	CRADLE & OUTRIGGER RUBBER CAPS
I-IDPL901	BIPOD BRAKE FOOT KIT	I-IDPL907	PANEL SUPPORT HOOK KIT
I-IDPL902	TRIPOD PIN & C-CLIP KIT	I-ICW5	ONE 5" CASTER
I-IDPL903	HANDLE KIT	I-CAS4PIN	LOCKING PIN



ALU SERIES™ 6' BAKER™

I-CAISC PARTS			
CODE	DESCRIPTION	CODE	DESCRIPTION
I-I1CAS5SALU	ONE 5" CASTER WITH LOCKING PIN	I-CAS5PIN	LOCKING PIN
I-I4CAS5SALU	FOUR 5" CASTERS WITH LOCKING PINS		



ALU SERIES™ 6'

I-CAIRC PARTS			
CODE	DESCRIPTION	CODE	DESCRIPTION
I-I1CAS5RALU	ONE 5" CASTER WITH LOCKING PIN	I-CAIRP	PLATFORM
I-I4CAS5RALU	FOUR 5" CASTERS WITH LOCKING PINS	I-IMPPIA	PLATFORM ANTI-SLIP INSERTS
I-CAS5PIN	LOCKING PIN		



ALU SERIES™ 4'

I-IMAC PARTS			
CODE	DESCRIPTION	CODE	DESCRIPTION
I-C1CAS4	ONE 4" CASTER WITH LOCKING PIN	I-IMPALU	PLATFORM
I-C4CAS4	FOUR 4" CASTERS WITH LOCKING PINS	I-IMPPIA	PLATFORM ANTI-SLIP INSERTS
I-CAS4PIN	LOCKING PIN		



GET THE METALTECH APP



REPLACEMENT PARTS

REPLACEMENT PARTS



BUILDMAN™ 6' BAKER™

I-BMSS PARTS

CODE	DESCRIPTION
I-C1CAS6	ONE 6" CASTER WITH LOCKING PIN
I-C4CAS6	FOUR 6" CASTERS WITH LOCKING PINS

CODE	DESCRIPTION
I-CAS5PIN	LOCKING PIN
I-BMSS003	PLATFORM WITH TRAPDOOR



BUILDMAN™ 6'

I-BM6S PARTS

CODE	DESCRIPTION
I-ICW5RD	ONE 5" CASTER WITH LOCKING PIN
I-I4CW5RD	FOUR 5" CASTERS WITH LOCKING PINS
I-CAS5PIN	LOCKING PIN

CODE	DESCRIPTION
I-BM6P	PLATFORM OF 8.75"
I-BM6SP	PLATFORM OF 6.5"
I-IMPNN	PLATFORM ANTI-SLIP INSERTS



BUILDMAN™ 4'

I-BM4S PARTS

CODE	DESCRIPTION
I-ICW5RD	ONE 5" CASTER WITH LOCKING PIN
I-I4CW5RD	FOUR 5" CASTERS WITH LOCKING PINS
I-CAS4PIN	LOCKING PIN

CODE	DESCRIPTION
I-BM4P	PLATFORM
I-IMPNN	PLATFORM ANTI-SLIP INSERTS
I-BM4GR	SAFETY RAIL



WALL HAULER™ SERIES 2000, 3000, 3600 AND H DRYWALL CART

I-BMD3631 / I-BMD3031 / I-BMD3131 / I-BMD2131 / I-BMDHER31 PARTS

CODE	DESCRIPTION
I-DCC8KPL	KINGPINLESS CASTER FRAME FOR 8" CASTER
I-DCCDL	DIRECTIONAL LOCK FOR CASTER
I-DCCWL	CASTER BRAKE
M-MLS	SPRING-LOCK (I-BMD3631)
I-DCC8P	ONE PHENOLIC 8" CASTER
I-DCC8P4	FOUR PHENOLIC 8" CASTERS
I-DCC8R	ONE POLYURETHANE 8" CASTER ON POLYPROPYLENE CORE
I-DCC8R4	FOUR POLYURETHANE 8" CASTERS ON POLYPROPYLENE CORE
I-DCC8YGR	ONE YELLOW POLYURETHANE 8" CASTER ON POLYPROPYLENE CORE
I-DCC8YGR4	FOUR YELLOW POLYURETHANE 8" CASTERS ON POLYPROPYLENE CORE



BUILDMAN™ DRYWALL STILTS

I-BMDS1830 / I-BMDS2440 PARTS

CODE	DESCRIPTION	CODE	DESCRIPTION
I-BMDS1830901	SPRING KIT	VB-HTL1/4X13/4	ADJUSTMENT KNOB
I-BMDS1830902	FOOT STRAP KIT	I-BMDS1830006	LOWER SIDE POLE (I-BMDS1830)
I-BMDS1830903	HEEL CUP KIT	I-BMDS1830005	UPPER SIDE POLE ASSEMBLY (I-BMDS1830)
I-BMDS1830904	FLOOR SOLE KIT	I-BMDS2440006	LOWER SIDE POLE (I-BMDS2440)
I-BMDS1830905	SLEEVE KIT	I-BMDS2440005	UPPER SIDE POLE ASSEMBLY (I-BMDS2440)
I-BMDS1830906	LEG STRAP KIT		



BUILDMAN™ 18"-30" DRYWALL BENCH

I-BMDWB18 PARTS

CODE	DESCRIPTION	CODE	DESCRIPTION
I-BMDWB18902	STEP-UP KIT	I-BMDWB18904	FOOT COVER KIT
I-BMDWB18003	BENCH LEG WITH FOOT	I-BMDWB18905	FINGER LEVERS LOCK KIT
I-BMDWB18903	RUBBER FOOT KIT	I-BMDWB18901	LOCKING BRACE KIT



BUILDMAN™ DRYWALL & PANEL HOIST

I-BMDPL PARTS

CODE	DESCRIPTION	CODE	DESCRIPTION
I-BMDPL901	TRIPOD LOCK KIT	I-BMDPL905	PANEL SUPPORT HOOK KIT
I-BMDPL906	CRADLE & OUTRIGGER RUBBER CAPS	I-CAS5PIN	LOCKING PIN
I-BMDPL903	RUBBER WASHER & NUT KIT	I-C1CAS6	CASTER
I-BMDPL025	HANDLE KIT	I-BMDPL902	BIPOD BRAKE FOOT KIT
I-BMDPL904	OUTRIGGER LOCK KIT	I-BMDPL029	BRAKE HANDLE RUBBER CAP

INDEX

AL-A0000.....	73,75	AL-T0100.....	73,75	F-KIT0740.....	82	I-BMDS1830.....	67
AL-A0001.....	73,75	AL-T0101.....	73,75	F-KIT0745.....	82	I-BMDS2440.....	67
AL-A0050.....	87	AL-T0102.....	73,75	F-KIT0750.....	82	I-BMDS1830005.....	108
AL-B0001.....	73,75	AL-T0103.....	73,75	F-KIT1215.....	82	I-BMDS1830006.....	108
AL-B0002.....	73,75	AL-T0104.....	73,75	F-KIT1220.....	82	I-BMDS1830901.....	108
AL-B0003.....	73,75	AL-T0105.....	73,75	F-KIT1225.....	82	I-BMDS1830902.....	108
AL-C0000.....	73,75	C-MART.....	25	F-KIT1230.....	82	I-BMDS1830903.....	108
AL-C0002.....	73,75	CT-PLAQUEIDGEN.....	101	F-KIT1235.....	82	I-BMDS1830904.....	108
AL-D0001.....	73,75	CT-SAFERRACK.....	100	F-KIT1240.....	82	I-BMDS1830905.....	108
AL-D0002.....	73,75	CT-SECBPFGV.....	101	F-KIT1245.....	82	I-BMDS1830906.....	108
AL-D0003.....	73,75	CT-SECCTYGV.....	98	F-KIT1250.....	82	I-BMDS2440005.....	108
AL-F3000.....	73	CT-SECWARDGV.....	98	F-KIT1255.....	82	I-BMDS2440006.....	108
AL-F3001.....	73	CT-SGTBGV.....	101	F-KIT1260.....	82	I-BMDSP.....	62,63,64
AL-F3002.....	73	CT-STABILGV.....	100	F-KIT1265.....	82	I-BMDSWB18.....	68
AL-F3003.....	73	CT-TAGB.....	100	F-KIT1270.....	82	I-BMDWB18003.....	108
AL-F4000.....	75	CT-TAGK.....	100	F-LAD2436.....	81	I-BMDWB18901.....	108
AL-F4001.....	75	CT-TAGT.....	100	F-OUT20.....	81	I-BMDWB18902.....	108
AL-F4002.....	75	CT-TFBPCTYHGV.....	101	F-OUT30.....	81	I-BMDWB18903.....	108
AL-F4003.....	75	CT-TFBPCTYRGV.....	101	F-PBRA0724.....	81	I-BMDWB18904.....	108
AL-F4004.....	75	CT-TFBPG.....	101	F-PBRA1224.....	81	I-BMDWB18905.....	108
AL-F4005.....	75	CT-TFC.....	101	F-TB07.....	80	I-BMS04.....	55
AL-F4101.....	75	CT-TFDCGK.....	100	F-TB12.....	80	I-BMSGRJP.....	55
AL-F4103.....	75	CT-TFHG.....	100	F-TB24.....	80	I-BMSO4TT.....	29,31,33,35,37,49,55
AL-G3000.....	73	CT-TFLGF.....	100	F-TBBRACK.....	80	I-BMSS.....	54
AL-G3001.....	73	CT-TFNET6BK.....	100	F-TCFUDU.....	81	I-BMSS003.....	108
AL-G3002.....	73	CT-TFNET6BL.....	100	F-TCSDU.....	81	I-BMSSEX.....	55
AL-G3003.....	73	CT-TFNET6GN.....	100	I-AN001.....	9	I-C1CAS4.....	106,107
AL-G4000.....	75	CT-TFNET8BK.....	100	I-AN011.....	9	I-C1CAS5.....	106
AL-G4001.....	75	CT-TFNET8BL.....	100	I-BM4GR.....	108	I-C1CAS5PY.....	106
AL-G4100.....	73,75	CT-TFNET8GN.....	100	I-BM4P.....	108	I-C1CAS6.....	108
AL-G4101.....	73,75	CT-TFP5276PLUSHS.....	98	I-BM4S.....	58	I-C4CAS4.....	106,107
AL-G4102.....	73,75	CT-TFP7296HS.....	99	I-BM6C4.....	57	I-C4CAS5.....	106
AL-J0001.....	73,75	CT-TFP7296S.....	99	I-BM6GR.....	57	I-C4CAS5PY.....	106
AL-J0002.....	73,75	CT-TFP7696PLUSHS.....	99	I-BM604.....	57	I-C4CAS5PYHD.....	35
AL-K3007.....	72	CT-TFP7696PLUS.....	99	I-BM6P.....	108	I-C4CAS6.....	108
AL-K3013.....	72	CT-TFP9696HS.....	99	I-BM6S.....	56	I-CAIRC.....	50
AL-K3019.....	72	CT-TFP9696S.....	99	I-BM6SK.....	57	I-CAIRP.....	107
AL-K3028.....	72	CT-TFP10396PLUSHS.....	99	I-BM6SP.....	108	I-CAIS04.....	49
AL-K3034.....	72	CT-TFP10396PLUS.....	99	I-BMD1931YGP.....	61	I-CAISC.....	48
AL-K3040.....	72	CT-TFPJSC.....	101	I-BMD1931YGPK.....	61	I-CAISCGR.....	49
AL-K3046.....	72	CT-TFPJSEBP.....	101	I-BMD1931YGR.....	61	I-CAS4PIN.....	106,107,108
AL-K3052.....	72	CT-TFPJSMBP.....	101	I-BMD1931YGRK.....	61	I-CAS5PIN.....	87,106,107,108
AL-K4007.....	74	E-LAD12T2.....	90	I-BMD2131P.....	60	I-CISC.....	28
AL-K4013.....	74	E-LAD15T1.....	91	I-BMD2131PK.....	60	I-CISC901.....	106
AL-K4019.....	74	E-LJ20P.....	93	I-BMD2131R.....	60	I-CISC902.....	106
AL-K4028.....	74	E-LJ30P.....	93	I-BMD2131RK.....	60	I-CISCH1.....	30
AL-K4034.....	74	E-MTL7000AL.....	92	I-BMD2131YGP.....	60	I-CISCH1003.....	106
AL-K4040.....	74	E-MTL7100AL.....	92	I-BMD2131YGPK.....	60	I-CISCMT.....	36
AL-K4046.....	74	E-MTL7200AL.....	92	I-BMD2131YGR.....	60	I-CISCMT901.....	106
AL-K4052.....	74	E-MTL7300AL.....	92	I-BMD2131YGRK.....	60	I-CISCMT902.....	106
AL-L0002.....	73,75	E-PWP7000AL.....	95	I-BMD3031P.....	62	I-CISCMT903.....	106
AL-O0000.....	73,75	E-PWP7100AL.....	95	I-BMD3031PK.....	62	I-CISCMT904.....	106
AL-O0001.....	73,75	E-PWP7101AL.....	95	I-BMD3031R.....	62	I-CISCMT905.....	106
AL-O0002.....	73,75	E-PWS7000AL.....	69	I-BMD3031RK.....	62	I-CISCPY.....	34
AL-P0001.....	73,75	E-PWS7100AL.....	69	I-BMD3131YGP.....	63	I-CISCPYGR.....	35
AL-P0002.....	73,75	E-PWS7200AL.....	69	I-BMD3131YGPK.....	63	I-CISCPYR.....	106
AL-P0003.....	73,75	E-PWS7300AL.....	69	I-BMD3131YGR.....	63	I-CISCTP.....	32
AL-P0100.....	73,75	E-SLA2RD.....	94	I-BMD3131YGRK.....	63	I-CISCWB.....	38
AL-P0101.....	73,75	E-SLA3RD.....	94	I-BMD3631P.....	64	I-CISGRJP.....	29,31,33,37
AL-P0102.....	73,75	E-SLS1BK.....	94	I-BMD3631PK.....	64	I-CIS04.....	29,31,33,37
AL-P1000.....	73,75	E-SLT3RD.....	94	I-BMD3631R.....	64	I-CIS04PY.....	35
AL-P1001.....	73,75	ETI-TAGTL.....	100	I-BMD3631RK.....	64	I-CIS0.....	106
AL-P1002.....	73,75	F-ADJ200.....	81	I-BMD4031YGPK.....	65	I-CISPT.....	29,33,37,106
AL-P1003.....	73,75	F-BBFP.....	20	I-BMD4031YGR.....	65	I-CISRL.....	29,33,35,37,39
AL-P1004.....	73,75	F-BRAD24.....	81	I-BMDHER31YGP.....	59	I-CISSU.....	29,33,35,37,39
AL-P1005.....	73,75	F-BRAH24.....	81	I-BMDHER31YGPK.....	59	I-CISSU901.....	106
AL-Q0100.....	76	F-DH24.....	81	I-BMDHER31YGR.....	59	I-CISTR.....	29,31,33,35,37,41,49
AL-Q0105.....	76	F-DP24.....	81	I-BMDHER31YGRK.....	59	I-DC8KPL.....	108
AL-Q0106.....	76	F-FRA0710L.....	80	I-BMDPL.....	66	I-DCC8P.....	108
AL-Q0107.....	77	F-FRA0715L.....	80	I-BMDPL025.....	108	I-DCC8P4.....	108
AL-Q0108.....	77	F-FRA1210L.....	80	I-BMDPL029.....	107,108	I-DCC8R.....	108
AL-Q3000.....	73	F-FRA1215L.....	80	I-BMDPL901.....	108	I-DCC8R4.....	108
AL-Q3001.....	73	F-ISPC.....	83	I-BMDPL902.....	108	I-DCC8YGR.....	108
AL-Q3002.....	73	F-KIT0715.....	82	I-BMDPL903.....	108	I-DC8YGR4.....	108
AL-Q3003.....	73	F-KIT0720.....	82	I-BMDPL904.....	108	I-DCCDL.....	108
AL-Q3004.....	73	F-KIT0725.....	82	I-BMDPL905.....	108	I-DCCWL.....	108
AL-Q3005.....	73	F-KIT0730.....	82	I-BMDPL906.....	108	I-EX4PPNCASPY.....	35
AL-Q3101.....	73	F-KIT0735.....	82	I-BMDPLK.....	66	I-I1CAS5.....	106



INDEX

I-1CAS5P.....	14	M-MA7860PS.....	11	M-MGR10.....	15	M-MTCFW2.....	18
I-1CAS5P.....	101	M-MA8036ATLW1PS.....	13	M-MGR30.....	15	M-MTCFW3.....	18
I-1CAS5RALU.....	107	M-MA12078GV.....	13	M-MGRMAEX.....	15	M-MTCH.....	87
I-4CAS5.....	106	M-MA12160DEGV.....	13	M-MGRMAEXGV.....	15	M-MTCL.....	87
I-4CAS5RALU.....	107	M-MBB4UGV.....	21	M-MGT30.....	15	M-MTCP.....	87
I-4CW5.....	106	M-MBBF.....	21	M-MGT60.....	15	M-MTCSDU.....	18
I-4CW5RD.....	108	M-MBBFGV.....	21	M-MGT84.....	15	M-MTCSW1.....	18
I-HBBF4.....	29,31,33,35,37,49,55	M-MBBS.....	21	M-MGT120.....	15	M-MTCSW2.....	18
I-IBSJP12H4.....	29,31,33,37,49,55	M-MBBSGV.....	21	M-MHA.....	23	M-MTCSW3.....	18
I-CW5.....	106,107	M-MBC8.....	21	M-MHAGV.....	23	M-MTCT.....	87
I-CW5RD.....	108	M-MBC8HD.....	21	M-MHAP.....	23	M-MTCW.....	87
I-IDPL.....	47	M-MBSJP8U24.....	21	M-MHP.....	23	M-MTCWL.....	87
I-IDPL038.....	107	M-MBSJP24.....	20	M-MLA13.....	17	M-MTE13100.....	24
I-IDPL901.....	107	M-MBSJP24H.....	20	M-MLA13GV.....	17	M-MTESCREW.....	24
I-IDPL902.....	107	M-MBSJP24N.....	20	M-MLA2931.....	17	M-MTOGGLE.....	17
I-IDPL903.....	107	M-MBSJP24NH.....	20	M-MLA2931GV.....	17	M-MTS01.....	86
I-IDPL904.....	107	M-MBSJP36.....	20	M-MLB.....	17	M-MTS02.....	86
I-IDPL905.....	107	M-MBSJPF24.....	21	M-MLC1.....	17	M-MTS03.....	86
I-IDPL906.....	107	M-MBSJPSW24.....	20	M-MLC1S.....	17	M-MTS04.....	86
I-IDPL907.....	107	M-MBSJPSW24H.....	20	M-MLC1U.....	17	M-MTWA.....	18
I-IDPLK.....	47	M-MBSJPSW24N.....	20	M-MLC1US.....	17	M-MTWAEGE.....	18
I-IJC.....	59	M-MBSJPSW24NH.....	20	M-MLG.....	17	M-MTWAFDUK.....	18
I-IMAC.....	51	M-MBSJS24.....	20	M-MLS.....	17,87,108	M-MTWAGVPL.....	18
I-IMAPN.....	106	M-MBSJS24H.....	20	M-MO32.....	21	M-MTWAK.....	18
I-IMCGR.....	106	M-MBSJS36.....	20	M-MO32GV.....	21	M-MTWLC8.....	87
I-IMCGR.....	107	M-MBT11.....	24	M-MPA719.....	19	M-MTWLCC.....	87
I-IMCHOOK.....	106	M-MC27.7584.....	16	M-MPA819.....	19	M-MTWLF.....	87
I-IMCN.....	46	M-MC27.75120.....	16	M-MPA1019.....	19	M-MTWLR.....	87
I-IMCNAT.....	45	M-MC2484.....	16	M-MPP719.....	19	M-MTWLTIE.....	87
I-IMCNDX.....	43	M-MC2496.....	16	M-MPP719AS.....	19	M-MW71016.....	24
I-IMCNT.....	44	M-MC3684.....	16	M-MPP719RE.....	19	M-MW71026.....	24
I-IMIAPA.....	106	M-MC3696.....	16	M-MPP724.....	19	M-MWB42.....	25
I-IMIAPA.....	106	M-MC4884.....	16	M-MPP724AS.....	19	M-MWB42GV.....	25
I-IMIS.....	42	M-MC4896.....	16	M-MPP728.....	19	M-MWC16FP.....	24
I-IMISGRA.....	106	M-MC24120.....	16	M-MPP728DL.....	19	M-MWC26.....	24
I-IMPALU.....	107	M-MC36120.....	16	M-MPP819.....	19	M-PA4B.....	25
I-IMPAN.....	106,107	M-MC48120.....	16	M-MPP828DL.....	19	M-PA5B.....	25
I-IMPPA.....	107	M-MC364884AN.....	16	M-MPP1019.....	19	M-PA6B.....	25
I-IMPPN.....	106,107,108	M-MC364896AN.....	16	M-MPP1019AS.....	19	M-PA6B.....	25
I-IRC.....	40	M-MDB3084.....	16	M-MPP1019RE.....	19	M-PA10B.....	25
I-IREX3.....	41	M-MDB6084.....	16	M-MPP1024.....	19	M-PA12B.....	25
I-IRGR.....	41	M-MDB30120.....	16	M-MPP1024AS.....	19	M-PA14B.....	25
I-IRO4.....	41	M-MDB60120.....	16	M-MPP1028.....	19	M-PA16B.....	25
I-IRP.....	106	M-MDNET10BK.....	24	M-MPP1028DL.....	19	M-PA18B.....	25
I-IRPP.....	106	M-MDNET10GN.....	24	M-MRBF.....	25	M-PA20B.....	25
I-ISEX4PPNCAS.....	29,31,33,37	M-ME20.....	16	M-MS20.....	16	M-PA21B.....	25
I-ISL.....	29,31,33,35,37,49,55	M-MF60EPS.....	8	M-MS20GV.....	16	M-PA24B.....	25
I-SBC.....	39	M-MF2460VLV1PS.....	8	M-MS30.....	16	M-PA28B.....	25
I-SCDPL.....	47,66	M-MF3660GVPS.....	8	M-MS40.....	16	M-PA32B.....	25
LD-LD4848DSPS.....	14	M-MF3660PS.....	8	M-MST760.....	22	M-PEP7000AL.....	93
LD-LD4848PS.....	14	M-MF4860GVPS.....	8	M-MST760IR.....	22	M-PEP7100AL.....	93
LD-LD7248-4MPS.....	14	M-MF4860PS.....	8	M-MST760OR.....	22	M-PEP7200AL.....	93
LD-LD7248DS-4MPS.....	14	M-MF6024VLV1PS.....	10	M-MST760RDE.....	22	M-SHPH0.....	25
LD-LDBJP24.....	14	M-MF6030GVPS.....	10	M-MST760RFN.....	22	M-SHPH1.....	25
LD-LDCL.....	14	M-MF6030PS.....	10	M-MST776US.....	22	M-SHPH2.....	25
LD-LDCLS.....	14	M-MF6048GVPS.....	10	M-MST776USIR.....	22	M-SHPH3.....	25
LD-LDGPC.....	14	M-MF6048PS.....	10	M-MST776USNR.....	22	M-SHPH4.....	25
LD-LDLA24.....	14	M-MF6060GVPS.....	9	M-MST776USOR.....	22	M-SHPM1.....	25
LD-LDLS.....	14	M-MF6060PS.....	9	M-MSTB.....	22	M-SHPM2.....	25
M-AR008.....	95	M-MF6060PS-A.....	9	M-MSTBGV.....	22	M-SHPM3.....	25
M-BAA07.....	15	M-MF7260PS.....	9	M-MSTGR6060.....	22	M-SHPM4.....	25
M-BAA08.....	15	M-MF7624VLV1PS.....	10	M-MTA18.....	86	M-TGRUS.....	23
M-BAA10.....	15	M-MF7660GVPS.....	9	M-MTA45.....	86	M-THUS.....	23
M-FASTBOLT1.5.....	25	M-MF7660PS.....	9	M-MTA60.....	86	M-TRDUS.....	23
M-FASTBOLT2.....	25	M-MFL4415.....	23	M-MTA75.....	86	M-TUF9018GV.....	25
M-MA7636VLV1PS.....	13	M-MFL7715.....	23	M-MTA120.....	18,86	M-TUF9036GV.....	25
M-MA7642GVPS.....	13	M-MFLBR.....	23	M-MTA240.....	18,86	M-TUF9072GV.....	25
M-MA7642PS.....	13	M-MFRACKGV.....	24	M-MTB.....	86,101	M-TUF9144GV.....	25
M-MA7660GVPS.....	12	M-MFRSLING.....	24	M-MTC4E.....	87	M-TYWUS.....	23
M-MA7660LGVPS.....	11	M-MGPUSL.....	15	M-MTC4L.....	87	VB-BSSC3/8-BSPX1/2Z.....	87
M-MA7660LPS.....	11	M-MGPUSLGV.....	15	M-MTCC.....	86	VB-BSSC3/8-BSPX7/8Z.....	87
M-MA7660PS.....	12	M-MGR4.....	15	M-MTCE.....	87	VB-CAC023/4Z.....	87
M-MA7860GVPS.....	12	M-MGR5.....	15	M-MTCF.....	86	VB-ESPRG.016X.188X1.5Z.....	107
M-MA7860LGVPS.....	11	M-MGR7.....	15	M-MTCFDU.....	18	VB-HTL1/4X13/4.....	108
M-MA7860LPS.....	11	M-MGR8.....	15	M-MTCFW1.....	18	VB-NM20Z.....	87

BUILT TOUGH FOR SAFETY

Our mission at Metaltech is to develop, manufacture and sell safe, reliable, innovative products that make work easier and faster to execute with built in safety and sturdiness. We have been building safety into our scaffolding since 1960. Innovation, design and great packaging drive us.

We strive to develop and design products specifically suited for each of our market segments; residential and commercial construction, rental and industrial.



BUILT TOUGH FOR SAFETY

**JOBSITE
SERIES™**

**BuildMan
Grade**

**Fiberglass
Series™**

SAFERSTACK
A METALTECH INNOVATION

**ALU
SERIES™**

**BUILT TOUGH FOR
SAFETY**

METALTECH®

CUSTOMER SERVICE

T : **1 800 363-7587** (TOLL FREE NUMBER)

F : **1 866 517-7585**

@ : **CS@METALTECH.CO**

WWW.METALTECH.CO

FOR THE LATEST ADDITIONS TO THE METALTECH PRODUCTS CATALOG, VISIT OUR ON-LINE CATALOG



GET THE METALTECH APP!
SCAFFOLDING CALCULATOR AND MORE!



FREE



METALTECHSCAFFOLDING



METALTECHNA

SAIA

AVA®

**STAFPA
ASSOCIATE**

CWB

©RA

SP®

OSHA

ANSI