Roof Louvres

Information Sheet

GAF ELK™

Quality You Can Trust Since 1886…
From North America's Largest Roofing Manufacturer™

Roof Louvers (Exhaust)

Proudly Made In The U.S.A.

For those who prefer roof louvers (or where existing roof louvers are being replaced), Master Flow® offers a complete line of quality choices. In fact, we're so confident in the performance of our louvers that we offer a four-year ltd. warranty! When you compare our features and warranty to any other brand on the market, Master Flow® louvers are the obvious choice!

SSB960A

Our Best Metal Roof Louver

with fully enclosed hood to help prevent rodent/insect infiltration and leaf/pine needle clogging



Texas Department of Insurance
Product Evaluation RV-27

MIAMI-DADE
Approval # 05-0909.02

- ***Slant-Back Design For Superior Performance…*** *Best choice against weather infiltration, especially in steep-slope applications*
- ***20% More Ventilating Capacity*…*** *A full 60 sq.in. of net free ventilating area (NFA) per vent*
- ***Lower Installation Costs…*** *Fewer vents needed for roof installation**
- ***Looks Better…*** *Embossed finish hides scratches, resists wear*
- ***Popular Colors…*** *To complement most roofs (Black, Brown, Weathered Wood, White, Mill, Shingle Match™ Weathered Wood)*
- ***Professional's Choice…*** *12% larger flashing with pre-drilled nail holes makes installation easier, helps prevent leaks*
- ***Longer Lasting…*** *Aluminum construction won't rust*

**Compared to 50 sq. in. NFA vents*

How Many Do I Need?

TOTAL ATTIC SQUARE FOOTAGE	RECOMMENDED NUMBER OF SSB 960 LOUVERS	MINIMUM INTAKE VENTILATION (NET FREE AREA IN SQ.IN.)
0-1000	4	240
1001-1500	6	360
1501-2000	8	480
2001-2500	10	600
2501-3000	12	720

IR65

Our Best High-Impact Resin Roof Louver

with superior resistance against dents and scratches



Texas Department of Insurance
Product Evaluation RV-17

- ***Slant-Back Design For Superior Performance…*** *Best choice against weather infiltration, especially in steep-slope applications*
- ***High Impact Resin Construction…*** *With UV inhibitors to maintain consistent color*
- ***30% More Ventilating Capacity*…*** *A full 65 sq. in. of net free ventilating area (NFA) per vent*
- ***Less Hassles…*** *Scratch, crush, and dent resistant*
- ***Lower Installation Costs…*** *Fewer vents needed for roof installation**
- ***4 Popular Colors…*** *To complement most roofs (Black, Brown, Gray, Weathered Wood)*
- ***Professional's Choice…*** *12% larger flashing with pre-drilled nail holes make installation easier, helps prevent leaks*
- ***Unique, Built-In Screen…*** *Helps deter bird and rodent infiltration; prevents clogging from leaves and pine needles*
- ***Hood Stays In Place…*** *Hood is securely snapped in place (rather than tacked) to reduce chance of blow-off*

**Compared to 50 sq. in. NFA vents*

How Many Do I Need?

TOTAL ATTIC SQUARE FOOTAGE	RECOMMENDED NUMBER OF IR65 LOUVERS	MINIMUM INTAKE VENTILATION (NET FREE AREA IN SQ.IN.)
0-1000	4	260
1001-1500	6	390
1501-2000	8	520
2001-2500	10	650
2501-3000	12	780

Proudly Made In The U.S.A.

How Many Do I Need?

TOTAL ATTIC SQUARE FOOTAGE	RECOMMENDED NUMBER OF RT65 LOUVERS	MINIMUM INTAKE VENTILATION (NET FREE AREA IN SQ. IN.)
0-1000	4	240
1001-1500	6	360
1501-2000	8	480
2001-2500	10	600
2501-3000	12	720



RT-65
Square-Top Resin Construction

- **Large Capacity...** *Full 60 sq. in. of net free ventilating area (NFA) per vent*
- **Less Hassles...** *Scratch, crush and dent resistant*
- **4 Popular Colors...** *To complement most roofs (Black, Brown, Gray, Weathered Wood)*
- **Easier To Install...** *Pre-drilled nail holes with extra wide flashing area*
- **Homeowner's Choice...** *High-impact resin construction looks great for years*

How Many Do I Need?

TOTAL ATTIC SQUARE FOOTAGE	RECOMMENDED NUMBER OF IR61 LOUVERS	MINIMUM INTAKE VENTILATION (NET FREE AREA IN SQ. IN.)
0-1000	7	259
1001-1500	10	370
1501-2000	13	481
2001-2500	17	629
2501-3000	20	740




IR-61
Super-Low Profile, Slant-Back Resin Construction

- **Sleek Design...** *Super-low profile (just 2" high!) for better appearance*
- **Homeowner's Choice...** *High-impact resin construction looks great for years*
- **4 Popular Colors...** *To complement most roofs (Black, Brown, Gray, Weathered Wood)*
- **Easier To Install...** *Pre-drilled nail holes make installation easier*

How Many Do I Need?

TOTAL ATTIC SQUARE FOOTAGE	RECOMMENDED NUMBER OF NSB50 LOUVERS	MINIMUM INTAKE VENTILATION (NET FREE AREA IN SQ. IN.)
0-1000	5	250
1001-1500	8	400
1501-2000	10	500
2001-2500	12	600
2501-3000	15	750

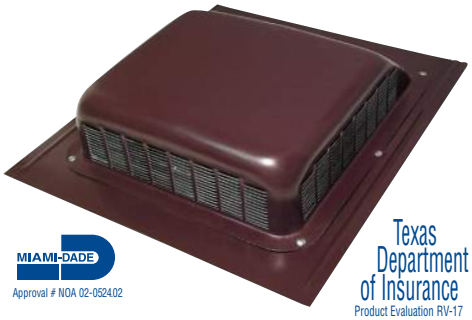

MIAMI-DADE
Approval # NOA 02-0524.02

Texas Department of Insurance
Product Evaluation RV-17

NSB50A
Square-Top Slant-Back Metal Vent

- **Large Capacity...** *Full 50 sq. in. of net free ventilating area (NFA) per vent*
- **Long Lasting...** *Aluminum construction resists rust (available in galvanized construction by special order only)*
- **Popular Colors...** *See chart at bottom of page*

How Many Do I Need?

TOTAL ATTIC SQUARE FOOTAGE	RECOMMENDED NUMBER OF R or RV Series LOUVERS	MINIMUM INTAKE VENTILATION (NET FREE AREA IN SQ. IN.)
0-1000	5	250
1001-1500	8	400
1501-2000	10	500
2001-2500	12	600
2501-3000	15	750



RV50A/R50A*
Square-Top Metal Utility Vent

- **Perfect Utility Vent...** *Recommended for kitchen duct outlets and bathroom fan exhausts, as well as attic ventilation*
- **Large Capacity...** *Full 50 sq. in. of net free ventilating area (NFA) per vent*
- **Versatile...** *Available with square (R50A) or round (RV50A) throat, in heavy duty aluminum*
- **Easier To Install...** *Pre-drilled nail holes with extra wide flashing area*
- **Popular Colors...** *See chart at bottom of page*

**R50A is CSA approved*

Mill	Brown	Black	Weathered Wood	Shingle Match™ Weath. Wood	Gray	White	Construction	Opening Size	Flashing Dimensions	Ht.	NFA (Sq. In.)
SSB960A	SSB960ABR	SSB960ABL	SSB960AWW	SSB960ASMWW	–	SSB960AW	Aluminum	10"	18" x 20½ "	5½"	60
NSB50A	NSB50ABR	NSB50ABL	NSB50AWW	–	–	–	Aluminum	9¼"	18¾" x 16¾"	4"	50
–	IR65BR	IR65BL	IR65WW	–	IR65G	–	High Impact Resin	11¾" x 10¾"	20¼" x 18"	5⅞"	65
–	IR61BR	IR61BL	IR61WW	–	IR61G	–	High Impact Resin	11¾" x 9¾"	18½" x 17½"	4¼"	37
–	RT65BR	RT65BL	RT65WW	–	RT65G	–	High Impact Resin	11⅞" x 10"	18½" x 18"	4"	60
RV50A	RV50ABR	RV50ABL	RV50AWW	–	–	–	Aluminum	9"	16½" x 15½"	4"	50
R50A	R50ABR	R50ABL	R50AWW	–	–	–	Aluminum	9"	17⅜" x 15⅜"	4"	50