



IHFL / IHF Face Mount I-Joist Hangers



IHFL (18GA) and IHF (16GA) series Face Mount Hangers feature speed prongs for temporary placement and seat cleats to grab the bottom flange of the supported I-joist. Install nails in all fastener holes where the Max factored resistance is needed while lighter load capacities can be achieved with a quick installation of round holes only.

Materials: IHFL – 18 gauge; IHF – 16 gauge

Finish: G90 galvanizing

Installation:

- Use all specified fasteners.
- Position I-joist into hangers and tap or push into place to fully seat joist and engage cleats.
- Web stiffeners are not required unless specified by the I-joist manufacturer.
- **Min Nailing** – Fill all round nail holes.
- **Max Nailing** – Fill all round and diamond holes.

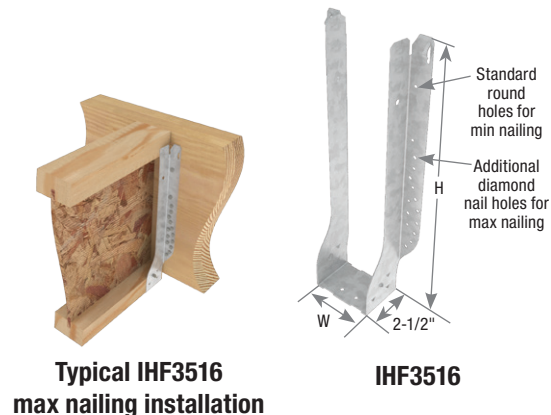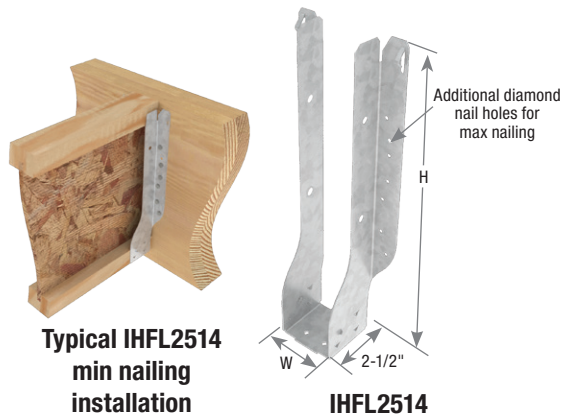

Joist Size (in)	MiTek Stock No.	GA	Dimensions (in)			Fastener Schedule ²				DF Factored Resistance				S-P-F Factored Resistance			
			W	H	Min/Max	Header		Joist		Lbs		kN		Lbs		kN	
						Qty	Type	Qty	Type	Vertical 100%	Uplift ¹ 115%	Vertical 100%	Uplift ¹ 115%	Vertical 100%	Uplift ¹ 115%	Vertical 100%	Uplift ¹ 115%
1-3/4 x 9-1/4 - 9-1/2	IHFL17925	18	1-3/4	8-15/16	Min	8	10d	--	--	3240	90	14.41	0.40	2425	90	10.79	0.40
					Max			2	10d x 1-1/2		405		1.80		385		1.71
1-3/4 x 11-7/8	IHFL17112	18	1-3/4	10-15/16	Min	10	10d	--	--	4420	90	19.66	0.40	3310	90	14.72	0.40
					Max			2	10d x 1-1/2		405		1.80		385		1.71
1-3/4 x 14	IHFL1714	18	1-3/4	13-3/8	Min	12	10d	--	--	4420	90	19.66	0.40	3310	90	14.72	0.40
					Max			2	10d x 1-1/2		405		1.80		385		1.71
2 - 2-1/8 x 9-1/2	IHFL20925	18	2-1/16	8-3/4	Min	8	10d	--	--	3240	90	14.41	0.40	2425	90	10.79	0.40
					Max			2	10d x 1-1/2		405		1.80		385		1.71
2 - 2-1/8 x 11-7/8	IHFL20112	18	2-1/16	11-5/16	Min	10	10d	--	--	4420	90	19.66	0.40	3310	90	14.72	0.40
					Max			2	10d x 1-1/2		405		1.80		385		1.71
2 - 2-1/8 x 14	IHFL2014	18	2-1/16	13-3/16	Min	12	10d	--	--	4420	90	19.66	0.40	3310	90	14.72	0.40
					Max			2	10d x 1-1/2		405		1.80		385		1.71
2 - 2-1/8 x 16	IHFL2016	18	2-1/16	15-11/16	Min	14	10d	--	--	4420	90	19.66	0.40	3310	90	14.72	0.40
					Max			2	10d x 1-1/2		405		1.80		385		1.71

1) Factored uplift resistance has been increased 15% for short-term loads such as wind and earthquake; reduce for other load durations in accordance with the code.

2) **NAILS:** 10d x 1-1/2 nails are 0.148" dia. x 1-1/2" long, 10d nails are 0.148" dia. x 3" long, 16d nails are 0.162" dia. x 3-1/2" long. **Load tables address hanger/header/fastener limitations only. Joist limitations must be determined for each installation.**

PEO
Certificate No. 10889485



July 11, 2019

Valid through Dec. 31, 2020

Use in conjunction with MiTek's current Canadian Structural Products Catalogue for detailed hanger information.

MiTek[®]
to build Stronger Safer Structures
MiTek.ca

IHFL / IHF Face Mount I-Joist Hangers



Joist Size (in)	MiTek Stock No.	GA	Dimensions (in)		Fastener Schedule ²				DF Factored Resistance				S-P-F Factored Resistance				
			W	H	Min/Max	Header		Joist		Lbs		kN		Lbs		kN	
						Qty	Type	Qty	Type	Vertical 100%	Uplift ¹ 115%	Vertical 100%	Uplift ¹ 115%	Vertical 100%	Uplift ¹ 115%	Vertical 100%	Uplift ¹ 115%
2-5/16 x 9-1/2	IHFL23925	18	2-5/16	9-3/16	Min	8	10d	--	--	3240	90	14.41	0.40	2425	90	10.79	0.40
					Max			2	10d x 1-1/2		405		1.80		385		1.71
2-5/16 x 11-7/8	IHFL23112	18	2-5/16	11-3/16	Min	10	10d	--	--	4420	90	19.66	0.40	3310	90	14.72	0.40
					Max			2	10d x 1-1/2		405		1.80		385		1.71
2-5/16 x 14	IHFL2314	18	2-5/16	13-1/2	Min	12	10d	--	--	4420	90	19.66	0.40	3310	90	14.72	0.40
					Max			2	10d x 1-1/2		405		1.80		385		1.71
2-5/16 x 16	IHFL2316	18	2-5/16	15-9/16	Min	14	10d	--	--	4420	90	19.66	0.40	3310	90	14.72	0.40
					Max			2	10d x 1-1/2		405		1.80		385		1.71
2-1/2 x 9-1/4 - 9-1/2	IHFL25925	18	2-1/2	9-1/8	Min	8	10d	--	--	3240	90	14.41	0.40	2425	90	10.79	0.40
					Max			2	10d x 1-1/2		405		1.80		385		1.71
2-1/2 x 11-1/4 - 11-7/8	IHFL25112	18	2-1/2	11-1/8	Min	10	10d	--	--	4420	90	19.66	0.40	3310	90	14.72	0.40
					Max			2	10d x 1-1/2		405		1.80		405		1.80
2-1/2 x 14	IHFL2514	18	2-1/2	13-7/16	Min	12	10d	--	--	4420	90	19.66	0.40	3310	90	14.72	0.40
					Max			2	10d x 1-1/2		405		1.80		385		1.71
2-1/2 x 16	IHFL2516	18	2-1/2	15-1/2	Min	14	10d	--	--	4420	90	19.66	0.40	3310	90	14.72	0.40
					Max			2	10d x 1-1/2		405		1.80		385		1.71
3-1/2 x 9-1/4 - 9-1/2	IHFL35925	18	3-1/2	8-5/8	Min	10	10d	--	--	4420	90	19.66	0.40	3310	90	14.72	0.40
					Max			2	10d x 1-1/2		405		1.80		385		1.71
3-1/2 x 9-1/4 - 9-1/2	IHF35925	16	3-1/2	8-5/8	Min	10	10d	--	--	4420	90	19.66	0.40	3310	90	14.72	0.40
					Max	24	16d	2	10d x 1-1/2		5655		605		25.15		2.69
3-1/2 x 11-1/4 - 11-7/8	IHFL35112	18	3-1/2	10-5/8	Min	10	10d	--	--	4420	90	19.66	0.40	3310	90	14.72	0.40
					Max			2	10d x 1-1/2		405		1.80		385		1.71
3-1/2 x 11-1/4 - 11-7/8	IHF35112	16	3-1/2	10-5/8	Min	10	10d	--	--	4420	90	19.66	0.40	3310	90	14.72	0.40
					Max	24	16d	2	10d x 1-1/2		5655		605		25.15		2.69
3-1/2 x 14	IHFL3514	18	3-1/2	12-15/16	Min	12	10d	--	--	4420	90	19.66	0.40	3310	90	14.72	0.40
					Max			2	10d x 1-1/2		405		1.80		385		1.71
3-1/2 x 14	IHF3514	16	3-1/2	12-15/16	Min	12	10d	--	--	4420	90	19.66	0.40	3310	90	14.72	0.40
					Max	28	16d	2	10d x 1-1/2		5655		605		25.15		2.69
3-1/2 x 16	IHFL3516	18	3-1/2	15	Min	14	10d	--	--	4420	90	19.66	0.40	3310	90	14.72	0.40
					Max			2	10d x 1-1/2		405		1.80		385		1.71
3-1/2 x 16	IHF3516	16	3-1/2	15	Min	14	10d	--	--	4420	90	19.66	0.40	3310	90	14.72	0.40
					Max	30	16d	2	10d x 1-1/2		5655		605		25.15		2.69
3-1/2 x 18	IHF3518	16	3-1/2	16-9/16	Min	14	10d	--	--	4420	90	19.66	0.40	3310	90	14.72	0.40
					Max	30	16d	2	10d x 1-1/2		5655		605		25.15		2.69
4 - 4-3/16 x 9-1/2	IHF20925-2	16	4-3/16	8-11/16	Min	10	10d	--	--	3845	90	17.10	0.40	2900	90	12.90	0.40
					Max	24	16d	2	10d x 1-1/2		5655		605		25.15		2.69
4 - 4-3/16 x 11-7/8	IHF20112-2	16	4-3/16	11	Min	10	10d	--	--	3845	90	17.10	0.40	2900	90	12.90	0.40
					Max	24	16d	2	10d x 1-1/2		5655		605		25.15		2.69
4 - 4-3/16 x 14	IHF2014-2	16	4-3/16	13-5/8	Min	12	10d	--	--	3845	90	17.10	0.40	2900	90	12.90	0.40
					Max	28	16d	2	10d x 1-1/2		5655		605		25.15		2.69
4-5/8 x 9-1/4	IHF23925-2	16	4-3/4	8-3/8	Min	10	10d	--	--	3845	90	17.10	0.40	2900	90	12.90	0.40
					Max	24	16d	2	10d x 1-1/2		5655		605		25.15		2.69
5 x 9-1/4	IHF25925-2	16	5-1/8	8-3/16	Min	10	10d	--	--	3845	90	17.10	0.40	2900	90	12.90	0.40
					Max	24	16d	2	10d x 1-1/2		5655		605		25.15		2.69
5 x 11-1/4	IHF25112-2	16	5-1/8	10-7/16	Min	10	10d	--	--	3845	90	17.10	0.40	2900	90	12.90	0.40
					Max	24	16d	2	10d x 1-1/2		5655		605		25.15		2.69

1) Factored uplift resistance has been increased 15% for short-term loads such as wind and earthquake; reduce for other load durations in accordance with the code.
 2) **NAILS:** 10d x 1-1/2 nails are 0.148" dia. x 1-1/2" long, 10d nails are 0.148" dia. x 3" long, 16d nails are 0.162" dia. x 3-1/2" long.
Load tables address hanger/header/fastener limitations only. Joist limitations must be determined for each installation.

PEO
 Certificate No. 10889485



July 11, 2019

Valid through Dec. 31, 2020

Use in conjunction with MiTek's current Canadian Structural Products Catalogue for detailed hanger information.




MiTek supplies quality products
 to build Stronger Safer Structures

MiTek.ca



IHFL / IHF Face Mount I-Joist Hangers

APEGA
Permit No. P3837



July 11, 2019



IHFL (18GA) and IHF (16GA) series Face Mount Hangers feature speed prongs for temporary placement and seat cleats to grab the bottom flange of the supported I-joist. Install nails in all fastener holes where the Max factored resistance is needed while lighter load capacities can be achieved with a quick installation of round holes only.

Materials: IHFL – 18 gauge; IHF – 16 gauge


Finish: G90 galvanizing

Installation:

- Use all specified fasteners.
- Position I-joist into hangers and tap or push into place to fully seat joist and engage cleats.
- Web stiffeners are not required unless specified by the I-joist manufacturer.
- **Min Nailing** – Fill all round nail holes.
- **Max Nailing** – Fill all round and diamond holes.

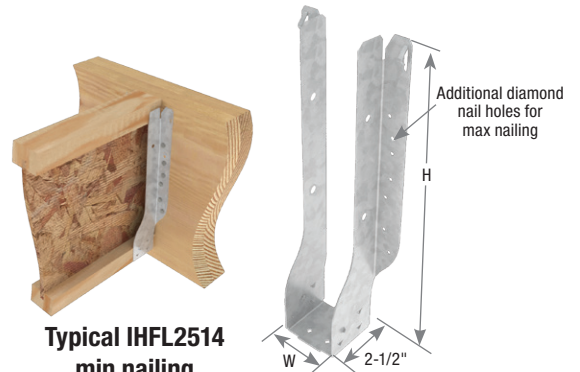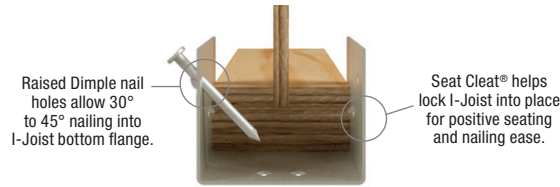


**Typical IHFL2514
min nailing
installation**

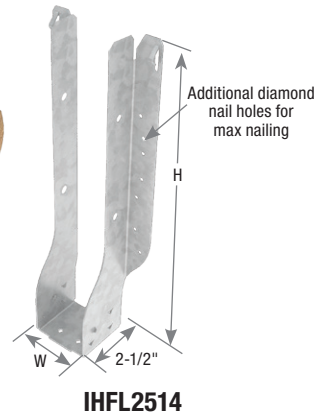

IHFL2514



**Typical IHF3516
max nailing installation**



IHF3516


July 11, 2019

APEGM
Certificate No. 96



July 11, 2019

APEGS
Certificate No. C0940



July 11, 2019

Joist Size (in)	MiTek Stock No.	GA	Dimensions (in)		Fastener Schedule ²				DF Factored Resistance				S-P-F Factored Resistance				
			W	H	Min/Max	Header		Joist		Lbs		kN		Lbs		kN	
						Qty	Type	Qty	Type	Vertical 100%	Uplift ¹ 115%	Vertical 100%	Uplift ¹ 115%	Vertical 100%	Uplift ¹ 115%	Vertical 100%	Uplift ¹ 115%
1-3/4 x 9-1/4 - 9-1/2	IHFL17925	18	1-3/4	8-15/16	Min	8	10d	--	--	3240	90	14.41	0.40	2425	90	10.79	0.40
					Max			2	10d x 1-1/2		405		1.80		385		1.71
1-3/4 x 11-7/8	IHFL17112	18	1-3/4	10-15/16	Min	10	10d	--	--	4420	90	19.66	0.40	3310	90	14.72	0.40
					Max			2	10d x 1-1/2		405		1.80		385		1.71
1-3/4 x 14	IHFL1714	18	1-3/4	13-3/8	Min	12	10d	--	--	4420	90	19.66	0.40	3310	90	14.72	0.40
					Max			2	10d x 1-1/2		405		1.80		385		1.71
2 - 2-1/8 x 9-1/2	IHFL20925	18	2-1/16	8-3/4	Min	8	10d	--	--	3240	90	14.41	0.40	2425	90	10.79	0.40
					Max			2	10d x 1-1/2		405		1.80		385		1.71
2 - 2-1/8 x 11-7/8	IHFL20112	18	2-1/16	11-5/16	Min	10	10d	--	--	4420	90	19.66	0.40	3310	90	14.72	0.40
					Max			2	10d x 1-1/2		405		1.80		385		1.71
2 - 2-1/8 x 14	IHFL2014	18	2-1/16	13-3/16	Min	12	10d	--	--	4420	90	19.66	0.40	3310	90	14.72	0.40
					Max			2	10d x 1-1/2		405		1.80		385		1.71
2 - 2-1/8 x 16	IHFL2016	18	2-1/16	15-11/16	Min	14	10d	--	--	4420	90	19.66	0.40	3310	90	14.72	0.40
					Max			2	10d x 1-1/2		405		1.80		385		1.71

1) Factored uplift resistance has been increased 15% for short-term loads such as wind and earthquake; reduce for other load durations in accordance with the code.


2) **NAILS:** 10d x 1-1/2 nails are 0.148" dia. x 1-1/2" long, 10d nails are 0.148" dia. x 3" long, 16d nails are 0.162" dia. x 3-1/2" long. Load tables address hanger/header/fastener limitations only. Joist limitations must be determined for each installation.

Valid through Dec. 31, 2020

Use in conjunction with MiTek's current Canadian Structural Products Catalogue for detailed hanger information.



APEGA
Permit No. P3837



July 11, 2019

IHFL / IHF Face Mount I-Joist Hangers

Joist Size (in)	MiTek Stock No.	GA	Dimensions (in)			Fastener Schedule ²				DF Factored Resistance				S-P-F Factored Resistance			
			W	H	Min/Max	Header		Joist		Lbs		kN		Lbs		kN	
						Qty	Type	Qty	Type	Vertical 100%	Uplift ¹ 115%	Vertical 100%	Uplift ¹ 115%	Vertical 100%	Uplift ¹ 115%	Vertical 100%	Uplift ¹ 115%
2-5/16 x 9-1/2	IHFL23925	18	2-5/16	9-3/16	Min	8	10d	--	--	3240	90	14.41	0.40	2425	90	10.79	0.40
					Max	2	10d x 1-1/2	405	1.80		385		1.71				
2-5/16 x 11-7/8	IHFL23112	18	2-5/16	11-3/16	Min	10	10d	--	--	4420	90	19.66	0.40	3310	90	14.72	0.40
					Max	2	10d x 1-1/2	405	1.80		385		1.71				
2-5/16 x 14	IHFL2314	18	2-5/16	13-1/2	Min	12	10d	--	--	4420	90	19.66	0.40	3310	90	14.72	0.40
					Max	2	10d x 1-1/2	405	1.80		385		1.71				
2-5/16 x 16	IHFL2316	18	2-5/16	15-9/16	Min	14	10d	--	--	4420	90	19.66	0.40	3310	90	14.72	0.40
					Max	2	10d x 1-1/2	405	1.80		385		1.71				
2-1/2 x 9-1/4 - 9-1/2	IHFL25925	18	2-1/2	9-1/8	Min	8	10d	--	--	3240	90	14.41	0.40	2425	90	10.79	0.40
					Max	2	10d x 1-1/2	405	1.80		385		1.71				
2-1/2 x 11-1/4 - 11-7/8	IHFL25112	18	2-1/2	11-1/8	Min	10	10d	--	--	4420	90	19.66	0.40	3310	90	14.72	0.40
					Max	2	10d x 1-1/2	405	1.80		405		1.80				
2-1/2 x 14	IHFL2514	18	2-1/2	13-7/16	Min	12	10d	--	--	4420	90	19.66	0.40	3310	90	14.72	0.40
					Max	2	10d x 1-1/2	405	1.80		385		1.71				
2-1/2 x 16	IHFL2516	18	2-1/2	15-1/2	Min	14	10d	--	--	4420	90	19.66	0.40	3310	90	14.72	0.40
					Max	2	10d x 1-1/2	405	1.80		385		1.71				
3-1/2 x 9-1/4 - 9-1/2	IHFL35925	18	3-1/2	8-5/8	Min	10	10d	--	--	4420	90	19.66	0.40	3310	90	14.72	0.40
					Max	2	10d x 1-1/2	405	1.80		385		1.71				
	IHFL35925	16	3-1/2	8-5/8	Min	10	10d	--	--	4420	90	19.66	0.40	3310	90	14.72	0.40
					Max	24	16d	2	10d x 1-1/2		5655		605		25.15		2.69
3-1/2 x 11-1/4 - 11-7/8	IHFL35112	18	3-1/2	10-5/8	Min	10	10d	--	--	4420	90	19.66	0.40	3310	90	14.72	0.40
					Max	2	10d x 1-1/2	405	1.80		385		1.71				
	IHFL35112	16	3-1/2	10-5/8	Min	10	10d	--	--	4420	90	19.66	0.40	3310	90	14.72	0.40
					Max	24	16d	2	10d x 1-1/2		5655		605		25.15		2.69
3-1/2 x 14	IHFL3514	18	3-1/2	12-15/16	Min	12	10d	--	--	4420	90	19.66	0.40	3310	90	14.72	0.40
					Max	2	10d x 1-1/2	405	1.80		385		1.71				
	IHFL3514	16	3-1/2	12-15/16	Min	12	10d	--	--	4420	90	19.66	0.40	3310	90	14.72	0.40
					Max	28	16d	2	10d x 1-1/2		5655		605		25.15		2.69
3-1/2 x 16	IHFL3516	18	3-1/2	15	Min	14	10d	--	--	4420	90	19.66	0.40	3310	90	14.72	0.40
					Max	2	10d x 1-1/2	405	1.80		385		1.71				
	IHFL3516	16	3-1/2	15	Min	14	10d	--	--	4420	90	19.66	0.40	3310	90	14.72	0.40
					Max	30	16d	2	10d x 1-1/2		5655		605		25.15		2.69
3-1/2 x 18	IHF3518	16	3-1/2	16-9/16	Min	14	10d	--	--	4420	90	19.66	0.40	3310	90	14.72	0.40
					Max	30	16d	2	10d x 1-1/2		5655		605		25.15		2.69
4 - 4-3/16 x 9-1/2	IHF20925-2	16	4-3/16	8-11/16	Min	10	10d	--	--	3845	90	17.10	0.40	2900	90	12.90	0.40
					Max	24	16d	2	10d x 1-1/2		5655		605		25.15		2.69
4 - 4-3/16 x 11-7/8	IHF20112-2	16	4-3/16	11	Min	10	10d	--	--	3845	90	17.10	0.40	2900	90	12.90	0.40
					Max	24	16d	2	10d x 1-1/2		5655		605		25.15		2.69
4 - 4-3/16 x 14	IHF2014-2	16	4-3/16	13-5/8	Min	12	10d	--	--	3845	90	17.10	0.40	2900	90	12.90	0.40
					Max	28	16d	2	10d x 1-1/2		5655		605		25.15		2.69
4-5/8 x 9-1/4	IHF23925-2	16	4-3/4	8-3/8	Min	10	10d	--	--	3845	90	17.10	0.40	2900	90	12.90	0.40
					Max	24	16d	2	10d x 1-1/2		5655		605		25.15		2.69
5 x 9-1/4	IHF25925-2	16	5-1/8	8-3/16	Min	10	10d	--	--	3845	90	17.10	0.40	2900	90	12.90	0.40
					Max	24	16d	2	10d x 1-1/2		5655		605		25.15		2.69
5 x 11-1/4	IHF25112-2	16	5-1/8	10-7/16	Min	10	10d	--	--	3845	90	17.10	0.40	2900	90	12.90	0.40
					Max	24	16d	2	10d x 1-1/2		5655		605		25.15		2.69

1) Factored uplift resistance has been increased 15% for short-term loads such as wind and earthquake; reduce for other load durations in accordance with the code.
 2) **NAILS:** 10d x 1-1/2 nails are 0.148" dia. x 1-1/2" long, 10d nails are 0.148" dia. x 3" long, 16d nails are 0.162" dia. x 3-1/2" long.
Load tables address hanger/header/fastener limitations only. Joist limitations must be determined for each installation.

Valid through Dec. 31, 2020

Use in conjunction with MiTek's current Canadian Structural Products Catalogue for detailed hanger information.



MiTek supplies quality products
to build Stronger Safer Structures


MiTek.ca

APENS
Permit No. 15800 0




July 11, 2019


PEG
Permit No. D0027



APEGNB
Certificate No. F0649



APEPEI
Permit No. A195

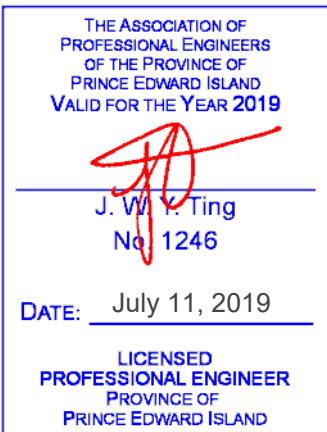

Valid through Dec. 31, 2020

IHFL / IHF Face Mount I-Joist Hangers





IHFL (18GA) and IHF (16GA) series Face Mount Hangers feature speed prongs for temporary placement and seat cleats to grab the bottom flange of the supported I-joist. Install nails in all fastener holes where the Max factored resistance is needed while lighter load capacities can be achieved with a quick installation of round holes only.

Materials: IHFL – 18 gauge; IHF – 16 gauge
Finish: G90 galvanizing

Installation:

- Use all specified fasteners.
- Position I-joist into hangers and tap or push into place to fully seat joist and engage cleats.
- Web stiffeners are not required unless specified by the I-joist manufacturer.
- **Min Nailing** – Fill all round nail holes.
- **Max Nailing** – Fill all round and diamond holes.

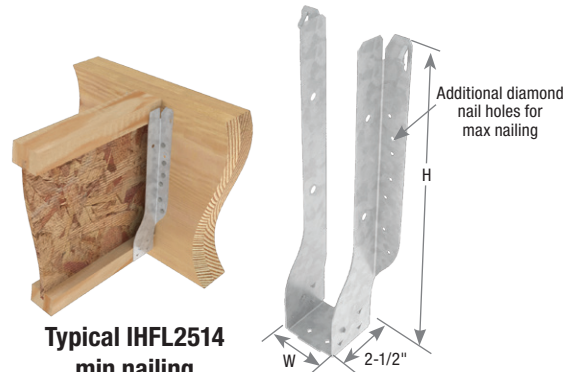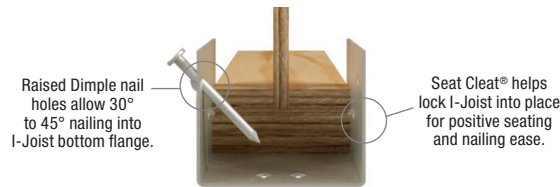

Typical IHFL2514
min nailing
installation

IHFL2514



Typical IHF3516
max nailing installation

IHF3516

Joist Size (in)	MiTek Stock No.	GA	Dimensions (in)		Fastener Schedule ²				DF Factored Resistance				S-P-F Factored Resistance				
									Lbs		kN		Lbs		kN		
									Vertical 100%	Uplift ¹ 115%	Vertical 100%	Uplift ¹ 115%	Vertical 100%	Uplift ¹ 115%	Vertical 100%	Uplift ¹ 115%	
1-3/4 x 9-1/4 - 9-1/2	IHFL17925	18	1-3/4	8-15/16	Min	8	10d	--	--	3240	90	14.41	0.40	2425	90	10.79	0.40
					Max			2	10d x 1-1/2								
1-3/4 x 11-7/8	IHFL17112	18	1-3/4	10-15/16	Min	10	10d	--	--	4420	90	19.66	0.40	3310	90	14.72	0.40
					Max			2	10d x 1-1/2								
1-3/4 x 14	IHFL1714	18	1-3/4	13-3/8	Min	12	10d	--	--	4420	90	19.66	0.40	3310	90	14.72	0.40
					Max			2	10d x 1-1/2								
2 - 2-1/8 x 9-1/2	IHFL20925	18	2-1/16	8-3/4	Min	8	10d	--	--	3240	90	14.41	0.40	2425	90	10.79	0.40
					Max			2	10d x 1-1/2								
2 - 2-1/8 x 11-7/8	IHFL20112	18	2-1/16	11-5/16	Min	10	10d	--	--	4420	90	19.66	0.40	3310	90	14.72	0.40
					Max			2	10d x 1-1/2								
2 - 2-1/8 x 14	IHFL2014	18	2-1/16	13-3/16	Min	12	10d	--	--	4420	90	19.66	0.40	3310	90	14.72	0.40
					Max			2	10d x 1-1/2								
2 - 2-1/8 x 16	IHFL2016	18	2-1/16	15-11/16	Min	14	10d	--	--	4420	90	19.66	0.40	3310	90	14.72	0.40
					Max			2	10d x 1-1/2								

1) Factored uplift resistance has been increased 15% for short-term loads such as wind and earthquake; reduce for other load durations in accordance with the code.

2) **NAILS:** 10d x 1-1/2 nails are 0.148" dia. x 1-1/2" long, 10d nails are 0.148" dia. x 3" long, 16d nails are 0.162" dia. x 3-1/2" long. Load tables address hanger/header/fastener limitations only. Joist limitations must be determined for each installation.

Use in conjunction with MiTek's current Canadian Structural Products Catalogue for detailed hanger information.

MiTek

MiTek supplies quality products
to build Stronger Safer Structures

MiTek.ca

Page 1 of 2

Copyright © 2019 MiTek Industries, Inc. All Rights Reserved.
July 2019 USP2320 IHF_IHFL



APENS
Permit No. 15800 0




July 11, 2019


PEG
Permit No. D0027



APEGNB
Certificate No. F0649



APEPEI
Permit No. A195

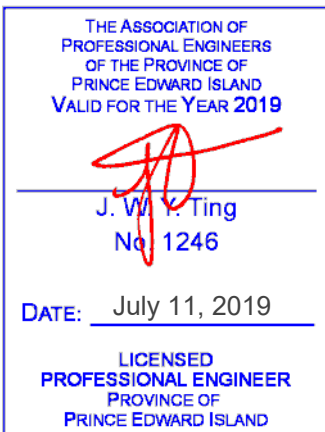

IHFL / IHF Face Mount I-Joist Hangers

Joist Size (in)	MiTek Stock No.	GA	Dimensions (in)			Fastener Schedule ²				DF Factored Resistance				S-P-F Factored Resistance			
			W	H	Min/Max	Header		Joist		Lbs		kN		Lbs		kN	
						Qty	Type	Qty	Type	Vertical 100%	Uplift ¹ 115%	Vertical 100%	Uplift ¹ 115%	Vertical 100%	Uplift ¹ 115%	Vertical 100%	Uplift ¹ 115%
2-5/16 x 9-1/2	IHFL23925	18	2-5/16	9-3/16	Min	8	10d	--	--	3240	90	14.41	0.40	2425	90	10.79	0.40
					Max	2	10d x 1-1/2	405	1.80		385		1.71				
2-5/16 x 11-7/8	IHFL23112	18	2-5/16	11-3/16	Min	10	10d	--	--	4420	90	19.66	0.40	3310	90	14.72	0.40
					Max	2	10d x 1-1/2	405	1.80		385		1.71				
2-5/16 x 14	IHFL2314	18	2-5/16	13-1/2	Min	12	10d	--	--	4420	90	19.66	0.40	3310	90	14.72	0.40
					Max	2	10d x 1-1/2	405	1.80		385		1.71				
2-5/16 x 16	IHFL2316	18	2-5/16	15-9/16	Min	14	10d	--	--	4420	90	19.66	0.40	3310	90	14.72	0.40
					Max	2	10d x 1-1/2	405	1.80		385		1.71				
2-1/2 x 9-1/4 - 9-1/2	IHFL25925	18	2-1/2	9-1/8	Min	8	10d	--	--	3240	90	14.41	0.40	2425	90	10.79	0.40
					Max	2	10d x 1-1/2	405	1.80		385		1.71				
2-1/2 x 11-1/4 - 11-7/8	IHFL25112	18	2-1/2	11-1/8	Min	10	10d	--	--	4420	90	19.66	0.40	3310	90	14.72	0.40
					Max	2	10d x 1-1/2	405	1.80		405		1.80				
2-1/2 x 14	IHFL2514	18	2-1/2	13-7/16	Min	12	10d	--	--	4420	90	19.66	0.40	3310	90	14.72	0.40
					Max	2	10d x 1-1/2	405	1.80		385		1.71				
2-1/2 x 16	IHFL2516	18	2-1/2	15-1/2	Min	14	10d	--	--	4420	90	19.66	0.40	3310	90	14.72	0.40
					Max	2	10d x 1-1/2	405	1.80		385		1.71				
3-1/2 x 9-1/4 - 9-1/2	IHFL35925	18	3-1/2	8-5/8	Min	10	10d	--	--	4420	90	19.66	0.40	3310	90	14.72	0.40
					Max	2	10d x 1-1/2	405	1.80		385		1.71				
3-1/2 x 11-1/4 - 11-7/8	IHFL35112	18	3-1/2	10-5/8	Min	10	10d	--	--	4420	90	19.66	0.40	3310	90	14.72	0.40
					Max	2	10d x 1-1/2	405	1.80		385		1.71				
3-1/2 x 14	IHFL3514	18	3-1/2	12-15/16	Min	12	10d	--	--	4420	90	19.66	0.40	3310	90	14.72	0.40
					Max	2	10d x 1-1/2	405	1.80		385		1.71				
3-1/2 x 16	IHFL3516	18	3-1/2	15	Min	12	10d	--	--	4420	90	19.66	0.40	3310	90	14.72	0.40
					Max	28	16d	2	10d x 1-1/2		5655		605		25.15		2.69
3-1/2 x 18	IHFL3518	18	3-1/2	15	Min	14	10d	--	--	4420	90	19.66	0.40	3310	90	14.72	0.40
					Max	30	16d	2	10d x 1-1/2		5655		605		25.15		2.69
3-1/2 x 18	IHF3518	16	3-1/2	16-9/16	Min	14	10d	--	--	4420	90	19.66	0.40	3310	90	14.72	0.40
					Max	30	16d	2	10d x 1-1/2		5655		605		25.15		2.69
4 - 4-3/16 x 9-1/2	IHF20925-2	16	4-3/16	8-11/16	Min	10	10d	--	--	3845	90	17.10	0.40	2900	90	12.90	0.40
					Max	24	16d	2	10d x 1-1/2		5655		605		25.15		2.69
4 - 4-3/16 x 11-7/8	IHF20112-2	16	4-3/16	11	Min	10	10d	--	--	3845	90	17.10	0.40	2900	90	12.90	0.40
					Max	24	16d	2	10d x 1-1/2		5655		605		25.15		2.69
4 - 4-3/16 x 14	IHF2014-2	16	4-3/16	13-5/8	Min	12	10d	--	--	3845	90	17.10	0.40	2900	90	12.90	0.40
					Max	28	16d	2	10d x 1-1/2		5655		605		25.15		2.69
4-5/8 x 9-1/4	IHF23925-2	16	4-3/4	8-3/8	Min	10	10d	--	--	3845	90	17.10	0.40	2900	90	12.90	0.40
					Max	24	16d	2	10d x 1-1/2		5655		605		25.15		2.69
5 x 9-1/4	IHF25925-2	16	5-1/8	8-3/16	Min	10	10d	--	--	3845	90	17.10	0.40	2900	90	12.90	0.40
					Max	24	16d	2	10d x 1-1/2		5655		605		25.15		2.69
5 x 11-1/4	IHF25112-2	16	5-1/8	10-7/16	Min	10	10d	--	--	3845	90	17.10	0.40	2900	90	12.90	0.40
					Max	24	16d	2	10d x 1-1/2		5655		605		25.15		2.69

1) Factored uplift resistance has been increased 15% for short-term loads such as wind and earthquake; reduce for other load durations in accordance with the code.
2) **NAILS:** 10d x 1-1/2 nails are 0.148" dia. x 1-1/2" long, 10d nails are 0.148" dia. x 3" long, 16d nails are 0.162" dia. x 3-1/2" long.
Load tables address hanger/header/fastener limitations only. Joist limitations must be determined for each installation.

Valid through Dec. 31, 2020

Use in conjunction with MiTek's current Canadian Structural Products Catalogue for detailed hanger information.



MiTek supplies quality products
to build Stronger Safer Structures

MiTek.ca