

Buy it for looks. Buy it for life.®

There is more than 1 version of this model. Page down to identify the version you have.

DESCRIPTION

- Reflex system offers smooth operation, easy movement, self-retraction, and secure docking
- · Metal construction with various finishes identified by suffix
- Duralock™ quick connect installation
- Pullout spray with 68" braided hose
- Flexible supply lines with 3/8" compression fittings
- 360° rotating spout

OPERATION

- Lever style handle
- · Operates with less than 5 lbs. of force
- · Operates in stream or spray mode in the pullout or retracted position

FLOW

Flow is limited to 2.2 gpm (8.3 L/min) at 60 psi

CARTRIDGE

1255™ Duralast™ cartridge for Single-Handle Faucets

STANDARDS

- Third party certified to ASME A112.18.1/CSA B125.1 and all applicable requirements referenced therein including NSF 61/9 & 372
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act

The backflow protection system in the device consists of two independently operating check valves, a primary and a secondary which prevent backflow

2.625"

ADA **t** for lever handle

WARRANTY

 Lifetime limited warranty against leaks, drips and finish defects to the original homeowner

10 year limited warranty when used in a multifamily installation

5 year limited warranty when used in a commercial installation

Visit www.moen.com/support for complete details and limitations


Specifications



Terrace™ Single Handle High Arc Pulldown Kitchen Faucet

Models: CA87055 series

NOTE: THIS FAUCET IS DESIGNED TO BE INSTALLED THROUGH 1, 3 or 4 HOLES, 1-1/2" (38mm) MIN. DIA.

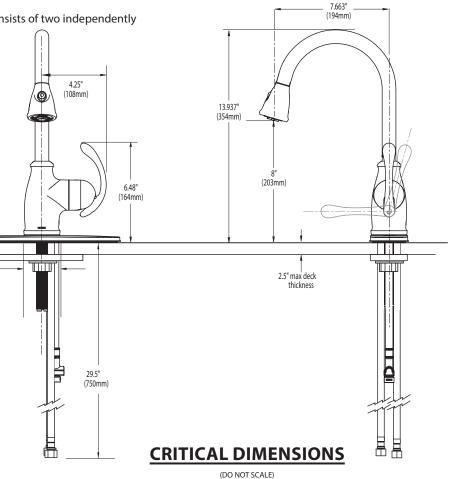

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN

01/18/2017 SPC11824 500002108 Released 03



Buy it for looks. Buy it for life.®

DESCRIPTION

- Reflex system offers smooth operation, easy movement, self-retraction, and secure docking
- Metal construction with various finishes identified by suffix
- Duralock™ quick connect installation
- Pullout spray with 68" braided hose
- Flexible supply lines with 3/8" compression fittings
- 360° rotating spout

OPERATION

- Lever style handle
- Operates with less than 5 lbs. of force
- Operates in stream or spray mode in the pullout or retracted position

Flow is limited to 2.2 gpm (8.3 L/min) at 60 psi

CARTRIDGE

1255™ Duralast™ cartridge for Single-Handle Faucets

STANDARDS

- Third party certified to ASME A112.18.1/CSA B125.1 and all applicable requirements referenced therein including NSF 61/9 & 372
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act
- The backflow protection system in the device consists of two independently operating check valves, a primary and a secondary which prevent backflow

ADA (b) for lever handle

WARRANTY

Lifetime limited warranty against leaks, drips and finish defects to the original homeowner

10 year limited warranty when used in a multifamily installation

5 year limited warranty when used in a commercial installation

Visit www.moen.com/support for complete details and limitations


Specifications



Terrace™ Single Handle High Arc **Pulldown Kitchen Faucet**

Models: CA87055 series

NOTE: THIS FAUCET IS DESIGNED TO BE INSTALLED THROUGH 1, 3 or 4 HOLES, 1-1/2" (38mm) MIN. DIA. (1 HOLE FOR SOAP DISPENSER) (Model with soap dispenser effective prior to April 2016)

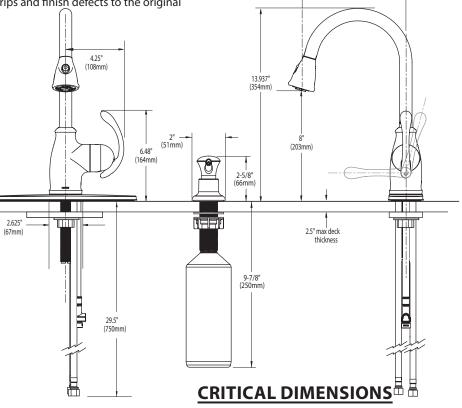

(DO NOT SCALE)

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN

www.moen.com



Buy it for looks. Buy it for life.®

DESCRIPTION

- Reflex system offers smooth operation, easy movement, self-retraction, and secure docking
- Metal construction with various finishes identified by suffix
- · Quick connect installation
- Pullout spray with 68" braided hose
- Flexible supply lines with 3/8" compression fittings
- 360° rotating spout

OPERATION

- · Lever style handle
- · Operates with less than 5 lbs. of force
- · Operates in stream or spray mode in the pullout or retracted position

FLOW

Flow is limited to 2.2 gpm (8.3 L/min) at 60 psi

CARTRIDGE

1255™ Duralast™ cartridge for Single-Handle Faucets

STANDARDS

- Third party certified to ASME A112.18.1/CSA B125.1 and all applicable requirements referenced therein including NSF 61/9 & 372
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act
- The backflow protection system in the device consists of two independently operating check valves, a primary and a secondary which prevent backflow

ADA for lever handle

Specifications



Models: CA87055 series

NOTE: THIS FAUCET IS DESIGNED TO
BE INSTALLED THROUGH 1, 3 or 4
HOLES, 1-1/2" (38mm) MIN. DIA.
(1 HOLE FOR SOAP DISPENSER)
(Model with soap dispenser effective prior to April 2016)

7 663"

4.25" (108mm) 13.937" (354mm) 2.5/8" (66mm) 2.5/8" (203mm) 2.5/8" (250mm) CRITICAL DIMENSIONS

WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
- 10 year limited warranty when used in a multifamily installation
- 5 year limited warranty when used in a commercial installation

Visit www.moen.com/support for complete details and limitations

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN www.moen.com

(DO NOT SCALE)