

QUIK-FIX™ EXPANSION REPAIR COUPLING





RATED @150 PSI STATIC PRESSURE @ 72°F
MOLDED IN THE USA
MADE OF PVC TYPE I MATERIAL
EPDM O-RING

NSF/ANSI 61+372, UPC LISTED

IPS HUB X IPS SPIGOT

IPS—IRON PIPE SIZE (SAME AS SCH 40)
SPIGOT (SAME AS PIPE OUTSIDE DIAMETER)
HUB—FITS IPS PIPE

RESTRAIN ALL PIPE MOVEMENT

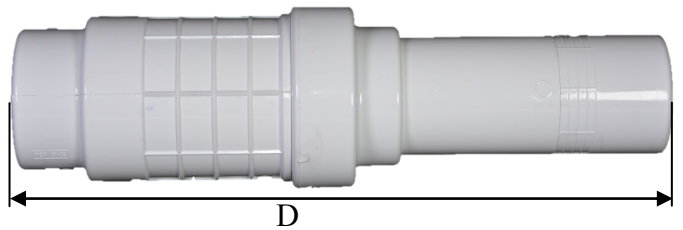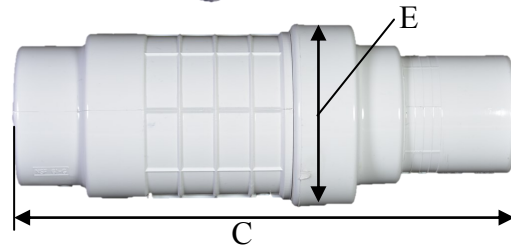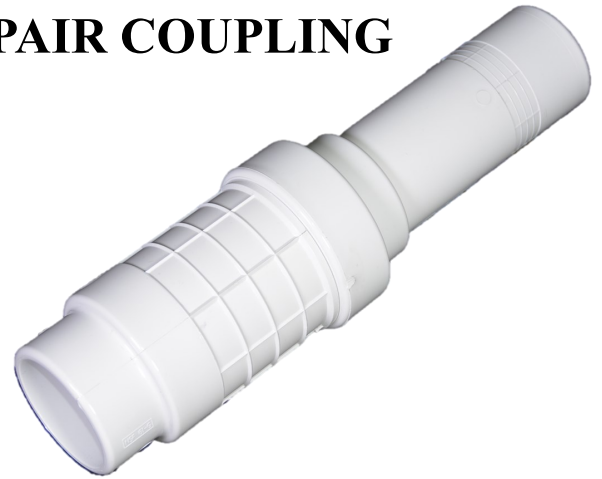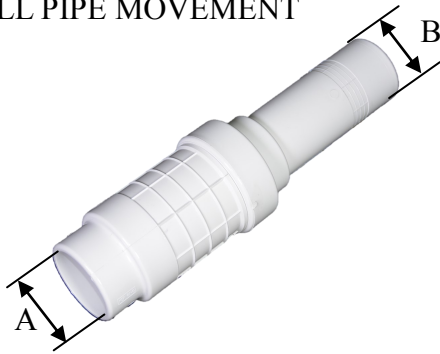

| PART NUMBER | A (INCHES) | B (INCHES) | C (INCHES) (FULL COMPRESSION) | D (INCHES) (MAX. EXPANSION) | E (INCHES) | WEIGHT (LBS) |
|-------------|------------|------------|----------------------------------|--------------------------------|------------|--------------|
| QF-0500 | 0.84 | 0.84 | 6.03 | 8.20 | 1.50 | 0.20 |
| QF-0750 | 1.04 | 1.04 | 6.56 | 8.98 | 1.89 | 0.30 |
| QF-1000 | 1.32 | 1.32 | 7.38 | 10.17 | 2.18 | 0.50 |
| QF-1250 | 1.66 | 1.66 | 8.66 | 11.41 | 2.82 | 0.80 |
| QF-1500 | 1.90 | 1.90 | 9.39 | 12.50 | 3.11 | 1.05 |
| QF-2000 | 2.38 | 2.38 | 9.82 | 13.00 | 3.66 | 1.55 |
| QF-2500 | 2.88 | 2.88 | 12.75 | 17.00 | 4.13 | 2.50 |
| QF-3000 | 3.50 | 3.50 | 13.50 | 18.00 | 4.87 | 3.80 |
| QF-4000 | 4.50 | 4.50 | 15.00 | 19.75 | 6.00 | 5.85 |
| QF-6000 | 6.63 | 7.36 | 18.50 | 26.25 | 9.00 | 12.75 |