

SPECIFICATION & FEATURES


WELDED HANDY BOXES AND EXTENSION RINGS 1-7/8" DEEP

DESCRIPTION:

Orbit Industries' Handy Boxes and extension rings mount on the surface of the wall and are used in the installation of switches, receptacles, and other electrical devices. They are constructed from 16 gauge galvanized steel. The welded, 1-7/8" deep boxes include 1/2" knockouts. Selected models include an FB bracket to mount on the flat side of the stud and an AB bracket to mount on the face and side of the stud.

CERTIFICATION:

UL file E227970, conforms to UL514A.

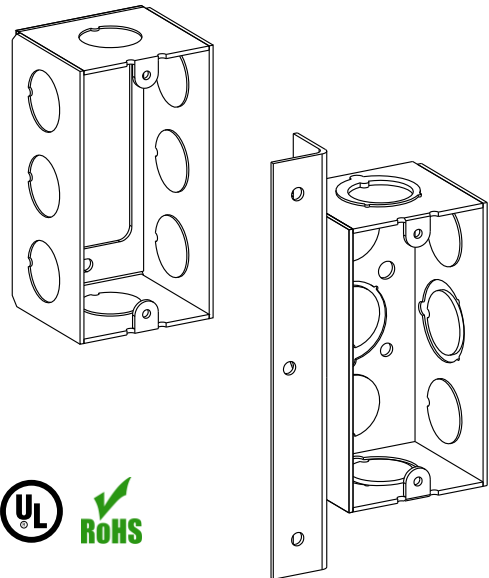

FEATURES

Knockout:

50: 1/2" K.O.;

MKO: Moon K.O. (1/2" and 3/4" K.O.)

Bracket:

FB: (L: 7", W: 1") Offset (9/16") Mounts on flat side of stud

AB: 90° (L: 5-7/8", W: 7/8") Offset (9/16") Positions box against face and side of stud

Mfg. Process:

WELDED

DIMENSIONS

Width: 2"

Height: 4"

Depth: 1-7/8"

Cu.In.: 13.0

CONFIGURATION DATA

Catalog No.	Bracket& Setback	Knockouts		Std. Pkg.
		Sides	Bottom	
HB-1-50	-	(8)-1/2"	(2)-1/2"	50
HB-1-50-FB	FB, 9/16"	(5)-1/2"	(3)-1/2"	50
HB-1-50-EXT	-	(8)-1/2"	-	50
HB-1-MKO	-	(4)-1/2", (4)-MKO	(1)-1/2", (1)-MKO	50
HB-1-MKO-AB	AB, 9/16"	(2)-1/2", (3)-MKO	(2)-1/2", (1)-MKO	50
HB-1-MKO-FB	FB, 9/16"	(2)-1/2", (3)-MKO	(2)-1/2", (1)-MKO	50
HB-1-MKO-EXT	-	(4)-1/2", (4)-MKO	-	50

