

HYDRO-RAIN®

Built for Speed®

PVC-Lock®

BY **HYDRO-RAIN®**

PVC-Lock® by Hydro-Rain® is a remarkable push-fit fitting for repairing or installing PVC piped sprinkler systems without toxic glues or primers. Each PVC-Lock® fitting contains a stainless steel retainer ring and an O-ring seal, preventing leaking at both low and abnormally high pressures.

Using PVC-Lock® fittings allows you to “lose the glue” and reduces traditional installation times by over 50%. With PVC-Lock® you’ll leave your project with clean hands and a clear conscience knowing that your installation crew and the environment are being protected from harmful chemicals.

BUILT FOR SPEED ADVANTAGES

- **Patent Pending “Push-and-Go” Design**—100% tool and chemical free approach that cuts installation time in half or more.

BUILT FOR GREEN ADVANTAGES


- **PVC-Lock® Fittings are Chemical Free**—Glue-less, tool-free installation protects the environment and the long-term health of your crew.

FEATURES AND BENEFITS

- **Patent Pending Retaining System**—Stainless steel teeth grip pipe tight for a strong, leak-proof connection.
- **Swivels on the Pipe**—After installation PVC-Lock® fittings can swivel 360° around the pipe allowing easy sprinkler head orientation and adjustment.
- **Universal**—For use with all brands and classes of Schedule 40 and 80 PVC pipe.
- **Removable & Reusable**—On-site sizing adjustments are easy using the PVC-Lock removal tool.
- **Pressure Rated**—Use on either side of the irrigation valve.



HOW DOES PVC-LOCK® WORK?

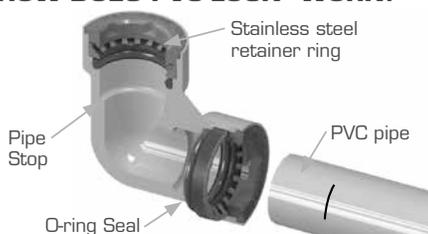

When PVC pipe is inserted to the Pipe Stop, the o-ring seals around the pipe and the stainless steel ring “locks” the pipe in place.

The fitting with a fully inserted pipe creates a permanent, leak-free connection.



HYDRO-RAIN®

Built for Speed®

PVC-Lock®


BY HYDRO-RAIN®

SPECIFICATIONS

- PVC-Lock® Lateral Pipe Fittings:
 - Burst Pressure: 600 PSI (41.4 BAR)
 - Working Pressure: 0 - 150 PSI (10.5 BAR) at 68° F (20° C)
 - Certifications: IAPMO IGC 300-2013

Warning: For cold water outdoor irrigation connections only. Do not insert fingers. Use only PVC pipe with PVC-Lock® fittings. Ensure that pipe and fittings are free of dirt and debris prior to inserting the pipe into fitting.

WHERE IS PVC-LOCK® USED?

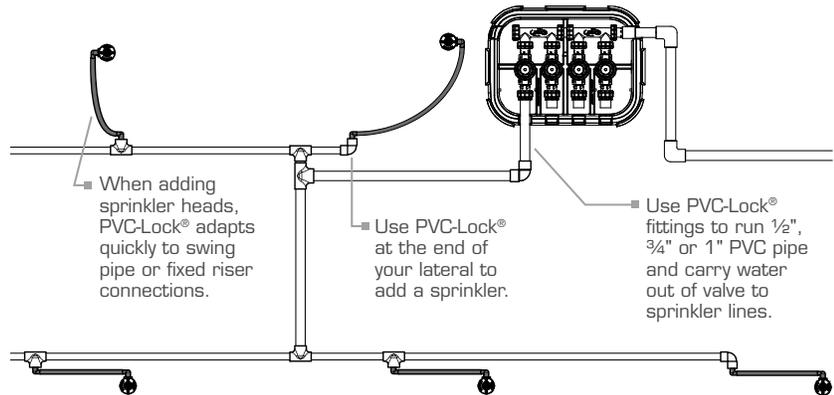


1" FITTINGS



SLIDE REPAIR FITTINGS




FLEXIBLE PUSH-ON FITTINGS

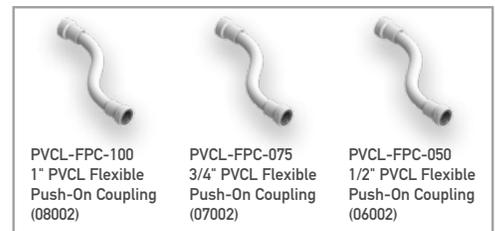

3/4" FITTINGS



RELEASE TOOLS

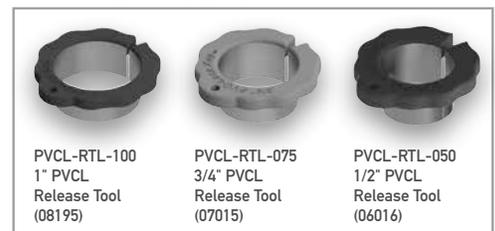

1/2" FITTINGS



BEVEL TOOL



PN 98606-36 rC