without the use of tools, and cleaned. cleaning. For a more thorough cleaning, the pump can be disassembled, Usually flushing the pump and hoses with hot water is all that is needed for Cleaning Instructions:

Snap-shut valve on the end of the air hose and begin pumping.

- 2. To inflate footballs, beach balls, etc., place the inflation needle into the tighten securely. Attach Snap-shut valve and begin pumping.
 - 1. Place the air pressure hose into the bottom nozzle (discharge) and

To use as an air pump:

- 3. Place the bottom (discharge) hose into a drain pan and start pumping. the bottom of the crankcase.
- 2. Insert the top (intake) hose into the engine dipstick hole until it reaches
- 1. To remove motor oil from the crankcase of an engine, follow steps 1 & 2

To change oil:

important to clean the pump.

NOTE: After siphoning gasoline, oil, or any flammable liquid, it is very

begins to flow, it will flow without further pumping.

4. Prime the pump by pumping the handle 3-4 times. Once the liquid

intake hose.

NOTE: For proper siphoning, the discharge hose must be lower than the (discharge) into where the liquid is to go.

to be transferred. Insert the other red hose from the bottom nozzle

- 3. Insert the red hose from the top nozzle (intake) into the liquid needing the hoses are securely inserted.
- on the pump housing and press the connectors over the nozzles after 2. Insert the connector end of the red hoses to the top and bottom nozzles
 - 1. Insert one end of each of the two red hoses through the black

To use as a siphon:

NOITARATION

Performance Tool® does not authorize any other person to

make any warranty or to assume any liability in connec Except for warranties of title and the limited express war

ranties set forth above, Performance Tool® makes no

express or implied warranties of any kind with respect to its products. In particular, Performance Tool® makes no implied warranty of merchantability and no implied war-

ranty of fitness for any particular purpose, except that for goods purchased primarily for personal, family or house-hold use and not for commercial or business use, Performance Tool® makes an implied warranty of mer-

chantability (and, if otherwise applicable, an implied war-

ranty of fitness for a particular purpose), but only for the particular qualities or characteristics, and for the duration.

from state to state, so the above limitations may not apply

Performance Tool® shall not be liable for consequential, incidental or special damages resulting from or in any

manner related to any product, or to the design, use, or

any inability to use the product. The sole and exclusive

limitation of remedies or on consequential, incidental or

special damages may vary from state to state, so the above limitations may not apply in all cases.


WARNING: This product and its packaging contain a chemical known to the State of California to cause

cancer, birth defects or other reproductive harm.


remedy for a defective product or part shall be the repair, or replacement thereof as provided above. The laws on

The laws on limitation of implied warranties may differ

expressly warranted above.



acle is in contact with the ground. be sure that the container that is acting as the recep-When transferring flammable liquids such as gasoline, WARNING: DISCHARGE OF STATIC ELECTRICITY -

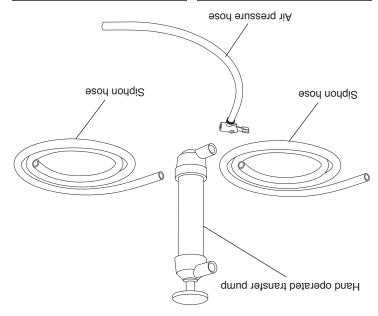

- Easy cleanup with no tools needed to disassemble
- Great for water toys and sports balls (inflation needle not included)
 - Easily transfer most any liquid including water, gasoline and oil
 - Handy tool for home auto and boat

SPECIFICATIONS

MULTI-USE TRANSFER PUMP

Bomba De Transferencia De Usos Múltiples Model No. W1145

OPERATOR'S MANUAL





FOR YOUR SAFETY. please read these instructions carefully and retain them for future use

LIMITED WARRANTY Performance Tool® extends only the following warranties.

and only to original retail purchasers. These warranties give specific legal rights. Except where prohibited by local law, the law of the State of Washington governs all war-

ranties and all exclusions and limitations of warranties and

remedies. There may be other rights which vary from

Performance Tool® warrants the product to be free from defects in materials and workmanship under normal use

and service. A defective product may be returned for a free replacement within 90 days from the date of purchase, provided that product is returned to place of pur chase immediately after discovery of defect. After 90 days

and up to one year from date of purchase, Performance
Tool® will replace at no charge any parts which our exami-

nation shall disclose to be defective and under warranty.

These warranties shall be valid only when a sales receipt

showing the date of purchase accompanies the defective product or defective part(s) being returned. For part(s)

after 90 days, please remit your request, postage prepaid

Performance Tool, P.O. Box 88259 Tukwila, WA 98138

These warranties exclude batteries, bulbs, blades, bits

punches, dies, bulbs, fuses, hoses, and other consum-ables which must be replaced under normal use and ser

vice. These warranties shall not apply to any product or

part which is used for a purpose for which it is not designed, or which has been repaired or altered in any

which has been subject to misuse, neglect, accident or wear and tear incident to normal use and service.

way so as to affect adversely its performance or reliability, nor shall these warranties apply to any product or part

Always wear eye protection when using tools