

Permatex Millions of Impressions from Print, Web and Social Media



## Table of Contents

### Table of Contents

### **A Word From Permatex**

Since 1909, quality Permatex® products have been used in workshops, garages, and at racetracks around the world. Permatex continues to thrive and expand with exciting new and innovative products.

Behind these products is the understanding that your needs are our primary concern. Our resources and people are organized to satisfy those needs. It is a market-driven concern for you and your customers that makes Permatex® a leading edge manufacturer and supplier of innovative products that meet your customers' needs.

Innovation through research and development is a Permatex hallmark. We are continually enhancing our capabilities to provide you with a constant flow of new and improved products that will keep your customers coming back.

### Visit us at www.permatex.com



Permatex.com features an online product catalog, news, store locator, technical information, product selection guides and training videos for technicians seeking materials and guidelines for their automotive projects. The site provides information about Permatex® brands, such as Fast Orange®, No Touch® and Spray Nine®. Products are searchable by category, keyword, and item number. Visitors can retrieve Material Safety Data Sheets (MSDSs) and Technical Data Sheets (TDSs), available as rapid downloads. The Motorsports section features the Follow-A-Dream NHRA Race Team with the latest updates. A Vintage Gallery features product and other memorabilia dating back to Permatex's early years.

Note: Refer to page 86 for Important Numbers to Remember and page 85 for Product Description Code Explanation.

4	Our History
6	Introduction
8	Gasketing
	Gasket Makers
	Anaerobic Gasket Makers & Flange Sealants 15
	Gasket Removers
	Gasket Sealants17
20	Threadlockers
	GEL TWIST <sub>TM</sub> & GEL SQUEEZE <sub>TM</sub> 21
24	Thread Sealants
26	Anaerobic Technology & Retaining Compounds
28	Adhesives & Sealants
	Super Glues - Instant Adhesives28
	Epoxies
	Specialty Adhesives32 Sealants32
34	Specialized Maintenance & Repair
	Rebuilder's Aids
	Single-Use Pouches35
	Auto Glass Repair
	Electrical System Maintenance
	Professional Repair Systems
	Fabric, Vinyl & Fiberglass Repair43
	Exhaust System Maintenance & Repair
	Brake Maintenance & Repair
46	Lubricants
	Environmentally Friendly Lubricants
	Multipurpose Lubricants
	Specialty Lubricants
52	Cleaners
	Specialty Cleaners54
	Spray Nine® Cleaners
58	Maintenance & Performance Additives
	Octane Boosters & Cleaners
60	Appearance Products
	No Touch® Tire Care, Tire Dressings
	Wheel Cleaner; Plastic, Glass, Surface Care62 Interior Care; Engine Care63
64	Hand Cleaners
J-	Waterless Hand Cleaners
	Hand Cleaners — Use with Water67
	Bar Soap & Wipes
	Accessories
	Hand Lotion
70	Hand Protection
	Disposable & Mechanics Gloves
72	Product Selectors
	Gasket Maker Product Selector
	Gasket Dressing Product Selector
	Threadlocker Product Selector
	Automotive Product Selector
	Motorcycle Product Selector
	OEM Interchange Charts84
	Index90

### PERMATÉ

### Our History Since 1909...

PERMATE)

In the beginning...the first Permatex product was a shellac designed to bond bicycle tires to their rims. Constant A. Benoit Sr., founder of the Permatex Company, enjoyed going to car races in his spare time.



In 1915, Mr. Benoit attended a 24-hour endurance race at the Sheepshead Bay track near his Brooklyn, New York laboratory. He observed that many of the cars were forced to make frequent pit stops to replace blown cylinder head gaskets.

The mechanic for driver Ralph DePalma's car sought Mr. Benoit's help after DePalma's car blew its head gasket for the fourth time. Mr. Benoit applied some of his experimental gasket cement and the DePalma car drove the rest of the 24-hour race without any further gasket problems. On that day, Permatex entered the automotive maintenance chemicals business. The Permatex Company became one of the early leaders in using professional auto racing to prove product performance and to promote sales.



In 1936. American stockcar driver and mechanic Bill France, Sr., assembled a

racing engine using only Permatex® Form-A-Gasket® products. Later, Driver Milt Marion won the first race at the Daytona Beach Road Course with the Form-A-Gasket® Test Car # 23. In 1966, the Permatex 300 became only the second race on the NASCAR schedule to be named for a corporate sponsor. The Permatex 300 NASCAR race at the Daytona International



Speedway became one of America's premier racing events. In the mid 1970's, NASCAR superstar Bobby Allison built a late model Chevrolet sportsman engine entirely with Permatex brand threadlockers. The car, built without a single cut gasket or lock washer, ran 300 miles at Alabama International Motor Speedway (Talladega).

Constant Benoit died in 1950 and his son Pete took over the Permatex Company. Pete shifted the company's manufacturing plant from Brooklyn, New York to Kansas City in 1954 - to take advantage of a more central shipping location. Later, preferring Florida's sunny climate, Pete moved the company headquarters to West Palm Beach in 1962. Soon the Permatex Company built a 12,000 square foot corporate and international sales office in West Palm Beach.

The Permatex product line was expanded and the company continued to prosper. In 1972, the Permatex Company was sold to Loctite Corporation. The business was moved to Cleveland, Ohio and integrated with the Woodhill Chemical Company.



In the late 1970's, Woodhill Permatex launched Permatex® Blue Silicone which went on to become the largest selling blister carded chemical item in the American auto parts business. In August 1980, the Woodhill Permatex division moved to a brand new 175,000 square foot facility with over 100 employees.

In February 1990, DL Banite, Inc., America's oldest manufacturer of waterless hand cleaners became a part of the Permatex line. Later that year, Permatex launched Fast Orange® citrus hand cleaners, a staple of the Permatex product line and a standard of the emerging citrus hand cleaner industry.

Permatex was purchased by a group of private investors in 1999. As a private company in 2000, Permatex introduced an unprecedented fifty new products, acquired the No Touch®

NO TOUCH. tire care line, bought the Loctite Mexican Hardware Business, and



purchased the NOS® (Nitrous Oxide Systems) fuel additive and treatment product line.

In January of 2001 Permatex finalized the acquisition of the Permatex International Business from Loctite. In 2002, Permatex re-entered the industrial market with a broad range of products including its proprietary waterless hand cleaners; silicone-based sealant and gasketing materials, anaerobic adhesives, epoxies, lubricants and other specialty chemicals.



In December of 2005, Permatex was acquired by ITW (Illinois Tool Works Inc.), a NYSE listed U.S. based corporation. ITW was founded in 1912 and is a Fortune 200 diversified manufacturing company with more than a 90 year history. ITW's decentralized business units in 49 countries employ 50,000 people focused on creating value-added products and innovative customer solutions. In addition,



Permatex announced a partnership with Jay Blake and the Follow A Dream® NHRA Racing Team.

In 2008, Permatex acquired the South American adhesives and sealants manufacturer, Anaerobicos S.A. and New York-based specialty cleaning products manufacturer, Spray Nine Corporation.

As a part of ITW's Performance Polymers & Fluids Group, Permatex continues its commitment to be an innovator and leader in adhesives, sealants and automotive aftermarket maintenance products.

Permatex currently operates in the United States, Canada, Mexico, and the U.K. and exports products to more than 85 countries around the world.

In 2009, Permatex celebrated its 100 year anniversary... and another century of quality and innovation.



### 100th Anniversary...a century of innovation and leadership in chemical tools.

2009 marked Permatex's 100th year in business. Since 1909, Permatex has been the preferred choice in chemical tools for motorsports teams, professional automotive

technicians, performance buffs, and general automotive do-it-yourselfers. The company offers a wide range of adhesives, sealants, gasket makers, hand cleaners, lubricants, appearance products, specialty repair kits, and additives.

Permatex now has over 350 products making over 1000 SKUs, providing market-specific formulations and application methods for a variety of industries, including automotive, marine, motorcycle, heavy duty, and off highway. The company is constantly working with automakers, parts suppliers, service parts groups, and other aftermarket companies to develop the next generation of service technology.

In addition to product development, Permatex is also focused on developing even more effective support programs for its product lines and distribution partners with new packaging,

bi-lingual clinics and online training for professional and student technicians, product demo videos,

category management, expanded website activities, and motorsports sponsorships.


At Permatex, we continue to deliver products that make caring for cars easier and repairs more reliable. From our performance proven "chemical tools" and shop supplies that simplify maintenance and repair to our innovative appearance and additive products that work better and last longer, Permatex delivers best-in-the-business performance and value. As we continue into another century of quality and innovation, we'd

like to thank all of our customers for making Permatex the brand they trust to get the job done right.



### Introduction

### Permatex Defined

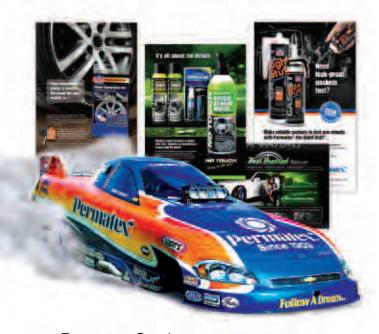

Customer-driven, cutting-edge products and leading brands...

OEM specified...

ISO 9001: 2008 certified...

NSF Registered...

Superior customer service...

Technological and merchandising innovations...

Award-winning package designs...

A variety of promotional campaigns & national advertising support...

These are the elements that define Permatex's automotive product lines...the elements that give Permatex® products the competitive edge...the elements that make Permatex products sell.

### Permatex Service

From its Hartford headquarters, Permatex directs a growing global automotive aftermarket enterprise serving North America, the Pacific Rim, South America, Europe, and Africa. Permatex manufacturing plants, distribution centers and offices are strategically located to help us achieve our growth goals and effectively service our customers. Many Permatex® products are packaged in our state-of-the-art Manufacturing, Distribution and Technical Center located in Solon, Ohio.







**Above:** Permatex Manufacturing, Distribution and Technical Center, Solon, Ohio

**Far Left:** Permatex Headquarters, Hartford. Connecticut

**Left:** Permatex Manufacturing, Kansas City, Kansas

Permatex is committed to conducting its business in a manner which protects the environment and the health and safety of employees, customers and the public. Some related services are:

- Material Safety Data Sheets (MSDS): exceed regulatory requirements and are continuously updated.
- Training: educational support for the safe handling, use, shipping, and disposal of chemicals.
- Response Line: professional responses to queries regarding health, safety, regulations and transport. Off-hours tie-in to Poison Control Centers is also provided.

### Permatex Free Training Clinics

Permatex® has organized a dedicated team of trainers who are committed to educating customers and end-users. This unmatched commitment provides free product training clinics that are attended by thousands of automotive technicians, installers, and vocational-technical students each year. These clinics teach people in the automotive repair industry how Permatex® products can help them save time, reduce costs, and increase repair reliability. They learn the proper use of products, repair procedures, and best practices, and receive informative reference materials and free samples. Since 1999, Permatex Sales Representatives have successfully trained more than 100,000 technicians!

Permatex has expanded its training program to now include a focus on student technicians studying at the 1,500+ accredited National Automotive Technicians Education Foundation (NATEF) schools. As part of this effort, we offer a 60 minute in-classroom introductory session on the proper use of Permatex silicones, threadlockers, and thread sealants by knowledgeable and highly trained full-time Technician Advisors. This is not a sales presentation, but rather a live, hands-on training with demonstrations and specific product applications.

After the presentation, a variety of application size products, charts, and handouts are given to the students. There is also an instructor's kit with additional products, a lesson plan, and a DVD for the classes' future reference. These are gifts for the instructor and the students as our way of saying "thank you" for their time and attention. Note this program also provides credit toward the instructor's continuing automotive service education requirements.

Time being a very limited resource, and travel a major expense, we request combining similar classes to minimize costs, and maximizing our efforts. Our experience has identified the best class size to be 30-50 students. We at Permatex understand the value of training. While most manufacturers have eliminated no-charge training programs, our company is expanding the effort to train the future ASE certified technicians of tomorrow and to assure the flow of future professional automotive service technicians having been exposed and trained in the proper use of Permatex silicones, threadlockers, and thread sealants.



Introduction

### **Gasket Makers**

Changing engine designs have meant new and different gasketing requirements. Extended warranties, engine sensors and new component materials such as aluminum, bi-metal alloys and high-tech plastics, have created the need for superior RTV silicone gasket makers in both OEM production and service applications.

Permatex® gasket makers offer significant performance advantages, even in today's complex vehicles. These include outstanding oil resistance, excellent torque retention and hi-temp, sensor-safe properties. Permatex always has the right gasket maker for your application.



### **Gasket Sealants**

As new engine designs require more advanced gasket makers, today's under hood requirements create a need for superior sealant technologies. When a chemical gasket is not an option, Permatex offers a wide range of gasket sealants suitable for applications on both import and domestic vehicles of any model year or performance caliber.



### Gasket Makers

Permatex: Gasketing Product		ERICAN AUT Motors, Ford,	IMPORT AUTOMOBILES Acura, Honda, Hyundai, Isuzu, Mazda, Mitsubishi, Nissan, Subaru, Toyota			
Recommendations	Ultra Black®	Ultra Blue®	Ultra Copper®	Ultra Grey®	Ultra Copper®	
GASKETING APPLICATIONS	STAND <i>a</i>	ARD PERFORM	IANCE	HIGH PER	HIGH PERFORMANCE	
Rear Main Bearing Cap Split Line					_	
Damper Keyway Sealing					_	
Differential Cover					_	
Intake End Seals			_		_	
OHC Cap					_	
Oil Pan Corner Seals					_	
Oil Pan Gasket					_	
Side Cover Plate					_	
Thermostat Housing					_	
Timing Cover					_	
Transmission Pan					_	
Valve Cover Gasket					_	
Vibration Damper					_	
Water Pump Cover Gasket	_	_			_	
GASKET DRESSING / ADHESIVE	APPLICATION	ONS				
Exhaust Manifold	_	_		_		
Intake Manifolds						



SEALANT FEATURES	Permatex® Form-A-Gasket® No. 1	Permatex® Form-A-Gasket® No. 2	Permatex® Aviation Form-A-Gasket®	Permatex® Indian Head®	Permatex® Tack & Seal™	Permatex® High Tack 97/98	Permatex® High Tack 99	Permatex® Copper Spray-A-Gasket®	Permatex® Ultra Rubber Gasket Sealant & Dressing
Import OE Endorsed	_	_	_	_	_	_		_	•
Non-Hardening Formula	_			_		•		_	
Hardening Formula	•	_	_		_	_		_	_
Thread Sealant				_		_		_	•
For Gasket Positioning	_	_	_	_	•	•			•
Gasket Sealant						_			•
High Pressure Resistance	•			_				_	•
Sensor-Safe	-								

RTV (Room Temperature Vulcanizing) Silicone cures at standard room temperatures. It is a flexible material that can be shaped then dries into a solid seal.





Gasket Makers — the Right Stuff® 1 Minute Gasket™



### Got a Minute?

### Make Instant Gaskets to Fit Any Application...

Put vehicles back into service in just one minute with the Right Stuff® 1 Minute Gasket™!

**OEM specified**. These long-lasting, elastomeric formed-in-place rubber gasket makers are more reliable and longer lasting than cut gaskets, and at a fraction of the cost. They fit many different applications quickly and easily by allowing you to custom fit gaskets to any shape or size.

- Leak & seepage resistant protects against leaks caused by vibration & thermal expansion.
- Superior to most 0E gaskets and fleet-tested to be leak-free in more than 5 million miles of heavy commercial use.

Now packaged in handy-sized Power Cans, each contains enough material to completely replace two or three large cut gaskets!



### Permatex® the Right Stuff® 1 Minute Gasket™

The self-merchandising proprietary clamshell can stand on it's own, be hung or binned.

Item #	Container Size	Pack
25229	3 oz. Power Can, carded	6
25238	3 oz Power Can carded - GREV	6

See also page 11.

Just Torque and Go with the Right Stuff®1 Minute Gasket™





Item # 25229

Item # 25238



### Gasket Makers — the Right Stuff®





### Permatex® the Right Stuff® Gasket Maker

Return equipment to service immediately and make leak-proof gaskets in just one minute. This latest elastomeric rubber gasket technology is blowout resistant and outperforms pre-cut gaskets. Specified on production lines by GM, Ford, Chrysler and Mercedes-Benz. Temperature range -75°F to 450°F (-59°C to 232°C) continuous, 500°F (260°C) intermittent; resists ATF, coolant, oil and other shop fluids. Protects against leaks caused by vibration and thermal expansion. Sensor-safe.

**Suggested Applications:** Automotive and marine gaskets, valve covers, gearbox covers, pumps, compressors, oil pans, thermostat housings, water pumps

Item #	<b>Container Size</b>	NSF	Pack
25229	3 oz. Power Can, carded		6
25223*	4 oz. Power Can	Nonfood Compounds Program Listed (P1) (132542)	6
25224*	7 oz. Power Can		6
85224	7.5 oz. PowerBead™ pressu	rized can	6
33694	10.1 fl. oz. cartridge		6
29208	5 oz. cartridge		6
99070	5 oz. cartridge, 2 pack w/ca	ullking gun	4
800368	short caulking gun		6

See also page 10.

Performance Scorecard					
Parameter	Cut Gaskets	the Right Stuff⊗			
Reliability, Durability	FAIR	EXCELLENT			
ATF/Oil/Coolant/Temp. Resistance	P00R	EXCELLENT			
Seals Consistently	FAIR	EXCELLENT			
OEM Approved/Specified	YES	YES			
Sensor Safe	YES	YES			
Ability to seal scored surfaces	P00R	EXCELLENT			
Ability to tighten/retighten bolts without concern of overtightening	POOR	GOOD			
Available in every possible shape	NO	YES			

### Permatex® the Right Stuff® GREY Gasket Maker

Specifically designed to perform under higher torque loads associated with engines having closely spaced bolt patterns (typically import vehicles). This product is blowout resistant, allowing leakproof gaskets to be made and put into service in just one minute. Sensor-safe, the Right Stuff® GREY seals instantly, forming a reliable, long lasting elastomeric rubber gasket that outperforms precut gaskets. OEM specified by Honda, Nissan and Mazda. This product is resistant to powertrain fluids (oil, coolant, and ATF) and operates in environments to 450°F (232°C) continuous; 500°F (260°C) intermittent.

**Suggested Applications:** Automotive gaskets, valve covers, oil pans, transmission pans, thermostat housings, water pumps, etc.

Item #	Container Size	Pack
25238	3 oz. Power Can, carded	6
85144	7.5 oz. PowerBead™ pressurized can	6
34311	5 oz. cartridge	6
34310	10.1 fl. oz. cartridge	6





### Ultra Series Gasket Makers



Groundbreaking research and testing by Permatex helped to develop the Ultra Series — the second generation of automotive silicone technology designed to meet or exceed OEM specifications while offering superior oil resistance and improved adhesion.

### Permatex® Ultra Black® Maximum Oil Resistance RTV Silicone Gasket Maker

**OEM specified.** For dealership warranty requirements, Ultra Black® ensures extended drivetrain warranty compliance. Fast-curing formula. Sensor-safe, low odor, noncorrosive. Meets performance specs of OE silicone gaskets. Retains high flexibility, oil resistant properties through use of a patented adhesion system. Temperature range -65°F to 500°F (-54°C to 260°C) intermittent; resists auto and shop fluids and vibration.

Suggested Applications: Valve covers, oil pans, intake manifold end seals, timing covers, differential covers

### **OEM INTERCHANGE, see pgs. 84-89**

Item #	<b>Container Size</b>	Pack
22072	.5 oz. tube, carded	6
82180	3.35 oz. tube, carded	12
82080	8.75 oz. Power Can	6
85080	9.5 oz. PowerBead™ can	6
24105	13 oz. cartridge	12

### Permatex® Ultra Copper® Maximum Temperature RTV Silicone Gasket Maker

**OEM specified.** For high operating temperatures common in 4-cylinder, turbocharged or high-performance engines. The most advanced, high temp RTV silicone gasket available. Sensor-safe, low odor, noncorrosive. Superior adhesion. Three times more oil resistant than conventional silicones; eight times more flexible than cut gaskets. Temperature range -65°F to 700°F (-54°C to 371°C) intermittent; resists auto and shop fluids and vibration.

Suggested Applications: Exhaust manifolds/headers, valve covers, oil pans, timing covers, water pumps, thermostat housings

### **OEM INTERCHANGE, see pgs. 84-89**

Item #	<b>Container Size</b>	Pack	Old P/N
81878	3 oz. tube, carded	12	101BR

### Permatex® Ultra Grey® Rigid High-Torque RTV Silicone Gasket Maker

**OEM specified.** Designed specially for high-torque and high vibration applications, like those common in import engines, this premium RTV gasket maker exceeds manufacturers' performance requirements. Sensorsafe, low odor, and noncorrosive. Maximum vibration resistance, with outstanding resistance to oils, cooling and shop fluids. Guaranteed not to leak. Temperature range -65°F to 500°F (-54°C to 260°C) intermittent.

Suggested Applications: Valve covers, oil pans, transmission pans, intake manifold end seals, timing covers, water pumps, thermostat housings

### **OEM INTERCHANGE, see pgs. 84-89**

Item #	<b>Container Size</b>	Pack	Old P/N
22074	.5 oz. tube, carded	6	
82194	3.5 oz. tube, carded	12	599BR
85084	9.5 oz. PowerBead™ can	6	
82195	13 oz. cartridge	6	

### Permatex® Ultra Blue® Multi-Purpose RTV Silicone Gasket Maker

**OEM specified.** Permatex<sup>®</sup> Ultra silicones were developed to meet today's technology changes. Sensor-safe, low odor, noncorrosive. Outstanding oil resistance and joint movement tolerance. Eight times more flexible than cork/composite gaskets; three times more oil resistant than conventional silicones. Temperature range -65°F to 500°F (-54°C

to 260°C) intermittent; resists auto and shop fluids and vibration.

**Suggested Applications:** Valve covers, oil pans, timing covers, differential covers

Item #	Container Size	<b>Pack</b>	Old P/N
81724	3.35 oz. tube, carded	12	77BR
85519	9.5 oz. PowerBead™ can	6	_
81725	13 oz. cartridge	12	77C





### Permatex® Sensor-Safe Blue RTV Silicone Gasket Maker

The original Permatex Blue now with low odor formula. Will not foul oxygen sensors. Replaces almost any cut gasket. Makes reliable "formed-in-place" gaskets that resist cracking, shrinking and migrating. Coats pre-cut gaskets to increase reliability. Temperature range -65°F to 500°F (-54°C to 260°C) intermittent; resists auto and shop fluids.

**Suggested Applications:** Valve covers, oil pans, timing covers, water pumps, thermostat housings

### **OEM INTERCHANGE, see pgs. 84-89**

Item #	<b>Container Size</b>	Pack	Old P/N
80022	3 oz. tube, carded	12	6BR
80628	12.9 oz. cartridge	12	6C
81860	7.25 oz. Power Can	6	6MA
85860	7.25 oz. PowerBead™ can	6	_



### Permatex® Sensor-Safe High-Temp RTV Silicone Gasket Maker

The high temp first generation gasket maker formulated for oxygen sensor equipped engines. Temperature range of -65°F to 650°F (-54°C to 343°C) intermittent; resists auto and shop fluids.

**Suggested Applications:** Valve covers, oil pans, timing covers, water pumps, thermostat housings

Item #	<b>Container Size</b>	<b>Pack</b>	Old P/N
Q1/122	3 oz tuba cardad	12	27RD



### **NEW!** Permatex® Automatic Transmission RTV Gasket Maker

**OEM specified.** Developed with U.S. automotive OEMs and complies with extended warranty requirements. It resists aging, weathering and thermal cycling without hardening, shrinking or cracking. Benefits include improved transmission oil resistance, good adhesion while retaining flexibility, sensor-safe, noncorrosive and can be used as a gasket maker or dressing. Compatible with both conventional and synthetic automatic transmission fluids. Nonflammable, nontoxic, low odor.

**Suggested Applications:** Automatic transmission pans, case halves, inside covers

P/N	<b>Container Size</b>	Pack
81180	3 oz. tube, carded	12



### Permatex® High-Temp Red RTV Silicone Gasket Maker

**OEM specified.** Formulated for hi-temp applications, or heavy-duty use (such as towing, etc.). Replaces almost any cut gasket by making reliable "formed-in-place" gaskets that resist cracking, shrinking and migrating caused by thermal cycling. Coats pre-cut gaskets to increase reliability. Temperature range -65°F to 650°F (-54°C to 343°C) intermittent; resists auto and shop fluids.

**Suggested Applications:** Valve covers, oil pans, timing covers, water pumps, thermostat housings

### **OEM INTERCHANGE, see pgs. 84-89**

Item #	Container Size	Pack	Old P/N
81160	3 oz. tube, carded	12	26BR
81409	11 oz. cartridge	12	26C
81915	7.25 oz. Power Can	12	_
85915	7.25 oz. PowerBead™ can	6	_



### Permatex® Water Pump & Thermostat RTV Silicone Gasket

A noncorrosive, sensor-safe RTV silicone gasket material formulated specifically for water pumps and thermostat housings. Highest water-glycol resistance available in an RTV silicone.

**Suggested Applications:** Water pump and thermostat housings

Item #	Container Size	Pack
22071	.5 oz. tube, carded	6



### **NEW!** Permatex® Gear Oil RTV Gasket Maker

**OEM specified.** Specially formulated to withstand the harsh gear oil environment found in differentials and transfer cases. Because gear oil has friction modifiers that break down normal RTV and cause leaking, this specialty silicone has been tested to OEM specifications to ensure complete sealing. As a gasket maker, it seeks and seals leak paths that cut gaskets cannot. It can also be used to seal cut gaskets. Compatible with both conventional and synthetic gear oils.

Suggested Applications: Differentials and transfer cases

P/N	Container Size	Pacl
81182	3 oz. tube, carded	12



### **Gasketing** The Ultimate Dispensing System...



### **Gasket Makers & Sealants Made Easier**

Our patented PowerBead™ Dispenser gives you enduring reliability with the ultimate in pinpoint control, outstanding product performance and ease of use.

- · Makes application quick and easy
- Extended, rigid nozzle gives pinpoint control
- Vertically-actuated valve design allows all material to be dispensed (NO WASTE!) and eliminates clogging
- · Product flow can be regulated easily, without finger fatigue
- Permatex branded comfort-grip

### The PowerBead™ Advantage

Our patented valve opens all internal orifices, unlike standard tilt valves, which only open a few. Your benefit...virtually no clogging and smoother product flow with better control.





### Permatex® Anaerobic Gasket Maker

**OEM specified.** Noncorrosive gasketing material designed primarily for use on aluminum, iron, and steel flanged mating surfaces. Ideal for on-the-spot and emergency repairs, or when a conventional gasket is unavailable. Fills gaps up to .015" and cures to a solvent-resistant seal that will not tear or decay during service. Parts disassemble easily even after extended service. Old gasket material can be removed in minutes with a simple putty knife.

**Suggested Applications:** Water pumps, thermostat housings, transmission pans,

transmission case covers, transaxle casings, o-ring replacement

### **OEM INTERCHANGE, see pgs. 84-89**

Item #	<b>Container Size</b>	Pack
51817	6 ml tube, carded	12
51813	50 ml tube, carded	6
51845	300 ml cartridge	10





### Permatex® Anaerobic Flange Sealant

Flexible, gasketing material for use on rigid machined flanges with less than .015" gap. 0EM approved — use where 0E's specify "anaerobic" gasket (cures in the absence of air). Withstands temperatures to 300°F (149°C). Eliminates preformed, pre-cut, paper, rubber and cork gaskets. Flexes with flanges that move in service.

**Suggested Applications:** Water pumps, thermostat housings, transmission pans, transmission case covers, engine cases, timing covers, transaxle casings, o-ring replacement

### **OEM INTERCHANGE, see pgs. 84-89**

Item #	<b>Container Size</b>	Pack
51531	50 ml tube	10
51580	300 ml cartridge	10





### Permatex® High Temperature Anaerobic Flange Sealant

A high temperature sealant specially engineered for making or dressing gaskets in rigid assemblies. Able to withstand temperatures to 400°F (204°C), fills gaps up to 0.020" (primed) and permits clamping loads to be maintained for strong, leakproof assemblies.

**Suggested Applications:** Water pumps, thermostat housings, engine cases, timing covers, transmission pans, transmission case covers, transaxle casings, o-ring replacement

Item #	<b>Container Size</b>	Pack	
51031	50 ml tube	10	





### Gasketing Convenient Half Ounce Size Gasket Makers

### Permatex® offers the right amount of product to handle small jobs...

When maintenance and repair jobs call for only a small amount of product to do the job right, Permatex offers the right amount for the job with select gasket makers and lubricants in convenient half ounce packages. Ideally suited for those small jobs where a larger size may be wasteful, they are convenient to handle, easily portable and can be stored almost anywhere.

• Ultra Disc Brake Caliper Lube, pg. 45, 50

Ultra Grey® Rigid High-Torque RTV Silicone Gasket Maker, pg. 12

• Ultra Black® Maximum Oil Resistance RTV Silicone Gasket Maker, pg. 12

Water Pump & Thermostat Housing RTV Silicone Gasket, pg. 13

Proven performance comes with even greater convenience!













### Gasket Removers



\* Can be used in all 50 states.

### Permatex® Gasket Remover -Low VOC Formula

This low VOC formulation combines powerful gasket remover strength with an innovative delivery system. Its fast-foaming action penetrates the most stubborn or baked-on gaskets in 15-20 minutes. The built-in brush-tip was designed for easy application and allows for scrubbing on intricate surfaces. This product is NOT recommended for use on silicone gaskets. Level 2 A

Suggested Applications: Removes solventbased gasketing, anaerobic gasketing and gasket sealant products including all Permatex®

Form-A-Gasket,® Spray-A-Gasket,® Indian Head,® High Tack™ Gasket Sealants and Dressings, baked-on gaskets and cements, and formed-inplace gaskets

P/N	Container Size	Pack
80645 *	4 oz. Power Can with brush-tip nozzle,	6
	stand-up carded	





### NEW! Permatex® SaferScraper™ **Plastic Scraper**

A safer alternative to metal razor blades... this specially designed hard plastic double-edged razor blade can be used for a variety of cleaning and scraping applications. Ideal for removing decals, bugs, tar and paint without scratching or harming the body paint underneath. Also great for removing gaskets from a plastic or aluminum flange. The durable plastic holder is designed to fit well in the hand for extra flexibility and fits standard metal razor blades if the job requires it.

Suggested Applications: Removes solvent-based

sealants, baked-on gaskets, weatherstrip adhesive, dried oil, grease and paint

P/N	Container Size	Pack
80190	scraper & 2 refillable blades, carded	12
See also pag	e 54.	



▲ NFPA Fire Code 30B

### Specialty Gasket Maker - Use on Motorcycles, Watercraft & Snowmobiles



### **MotoSeal® 1 Ultimate Gasket Maker Grey**

Ultimate Gasket Maker for All Two-Cycle & Four-Cycle Engines



For two and four cycle engines. Solvent-based bond fully seals within 20 minutes. Forms a tough flexible bond that is highly effective on irregular and uneven joint surfaces. Resists gasoline and other damaging fluids. Withstands temperatures 350°F (177°C) continuous, 400°F (204°C) intermittent.

Suggested Applications: Transmission case halves, valve covers, center and end covers (transmissions), crank case halves, cam covers, exhaust manifold seals, timing chain cases, side covers, clutch housings

Item #Container SizePack291322.7 oz. tube, carded6

### Gasket Sealants — Hylomar® Universal Blue



### Permatex® Hylomar® Universal Blue Racing Formula Gasket Dressing & Flange Sealant

Adopted worldwide by many automotive manufacturers and countless race teams for sealing gas and diesel engines and transmissions.

This non-chlorinated gasketing and sealing compound has been specially formulated to be non-setting and non-hardening at elevated temperatures. It withstands rapid changes in temperature and remains flexible and tacky even at high temperatures, allowing repeated disassembly and reassembly in high performance applications. This no-run formula seals surface imperfections on machined flanges and is vibration resistant. Temperature range of -60°F to +500°F (-50°C to +260°C); resists engine fluids, including water, coolant, gasoline, lubricating oils, kerosene and some refrigerants. Also possesses dust and moisture proofing properties.

**Suggested Applications:** Thermostat housings, differential coverings, hydraulic drives and motors, gearbox assemblies, intake manifold assemblies, oil, fuel and water pump housings and seals, fuel injectors and fuel pumps, transmission and torque converter seals

P/N	Container Size	Pack
85249	1.2 fl. oz. tube, carded	12









### **Gasketing** Gasket Sealants



### Permatex® Form-A-Gasket® No. 1 Sealant

Fast-drying, hard-setting sealant designed for sealing rigid materials and flanges, or patching holes and joints where permanent assembly is desired. Temperature range -65°F to 400°F (-54°C to 204°C); resists common shop fluids and fuels.

Suggested Applications: Freeze plugs, threaded connections, manifold gaskets

**OEM INTERCHANGE, see pgs. 84-89** 

Item #	<b>Container Size</b>	Pack	Old P/N
80007	1.5 oz. tube, carded	12	1AR
80008	3 oz. tube, carded	12	1BR
80003	11 oz. tube, boxed	12	1C



### Permatex® Form-A-Gasket® No. 2 Sealant

Slow-drying, non-hardening sealant designed for sealing cut gaskets and stamped parts. Allows for easy disassembly if required. Temperature range -65°F to 400°F (-54°C to 204°C); resists common shop fluids and fuels. Use where sealing is more important than adhesion.

Suggested Applications: Valve cover gaskets, oil pan gaskets

**OEM INTERCHANGE, see pgs. 84-89** 

Item #	Container Size	Pack	Old P/N
80015	1.5 oz. tube, carded	12	2AR
80016	3 oz. tube, carded	12	2BR
80011	11 oz. tube, boxed	12	2C



### Permatex® Aviation Form-A-Gasket® No. 3 Sealant Liquid

Slow-drying, non-hardening brush-top sealant approved for use in aviation as well as automotive applications. Temperature range -65°F to 400°F (-54°C to 204°C); resists gasoline, oil and grease.

Suggested Applications: Close-fitting machined surfaces, sealing hoses, solid gaskets

**OEM INTERCHANGE, see pgs. 84-89** 

Item #	<b>Container Size</b>	Pack	Old P/N
80017	16 oz. bottle	12	3D
80019	4 oz. bottle	12	3H
80018	2 oz. bottle	12	3J



### Permatex® Super "300"® Form-A-Gasket® Sealant

Non-hardening sealant designed to resist heat transfer fluids such as oil or antifreeze. Temperature range -65°F to 400°F (-54°C to 204°C); resists antifreeze, aviation fuels, aggressive detergent bearing oils and lubricants.

Suggested Applications: Valve cover gaskets, compressors, diesel engine heads

Item #	<b>Container Size</b>	Pack	Old P/N
80057	4 oz. bottle	12	83H



### The Original Permatex® Indian Head® **Gasket Shellac Compound**

The original quality formula, a hard setting, economical sealant. Seals all common gasketing materials in low temperature and low pressure applications. Temperature range -65°F to 350°F (-54°C to 177°C); resists diesel fuels and most shop fluids.

Suggested Applications: Hose connections, paper and cardboard gaskets

**OEM INTERCHANGE, see pgs. 84-89** 

Item #	<b>Container Size</b>	Pack	Old P/N
20539	2 oz. bottle	12	5J-1



### Permatex® Copper Spray-A-Gasket® **Hi-Temp Sealant**

Fast-drying, metallic copper sealant helps dissipate heat, prevents gasket burnout and improves heat transfer. Fills minor surface irregularities. Seals instantly. Fills hot spots and surface imperfections. Temperature range -50°F to 500°F (-45°C to 260°C); resists all types of automotive fluids, especially gasoline. Level 3 A

Suggested Applications: Cylinder head gaskets, carburetor gaskets, exhaust manifold gaskets and other high temperature applications

Item #	Container Size	Pack	Old P/N
80697	12 oz. aerosol can, 9 oz. net. wt.	12	101MA



▲ NFPA Fire Code 30B

### Gasket Sealants



### Permatex® Ultra Rubber Gasket Sealant & Dressing

Formulated specially for rubber gaskets, it conditions gaskets for longer life and seals potential leak paths. It also functions to hold gaskets in place during installation. The non-hardening, soft-setting formula makes gasket repositioning quick and easy. Provides outstanding oil and fluid resistance. Temperature range -65°F to 400°F (-54°C to 204°C).

**Suggested Applications:** Designed for use on all cut and formed rubber gaskets,

but also great to condition and extend the life of composite, paper and cork gaskets.

Item #	<b>Container Size</b>	Pack
85409	1 oz. tube, carded	6



### Permatex® Tack & Seal™ Gasket Sealant

Non-hardening for easy disassembly. Keeps large gaskets in place during positioning and assembly. "Clean hands" formula won't stain. Temperature range -65°F to 400°F (-54°C to 204°C); resists engine fluids including diesel fuels and synthetic oils.

Suggested Applications: Seals air conditioning, fuel fittings, radiator hoses, PVC fittings and cork, paper, cardboard, felt and metal gaskets

Item #	<b>Container Size</b>	<b>Pack</b>	Old P/N
80938	1.25 oz. tube,	12	9AR
	carded		

### Permatex® High Tack™ Gasket Sealant and High Tack™ Spray-A-Gasket® Sealant

Fast-drying all-purpose sealant dries to a highly tacky, non-brittle film. A reliable general adhesive remains tacky indefinitely – can be applied in advance for convenience in assembly. Remains effective at temperatures of -65°F to 500°F (-54°C

to 260°C). Sensor-safe. Resists gasoline, oil, antifreeze, axle lube, kerosene, propane and butane. Aerosol Level 3 🛦

Suggested Applications: Bonds and seals any type of cut gasket including: rubber, cork, felt, paper, metal. Use for valve cover, fuel pump, carburetor, manifold gaskets; Spray-A-Gasket® seals all felt, cork, metal, paper, and rubber

Item #	Container Size	Pack	Old P/N
80062	4 oz. brush-top can	12	98H
80063	16 oz. brush-top can	12	98D
80064	6 oz. aerosol can, 4 oz. net wt.	12	99GA
80065	12 oz. aerosol can, 9 oz. net wt.	12	99MA



### Permatex® Super High Tack™ Gasket Sealant

Fast-drying sealant works like a contact adhesive. Temperature range -65°F to 500°F (-54°C to 260°C); resists gasoline, oil, antifreeze, axle lube.

**Suggested Applications:** Seals rubber, cork, paper and composite gaskets and hose connections

item #	Container Size	Pack	UIA P/N
80060	1.75 oz. tube, carded	12	97BR



▲ NFPA Fire Code 30B

### **Threadlockers**

### Introduction

Permatex® Threadlocker adhesives are widely accepted in a broad range of applications, from delicate fuel injection components to heavy duty transmission and engine assemblies. Specified by automotive OEM's and approved for use on factory assembly lines, Threadlockers apply as liquids or gels, filling the space between threaded metal parts, curing to form a tough, adhesive bond and seal.

Permatex® Threadlockers are superior to conventional lock washers, nylon inserts, and other mechanical devices because they secure the entire fastener assembly against loosening from shock and vibration, so fastener clamping forces are maintained. Threadlockers also seal the threads against leakage, preventing rust and corrosion. Available in a variety of strengths and temperature ratings, Permatex® Threadlockers are simply the most reliable way to lock and seal threaded fasteners of all shapes and sizes, either before or after assembly.

Product	Item No.	Color	Viscosity cP	Fasteners	Torque in lbs.* Break/Prevail	Fixture** (Full Cure)	Fixture/ with Primer	Temperature Range	Use/Common Applications
Permatex® Low Strength Threadlocker PURPLE	24024	Purple	1,200/5,000 Thixotropic	Up to 1/4" (6mm)	62/27	20 min. (24 hrs.)	5 min.	-65° to 300°F (-54° to 149°C)	Applied before assembly for throttle body assembly screws, choke assembly screws, mixture adjusting screws, idle control screws, relay lock screws, body panel mounting fasteners.
Permatex <sup>®</sup> Medium Strength Threadlocker BLUE	19960 24206 24200 24240 24283	Blue	1,200/6,000 Thixotropic	1/4" to 3/4" (6-20mm)	115/53	20 min. (24 hrs.)	5 min.	-65° to 300°F (-54° to 149°C)	Applied before assembly for oil pan bolts; case cover bolts; shift lever nuts; alternator mounts; intake manifold, valve cover and disc brake caliper bolts.
Permatex <sup>®</sup> Surface Insensitive Threadlocker BLUE	24027 24300	Blue	2,250/12,000 Thixotropic	1/4" to 3/4" (6-20mm)	180/62	20 min. (24 hrs.)	5 min.	-65° to 300°F (-54° to 149°C)	Applied before assembly for oil pan bolts, valve and cam cover bolts, intake bolts, disc brake caliper bolts, alternator mounting bolts, rocker studs.
Permatex® Permanent Strength Threadlocker RED	19962	Red	1,800/5,000 Thixotropic	3/8" to 1" (10-25mm)	189/275	20 min. (24 hrs.)	5 min.	-65° to 300°F (-54° to 149°C)	Applied before assembly of air tools, cylinder block bolts, ring gear bolts, transmission shaft bolts.
Permatex® Permanent Strength Threadlocker RED & Cup/Core Plug Sealant Retaining Compound	26240	Red	1,800/5,000 Thixotropic	3/8" to 1" (10-25mm)	189/275	20 min. (24 hrs.)	5 min.	-65° to 300°F (-54° to 149°C)	Applied before assembly of air tools, cylinder block bolts, ring gear bolts, transmission shaft bolts, frame bolts, shock absorber bolts
Permatex <sup>®</sup> High Strength Threadlocker RED	27100 27140 27183	Red	500	3/8" to 1" (10-25mm)	230/225	20 min. (24 hrs.)	5 min.	-65° to 300°F (-54° to 149°C)	Applied before assembly for threaded and slip fit joints on cylinder block and rocker arm studs; shock absorber bolts; ring gear bolts; frame bolts.
Permatex <sup>®</sup> High Temperature Threadlocker RED	24026 27200 27240	Red	10,000	3/8" to 1-1/2" (10-38mm)	180/270	30 min. (24 hrs.)	5 min.	-65° to 450°F (-54° to 232°C)	Applied before assembly for camshaft sprocket bolts, crankshaft attaching bolts, idler bearings, press fit filler tubes, transmission input and output shaft threads, shock bolts, ring gear bolts.
Permatex <sup>®</sup> Large Diameter Threadlocker RED	27710 27740	Red	7,000	1" and over (25mm+)	250/200	60 min. (24 hrs.)	5 min.	-65° to 300°F (-54° to 149°C)	Applied before assembly for frame brackets, suspension fasteners, shock absorber mount, wheel studs.
Permatex <sup>®</sup> Penetrating Grade Threadlocker GREEN	29000 29010 29040	Green	12	#2 to 1/2" (2.2-12mm)	90/310	20 min. (24 hrs.)	3 min.	-65° to 300°F (-54° to 149°C)	Applied AFTER assembly for carb adjustment screws; distributor bolts; preassembled nuts and bolts; set screws.



Thixotropic: resists dripping from threads during assembly

<sup>\*3/8&</sup>quot;-phosphate steel \*\*Fixture strength is equivalent to 20% of full cure strength resists dripping from threads during assembly

## hreadlockers

### GEL TWIST™ & GEL SQUEEZE™ Threadlockers

Permatex® Threadlocker Gels in the Gel Twist & Gel Squeeze applicators!

Permatex<sup>®</sup> Medium Strength BLUE Gel and High Strength RED Gel in the patent-pending GEL TWIST™ pin-point applicator and the handy-sized GEL SQUEEZE™ applicator puts the Threadlocker where you want it...on the part!

Permatex® Threadlocker Gels provide "liquid quality" reliability without the problems. No drips. No globs. No mess. No waste.

**Suggested Applications:** Cylinder block and rocker arm studs, ring gear bolts, frame bolts, shock absorber bolts

### **OEM INTERCHANGE, see pgs. 84-89**

Item #	<b>Description/Container Size</b>	Pack
24005	Medium Strength Threadlocker BLUE Gel, 5 g GEL SQUEEZE™ applicator, carded	6
24010	Medium Strength Threadlocker BLUE Gel, 10 q GEL TWIST™ applicator, carded	6
09978*	Medium Strength Threadlocker BLUE Gel, 1 q pouch	480
27005	High Strength Threadlocker RED Gel, 5 g GEL SQUEEZE™ applicator, carded	6
27010	High Strength Threadlocker RED Gel, 10 g GEL TWIST™ applicator, carded	6
09979*	High Strength Threadlocker RED Gel, 1 g pouch	480

<sup>\*</sup> See also page 35.



True Innovation....
No drips. No globs.
No mess. No waste.









### **NEW!** Permatex® Multipack Threadlocker Assortment

Variety pack of popular threadlocker formulas in convenient 0.5 ml pipettes. Offers user the choice of low, medium or high strength product for various applications in a right size package. Re-usable pipettes are a great choice for professionals with small jobs or occasional users.

Suggested Applications: Oil pan bolts, shock absorber mounts, hub and shaft

assemblies, cup & core plugs, transmission shaft bolts, etc.

### **OEM INTERCHANGE, see pgs. 84-89**

Item #	Container Size	Pack
29520	1.5 ml (3-0.5 ml pipettes), carded	6



### **NEW!**Permatex® Plastic Threadlocker

A threadlocker just for plastics! Plastic Threadlocker fills small gaps and sets fast so parts can be used quickly. Won't harm fasteners or other plastics and is low strength so that removal is easy. A needle tip bottle allows pinpoint product application and a pin in cap feature keeps unused product from clogging.

Suggested Applications: Headlight

screws, console assemblies, soundproofing, attachment screws, electrical component boxes, plastic knobs, hose fasteners, dashboard accessories, etc.

Item #	Container Size	Pac
19920	10 g bottle, carded	6



### **Threadlockers**

### Anaerobic Threadlockers



### Permatex® Low Strength Threadlocker PURPLE

**OEM specified.** Low strength threadlocker designed for fasteners under 1/4" (6mm) that require occasional adjustment. Removable with hand tools for easy disassembly. Noncorrosive. Conforms to ASTM D 5363 AN0311 (Mil-S-46163A, Type II, Grade M).

Suggested Applications: Carburetors, relay locks, headlamps, throttle body assembly, choke assembly and fuel injection set screws,

body panel mounting fasteners, fine threads

### OEM INTERCHANGE, see pgs. 84-89

Item # Container Size 24024 6 ml tube, carded





### Permatex® Surface Insensitive Threadlocker BLUE

**Pack** 

6

**OEM specified.** Medium/high strength thread-locker for general-purpose applications. Especially well-suited for 1/4" to 3/4" (6mm to 20mm) fasteners that have a slight oil film. Prevents vibration loosening. Oil resistant. Removable with hand tools for easy disassembly.

Suggested Applications: Rocker studs, rocker adjustment bolts and bolts on valve and cam covers, oil pans, disc brake calipers,

intakes, alternators, and pulley assemblies

### **OEM INTERCHANGE, see pgs. 84-89**

Item #	Container Size	Pack
24027	6 ml tube, carded	6
24300	10 ml bottle, carded	6



### Permatex® Permanent Strength Threadlocker RED

**OEM specified.** A permanent, high strength product that is applied to fasteners 3/8" to 1" (10mm to 25mm) in size before assembly. Designed for securing parts that must withstand heavy shock, vibration, or extreme chemical or environmental conditions. Localized heating and hand tools are required to separate parts. Conforms to ASTM D5363 AN0331 (Mil-S-46163A, Type II, Grade 0).

Suggested Applications: Assembly with air

tools, cylinder block bolts, ring gear bolts, transmission shaft bolts

**OEM INTERCHANGE, see pgs. 84-89** 

Item # Container Size Pack

6 ml tube, carded 12





### Permatex® Medium Strength Threadlocker BLUE

**OEM specified.** All-purpose, medium strength threadlocker. Ideal for all nut and bolt applications 1/4" to 3/4" (6mm to 20mm). Eliminates need for stocking expensive lock nuts and lock washers. Locks and seals while preventing parts loosening due to vibration. Protects threads from corrosion. Removable with hand tools for easy disassembly. Conforms to ASTM D 5363 AN0321 (Mil-S-46163A, Type II, Grade N).

Suggested Applications: Valve cover bolts, water pump bolts, oil pan bolts, drive shaft bolts, rocker arm adjustment nuts, carburetor studs

### **OEM INTERCHANGE, see pgs. 84-89**

	. ,	
Item #	<b>Container Size</b>	Pac
19960	.5 ml pipette, polybagged	25
24206	2.5 ml bottle, carded	6
24200	6 ml tube, carded	12
24240	36 ml bottle, carded	6
24283	90 ml bottle	6
09978*	1 g pouch	480



\* See also page 35.



### Permatex® Permanent Strength Threadlocker RED & Cup/Core Plug Sealant Retaining Compound

Dual Purpose. A permanent, high strength product that is applied to fasteners 3/8" to 1" (10mm to 25mm) in size before assembly. Designed for securing parts that must withstand heavy shock, vibration, or extreme chemical or environmental conditions. Also used for sealing and securing cylindrical metal assemblies. Localized heating and hand tools are required to separate parts. Conforms to ASTM D5363 AN0331 (Mil-S-46163A, Type II, Grade 0).

**Suggested Applications:** Assembly with air tools, cylinder block bolts, ring gear bolts, transmission shaft bolts; engine block cup and core plugs, water pump seals, hub and shaft assemblies

### **OEM INTERCHANGE, see pgs. 84-89**

Item #	m # Container Size	
26240	36 ml bottle, carded	6



## hreadlockers

### Anaerobic Threadlockers





### Permatex® High Strength Threadlocker RED

**OEM specified.** High strength threadlocker for heavy-duty applications 3/8 inch to 1 inch (10mm to 25mm). Especially well-suited for permanently locking studs and press fits. Adds 3,000 PSI holding power on slip and press fit assemblies. Replaces set screws and snap rings. Locks against vibration loosening. May require heat or special tools for removal. Conforms to ASTM D5363 AN0221 (Mil-S-46163A, Type I, Grade K).

**Suggested Applications:** Cylinder block and rocker arm studs, ring gear bolts,

frame bolts, shock absorber bolts

### **OEM INTERCHANGE, see pgs. 84-89**

Item #	Container Size	Pack
27100	6 ml tube, carded	12
27140	36 ml bottle, carded	6
27183	90 ml bottle	6
09979*	1 g pouch	480

<sup>\*</sup> See also page 35.



### Permatex® Large Diameter Threadlocker RED

**OEM specified.** A high strength adhesive for locking and sealing large bolts and stud 1" (25mm+) or larger in diameter. Heat may be required to weaken bond before parts can be disassembled. Conforms to ASTM D5363 ANO211 (Mil-S-46163A, Type I, Grade L).

**Suggested Applications:** Frame brackets, suspension fasteners, shock absorber mounts, wheel studs

**OEM INTERCHANGE, see pgs. 84-89** 

Item # Container Size		Pack	
27710	10 ml bottle, carded	6	
27740	36 ml bottle, carded	6	



### Permatex® High Temperature Threadlocker RED

**OEM specified.** High temperature/high strength threadlocker for heavy-duty applications. Prevents bolts and press fits 3/8" to 1-1/2" (10mm to 38mm) from loosening due to shock, severe vibration and heat stress. Exclusive formulation for newer engines and high performance applications that require extreme temperature resistance. Suited for temperatures up to 450°F (232°C).

Removable with heat and hand tools.

**Suggested Applications:** Camshaft sprocket bolts, crankshaft bolts, idler bearings, press fit filler tubes, transmission input and output shaft threads, ring gear or shock bolts

### **OEM INTERCHANGE, see pgs. 84-89**

Item #	<b>Container Size</b>	Pack
24026	6 ml tube, carded	6
27200	10 ml bottle, carded	6
27240	36 ml bottle, carded	6



### Permatex® Penetrating Grade Threadlocker GREEN

**OEM specified.** A low viscosity thread-locking liquid that wicks along the threads of preassembled fasteners to secure them in place. Since it is applied after assembly, preventive maintenance procedures are simplified. Ideal for fasteners ranging from #2 to 1/2" (2.2 to 12mm) in size. Localized heating and hand tools are needed for disassembly. Conforms to ASTM D5363 AN0261 (Mil-S-46163A, Type III, Grade R).

Suggested Applications: Bolts on alternators, air conditioning belts and distributor clamps, carburetor adjustment screws, hairline cracks

### **OEM INTERCHANGE, see pgs. 84-89**

	,	
Item #	<b>Container Size</b>	Pack
29000	6 ml tube, carded	12
29010	10 ml bottle, carded	6
29040	36 ml bottle, carded	6






### **Thread Sealants**

Permatex® Thread Sealants seal and secure metal pipes and fittings. By filling the space between threaded metal parts, Thread Sealants cure to a pliable seal to prevent leakage caused by vibration loosening, tape shredding, solvent evaporation, damaged threads, and temperature cycling. Designed for low and high pressure applications, Thread Sealants seal instantly for on-line low pressure testing. When fully cured, they seal to the burst strength of most piping systems. The high lubricating

properties of Permatex® Thread Sealants ease assembly and prevent galling of the threads.

For system repairs, parts may be disassembled with

basic hand tools.

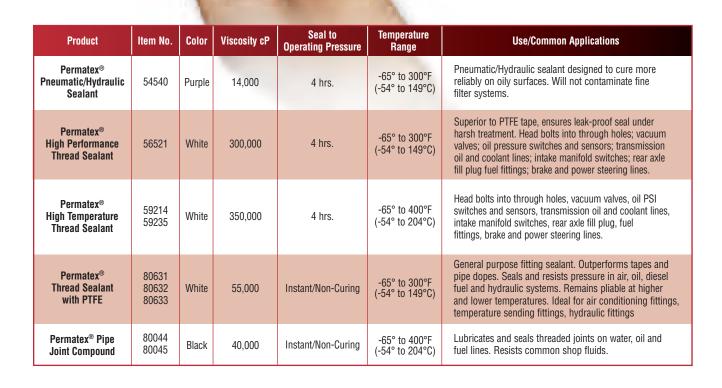

Introduction



## hread Sealants

### Thread Sealants



### Permatex® High Performance Thread Sealant

**OEM specified.** Formulated specifically for metal, tapered pipe thread fittings, it replaces tapes and pipe dopes. Cures rapidly to withstand up to 10,000 PSI. Prevents galling and protects mated threaded areas from rust and corrosion. Contains PTFE.

Suggested Applications: Stainless steel fittings, head bolts into through holes, oil PSI sending units/sensors, oil and coolant lines, intake manifold switches, rear axle fill plug, fuel fittings



**OEM INTERCHANGE, see pgs. 84-89** 

Item #	<b>Container Size</b>	Pack
56521	50 ml tube, carded	6



### Permatex® Thread Sealant with PTFE

Economical general-purpose fitting sealant. Outperforms tapes and pipe dopes. Seals and resists pressure in air, oil, diesel fuel and hydraulic systems. Remains pliable at higher and lower temperatures. Temperature range -65°F to 300°F (-54°C to 149°C); resists common shop fluids.

Suggested Applications: Air conditioning fittings, temperature sending fittings, hydraulic fittings

Item #	<b>Container Size</b>	Pack	Old P/N
80631	1 oz. tube, carded	12	14AR
80632	4 oz. bottle	12	14H
80633	16 oz. bottle	12	14D





### Permatex® High Temperature Thread Sealant

**OEM specified.** Locks and seals threaded fittings. Resists leakage, vibration loosening, moisture, hydraulic fluids and diesel fuels. Lubricates threads for easy assembly and disassembly. Won't shred or wear like tapes. Parts may be repositioned up to 4 hours after application. Temperature range -65°F to 400°F (-54°C to 204°C). Contains PTFE.

**Suggested Applications:** Head bolts into through holes, oil PSI sending units and sensors, oil and coolant lines, fuel fittings,

rear axle fill plug, brake and power steering fittings

### **OEM INTERCHANGE, see pgs. 84-89**

Item # Container Size		Pack	
59214	6 ml tube, carded	12	
59235	50 ml tube, carded	6	



### Permatex® Pneumatic/Hydraulic Sealant

**OEM specified.** Designed for locking and sealing high pressure hydraulic and pneumatic systems. Contains no fillers or particles which could contaminate system fluids, foul valves, or clog fine filters and screens. Reliably cures on "as received" fasteners and controlled locking strength affords easy disassembly.

Suggested Applications: Hydraulic line fittings, brake fittings, transmission fluid fittings, PTO fittings

Item # Container Size		Pack	
54540	36 ml bottle, carded	6	



### Permatex® Pipe Joint Compound

Universal sealant. Lubricates and seals threaded joints on water, oil and fuel lines. Temperature range -65°F to 400°F (-54°C to 204°C); resists common shop fluids.

**Suggested Applications:** Thread fittings, plumbing applications

Item #Container SizePackOld P/N8004516 oz. bottle1251D

Not for sale or use in the state of California.



### Anaerobic Technology

### Activator for Anaerobics



### **Permatex® Surface Prep Activator** For Anaerobics

Speeds cure of Permatex® Threadlockers, Thread Sealants, Retaining Compounds, and Anaerobic Gasket Makers by 50%. Increases threadlocker strength. Recommended for use during cold weather. General-purpose solvent for cleaning and preparing parts and surfaces. Level 1 A

Suggested Applications: All anaerobic applications

**Container Size** 

24163 6 oz. aerosol can, 4.5 oz. net wt.





### Thread Repair



### **Permatex® Stripped Thread Repair Kit**

Makes reliable thread repairs without drills, taps, tools or inserts. Restores worn, stripped or damaged threads and eliminates future corrosion, galling, seizing and rust. Effective up to 128 ft. lbs. of torque and between -65°F to 300°F (-54°C to 149°C). Repairs most metal-to-metal fasteners up to SAE grade 5 English and 8.8 metric (coarse and fine).

Suggested Applications: Intake manifold bracket fastener threads, timing chain cover bolt threads, valve cover bolt threads, water pump bolt threads

**OEM INTERCHANGE, see pgs. 84-89** 

Item # **Container Size Pack** 

81668 1 kit, clamshelled

See also Permatex® Professional Repair Systems on page 42.



Damaged Threads



Repair damaged threads with Stripped Thread Repair

### Retaining Compounds Introduction

Permatex® Retaining Compounds are designed to bond non-threaded, cylindrical metal assemblies. By filling the voids between close-fitting metal parts, Retaining Compounds harden to create a solid, one-piece assembly. Retaining Compounds can be used to lock keyways, secure splines, augment press fits, and strengthen interference fits. Use them to prevent wear on new components, or restore the

fit to worn or out-of-tolerance parts.



▲ NFPA Fire Code 30B

## etaining Compounds

### Retaining Compounds

Product	ltem No.	Color	Max Gap Fill (Diametral)	Viscosity cP	Shear Strength	Temperature Range	Cure - Steel Fixture (Full)	Use/Common Applications
Permatex® Bearing Mount For Close Fits	60910 60950	Green	.005"	125	3,000 PSI	-65° to 300°F (-54° to 149°C)	10 min. (24 hrs.)	Bushings, bearings, oil seals, ring gear bolts, differential lock pins
Permatex® High Temperature Sleeve Retainer	64000 64040	Green	.007"	600	3,000 PSI	-65° to 400°F (-54° to 204°C)	1 hr (24 hrs.)	Valve guides, woodruff keys, bearings and bushings, reanchoring studs, pins and sleeves.
Permatex® Bearing Mount For Relaxed Fits	68050	Green	.015"	1,250	2,800 PSI	-65° to 300°F (-54° to 149°C)	10 min. (24 hrs.)	Replaces set screws, replaces clamp rings, replaces snap ring, wheel bearings, idler shaft, press fit bearings
Permatex® Bearing Mount For Worn Parts	20297	Grey	.020"	1,200,000	3,000 PSI	-65° to 300°F (-54° to 149°C)	10 min. (1-2 hrs.)	Refitting worn shafts and housings, repair worn keyways, repair loose set screws, refit worn couplings, form-in-place shims



### **Permatex® High Temperature Sleeve Retainer**

**OEM specified.** High temperature, up to 400°F (204°C), anaerobic adhesive that secures slip and press fit assemblies. Adds up to 3,000 PSI holding power. Restores fit to worn or out-of-tolerance assemblies. Prevents surface corrosion. Conforms to ASTM D5363 AN0411 (Mil-R-46082, Type II).

Suggested Applications: Cylinder sleeves, valve guides, valve seats, bearings and bushings, woodruff keys, liner assemblies

**OEM INTERCHANGE, see pgs. 84-89** 

Item #	Container Size	Pack
64000	6 ml tube, carded	12
64040	36 ml bottle, carded	6



for Relaxed Fits

**OEM specified.** High strength, medium viscosity anaerobic adhesive for slip fit assemblies. Provides 2,800 PSI shear strength on steel. Fixtures in 10 minutes at room temperature.

Suggested Applications: Replaces set screws, replaces clamp rings, replaces snap rings, wheel bearings, idler shaft, press fit bearings

**OEM INTERCHANGE, see pgs. 84-89** 

**Container Size** 

50 ml bottle





### **Permatex® Bearing Mount** for Close Fits

**OEM specified.** A low viscosity, rapidcuring anaerobic adhesive that augments the strength of press fit assemblies up to .005" in diameter. Adds up to 3,000 PSI holding power. Conforms to ASTM D5363 AN0411 (Mil-R-46082, Type I).

Suggested Applications: Bushings, bearings, oil seals, ring gear bolts, differential lock pins

**OEM INTERCHANGE, see pgs. 84-89** 

Item #	<b>Container Size</b>	Pac
60910	10 ml bottle, carded	6
60950	50 ml bottle	6



### **Permatex® Bearing Mount** for Worn Parts

**OEM specified.** A creamy, non-running adhesive used between parts to repair large gaps and severely worn parts. Adds up to 3,000 PSI holding power. Fills gaps to .020" in diameter. Use to 300°F (149°C). Very rapid cure.

Suggested Applications: Refitting worn shafts and housings, repair worn keyways, repair loose set screws, refit worn couplings, form-in-place shims

Item #	Container Size	Pack
20297	6 ml tube, carded	6





Super Glues

### **Super Glues & Instant Adhesives**

From the world leader in cyanoacrylate, or super glue, technology comes a complete line of adhesives designed to cover the vast majority of common automotive repairs and materials. From the revolutionary Ultra Bond™, a high performance super glue, to Dr. Bond™ adhesive, Permatex® offers a wide range of instant adhesives to meet your many needs.

### **Epoxies**

Permatex® epoxies offer convenient solutions for a wide range of bonding applications. Available in many packaging configurations, Permatex® epoxies are versatile and easy-to-use. From general-purpose to material-specific, Permatex® offers a formulation that will work in virtually any environment.

### **Specialty Adhesives**

Permatex® specialty adhesives offer ideal solutions for many automotive bonding jobs. As complements to a full line of super glues, these products make a more complete adhesive set, while the tried and true formulas guarantee consumer satisfaction.

### **Sealants**

There is a trusted Permatex® sealant for virtually any automotive sealing application, from windshields to vinyl tops to electrical connections. These well-known general-purpose and job specific sealants are cornerstones in the Permatex® line.



### Permatex® Ultra Bond™ Super Glue

Designed to meet the most demanding automotive adhesive needs, this premium high performance super glue provides a stronger, faster-acting and longer lasting bond. Works on porous and nonporous materials including metal, most plastics, laminated plastics, vinyl, rubber, ceramics, paper, wood, textiles, leather, synthetic leather, cork and chipboard. Permanent, transparent bond fills qaps to .004". Convenient 5 q cloq-free nozzle

bottle keeps fingers glue-free. Outperforms regular super glues.

Suggested Applications: Automotive trim, logos, knobs, gear shift logos, minor interior repairs

Item #	Pack	
21309	5 g bottle, carded	6



### Permatex® Ultra Bond™ Super Glue Gel

This premium gel formula provides a stronger, longer lasting bond that works on more materials than regular super glue gels.

The no-run formula was designed for fast, heavy-duty repairs to vertical surfaces where regular adhesives run. Works on porous and nonporous materials including metal, most plastics, laminated plastics, vinyl, rubber, ceramics, paper, wood, textiles, leather,

synthetic leather, cork and chipboard. Permanent, transparent bond fills gaps to .004".

**Suggested Applications:** Automotive trim, logos, knobs, gear shift logos, minor interior repairs

Item #	tem # Container Size		
82196	2 g tube, carded	6	



### Super Glues & Instant Adhesives



### Permatex® Super Glue

This formulation was specially designed for a faster, long-lasting bond. It is easily applied and works on non-porous materials including metal, plastics, rubber, vinyl, paper, wood, and textiles. Permanent, transparent bond fills gaps to .004"

### **Suggested Applications:**

Automotive trim, logos, knobs, gear shift logos, minor interior repairs

**OEM INTERCHANGE, see pgs. 84-89** 

Item #	<b>Container Size</b>	Pack
49450	1 oz. bottle, carded	6
82190	2 g tube, carded	12
30878	2 g tube, 2-pack carded	6
49550	1 oz. bottle, Class 1, Type II*	10
49650	1 oz. bottle, Class 2, Type I*	10

<sup>\*</sup> Meets Gov. Mil-A-46050C

**Did You Know?...**Super Glue or Super Glue Gel can be removed from your fingers by using a small amount of acetone-based nail polish remover on a cotton swab or white terry cloth. Gently apply to glue to dissolve bond without damaging skin.



### Permatex® Super Glue Gel

This no drip gel formula "stays put" for precise application on hard-to-reach, overhead, or vertical surfaces. This permanent, transparent bond is easily applied and works on both porous and nonporous materials including metal, rubber, glass, aluminum, vinyl, ceramics, alloys, and plastics. Fills gaps to .004"

### **Suggested Applications:**

Automotive trim, logos, knobs,

gear shift logos, minor interior repairs

Item #	<b>Container Size</b>	Pack
82191	2 g tube, carded	12



### Dr. Bond® Plastic Bonder

Repairs any automotive plastic. No mixing required. Prepare the surface with the activator, apply the bonding agent, and bond the parts.

**Suggested Applications:** All plastics, even polyethylene and polypropylene

Item #	<b>Container Size</b>	Pack
82565	2 g tube & 2.9 ml	6
	bottle, carded	













### Dr. Bond® Super Glue and Super Glue Gel

This super strong, super fast instant-bonding adhesive sets in seconds to form a permanent bond. One drop does the job. It makes permanent repairs to almost all nonporous surfaces including metal, laminated plastics, rubber, ceramics, and china. Permanent, transparent bond fills gaps to .004".

Suggested Applications: Automotive trim, logos, knobs, gear shift logos, ornaments, minor interior repairs

Item #	Container Size	Pack	Item #	Container Size	Pack
01810	super glue, 2 g tube, carded	12	81742	super glue, 2 g tube, 2-pack carded (space-saver)	6
81737	super glue, 2 g tube, carded (space-saver)	6	82223	super glue, 2 g tube, 3-pack carded	12
81554	super glue, 2 g tube, 2-pack carded	12	85742	super glue gel, 2 g tube, 2-pack carded (space-saver)	6



### **Epoxies**



Convenient premeasured epoxy mixer cups contain resin and hardener in one convenient package. No guess, no mess, no waste. Ideal for bonding glass, hard plastics, rubber and metal. Bonds in

5-15 minutes, useable in 30 minutes. Grey adhesive has excellent chemical resistance. Fills porosities and can be used to build up worn parts. May be drilled, tapped, sanded, or machined and painted after cure.

Suggested Applications: Repairs loose auto trim, broken grills, ornaments, loose door glass channels and fills casting cracks and holes

Item # Container Size

21425 10 - 4 g mixer cups, canister \*21427 4 - 4 g mixer cups, foil pouch Pack

10 Fast Cure Epoxy Cups
6 are this easy to use...

6 are this easy to













### Permatex® Cold Weld Bonding Compound

A 15-minute, two-part adhesive and filler system that eliminates the need for welding or brazing. It repairs, fills and bonds to iron, steel, brass, bronze, aluminum and copper. Once cured, it can be drilled, tapped, threaded, filed, sanded and painted. Resists most automotive, shop and cleaning fluids. Withstands temperatures to 300°F intermittent. Over 3,000 PSI shear strength on steel.

Suggested Applications: Cracked transmission cases, chipped heads, rear end castings, cracked blocks, cracked intake manifolds, damaged keyways, split stampings

Item #	Container Size	Pac
14600	2-1 oz. tubes, carded	12



### Permatex® PermaPoxy™ 4 Minute Multi-Metal Epoxy Stick

This two part, hand kneadable, putty type epoxy has contrasting colored materials that are mixed together to form a uniform color to indicate thorough mixing. Eliminates the need for welding or brazing. Holds in four minutes, useable in 30 minutes. Dark grey appearance. Temperature range -40°F to 350°F (-40°C to 176°C). When cured, can be drilled, sanded, threaded or filed. Resistant to fuels and solvents after full cure. Permanent strength up to 3500 PSI.

Suggested Applications: Bonds rigid materials

including aluminum, brass, chrome, copper, iron, stainless steel, steel; cracked transmission cases, chipped heads, rear end castings, cracked blocks, cracked intake manifolds, damaged keyways, split stampings

Item #	Container Size	Pack
84309	2 oz. putty vial, carded	12

### Permatex® PermaPoxy™ 4 Minute Multi-Metal Epoxy Syringe & Tubes

Versatile, easy-to-use, multi-metal epoxy adhesive is two-part adhesive and filler system that eliminates the need for welding or brazing. Sets in four minutes, no clamping needed. Dark grey appearance. Fills gaps and will not shrink. When cured, can be drilled, sanded, threaded or filed. Resistant to water and solvents. Temperature range -60°F to 300°F (-51°C to 149°C). Permanent strength up to 4500 PSI.

**Suggested Applications:** Ideal for complex, multi-piece assemblies. Bonds rigid materials including aluminum, brass, chrome, copper, iron, stainless steel, steel. Use to seal welded seams, fills metal cracks, mount metal components.

Item #	Container Size	Pack
84109	.84 fl. oz. dual syringe, carded	12
84209	2 - 1oz. tubes, carded	12







### PermaPoxy™ Epoxies











### NEW!

Item # 84164
Self-mixing syringe
blends adhesive and
filler as it dispenses,
eliminating the need
for manual mixing.
Includes two detachable mixing heads
which allow additional
uses while providing
pinpoint application.

### Permatex® PermaPoxy™ General Purpose Epoxies

These two-part adhesive and filler systems are versatile, easy-to-use, and are available in one, five or thirty minute setting times with no clamping needed. Clear appearance. Fills gaps and will not shrink. Resistant to water and solvents. Temperature range -60°F to 180°F (-51°C to 82°C). When cured, PermaPoxy can be drilled, sanded, threaded, or filed. Bonds dissimilar materials. Resistant to fuels, solvents, and most other liquids.

Packaging configurations include:

- Dual dispensing syringes and tubes are a two-part adhesive and filler system
- NEW! Self-mixing dual syringe blends the adhesive and filler as it dispenses, eliminating the need for manual mixing.

Suggested Applications: Ideal for complex, multi-piece assemblies. Bonds rigid materials including, ceramic, chrome, fabric, fiberglass, glass, hard plastic, metal, and rubber. Fills gaps and bonds dissimilar materials. Use on casting cracks and holes, automotive trim parts, ornaments, knobs, cracked taillights, damaged grills, mount components, body moldings, tamper proofing, hub cap trim, damaged spoilers, seals metal seams, repair tanks, mount bushings, repair castings, interior trim, mounting brackets

Item #	Container Size	PSI	Pack
84160	1 Minute General Purpose Epoxy, .84 oz. dual syringe, carded	2500 PSI	12
84101	5 Minute General Purpose Epoxy, .84 oz. dual syringe, carded	3400 PSI	12
84107	30 Minute High Strength Epoxy, .84 oz. dual syringe, carded	3500 PSI	12
84164	5 Minute General Purpose Epoxy, .47 oz. self-mixing syringe, carded	3400 PSI	12
84201	5 Minute General Purpose Epoxy, 2 - 1 oz. tubes, carded	3400 PSI	12

Easy-To-Usə!



### Permatex® PermaPoxy™ 5 Minute Plastic Weld

A structural adhesive designed for general purpose bonding of a wide variety of material such as hard and soft plastics to specified surfaces. Forms a tough, durable bond to most plastics, composites, ceramics, wood in any combination. Fast curing product with gelling of mixed adhesive in 5 – 6 minutes and fixturing in 9 – 10 minutes. **NOTE**: Will not bond most polyethylene or polypropylene plastics. Bonds hard and soft plastics to specified surfaces. Requires no primers, sets in five minutes at room temperature. Cream appearance. Gap filling to 0.125 inch. Water resistant and good chemical resistance. Temperature range -60°F to 250°F (-51°C to 121°C). Permanent strength up to 3500 PSI.

Suggested Applications: Bonds rigid materials including ABS, acrylic, fiberglass, FRP, glass, PVC, SMC, steel, styrene, vinyl, and wood. Use for interior trim, fills cracks, bonds most plastic, bonds plastic to vinyl

Item #Container SizePack84115.84 fl. oz. dual syringe, carded12



lhesives & Sealants

### Specialty Adhesives



### Permatex® Pit Crew's Choice™ Adhesive & Sealant

A versatile automotive adhesive/sealant. Bonds nearly anything from seat tears to loose trim. Super strong, dries gradually – allowing time to reposition parts. Goes on white, dries clear. Provides a waterproof seal. Withstands vibration. Nontoxic. For interior and exterior use.

**Suggested Applications:** Fiberglass, leather, plastic, vinyl, rubber, steel, etc.

Item #	Container Size	Pack
25831	2 fl. oz. tube, carded	6



### **Permatex® Contact Cement**

Makes a tough, permanent bond on contact. Instantly bonds metal, wood, ceramic, leather, rubber and many other surfaces. Instantly bonds rubber to glass and metal. Heat and water resistant. Easy-to-use. Requires no clamping.

Suggested Applications: Weather stripping

Item #	<b>Container Size</b>	Pack
25905	1.5 fl. oz. tube, carded	12



### Permatex® Liquid Metal Filler

Easy-to-use filler can be drilled, filed, sanded and painted. Forms a long-lasting, metal-tough bond. Works on metal, wood, and concrete. Excellent adhesion to galvanized metal. Repairs cracks or porosity leaks in cast metal parts. Fills small holes, cracks, and perforations. Resists water, oil and gasoline.

**Suggested Applications:** Oil pans, stake bed holes, door panels, cast metal parts

Item #Container SizePack259093.5 fl. oz. tube, carded12



### NEWI


### **Permatex® Liquid Electrical Tape**

Weatherproof protectant for wiring and electrical connections. Goes on as a liquid and dries to a vinyl polymer that resists dirt, dust, chemicals, moisture, ensuring that connections stay intact. Brush-top applicator allows coverage without gaps and enables access to tight spaces that roll tape and shrink tubing can't get to.

**Suggested Applications:** Ignition wires, underground wiring, outdoor lighting fixtures, bilge pumps, terminal blocks, exposed wires, etc.

Item #	<b>Container Size</b>	Pack
85120	4 oz. brush-top	6
	bottle, carded	

See also age 37.






### Permatex® Spray Sealant Leak Repair

Targets Any Low Pressure Leak without Disassembly!

A sprayable sealer that forms a durable rubber barrier that stop leaks in minutes. The wicking action seals hard-to-reach leaks without the need for disassembling or removing parts. Designed specifically to target low pressure leaks in hoses, oil pans, differentials, transmission pans, fluid reservoirs as well as plastic, PVC and metal pipes, their connections and much more! Eliminates the need for liquid additive sealers that can swell and foul internal seals. Resists common shop fluids. **Note:** In many cases, more than one coat will be needed to solve the problem. Level 3 **A** 

**Suggested Applications:** Engine and transmission leaks, hoses, oil pans, differentials, transmission pans, cooling systems, thermostats, water pumps, valve covers, tubing connections, electrical harness connectors, plastics, and PVC

Item #Container SizePack82099net wt. 9 oz. aerosol6





▲ NFPA Fire Code 30B



### Permatex® Black Silicone Adhesive Sealant

Low odor formula! General-purpose, black RTV indoor/outdoor sealant. Seals, bonds, repairs, mends and secures glass, metal, plastics, fabric, vinyl, weather stripping and vinyl tops. Protects and repairs electrical wiring. May be applied to horizontal or vertical surfaces. Waterproof and flexible. Temperature range -75°F to 450°F (-59°C to 232°C); resists water, weather, and vibration.

**Suggested Applications:** Windshields, door frames, electrical connections, seams and roofs, vinyl tops, weather stripping

(Not recommended for engine gasket applications)

### **OEM INTERCHANGE, see pgs. 84-89**

Item #	<b>Container Size</b>	Pack	Old P/N
81158	3 oz. tube, carded	12	16BR
81173	12.9 oz. cartridge	12	16C



### Permatex® Flowable Silicone Windshield & Glass Sealer

Wicking action silicone "seeks the leak". Flows into hidden and hard-to-reach areas. Forms a tough, waterproof, durable, clear seal that is resistant to weather, extreme temperatures, vibration, shock and most shop chemicals. Fills surface voids and irregularities. Temperature range -80°F to 400°F (-62°C to 204°C).

**Suggested Applications:** Windshields, sunroofs, windows, headlamp assemblies, marine glass, RV vents and windows

**OEM INTERCHANGE, see pgs. 84-89** 

Item #	Container Size	Pack	Old P/N
81730	1.5 fl. oz. tube, carded	12	65AR



### Permatex® Form-A-Seal® Leak Repair

Forms a durable rubber barrier that stops leaks in minutes without part removal. Many auto, home, shop, garage, farm, marine and industrial uses. A sprayable sealer eliminates the need for disassembly prior to repair. Follow label for instructions. Resists common shop fluids. Level 3 A

**Suggested Applications:** Engine and transmission leaks, cooling systems, plumbing, masonry, wood, plastics, glass, PVC

Item #	<b>Container Size</b>	Pack
82096	6 oz aerosol can 5 oz net wt	12



### Permatex® Clear RTV Silicone Adhesive Sealant

General-purpose, clear RTV indoor/ outdoor sealant. Seals, bonds, repairs, mends and secures glass, metal, plastics, fabric, vinyl, weather stripping and vinyl tops. Protects and repairs electrical wiring. May be applied to horizontal or vertical surfaces. Waterproof and flexible. Temperature range -75°F to 400°F (-59°C to 204°C); resists water, weather, and vibration.

Suggested Applications: Windshields, door frames, electrical connections, vinyl tops, seams and roofs

(Not recommended for engine gasket applications)

### **OEM INTERCHANGE, see pgs. 84-89**

Item #	Container Size	<b>Pack</b>	Old P/N
80050	3 oz. tube, carded	12	66BR
80855	11 oz. cartridge	12	66C
81913	7.25 oz. Power Can	12	_
85913	7.25 oz. PowerBead™ can	6	_



### Permatex® Auto Glass Sealer

Seals out leaks and drafts around windows. Makes a tight, permanent seal. Can be used for glass, metal, wood and rubber. Economical clear sealant.

**Suggested Applications:** Car windows, windshields, sunroofs

Item #	Container Size	Pack	Old P/N
80329	1.5 fl. oz. tube,	12	DWS-37
	carded		



### Permatex® Black Rubber Sealant

High-strength, ready-to-use automotive sealant insulates, seals and caulks. Does not dry out or become brittle. Economical black sealant.

Suggested Applications: Weather stripping, door and window glass, electrical connections

Item #	<b>Container Size</b>	<b>Pack</b>	Old P/N
80338	1.5 fl. oz. tube,	12	RS-9
	carded		

▲ NFPA Fire Code 30B



### Specialized Maintenance

### Introduction



### Specialized Maintenance & Repair

Whether it's sealing a hole in a tailpipe, attaching a rearview mirror or mending a tear in upholstery, there's a Permatex® product that offers the solution. These problem-solving products are formulated and tested to deliver optimum results for specific maintenance and repair needs.

- Rebuilder's Aids
- Counterman's Choice®
- Auto Glass Repair
- Electrical System Maintenance
- Body, Interior & Trim
- Professional Repair Systems
- Fabric, Vinyl & Fiberglass Repair
- Exhaust System Repair
- Brake Maintenance & Repair
- Radiator & Fuel Tank Repair

### Rebuilder's Aids



### **Permatex® Valve Grinding Compound**

Aids valve grinding and seating operations to remove burrs, surface defects, carbon, gum and corrosion. Can be used for lapping and grinding chromium. Mixes with water to form an easy-to-use paste.

**Suggested Applications:** Seat valves, sharpen reel type lawn mowers

Item #	<b>Container Size</b>	<b>Pack</b>	Old P/N
80036	1.5 oz. tube, carded	12	34A
80037	3 oz. tube, carded	12	34B



### **Permatex® Prussian Blue**

Aids precision-fitting of machined surfaces. Locates high spots on bearings, valves, gears and other close-to-tolerance components. Nondrying. Easy clean-up.

**Suggested Applications:** Bearings, valves, gears, other close tolerance or machined assemblies

Item #	<b>Container Size</b>	Pack	Old P/N
80038	.75 fl. oz. tube	36	35V



Permatex®

O-Ring Splicing Kit contains
all the materials and tools
necessary to produce O-rings
on-the-spot.











### Permatex® O-Ring Splicing Kit

Makes custom o-rings on the spot. Eliminates the need to disassemble parts and components. Includes adhesive waterproofing solution,

cleanup solvent, cutting blade, splicing fixture and 12 ft. of Buna-N cord stock.

Suggested Applications: Custom o-rings OEM INTERCHANGE, see pgs. 84-89

Item #	<b>Container Size</b>	Pack
00112	1 boxed kit	5



# Specialized Maintenance & Repair

### Single-Use Pouches - the Right Amount for Small Jobs



### **Permatex® Single-Use Pouches**

A line of single-use chemicals that deliver just the right amount of material for typical automotive repair jobs. Consistent with the high quality associated with the Permatex® brand, each item in the line contains premium chemical compounds. The convenient single-use pouches feature an exclusive "easy squeeze spout" with a tapered channel to provide for more accurate dispensing of compounds while minimizing waste and mess. Permatex® Single-Use chemicals are a convenient and economical new way for DIY'ers to complete a wide range of automotive repairs.

Suggested Applications: See descriptions under the various item descriptions in the lubricants, threadlockers or specialty repair sections of this catalog.

Item #	Container Size	Pack
09973	Ceramic Extreme Brake Lubricant, 4 g pouch	480
09974	Gasket Sealant & Dressing, 5 g pouch	480
09975	Anti-Seize Lubricant, 4 g pouch	480
09976	Battery Protector, 4 g pouch	480
09977	Ultra Disc Brake Lubricant, 4 g pouch	480
09978	Medium Strength Threadlocker BLUE Gel, 1 g pouch	480
09979	High Strength Threadlocker RED Gel, 1 g pouch	480
09980	Spark Plug Boot Grease, 4 g pouch	480

Did you know?...Permatex® single-use pouch displays can increase profit opportunity.

- Add-on sales opportunity whenever parts are sold!
- Ideal for high incidence, one-time DIY repairs
- Introduces DIY to new chemical products sold in other parts of store



### Specialized Maintenance

### Auto Glass Repair



### Permatex® Extreme Rearview Mirror Professional Strength Adhesive

2-part (towelette & pipette) professional strength rearview mirror adhesive & activator. Patent pending medical grade towelette helps to minimize application messes, improves application accuracy and also provides a safer package for general consumers and professional installers. This product incorporates the same professional strength OEM specified formula which ensures that it works!

NOT DESIGNED FOR PLASTIC BUTTONS.

Suggested Applications: Mounting rearview mirrors to windshields

ouggood rippinoution mountaing road flow millions to millions			
Item #	Container Size	Pack	
81840	2 part kit01 fl. oz. adhesive vial &	12	
	02 fl.oz activator towelette carded		



### Permatex® Quick Grid™ Rear Window Defogger Repair Kit

Provides a low-cost, high-quality repair for damaged rear window defogger grids.

Complete kit for a superior repair. Quick Grid™ is the result of a joint research project with the General Motors Research Center.

**Suggested Applications:** Rear window defoggers

Item #	Guillainei Size	raur
15067	.05 fl. oz. bottle, carded	12
	matex® Professional Repair System	S
Rear Window	Defogger Repair Kit on page 41.	



### Permatex® Bullseye™ Windshield Repair Kit

The first one-component windshield repair system designed to be used by the car owner. May be used on star damage and bullseyes up to 1-1/4" in diameter to prevent further spreading of glass fracture. Safe and easy to use. Requires no mixing, no heat. Makes the repair virtually undetectable.

**Suggested Applications:** Bullseyes, star damage, and chips in windshields

uarriago,	and ompo in windomoido	
Item #	<b>Container Size</b>	Pack
16067	.025 fl. oz. syringe, carded	12
	ermatex® Professional Repair Systems Repair Kit on page 41.	



### Permatex® Professional Strength Rearview Mirror Adhesive

Approved and used by GM, Ford and Chrysler. Permanently remounts mirrors to windshields. Achieves handling strength in seconds; mirror-mounting strength in 15 minutes. Available in single and multi-applications. ODC-free. NOT DESIGNED FOR PLASTIC BUTTONS.

**Suggested Applications:** Mounting metal rearview mirror buttons to windshields

Item #	Container Size	<b>Pack</b>	Old P/N
03325*	combination pack - 24 ml adhesive bottle	5	3325
	& 4.5 oz. primer aerosol can, boxed		
81844	2-part kit, carded	12	11067-2

See also Permatex® Professional Repair Systems Rearview Mirror Adhesive Kit on page 41.

\* Product photo - see bottom of page 87.



### Permatex® Rear Window Defogger Electrically Conductive Tab Adhesive

Quickly and easily bonds defogger tab to grid on rear window. Provides a low-cost, high-quality repair for damaged rear window defogger tabs. Complete kit for a quick repair.

**Suggested Applications:** Rear window defogger tabs

Item #	Container Size	Pack
21351	2-part kit, carded	6

### Electrical System Maintenance



### **Permatex® Tune-Up Kit**

Easy-to-use, two-part kit contains both Dielectric Tune-Up Grease and Anti-Seize Lubricant. Dielectric Tune-Up Grease protects spark plug boots and electrical connections from corrosion, while extending the life of rotor caps in all modern vehicles. Anti-Seize Lubricant is used on spark plugs before installation to prevent thread damage and allow for easy removal of spark plugs later.

**Suggested Applications:** Electrical connections, spark plug boots, rotor caps

Item #	Container Size	Pack
26984	.33 oz. tube &	6
	.18 oz. pouch, carded	

See also page 51.



## pecialized Maintenance & Repai

### Electrical System Maintenance



### Permatex® Dielectric Grease

Protects electrical connections and wiring from salt, dirt and corrosion. Extends the life of bulb sockets. Prevents voltage leakage around any electrical connection. Also prevents spark plugs from fusing to boots. Required for modern high energy ignition systems.

Suggested Applications: Marine and automotive electrical connections, spark plug boots, trailer hitches

Item #	<b>Container Size</b>	Pack	Old P/N
81150	.33 oz. tube, carded	12	67VR
81153	3 oz. Power Can,	6	_
	stand-up carded		
22058	3 oz. tube, carded	6	_
09980*	4 g pouches	480	_





### Permatex® Bulb/Lamp & Electrical Connector Dielectric Grease

Increases performance and extends service life of bulbs and lamps by preventing voltage leakage and protecting electrical connections from moisture, dirt and corrosion. Great lubricating properties ease the disassembly process. Protects rubber, plastic, ceramic and metal surfaces.

Suggested Applications: Headlamps, lighting bulbs for: instrument panel, glove compartment, inside door trim, interior courtesy lamps, parking & turn signals, brake lights, license plate lights, trunk and hood lamps; also for fuses, ignition components and other electrical connections.

Item #	Container Size	Pack
31824	.10 oz. dose, carded	12
See also nage	51	



### **NEW!** Permatex® Liquid Electrical Tape

Weatherproof protectant for wiring and electrical connections. Goes on as a liquid and dries to a vinyl polymer that resists dirt, dust, chemicals, moisture, ensuring that connections stay intact. Brush-top applicator allows coverage without gaps and enables access to tight spaces that roll tape and shrink tubing can't get to.

Suggested Applications: Ignition wires, underground wiring, outdoor lighting fixtures, bilge pumps, terminal blocks, exposed wires, etc.

Item #	<b>Container Size</b>	Pack
85120	4 oz. brush-top	6
	hottle carded	

See also age 32.



### **Permatex® Battery Installation Kit**

Complete kit for battery installation to insure a good connection. Protects electrical connections and prevents corrosion. Increases battery life and cranking powers. Stops terminal corrosion and prevents harmful buildup. Kit contains Battery Protector and one pair latex gloves (for safe handling, helps protect against acid contact).

Suggested Applications: Batteries

Item #	Container Size	Pack
85176	4 g pouch & 1 pair	6
	latex gloves, carded	



### Permatex® Battery Protector & Sealer

Stops terminal corrosion and increases battery life. Spray on battery terminals, in or out of storage.

Aerosol - Level 3 ▲

**Suggested Applications:** Automotive, marine, farm machinery and motorcycle batteries

Item #	<b>Container Size</b>	Pack	Old P/N
80370	6 oz. aerosol can,	12	SA-9
	5 oz. net wt.		
09976*	4 g pouch	480	_

<sup>\*</sup> See also page 35.



### **Permatex® Battery Cleaner**

Spray it on and wash corrosion off. Works in just three minutes. Level 1  $\blacktriangle$ 

**Suggested Applications:** Automotive, marine, farm machinery and motorcycle batteries

Item #	<b>Container Size</b>	Pack	Old P/N
80369	6 oz. aerosol can,	12	SA-8
	5.75 oz. net wt.		

See also page 54.



### Specialized Maintenance

### Body, Interior & Trim



### Permatex® Undercoating

Protects fenders, frames, fuel tanks, door panels, rocker panels, hoods and firewalls against moisture, road salt and corrosion. Won't sag or drip. Sound-proofs and insulates. Body shop proven. Level 3  $\blacktriangle$ 

**Suggested Applications:** Wheel wells, rocker panels, frames and underbody, body repairs, rust holes, tree pruning, driveway cracks, minor roof repairs, and post preserver

Item #	Container Size	Pack	Old P/N
80072	20 oz. aerosol can, 16 oz. net. wt.	12	117EA

### **Permatex® Heavy Duty Rubberized Undercoating**

Now with an improved formula! Rubberized for maximum durability; seals, protects and insulates. Excellent professional blend all-purpose coating. Ideal for home or shop use. Level 3 ▲

**Suggested Applications:** Automotive frames, rocker panels and wheels. Other uses include sealing gutters, roofs, drain systems and tree pruning

Item #	<b>Container Size</b>	Pack	Old P/N
81833	20 oz. aerosol can,	12	135EA
	16 oz. net. wt.		

### **Permatex® Rust Treatment**

Provides one-step treatment that destroys old rust and prevents new rust. Just brush or spray on. Within minutes, rust is replaced by a durable black polymer coating that may be painted. Excellent protective primer. Specially formulated to be used with body filler and fiberglass. Can be used when temperature is between 50°F and 90°F (10°C and 32°C) and on surfaces which do not exceed 200°F (93°C). Aerosol - Level 2 ▲

**Suggested Applications:** Destroys rust on all automotive applications; trucks, trailers, storage tanks, pipes, valves, fences, guard rails, bulkheads, overheads, decks, hatch covers (topcoat with appropriate marine paint), agricultural equipment, plows, tractors, snow removal equipment, etc.

### **OEM INTERCHANGE, see pgs. 84-89**

Item #	Container Size	Pack	Old P/N
81775	8 fl. oz. bottle	12	RT-8A
81773	16 fl. oz. bottle	12	RT-16A
81849	16 oz. aerosol can, 10.25 oz. net. wt.	12	79DA
75448	1 gallon bottle	4	_

### **Permatex® Rust Dissolver Gel**

Chemically dissolves rust from all iron and steel surfaces. Brush or spray on, wipe off rust with cloth. Replaces sanding and scraping.

Suggested Applications: Iron and steel surfaces on cars, trucks,

motorcycles, tractors, and trailers

Item # Container Size Pack Old P/N
81756 8 fl. oz. bottle 12 NJ-1A

6

12 fl. oz. trigger spray bottle

See also page 54.

82138





### Body, Interior & Trim



### Permatex® Body Shop® Heavy Duty Headliner & Carpet Adhesive

High-strength spray adhesive designed for repairing interior parts which have become detached or loosened. Resistant to extreme weather conditions. Water-resistant. Dries clear for neat appearance. High temperature formula maintains high strength at temperatures up to 170°F (77°C). VOC compliant. Level 3 ▲

Suggested Applications: Excels at attaching headliners, carpets, trunk linings and inside door panels; bonds foam, fabrics, plastics, rubbers, other automotive materials, etc.

Item #	<b>Container Size</b>	Pack
27828	20 oz. aerosol can,	6
	16.75 oz net wt	



### Permatex® All Purpose Spray Adhesive

An all-purpose, pressure sensitive, spray adhesive that allows both permanent and repositionable bonding. Won't bleed through leaving surfaces unstained, dries clear. Unique formula resists water and humidity. Will not shrink. Adheres to porous and nonporous materials. VOC compliant. Level 3

**Suggested Applications:** For general purpose, nonstructural applications; excels at attaching upholstery cloth, carpeting, floor mats, insulation, kick and silencer pads to metal, wood or KB board; bonding paper, metal, fabric, most plastics, leather, rubber, cardboard, felt, polystyrene foam, cork, foam rubber, glass, foil, wood

Item #	<b>Container Size</b>	<b>Pack</b>	Old P/N
82019	16 oz. aerosol can,	12	118DA
	10.5 oz. net wt.		



### Permatex® Black Super Weatherstrip Adhesive

A professional, black weatherstrip adhesive that blends with automotive weatherstripping for less clean-up. Allows for repositioning parts after contact is made. Withstands extreme temperatures. Water resistant. Resistant to gasoline, kerosene, antifreeze and most solvents.

**Suggested Applications:** All types of automotive weatherstripping; door and trunk moldings, body side moldings, cut gaskets

**OEM INTERCHANGE, see pgs. 84-89** 

Item #	Container Size	Pack	Old P/N
81850	5 fl. oz. tube,	12	82
	boxed		



### Permatex® Super Weatherstrip Adhesive

A superior adhesive ideal for many applications including rubber, metal, auto or van carpeting and fabric-backed vinyl upholstery and automotive gaskets. Allows for repositioning parts after contact is made. Withstands extreme temperatures. Water resistant. Resistant to gasoline, kerosene, antifreeze and most solvents.

**Suggested Applications:** All types of automotive weatherstripping, door and trunk moldings, body side moldings, decorative trim, cut gaskets

Item #	Container Size	<b>Pack</b>	Old P/N
81731	5 fl. oz. tube, boxed	12	80
80638	2 fl. oz. tube, carded	12	80BR



### **Permatex® Weatherstrip Cement**

A translucent all-purpose cement and sealer that bonds in minutes and dries to a tough, strong bond. Waterproof and durable. It provides a flexible, vibration resistant bond that adheres rubber to glass and metal.

**Suggested Applications:** Bonds glass, rubber and metal; door and windshield weatherstripping

Item #	Container Size	<b>Pack</b>	Old P/N
80328	2 oz tuhe carded	12	DCD-19







### **Specialized Maintenance**

Professional Repair Systems



Visit **PermatexRepair.com**, a website designed to help consumers find easy, do-it-yourself repair solutions to save time and money. The site features How-to videos, a 'Which kit is right for you' section, FAQs, and a 'Where to buy' section.



### **NEW!** Permatex® Wheel Restoration Kit

This effective kit restores damaged metal wheel surfaces to a "LIKE NEW" appearance. This easy-to-use, do-it-yourself kit makes permanent repairs to various unappealing wheel damage including curbside rash, corrosion, rust, pitting, scuffs, dents and scratches. Dupli-Color® high performance silver wheel paint included to restore original silver metallic finish. See other Dupli-Color® wheel paints (not included) for your exact color match. *See video demo online at permatex.com.* 

NOTE: Not for use on plastic wheel covers or structural wheel damage. Included silver paint matches most wheels.

Suggested Applications: Metal wheels (e.g. aluminum, alloy, steel, and mixed metals); wheel damage including curbside rash, scuffs, corrosion, rust, pitting, dents, grooves, and scratches

Item # Container Size Pack

09142 1 kit, clamshelled



Curbside Rash & Scuffs



Corrosion & Rust



Dents & Scratches



## pecialized Maintenance & Repai



### **NEW!** Permatex® Lens Renew Headlight Restoration Kit

Formulated with UV protectant, this kit works on most exterior plastic lighting lenses to restore "LIKE NEW" clarity, improving light output and appearance. Contains attachment intended for use with portable drill for quick and easy restoration. Renews clouded, pitted, and yellowed lens surfaces. Each kit contains lens restoration polish/UV protector,


1 disc pad mandrel, 2 sanding discs, 2 polishing discs,

1 foam polishing pad, and an instruction sheet.

Suggested Applications: Headlight lenses

Item #Container SizePack091361 kit, clamshelled6







### Permatex® Headlight Lens Restoration Kit

No drill required. Our economical and effective kit works on exterior plastic lighting lenses to restore "LIKE NEW" clarity, improving light output and appearance. Restores clouded, pitted, and yellowed lens surfaces. Kit contains lens restoration polish, a polishing cloth, 4 wet/dry sand-papers (1000, 1500, 2000 & 2500 grits), 1 pair latex gloves, and a simple step-by-step instruction sheet. See video demo online at permatexrepair.com

Suggested Applications: Headlight lenses

Item #	Container Size	Pack
09135	1 kit, clamshelled	6



### Permatex® Windshield Repair Kit

Make permanent air-tight repairs on most types of damaged laminated windshield glass, including bullseye's and star damage up to 1 1/4 inches, in just a few minutes. This state-of-the-art delivery system with advanced spring-lock feature, allows you to make professional-quality repairs with no mixing required and it cures by natural daylight. This complete kit provides everything needed for the repair including easy-to-follow instructions with photographs. See video demo online at permatex.com.

Suggested Applications: Repairs bullseye's,

star damage, and chips (up to 1 1/4 inches long) in laminated automotive windshields

Item #	<b>Container Size</b>	Pack
09103	1 kit, clamshelled	6



### Permatex® Rearview Mirror Adhesive Kit

**OEM approved.** Complete kit contains everything required for making professional-quality repairs in just minutes. State-of-the-art components and easy-to-follow instructions with photographs. Two part adhesive that permanently bonds mirror buttons to windshields. Achieves handling strength in seconds, and mirror mounting strength in 30 minutes. ODC free. NOT designed for PLASTIC buttons. *See video demo online at permatex.com.* 

Suggested Applications: All foreign

and domestic metal rearview mirror mounting buttons

		0
Item #	<b>Container Size</b>	Pack
09102	1 kit, clamshelled	6



### Permatex® Complete Rear Window Defogger Repair Kit

Complete kit contains everything required for making professional-quality repairs in just minutes. State-of-the-art components and easy-to-follow instructions with photographs. Provides a low-cost, high-quality repair for damaged rear window defogger grids and tabs. Quick Grid<sup>TM</sup> is the result of a joint research project with the General Motors Research Center.

**Suggested Applications:** Rear window defogger grids and tabs

Item #	<b>Container Size</b>	Pack
09117	1 kit_clamshelled	6



### Specialized Maintenance

### Professional Repair Systems



### **Permatex® Fuel Tank Repair Kit**

Eliminates dangerous welding. Complete kit contains everything required for making professional-quality permanent repairs in just minutes. Includes state-of-the-art components and easy-to-follow instructions with photographs to make quick permanent repairs to leaks in all types of metal fuel tanks. It repairs cracks up to 4" (10cm) long and holes up to 3/8" (9mm) in diameter. Repair will be complete when the resin cures in 30 minutes. Tank may be refilled after 30 minutes or when the repair is tack free. The repair resin is

designed to harden within 8-10 minutes and cures in 30 minutes. Repairs can be made ideally at temperatures from  $50^{\circ}F$  to  $75^{\circ}F$  ( $10^{\circ}C$  to  $24^{\circ}C$ ). Repairs made at lower temperatures will take longer to cure. Repairs can be made on slow leaking cracks up to 4 inches in length and holes up to 3/8 inch in diameter. (THIS PRODUCT IS NOT FOR USE ON PLASTIC FUEL TANKS).

**Suggested Applications:** Ideal for cars, light trucks and commercial vehicles; portable metal fuel tanks, metal car fuel tanks

Item #	<b>Container Size</b>	Pack
09101	1 kit, clamshelled	6
* Soo also Por	natov® Gac Tank & Radiator Ronai	r on nage A



### Permatex® Plastic Tank Repair Kit

Complete kit contains everything required for making professional-quality permanent repairs in just minutes. State-of-the-art components and easy-to-follow instructions with photographs. Repairs all types of plastic tanks. The repair resin is designed to harden within 8-10 minutes and cures in 30 minutes. Repairs can be made ideally at temperatures from  $50^{\circ}\text{F}$  to  $75^{\circ}\text{F}$  ( $10^{\circ}\text{C}$  to  $24^{\circ}\text{C}$ ). Repairs cracks up to 4 inches in length and holes up to 3/8 inch in diameter. (THIS PRODUCT IS NOT FOR USE ON PLASTIC <u>FUEL</u> TANKS).

**Suggested Applications:** Ideal for cars, trucks, boats and RV's; windshield washer reservoirs, radiator overflow tanks, coolant reservoirs, water tanks, waste tanks

Item #	<b>Container Size</b>	Pack
09100	1 kit, clamshelled	6



### Permatex® Radiator Repair Kit

Complete kit contains everything required for making a professional-quality permanent repairs in just minutes. Includes easy-to-follow instructions with photographs. Formulated to repair all plastic and metal radiator tanks. The repair resin is designed to harden within 8-10 minutes and cures in 30 minutes. Repairs can be made on cracks up to 4 inches (10cm) long and holes up to 3/8 inches (9mm) in diameter. Seals small holes and weak seams in gas tanks without welding or tank removal.

**Suggested Applications:** Plastic and metal radiator tanks in cars, light trucks and RV's

Item #	<b>Container Size</b>	Pack
09104	1 kit, clamshelled	6
* See also Per	natev® Gas Tank & Radiator Rena	ir on nage 4



### Permatex® Stripped Thread Repair Kit

Makes reliable thread repairs without drills, taps, tools or inserts. Restores worn, stripped or damaged threads and eliminates future corrosion, galling, seizing and rust. Effective up to 128 ft. lbs. of torque and between -65°F to 300°F (-54°C to 149°C). Repairs most metal-to-metal fasteners up to SAE grade 5 English and 8.8 metric (coarse and fine).

Suggested Applications: Intake manifold bracket fastener threads, timing chain cover bolt threads, valve cover bolt threads, water pump bolt threads

**OEM INTERCHANGE, see pgs. 84-89** 

, <b>pg</b>			
Item #	<b>Container Size</b>	Pack	
81668	1 kit, clamshelled	6	
See also pag	e 26.		



Damaged threads on the left and repaired on the right with Permatex® Stripped Thread Repair.



### Fabric, Vinyl & Fiberglass Repair



### Permatex® Fabric Repair Kit

Repairs automobile upholstery, carpet, clothing and furniture. Matches popular colors and textures. Contains: 7 assorted colors of fabric repair compound, 2 cups fabric air dry adhesive, screen applicator, application spatula, mixing bottle, instruction card with color matching chart.

**Suggested Applications:** Automotive and home fabric upholstery and carpet, clothing

Item #	<b>Container Size</b>	Pack
25247	1 kit. clamshelled	6



### Permatex® Fiberglass Patch Kit

Complete epoxy-based kit for bridging holes and rusted areas in metal, wood, and fiberglass. Includes one 1 fl. oz. tube of resin, one 1 fl. oz. tube hardener, fiberglass cloth, spreader and mixing stick

**Suggested Applications:** Automotive and marine applications

Item #	<b>Container Size</b>	<b>Pack</b>	Old P/N
80265	1 kit clamshelled	6	FK-Q8



### Permatex® Ultra Series Vinyl & Leather Repair Kit

A complete professional kit with plug-in electric heat iron to make professional style repairs. Contains: professional electric heat tool, 7 intermixing colors of repair compound, clear vinyl adhesive and filler (net .34 fl. oz.), grain pattern paper, metal spatula, plastic dashboard hardening powder.

**Suggested Applications:** Repairs cracks, tears, holes and burns in dashboards, vinyl and leather upholstery and vinyl tops, marine upholstery, luggage

Item #	<b>Container Size</b>	<b>Pack</b>	Old P/N
81781	1 kit, clamshelled	6	VR-8A





### Permatex® Vinyl & Leather Repair Kit

A complete DIY repair kit for home, automotive, and marine vinyl and leather upholstery. Contains: heat transfer tool, 7 colors of repair compound, clear vinyl adhesive and filler (net .34 fl. oz.), grain pattern paper, plastic spatula, and instruction sheet with color matching chart.

**Suggested Applications:** Repairs tears, holes, burns, gashes, and gouges in vinyl and leather upholstery, infant car seats, chairs, stools, luggage

Item #	<b>Container Size</b>	Pack	Old P/N
80902	1 kit. clamshelled	6	VR-1A



### Permatex® Super Clear Vinyl Sealant Repair Kit

Makes invisible repairs from rips, cuts and tears to upholstery, luggage, clothing, etc. Contains: clear vinyl sealant and filler (net 1.5 fl. oz.), special applicator nozzle, grain pattern paper.

**Suggested Applications:** Rips and cuts in luggage, rainwear, vinyl boots, automotive, marine and home upholstery

Item #	<b>Container Size</b>	Pack	Old P/N
81786	1 kit carded	12	VR-12Δ





### **Specialized Maintenance**

### Exhaust System Repair



### Permatex® Muffler & Tailpipe Bandage

Epoxy-impregnated fiberglass bandage chemically welds mufflers and tailpipes. Permanently repairs holes and leaks in exhaust systems saving costly part replacement. Seals out poisonous fumes to temperatures of 800°F (426°C).

Suggested Applications: Mufflers and tailpipes on automobiles, trucks, tractors and farm equipment

Item #	<b>Container Size</b>	<b>Pack</b>	Old P/N
80331	84 sq. in. bandage,	12	MB-1
	carded		
80332	120.54 sq. in.,	12	MB-2
	carded (jumbo size)		



### Permatex® Muffler & Tailpipe Putty

Permanently repairs holes and leaks in exhaust systems. Seals out fumes at temperatures up to 2000°F (1000°C). Safe for catalytic converters. 2-pouch bonus pack.

**Suggested Applications:** Mufflers, tailpipes, joints and catalytic converters

Item #	<b>Container Size</b>	Pack	Old P/N
80333	4 oz. net wt.	12	MP-1
	(2 foil pouches,		
	carded)		



### Permatex® Muffler & Tailpipe Sealer

Seals holes and leaks in mufflers, tailpipes and around joints. Makes new installations more secure. Resists temperatures to 2000°F (1000°C).

**Suggested Applications:** Mufflers, tailpipes, joints and catalytic converters

Item #Container SizePackOld P/N803353 oz. tube, carded12MTK-1



### Permatex® 1000° Plus™ Exhaust Repair Kit

Complete kit for repairing cracks and splits in mufflers, tailpipes and exhaust pipes. Withstands temperatures over 1000°F (540°C). Kit contains ready-to-use foil-packed bandage and support wire.

Suggested Applications: Mufflers and tailpipes on automobiles, trucks, tractors and farm equipment

Item #	Container Size	Pack	Old P/N
80334	1 bandage,	12	MRK-1
	1 support wire,		
	carded		



### Permatex® Hi-Temp Metal Repair Compound

Makes long-lasting repairs to high-temp, low pressure exhaust leaks from the exhaust manifold to the muffler. Gets stronger with heat up to 2000°F. One-part, water-based ceramic is safe and easy-to-use.

**Suggested Applications:** Cracked and broken exhaust manifolds, headers, furnaces

Item #	<b>Container Size</b>	Pack
26346	20 g pouch, carded	6





## pecialized Maintenance & Repai

### Brake Maintenance & Repair



### Permatex® Disc Brake Quiet

Stops brake squeal by dampening vibration at caliper/brake pad interface. Provides

tighter fit and allows for easier disassembly. Protects against corrosion. Compatible with anti-lock brake systems. This product contains an elastomeric polymer for use with brake pads not having anti-squeal shims. Aerosol - Level 3

### Suggested Applications:

Automotive disc brakes, out board and inboard pads for disc braking systems, disc brake pads without anti-squeal shims

	•	•	
Item #	Container Size	Pack	Old P/N
80729	.5 fl. oz. (225 fl. oz. pouches), carded	12	126VR
80077	12 oz. aerosol can, 9 oz. net wt.	12	127MA
See also nad	e 50		

### Permatex® Ultra Disc Brake Caliper Lube

An environmentally-friendly, green, nonmelting, synthetic lubricant. It is formulated to lubricate under the most adverse brake conditions, assuring that critical caliper pins, sleeves, bushings and pistons

> remain lubricated throughout pad life. **Suggested Applications:** Caliper pins,

sleeves, bushings and pistons

Item #	Container Size	Pack
20353	2 oz. tube with nozzle	6
20356	10 g (2-5 g pouches), carded	6
24110	8 oz. brush-top bottle	6
09977*	4 g pouches	480

<sup>\*</sup> See also page 35.

### Radiator & Fuel Tank Repair



### Permatex® Instant Gas Tank Repair

Instantly seals small holes in gas tanks without tank removal. Sticks to "gasolinewet" metal. Dries to a hard seal. Hardens in 60 minutes. Easy-to-use, two-part epoxy ribbon. No measuring. Permanent. (THIS PRODUCT IS NOT FOR USE ON PLASTIC GAS TANKS.)

**Suggested Applications:** Gas tanks in cars, trucks, farm equipment

ltem #	<b>Container Size</b>	Pack
12020	1 oz. stick, carded	12

<sup>\*</sup> See also Permatex® Professional Repair Systems Fuel Tank Repair Kit on page 42.



### Permatex® Gas Tank & Radiator Repair

Seals small holes and weak seams in gas tanks without welding or tank removal.
Repairs leaks and holes in all types of radiators. Hardens in 60 minutes, permanent.
(THIS PRODUCT IS NOT FOR USE ON PLASTIC GAS TANKS.)

**Suggested Applications:** Holes and seams in gas tanks, radiators or gas cans

Item #Container SizePackOld P/N808841 oz. stick, carded12GTR-1

### Wiper Blade Maintenance



### **NEW!** Permatex® Wiper Restore™

A quick and easy solution to keep your wipers in top performing condition. Wiper Restore is a water-based, silicone emulsion formula with a special surfactant to aid in the cleaning, softening, and conditioning of wiper blade rubber. This increases flexibility and helps to minimize various wiper performance issues, such as, chatter, streaking, and skipping. This special formula is alcohol and petroleum free, so it will not deteriorate blade rubber.

Suggested Applications: Windshield wipers


Item # Container Size Pack
16050 1.25 g pouch (48 pouches in 1 display box) 1

\* See also page 55.



<sup>\*</sup> See also Permatex® Professional Repair Systems Radiator Repair Kit on page 42.



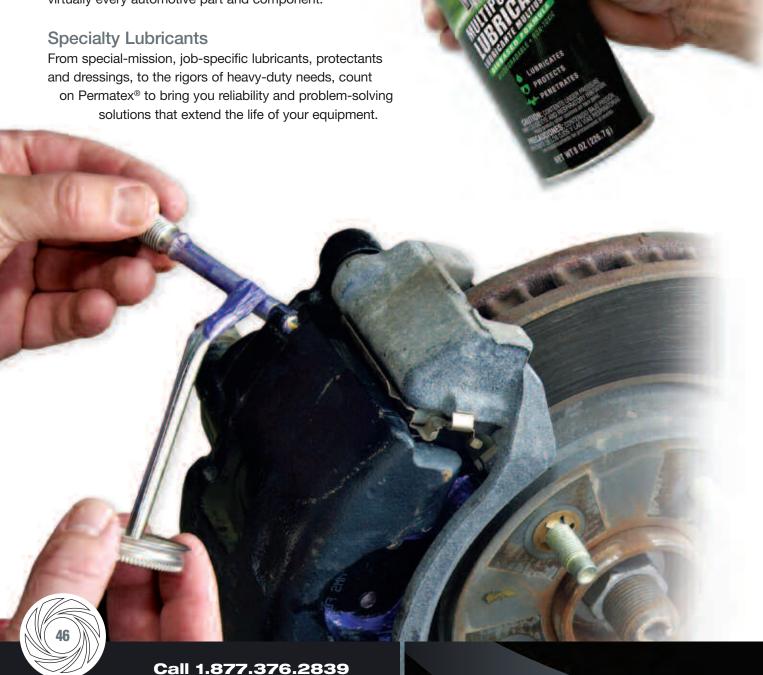

### Environmentally Friendly Lubricants

### Best for the job. Better for the planet.



B Force™ Multipurpose Lubricant... a force of nature that's easy on the environment.

### Permatex® B Force™ Multipurpose Lubricant

A biodegradable lubricant and penetrant that performs as well or better than traditional petroleum-based products. Formulated from renewable feedstock base, B Force™ is safe to use for a variety of home, auto, and industrial applications. Unlike petroleum-based formulas, B Force™ will not pollute the water or soil and will not harm children and pets. It penetrates into close tolerance areas, providing a thin protective film that lubricates and prevents corrosion. Aerosol - Level 3 A

Suggested Applications: Lubricates door hinges, latches, garage door tracks, seat tracks, brake cables, chains, air tools, and thousands of other applications. Protects frozen and rusted bolts, nuts and fittings.

Item #	Container Size	Pack
80059	12 oz. aerosol can, 8 oz. net wt.	6









### Permatex® B Force™ Hydraulic Jack Oil

Renewable, biodegradable and non-hazardous hydraulic oil for use in general purpose hydraulic systems. Improves lubrication and prevents rust and sludge buildup. Permits hydraulic actuator to function properly in temperatures from -49°F to 120°F (-45°C to 48°C). Maintains proper viscosity. Contains antioxidant, anti-rust and anti-wear additives for maximum service life. Noncorrosive formula that meets or exceeds the requirements of all major hydraulic equipment manufacturers and meets the requirements for Type I, II and III hydraulic tools.

Suggested Applications: Floor lifts, motorcycle front forks, hydraulic hand jacks, rebuildable rear shocks, hydraulic vane, piston and gear pumps, floor jacks, fork lift gates, pallet jacks, tilt cab systems, all ISO 32 viscosity specified applications

Item #	<b>Container Size</b>	Pack
80051	1 quart bottle	12
80056	1 gallon bottle	6









### Lubricants

### Multipurpose Lubricants



### Permatex® Ultra Slick® Synthetic **Multi-Purpose Lubricant with PTFE**

A grease based formula for high load applications. Can be used on any moving parts to provide better, longer lasting lubrication that withstands higher temperatures and is safe onmore surfaces. It withstands temperatures from -45°F to 350°F (-42°C to 177°C), 450°F (232°C) intermittent. Level 3 A

Suggested Applications: Hood support bushings, latch assemblies, hinges, door checks, trunk locks, weather stripping, mechanical linkages, o-rings, seat tracks, cams, headlight seals, antenna base threads, nuts and studs; and other moving parts

Item #	Container Size	Pack
81943	12 oz. aerosol can, 11 oz. net. wt.	6



### Permatex® Fast Break® Super Penetrant

Heavy-duty penetrant for rusted and frozen assemblies. Works quickly to penetrate and loosen rust, tar, grease, dirt, carbon deposits and corrosion from metal parts. Frees frozen nuts, bolts and fittings in all types of assemblies. Level 3 A

Suggested Applications: Lubricates to free any corroded or seized part. Penetrates rust, scale, paint, varnish, carbon or gum

Item #	Container Size	Pack	Old P/N
80052	16 oz. aerosol can,	12	68DA
	12 oz. net wt.		



### Permatex® White Lithium Grease

All-purpose white lubricant for metal-to-metal and metal-to-plastic applications. Protects against rust and makes surfaces friction-free. Stainless. Contains no ODCs. Withstands moisture and high heat. Level 3 A

Suggested Applications: Door hinges, hood latches, trunk latches, hatchback struts, seat tracks, garage door and delivery truck door tracks

Item #	<b>Container Size</b>	Pack	Old P/N
81981	16 oz. aerosol can,	12	195DA
	10.75 oz. net wt.		
80345	1.5 fl. oz. tube, carded	12	WI -9



### Permatex® Silicone Spray Lubricant

Lubricates and waterproofs all types of mechanical equipment. Stops friction and squeaks. Prevents locks, doors and windows from binding. High silicone formula does not attract dust or dirt. Protects and renews rubber mountings, bushings and weatherstripping. Prevents binding, sticking and deterioration. Non-gumming. Will not mar paint, rubber or plastic surfaces. Waterproofs, Level 1

Suggested Applications: Lubricates door locks, trunk lids, brake cables and rubber molding

Item #	<b>Container Size</b>	Pack	Old P/N
80070	16 oz. aerosol can,	12	116DA
	10.25 oz. net wt.		

### Specialty Lubricants



### Permatex® Chain Lube

Cleans, lubricates, extends life and protects all types of roller chains, gears and cables that operate under exposed conditions. Easy-to-apply foaming action assures effective application. Repels dirt, sand, dust. Minimal "throw - off". Contains no ODC's. Level 3 ▲

Suggested Applications: Ideal for any chain-driven tool or vehicle such as motorcycles, mopeds, chainsaws, lawnmowers and bicycles

Item #	<b>Container Size</b>	Pack	Old P/N
80075	6 oz. aerosol can,	12	122GA
	5 oz net wt		

▲ NFPA Fire Code 30B



### **Permatex® Belt Dressing & Conditioner**

Extends belt life. Penetrates the cord fibers of "V" belts to restore pliability and flexibility. Prevents belt slippage due to heat, cold, dampness, dust and glazing. Eliminates squeaking and slipping. Level 1 A

Suggested Applications: Fan belts, water pumps, power steering, sewing machines, washing machines, air conditioners, lawn mowers and power tools

Item #	Container Size	Pack	Old P/N
80073	16 oz. aerosol can, 12 oz. net wt.	12	120DA
80074	6 oz. aerosol can. 5 oz. net wt.	12	120GA





### Permatex® Anti-Seize Lubricant

A highly refined blend of aluminum, copper and graphite lubricants. Use during assembly to prevent galling, corrosion and seizing due to weathering or chemicals. Anti-Seize assures easier disassembly. Temperature range: -60°F to 1600°F (-51°C to 871°C). Salt, corrosion and moisture resistant – ideal for marine use. Non-aerosol version meets Mil Spec #907E. Aerosol - Level 3

Suggested Applications: For easy removal of spark plugs, cylinder head and exhaust head bolts; apply to anchor pins on brake assemblies, u-bolts and spring bolts, hinges, gears, chain, sprockets and rollers

### **OEM INTERCHANGE, see pgs. 84-89**

Item #	<b>Container Size</b>	Pack	Old P/N	Item #	<b>Container Size</b>	Pack	Old P/N
81343	1 oz. tube, carded	12	133AR	80208	16 oz. brush-top bottle	12	767
80071	4 oz. bottle	12	_	80206	1gallon pail	4	_
80078	8 oz. brush-top bottle	12	133K	09975*	4 g pouch	480	_
81464	12 oz. aerosol can,	12	133MA	* See also pa	ge 35.		
	8.5 oz. net wt.						



### Permatex® Copper Anti-Seize Lubricant

A premium quality copper anti-seize and thread lubricant that may be used to prevent seizing, corrosion and galling where high temperature conditions exist. Contains a high percentage of micro-fine copper flakes in a semi-synthetic grease carrier and is fortified with high quality rust and corrosion inhibitors. Temperature range: -30°F to 1800°F (-34°C to 982°C). Provides

good electrical conductivity. Meets Mil Spec #907E.

**Suggested Applications:** Spark plug threads installed in aluminum, exhaust manifold bolts, engine bolts, oxygen sensors, knock sensors, thermostat housing bolts, and fuel filter fittings

Item #	Container Size	Pack
31163	16 oz. brush-top bottle	12
09128	8 oz. brush-top bottle	6



### **Permatex® Nickel Anti-Seize Lubricant**

Protects metal parts from seizing and galling at temperatures up to 2400°F (1316°C). It is recommended where copper contamination must be avoided, under conditions of extreme pressure and temperature, and with stainless steel, titanium and nickel alloys.

Suggested Applications: Exhaust manifold bolts, exhaust system bolts, muffler clamps and tailpipe assemblies

Item #	Container Size	Pack	Old P/N
77124	8 oz. brush-top bottle	12	771
77164	16 oz. brush-top bottle	10	





### Lubricants

### Specialty Lubricants — Brake Lubes

### A lubricant that handles extreme heat and lasts throughout the life of the pad....



Permatex® Ceramic Extreme Brake Parts Lubricant

A 100% synthetic formula, coupled with real ceramic solids make this premium brake lubricant our longest

lasting, most temperature resistant way to silence brake noise. Effective from -50°F to 3000°F (-46°C to 1649°C), this product maintains its lubricating integrity under the most extreme conditions. Resistant to corrosion and contaminants, it will not wash out.

**Suggested Applications:** Disc brake caliper hardware, bushings, pistons, rubber sleeves and seals

Item #	<b>Container Size</b>	Pack
24125	8 fl. oz. brush-top bottle	6
24124	8 g (2-4 g pouches), carded	6
09973*	4 g pouch	480

\* See also page 35.







### Permatex® Ultra Disc Brake Caliper Lube Hi-Temp Silicone Formula

A silicone-based synthetic lubricating compound with outstanding temperature resistance. Fortified with moly for superior performance in high pressure conditions, this product provides continuous lubrication and has no dropping point. Temperature range -65°F to 550°F (-54°C to 288°C) intermittent. Maintains a grease-like consistency and will not liquefy, even at extreme temperatures.

**Suggested Applications:** Disc brake caliper pins, slides, bushings, pistons and rubber sleeves

Item #	<b>Container Size</b>	Pack
24115	8 fl. oz. brush-top bottle	6



### Permatex® Ultra Disc Brake Caliper Lube

An environmentally-friendly, green, non-melting, synthetic lubricant. It is

formulated to lubricate under the most adverse brake conditions, assuring that critical caliper pins, sleeves, bushings and pistons remain lubricated throughout pad life.

### **Suggested Applications:**

Caliper pins, sleeves, bushings and pistons

Item #	Container Size	Pack
85188	.5 oz. tube	6
20353	2 oz. tube with nozzle	6
20356	10 g (2-5 g pouches), carded	6
24110	8 fl. oz. brush-top bottle	6
09977*	4 g pouch	480

<sup>\*</sup> See also pages 35 & 45.

### Permatex® Disc Brake Quiet



### shims. Aerosol - Level 3 ▲ Suggested Applications:

Automotive disc brakes, outboard and inboard pads for disc braking systems, disc brake pads without anti-squeal shims

brake pads not having anti-squeal

Item #	Container Size	Pack	Old P/N
80729	.5 fl. oz. (225 fl. oz. pouches), carded	12	126VR
80077	12 oz. aerosol can, 9 oz. net wt.	12	127MA
See also page 45.			



### Specialty Lubricants



### Permatex® Dielectric Tune-Up Grease

Protects electrical connections and wiring from salt, dirt and corrosion. Extends the life of bulb sockets. Prevents voltage leakage around any electrical connection. Also prevents spark plugs from fusing to boots. Required for modern high energy ignition systems.

Suggested Applications: Marine and automotive electrical connections, spark plug boots, and trailer hitches

Item #	<b>Container Size</b>	Pack	Old P/N
81150	.33 oz. tube, carded	12	67VR
81153	3 oz. Power Can,	6	_
	stand-up carded		
22058	3 oz. tube, carded	6	_
09980*	4 g pouch	480	_





### Permatex® Tune-Up Kit

Easy-to-use, two-part kit contains both Dielectric Grease and Anti-Seize Lubricant. Dielectric Grease protects spark plug boots and electrical connections from corrosion, while extending the life of rotor caps in all modern vehicles. Anti-Seize Lubricant is used on spark plugs before installation to prevent thread damage and allow for easy removal of spark plugs later.

**Suggested Applications:** Electrical connections, spark plug boots, rotor caps

Item #	Container Size	Pack
26984	.33 oz. tube &	6
	18 oz pouch carded	

See also page 36.



### Permatex® Bulb/Lamp & Electrical Connector Dielectric Grease

Increases performance and extends service life of bulbs and lamps by preventing voltage leakage and protecting electrical connections from moisture, dirt and corrosion. Great lubricating properties ease the disassembly process. Protects rubber, plastic, ceramic and metal surfaces.

Suggested Applications: Headlamps, lighting bulbs for: instrument panel, glove compartment, inside door trim, interior courtesy lamps, parking & turn signals, brake lights, license plate lights,

trunk and hood lamps; also for fuses, ignition components and other electrical connections.

Item #	<b>Container Size</b>	Pack
31824	.10 oz.dose, carded	12
	0.7	

See also page 37.



### Permatex® Ultra Slick™ Engine Assembly Lube

Proper lubrication of metal mating surfaces is essential prior to starting a new or rebuilt engine. Ultra Slick™ adheres to component surfaces to prevent scuffing and galling during initial start-up. This high quality formulation meets or exceeds OEM performance specs for engine assembly lubricants.

**Suggested Applications:** Engine bearings, camshafts, lifters, valves, guides and rocker shaft assemblies

Item #	Container Size	Pack
81950	4 oz. bottle	12



A slick way to maintain your 5th wheel. Designed by a trucker for a trucker. Simply place one envelope on each side of king pin on trailer or on each side of fifth wheel plate near the base. Lubricant pouch will burst upon engagement between tractor and trailer.

### Permatex® Fifth Wheel Lubricant

Effectively and conveniently lubricates 5th wheel top plates. Premeasured grease comes in handy pouch, requires no tools, creates no mess. Packaging disintegrates leaving no waste. Graphite lubricant designed for heavy duty applications and effective at extreme temperatures and environmental conditions.

Suggested Applications: All Fifth Wheel applications, sliding and oscillating to all vehicle types

Item #	Container Size	Pack
01010	60pk display carton	4
01020	350nk bulk carton	1







### Permatex® Pro-Strength Brake & Parts Cleaner

Aggressively penetrates, dissolves, and removes oil, grease, and brake fluid. Dries fast with no residue. Developed for brake professionals. Contains no ODCs. Level 1

\_ . . . . .

**Suggested Applications:** All brake systems, C.V. joints, machinery, tools, farm equipment

Item #	Container Size	Pack
82606*	20 oz. aerosol can,	12
	19 oz. net wt.	
26630*	24 oz. aerosol can,	12
	23.75 oz. net wt.	

<sup>\*</sup> Not for sale or use in the states of California and New Jersey.



### Permatex® Non-Chlorinated Brake & Parts Cleaner

Penetrates, dissolves and removes dirt and oil from brake systems and metal parts. Safer for aluminum. Leaves no contaminant-attracting residue or chlorinated solvent run-off. Helps manage EPA halide limits. Level 3 ▲

**Suggested Applications:** All brake systems, C.V. joints, machinery, tools, farm equipment

ltem #	<b>Container Size</b>	Pack
82220*	20 oz. aerosol can,	12
	14.5 oz. net wt.	
82450**	20 oz. aerosol can,	12
	14.5 oz. net wt.	

<sup>\*</sup> Not for sale or use in the state of California.



<sup>\*\*</sup> VOC compliant in all 50 states.



### **NEW!** Permatex® Eliminator® III Engine Degreaser

New formula contains no petroleum distillates.
Foaming action quickly dissolves and removes grease, oil and dirt from all types of equipment.
Cleans iron, steel, aluminum, magnesium and copper.
Not harmful to metal, rubber, plastic, or concrete.
Rinses off easily with water. Level 3 ▲

**Suggested Applications:** Engines, garage floors, tools, machinery

Item #	Container Size	Pack	Old P/I
80043	20 oz. aerosol can,	12	48TA
	15 oz. net wt.		



### Permatex® Motor Muscle® Throttle Body, Carb & Choke Cleaner

**OEM certified.** A blend of solvents specifically formulated to dissolve and clean the residue deposited on carburetors and chokes during the normal operation of a motor vehicle or other gasoline engine-powered equipment. High pressure spray cuts and removes grease and varnish. VOC compliant in all 50 states. Oxygen sensor-safe. Improves engine performance. Level 3 ▲

**Suggested Applications:** Manual and automatic chokes, baffle plates, air intakes, carburetors, linkages, throttle bodies, heat risers, PCV valves

Item #	Container Size	Pack
80279	16 oz. aerosol can,	12
	12 oz. net wt.	



### Permatex® Carburetor & Parts Cleaner

Excellent cold parts immersion cleaner. Removes grease, gum, varnish, paint and barrel carbon from carburetor assemblies and all metal parts. Works on all types of engines and equipment.

Suggested Applications: Removes gum and deposits on throttle plates or choke plates; removes grease from all metal parts

Item #	<b>Container Size</b>	Pack	Old P/N
82580	3.5 gallon pail with dip basket	1	46YB





### **NEW!** Permatex® Heavy Duty Aluminum Radiator Flush

Removes rust, oxidation and scale deposits from automotive engines, radiators and water jackets. Improves cooling system's operation. Mild, organic acids clean coils and boiler tubes, effectively removing radiator rust and scale deposits. Noncorrosive formula, ideal for passenger car and light duty truck use.

### Suggested Applications: Engines, aluminum radiators,

water jackets, industrial and maintenance applications

Item #	<b>Container Size</b>	Pack
80032	22 fl. oz. plastic bottle	12



### Permatex® Heavy Duty Radiator Cleaner

Removes rust and scale from automotive engines, radiators and water jackets. Cleans and unclogs steam cleaner coils and boiler tubes. Not for use in aluminum radiators.

**Suggested Applications:** Engines, radiators, water jackets, industrial and maintenance applications

Item #	Container Size	Pack	Old P/N
80030	1 qt. plastic bottle	12	18E

▲ NFPA Fire Code 30B



leaners

### Specialty Cleaners



### **NEW!** Permatex® SaferScraper™ Plastic Scraper

A safer alternative to metal razor blades... this specially designed hard plastic double-edged razor blade can be used for a variety of cleaning and scraping applications. Ideal for removing decals, bugs, tar and paint without scratching or harming the body paint underneath. Also great for removing gaskets from a plastic or aluminum flange. The durable plastic holder is designed to fit well in the hand for extra flexibility and fits standard metal razor blades if the job requires it.

Suggested Applications: Removes solvent-based sealants, baked-on gaskets, weatherstrip adhesive, dried oil, grease and paint

P/N	Container Size	Pack	
80190	scraper & 2 refillable blades, carded	12	

See also page 16. Ideal for use with Permatex® Decal & Adhesive Remover on this page and Permatex® Gasket Remover on page 16.



### **Permatex® Battery Cleaner**

Spray it on and wash corrosion off. Works in just three minutes. Penetrates and removes corrosion, dirt and grime instantly. Cleans all types of storage batteries and attachments in emergency power supply systems. Level 1 ▲

Suggested Applications: Automotive, marine, farm machinery and motorcycle batteries, cables, and terminal connections

Item #	<b>Container Size</b>	Pack	Old P/N
80369	6 oz. aerosol can,	12	SA-8
	5.75 oz. net wt.		

See also page 37.



### Permatex® Rust Dissolver Gel

Chemically dissolves rust from all iron and steel surfaces. Brush or spray on, wash off rust with cloth. Replaces sanding and scraping.

**Suggested Applications:** Iron and steel surfaces on cars, trucks, motorcycles

Item #	<b>Container Size</b>	Pack	Old P/N
81756	8 fl. oz. bottle	12	NJ-1A
82138	12 fl. oz. trigger	6	
	sprav bottle		

See also page 38.



### **NEW!** Permatex® Decal & Adhesive Remover

This fast-acting formula quickly removes adhesive residue, decals, bumper & window stickers, tape, tar, sap, bugs, grease, and other sticky substances. This versatile adhesive remover contains no acetone and is safe for use on virtually any surface including windows, auto body paint, bumpers, vinyl, leather, fabric, metal, plastic, and wood. VOC compliant, its pleasant citrus scent is safe for indoor use. Level 1

Suggested Applications: Cars, trucks, motorcycles,

trailers, snowmobiles, waverunners, atvs, boats, helmets, tools, equipment, and appliances.

Item #	Container Size	Pack
80025	6 oz. aerosol can, 5 oz. net wt.	12

Ideal for use with Permatex® SaferScraper.™



### **NEW!** Permatex® Electrical Contact & Parts Cleaner

Suited for cleaning electrical and electronic devices, this fast evaporating, noncorrosive cleaner leaves no residue. It removes grease, dirt, oil, flux and other surface contaminants. Designed to be an alternative to CFC-113, 1,1,1-trichloroethane and perchloroethylene solvents. Level 1

**Suggested Applications:** Electronic parts: circuit boards, computer components, relay switches, etc. Electric parts: electric motors, generators, starters, pumps, motor windings, solenoids, compressors, etc.

Item #	<b>Container Size</b>	Pack
82588	16 oz. aerosol can,	12
	11 oz not wt	

VOC compliant in all 50 states.



### Permatex® Paint Stripper

Quickly strips and removes unwanted paint from metal surfaces. Eliminates costly and time-consuming sanding and scraping. Works in 10-15 minutes at temperatures from 40°F to 100°F (5°C to 38°C). Level 2 ▲

Suggested Applications: Various types of paint

Item #	<b>Container Size</b>	Pack	Old P/N
80577	16 oz. aerosol can,	12	161DA
	12 oz. net wt.		



### Specialty Cleaners



### Permatex® Fast Orange® Glass & Multi-Surface Cleaner

A professional strength aerosol made with our original "no-streak, non-runny orange scented formula" that cleans and deodorizes practically any surface. Can be used on a wide variety of surfaces. Level 1 **Suggested Applications:** Glass, stainless steel, aluminum, chrome, vinyl, plastic, enamel, laminate and more. Safe for use on film-tinted windows.

and more care for doc on min annount and		
Item #	<b>Container Size</b>	Pack
25544	20 oz. aerosol can,	6
	18.75 oz. net wt.	



### **NEW!** Permatex® Wiper Restore™

A quick and easy solution to keep your wipers in top performing condition. Wiper Restore is a water-based, silicone emulsion formula with a special surfactant to aid in the cleaning, softening, and conditioning of wiper blade

rubber. This increases flexibility and helps to minimize various wiper performance issues, such as, chatter, streaking, and skipping. This special formula is alcohol and petroleum free, so it will not deteriorate blade rubber.

Suggested Applications: Windshield wipers

 Item #
 Container Size
 Pack

 16050
 1.25 g pouch (48 pouches in 1 display box)
 1

\* See also page 45.



### Absorbent / Spill Containment / Spill Cleanup



### Permatex® PermaSorb™ Multi-purpose Cellulose Absorbent

The clay alternative...several times more absorbent than clay. Safely absorbs all liquids including oil, coolant, ATF, brake fluid, paint and solvents on contact. It effectively turns spills from liquid to solid. Made from 100% reclaimed unbleached wood cellulose fiber. Contains no carcinogens that may cause respiratory hazard making it safe for user to handle. Biodegradable fibers lock liquids to prohibit leeching into soil. Absorbs coolant better than alternatives. Light product weight makes package handling easy to use. Environmentally friendly, it can be disposed in a landfill or by incineration or bioremediation.

Suggested Applications: Spills on garage floors, shop floors, driveways, sidewalks

Item #	<b>Container Size</b>	Pack
38490	15 lb. bag	1





**NEW!** Spray Nine® Brand Cleaners

The most versatile power tool for cleaning, disinfecting, deodorizing, and degreasing...all in one convenient formula!

### Spray Nine® Multi-Purpose Cleaner & Disinfectant

The original...first ready-to-use spray cleaner for fast cleanup, degreasing and automotive detailing. This water-based cleaning solution contains no petroleum solvents. USDA approved, it safely cleans and degreases, as well as disinfects surfaces from harmful viruses, germs and bacteria. It removes dirt, mud, road film, bug splatter, grease, oil, brake dust, tar, light rust, ashes, soot, silt, smoke stains, carpet stains, mildew stains, mold, carbon deposits, fresh paint, fingerprints, and more! Also helps control mold and mildew, destroys bacterial odors and reduces cross contamination of germs.

**Suggested Applications:** Vinyl, plastics, rubber, tires, bumpers, convertible tops, dashboards, upholstered seats, consoles, steering wheels, interiors, mats, engines, tools, toolboxes, equipment, garbage pails, countertops, keyboards, workbenches, vinyl siding, showers, and more



Item #	<b>Container Size</b>	Pack
26825	25 oz. trigger spray bottle	12
26832	32 oz. trigger spray bottle	12
26810	34 oz. trigger spray bottle	12
26801	1 gallon capped bottle	6
26805	5 gallon pail	1
26815	15 gallon drum	1
26830	30 gallon drum	1
26855	55 gallon drum	1

Scan QR Code to go directly to SprayNine.com









### Spray Nine® Grez-Off® Heavy Duty Degreaser



A biodegradable, water-based cleaner that effectively removes heavy duty grease, dirt, fifth wheel grease, lubricants, oil, hydraulic fluid, grime, heavy molly grease, tar and more! Nonflammable, no fumes, no abrasives, no acids. USDA approved and VOC compliant in all 50 states.

**Suggested Applications:** Engines, machinery, tools, workbenches, garage floors/walls, asphalt, stainless steel, chrome, condenser coils, exhaust hoods

Item #	Container Size	Pack
22732	32 fl. oz. trigger spray bottle	12
22701	1 gallon capped bottle	6
22705	5 gallon pail	1
22755	55 gallon drum	1



### **NEW!** Spray Nine® Brand Cleaners



### Spray Nine® Earth Soap® Concentrated Cleaner

An environmentally friendly, biodegradable industrial strength cleaner/degreaser. A bio-based safe alternative to solvent and caustic cleaning products. Removes dirt, grease, carbon, oil, adhesives, soot, smoke, stains, and more!

Suggested Applications: Vehicles, engines, machinery, tools, workbenches, garage floors/walls, metal/plastic parts, kitchen appliances, bathroom fixtures, etc.

Item #	<b>Container Size</b>	Pack
27932	34 fl. oz. trigger spray bottle	6
27901	1 gallon bottle	6
22905	5 gallon pail	1
22955	55 gallon drum	1



### Spray Nine® Non-Butyl Cleaner/Degreaser

An environmentally smart cleaner, discover "consideration without compromise" on product quality. Non-Butyl packs Spray Nine's performance into a biodegradable formula that is compliant with VOC regulations and SARA Title III Act.

**Suggested Applications:** Tough grease, adhesives, lubricants, fresh paint, smoke deposits, light rust, fingerprints & more.

Item #	<b>Container Size</b>	Pack
87732	32 oz. trigger spray bottle	12
87701	1 gallon capped bottle	4
87705	5 gallon pail	1
87755	55 gallon drum	1



### Spray Nine® BBQ Grill Cleaner

This cleaner does double duty as a heavy-duty cleaner and a hard surface disinfectant. Easily dissolves grease, fat & burned-on food for quick cleanup with less effort. Also kills food born germs that contaminate food preparation surfaces, including Salmonella and E.coli in just 45 seconds.

**Suggested Applications:** BBQ grills, propane tanks, countertops, stainless steel, painted surfaces, BBQ covers, ceramic and tempered glass.

Item #	<b>Container Size</b>	Pack
26706	25 fl. oz. trigger	6
	spray bottle	



### Spray Nine® Citrus Blaster™ Heavy Duty Bug, Tar & Asphalt Remover

A bolt of true citrus power. Charged with 25% d'limonene - a pure, powerful solvent. This formula instantly dissolves and lifts away stubborn soils and contains no petroleum solvents.

Fresh orange scent. Level 1 ▲

Suggested Applications: Grease, adhesives, carbon based soils, tar, road film, pitch, asphalt, oil, automotive grease, kitchen grease, and fresh paint; concrete floors, tile, chrome, engines, glass, chassis, painted automotive surfaces, vinyl siding, tools, driveways, cook stoves, range hoods and filters.

Item # Container Size		Pack
15717	17.5 oz. aerosol can	12



### Spray Nine® Professional Strength Glass & Stainless Steel Cleaner

Glass & Stainless Steel Cleaner's clinging action works great even on vertical surfaces to remove dirt, soil, dust, fingerprints & smudges, light grease and more! The ideal way to bring out the sparkling shine hidden in every glass or metal surface without harmful Chlorofluorocarbons (CFC's). Leaves behind a refreshing lemon scent. Level 1 A

Suggested Applications: Windows, mirrors, windshields, sinks, faucets and more! Ideal for industrial, institutional, automotive, food service and household applications

Item #	<b>Container Size</b>	Pack
23319	19 oz aerosol can	12



### Spray Nine® Gloss Car Wash™

Let Gloss Car Wash's affordable suds make any car look like it just came off the lot! The paint job shows through like new with sparkling gloss and deep color as dirt and road film rinse away. Dilution ratio: 1:240

**Suggested Applications:** Dirt, grime and road film on cars, trucks, RV's, trailers and ATV's

Item #	Container Size	Pack
21101S	1 gallon capped bottle	6
21105	5 gallon pail	1
21155S	55 gallon drum	1



### **Maintenance & Performance Additives**



THE ORIGINAL HORSEPOWER IN A BOTTLE!

NOS® Automotive Chemicals from Permatex® achieve notable performance gains through the use of unique chemical blends and race proven technology. NOS® Automotive Chemicals employ proprietary chemistries to enhance performance, and engine life. NOS® chemistries will boost octane, clean components, and optimize engine efficiency. It is this commitment to quality, proven effectiveness, and performance history that has made NOS® a name that is synonymous with performance.

Introduction



# laintenance & Performance Additives

### Octane Boosters



### NOS® Max Street™ Octane Booster

NOS maximum performance for the street was developed to increase octane effect up to 30 points or 3 octane numbers. Blended with the strongest MMT concentration allowed by law for street use. Also contains our unique performance-enhancing Powertane. Restores and improves horsepower. Improves gas mileage, eliminates knocks, pings, and hesitation. Protects against carbon deposits in the fuel injectors and combustion chamber.

P/N	<b>Container Size</b>	Pacl
12003	16 fl. oz. bottle	6





### NOS® Octane Booster Racing Formula

NOS performance for the serious racing enthusiast. Developed to increase octane effect up to 60 points or 6 full octane numbers. Blended with MMT and our performance-enhancing Powertane, along with Nitro Methane and unique lubricants specially developed for high performance engines.

Item #	<b>Container Size</b>	Pack
12010	12 fl. oz. bottle, boxed	6





### Cleaners



### **NOS® Complete Fuel System Cleaner**

NOS performance and cleaning for your fuel system. Uniquely formulated to provide maximum cleaning for your entire fuel system, and carbureted and fuel injected engines. Includes NOS's uniquely blended performance-enhancing Powertane.

Item # Container Size		Pack
12203	16 fl. oz. bottle	6






### NOS® Fuel Injector Cleaner and Performance Enhancer

NOS performance and cleaning for your fuel injected engines. Restores lost horsepower, cleans fuel injectors and also provides additional performance with NOS's unique Powertane formula.

Item #	<b>Container Size</b>	Pack	
12103	16 fl. oz. bottle	6	









### Appearance Products Introduction



### pearance Products

### Tire Care



### No Touch® Original Tire Care

This original tire foam established the onestep tire care category. In one easy step, No Touch® Tire Care cleans, shines, and protects your tires. No wiping, no rubbing, no dirty rags. It leaves a rich, satin finish and a protective barrier that prevents surface cracking and discoloration while helping to repel dirt, dust and moisture. Level 1 A

Suggested Applications: Blackwall tires

ouggootou Applioutiono: Diaoittian tiroo			
Item #	<b>Container Size</b>	Pack	Old P/N
23549	18 oz. net wt.	6	NTBP15-6
	aerosol can		
23579	21 oz. net wt.	6	NT21-6

aerosol can



### No Touch® High Shine Tire Care

New and improved High Shine Tire Care provides twice as much shine as the old High Shine formula. The patented formula deep cleans and protects while leaving a long lasting high gloss shine. Guards against premature cracking by providing the maximum level of UV and ozone protection. No wiping, no rubbing, no mess. Just spray and walk away. Level 1 🛦

Suggested Applications: Blackwall tires

Item #	<b>Container Size</b>	Pack	Old P/N
36052	21 oz. net wt.	6	NTHS21-6
	aerosol can		

### Tire Dressings



### **NEW!** No Touch® Turbo Wet™ **Longer Lasting Tire Shine**

A high-tech formula developed to bring your tires a more durable longer lasting extreme high gloss wet finish. Lasts up to 4 times longer than leading aerosol tire shines and withstands exposure to rainfall and car wash. Self-healing formula retains finish even after light scuffing. Precision sprayer helps to minimize overspray. Protects tires from UV damage, ozone and cracking. Level 3 A

Suggested Applications: Blackwall tires

ltem #	Container Size	Pack	Old P/N
36071	12 oz. net wt.	6	NTTW12-6
	aerosol can		





### No Touch® Seriously Wet™ **Extreme Tire Shine**

Serious tire shine for serious car enthusiasts! Our wettest tire shine sprays on wetter for an exceptionally lasting ultra high-gloss "wet" finish. Provides tires with an irresistibly rich deep black shine. Protects tires from UV and ozone damage. Level 3 ▲

Suggested Applications: Blackwall tires

Item #	Container Size	Pack	Old P/N
36098	15 oz. net wt.	6	NTSW15-6
	aerosol can		



### No Touch® Wet'N'Protect™ "Wet" Tire Finish

Our all-around premium "wet look" formula provides an ultra high-gloss finish. Protects against dirt, dust and ozone damage. Streak-free, guaranteed. Prevents cracking and swelling. Level 3 A

### **Suggested Applications:**

Blackwall tires

Item #	Container Size	Pack	Old P/N
36051	15 oz. net wt.	6	WPBP15-
	aerosol can		





### **Appearance Products**

### Wheel Cleaner



### No Touch® All Wheel Care® Wheel Cleaner

All Wheel Care® cleans, shines and protects wheels. This unique foaming formula loosens road grime and brake dust for easy removal, while adding a gorgeous shine and a protective barrier. Just rub, rinse and buff. Contains no acids. Level 1 ▲

Suggested Applications: All wheels, rims and hubcaps

Item #	<b>Container Size</b>	Pack	Old P/N
36053	20 oz. net wt.	6	AWC20-6
	aerosol can		



### Plastic, Glass, and Surface Care



### No Touch® Perfect Plastic™

A premium plastic cleaner and polish that cleans without scratching to produce a smooth lustrous finish on clear and pigmented plastic surfaces. Excellent for removing fine scratches, oxidation, yellowing, insects, and grime. Forms a water repellent, anti-static shield that resists fogging. Safely cleans Plexiglas™ acrylic glass, LEXAN® (polycarbonate) and fiberglass surfaces. Suggested Applications: Motorcycle and boat

windshields, convertible top windows, fiberglass hulls, headlights, goggles, helmets, lenses, display cases, polished metals, stainless steel,

plus other automotive, motorcycle, RV, powersports, marine and home surfaces.

Item # Container Size		Pack
80185	16 fl. oz. trigger spray bottle	6



### No Touch® Auto Glass Stripper®

A heavy-duty cleaner specially formulated for auto windshields. It removes silicone build-up, hard water stains, mud, oil, bugs, and tar that other cleaners cannot.

**Suggested Applications:** All cars, trucks, vans, RVs (Also use as a periodic pre-treatment before using No Touch® Rain Shield®)

ltem #	Container Size	Pack	Old P/N
95208	8 fl. oz. bottle	12	GS8-12



### **NEW!** No Touch® Screen Clean Kit

Increase the clarity and lifespan of your personal electronics. This safe and effective, non-streak, gel spray formula helps clean troublesome dirt, grease, and dust quickly and thoroughly. The gentle optical grade polishing cloth and retractable detailing brush help wipe away any unwanted residue safely for a scratch free surface. This is the ideal solution to keep your electronics in top performing condition. Alcohol and ammonia free.

**Suggested Applications:** Plasma screens, HDTV screens, LCD, computer, laptop, camera,

projector lenses, copier & scanner glass, cell phones, touch screens, instrument panels, GPS devices & more!

Item #	Container Size	Pack
36045	clamshell kit	10



### No Touch® Instant Rainshield® Windshield Coating

A revolutionary formula that improves visibility with hands-free application. Spray on in rainy conditions and apply using the wipers. Forms an instant coating on windshields to repel rain, sleet and snow. Raindrops bead off windshield above 35 mph. Great for highway driving. Level 2

Suggested Applications: All cars, trucks, vans, RVs and boats (Use on glass, polycarbonate and LEXAN®)

Item #	Container Size	Pack	Old P/N
93106	6 oz. net wt.	12	RS6-12
	aerosol can		



### Interior Care



### **NEW!** No Touch® Interior Detailing Mousse Cleaner/Protectant

Quickly and easily cleans and restores a rich luster to vinyl, plastic and rubber surfaces. This unique mousse formulation allows for easier application control by distributing a rich, satin finish on interior surfaces with no mess, drips, streaks, or overspray. Designed to







provide longer lasting protection, this premium formula has a pleasant scent and leaves surfaces with a non-greasy, film-free shine that keeps car interiors looking like new. Formula also features UV protectant and anti-static dust repellent.

Suggested Applications: Interior surfaces, vinyl, polypropylene, rubber, dashboards, consoles, door panels

Item #Container SizePack3604011 oz. aerosol can6

### Engine Care



### **NEW!** No Touch® Engine Detailing Kit

No Touch outperforms the all-in-one competition with a complete kit that will maintain that "like new" appearance while keeping parts in good working order. Car enthusiasts know — a clean engine is a well-maintained engine. This two-step system, Heavy Duty Engine Degreaser and Shine'N'Protect™ Engine Detailer offers safe and powerful formulas that properly clean, shine and protect under-the-hood components while achieving a detailed appearance.

**Suggested Applications:** All metal, plastic and rubber under the hood components

Item #	<b>Container Size</b>	Pack
36050	2-15 oz. aerosol cans, bundled	6



Prior to using the No Touch® Engine Detail Kit, this engine and its components had a buildup of grease, grime, dirt and dust.



After using No Touch's two-step system, the engine appears clean and is enhanced by a long lasting protective finish.





### Permatex® Hand Cleaner Reference Chart

Cleaning Requirements	Recommended Permatex Product	Type Of Grit	Cream/Lotion	Biodegradable	Type Of Solvent
Heavy Duty Soils					
***	Ultra Cherry® Pumice Hand Scrub Trounce® Pumice Hand Cleaner Grease Grabber® Hand Cleaner	Pumice Pumice Poly Scrubbers	Lotion Cream/Lotion Paste	No No No	Petroleum Petroleum –
Heavy Duty Soils (Paint, Re	esin Type Soils)				
# # #	Parr® Painter's Clean™ Hand Cleaner	Pumice	Lotion	Yes	Esters
Heavy to Medium Duty Soi	ls				
	Fast Orange <sup>®</sup> Pumice Hand Cleaner Fast Orange <sup>®</sup> Dry Skin Formula Fast Orange <sup>®</sup> Wipes	Pumice Pumice —	Cream/Lotion Lotion —	Yes Yes —	Natural Citrus Natural Citrus Natural Citrus
Medium Duty Soils					
	Fast Orange® Smooth Hand Cleaner Blue Label™ Hand Cleaner Fast Orange® Bar Soap	– – Pumice	Cream/Lotion Cream —	Yes No –	Natural Citrus Petroleum —



### Waterless Hand Cleaners



### Permatex® Fast Orange® - Fine Pumice and Smooth Lotion Hand Cleaner

The #1 selling, biodegradable, waterless, petroleum solvent-free hand cleaner that contains no harsh chemicals, petroleum solvents or ammonia that can sting cuts or abrasions. Pure, fresh-smelling natural citrus power does the cleaning. Fortified with aloe, lanolin, glycerin, and other skin conditioners to soothe raw, rough hands. Fine Pumice or Smooth Formula gently deep cleans the toughest dirt. Works great on laundry stains (smooth lotion only), scuff marks, tile floors, pet odors and many other household cleaning needs.

Suggested Applications: Resins, oil, grease, tar, grime, soil, printers' ink, epoxies, paint, rubber cement, gasket and tile cements

Item #	Container Size	Pack	Item #	Container Size	Pack
23108	smooth, 7.5 fl. oz. bottle	12	25108	pumice, 7.5 fl. oz. bottle	12
23113	smooth, 15 fl. oz. Brush-Up™ bottle	12	25113	pumice, 15 fl. oz. Brush-Up™ bottle	12
23116	smooth, 15 fl. oz. squeeze bottle	6	25116	pumice, 15 fl. oz. squeeze bottle	12
23217	smooth, 1/2 gallon bottle with pump	6	25217	pumice, 1/2 gallon bottle with pump	6
23218	smooth, 1 gallon low profile bottle with pump	4	25219	pumice, 1 gallon low profile bottle with pump	4
23104†	smooth, 1 gallon flat-top bottle	4	25104†	pumice, 1 gallon flat-top bottle	4
	95140 Universal Dispenser - see page 68. wire bracket also available for gallon bottles - see page 68		23507	pumice, 3 oz. tube (Merchandising clip strip included!)	24

### **Permatex® Fast Orange® Cream Hand Cleaner**

A cream version of our #1 selling Fast Orange® Lotion Hand Cleaner. Pure, fresh-smelling, natural citrus power cleans deep down to remove even the most stubborn grease and grime. Readily biodegradable, non-toxic and petroleum solvent-free, Fast Orange® Cream was formulated for those who prefer a thicker consistency hand cleaner. Fortified with premium skin conditioners, Fast Orange® is the choice for working hands. Also works great on laundry stains, pet odors

and many other household cleaning needs.

Suggested Applications: Resins, oil, grease, tar, grime, soil, printers' ink, adhesives, paint, scuff marks along with gasket and tile cements.

Item #	Container Size	Pack
35013	pumice, 14 oz. plastic tub	12
28192	pumice, 28 oz. plastic tub (bonus pack)	12
35406†	pumice, 4.5 lb. container	6
33013	smooth, 14 oz. plastic tub	12
33406†	smooth, 4.5 lb. container	6
† For use with 9	95140 Universal Dispenser - see page 68.	



### **Hand Cleaners**

### Waterless Hand Cleaners



### Permatex® Fast Orange® Dry Skin Hand Cleaner

Developed specifically for professional automotive technicians, Fast Orange® Dry Skin Formula helps reduce the symptoms of dry, cracked skin. The natural citrus formula has a unique polymeric skin conditioning system that leaves hands feeling smoother, while it quickly and gently deep cleans the toughest dirt. Biodegradable, petroleum solvent-free and nontoxic, it also contains aloe, lanolin, glycerin & other premium skin conditioners.

Suggested Applications: Resins, oil, grease, tar, grime, soil, printers' ink, epoxies, paint, rubber cement, gasket and tile cements

Item # Container Size		Pack
27218	1 gallon bottle with pump	4



### DL® Permatex® Trounce® Lotion and Cream Hand Cleaner

Pleasantly scented with finely ground pumice for deep scrubbing to remove the most difficult soils. Ideal for removing semi-dried glazes

on hands such as paint and gasket cement.

This fast-acting formula won't irritate hands or leave a greasy residue. Professional strength, contains aloe vera and lanolin to condition skin.

**Suggested Applications**: Oil, grease, tar, grime, soil, resins, printers' ink, epoxies, paint, tile cement and stains, gasket cements and adhesives

Item #	<b>Container Size</b>	Pacl
03406†	4.5 lb. plastic tub, cream	6
21218	1 gallon bottle with pump, lotion	4
† For use wit	h 95140 Universal Dispenser pg. 68.	



### Permatex® Ultra Cherry® Pumice Hand Scrub

A professional strength hand cleaner concentrated to tackle the toughest grease, while conditioning hands.

This premium fine pumice lotion acts quickly to power out the harshest soils without leaving hands feeling greasy or irritated. Great for hard working hands, it contains a unique skin conditioning system that helps to restore moisture and

prevent dry, chapped hands. Its light clean cherry scent is refreshing and contains no petroleum odors. No Kerosene, no Phosphates.

Suggested Applications: Removes grease, grime, tar, adhesives, asphalt, carbon, epoxies, tile cement, oil, paint, odors, ink, and much more!

Item #	<b>Container Size</b>	Pack
21108	7.5 fl. oz. comfort grip bottle	12
21222	102.4 fl. oz. bottle	4



### Permatex® Painter's Clean™ Hand Cleaner

A safer alternative to harsh, drying and potentially toxic solvents and thinners.

Fortified with four premium skin

conditioners, this freshlyscented, fine pumice formula quickly removes the toughest soils. Readily biodegradable\*, nontoxic and nonflammable, Painter's Clean™ Hand Cleaner has the muscle to clean where most

hand cleaners fall short.

Suggested Applications: Stains, varnish, lacquer, urethane adhesives and paints, resins, clear coats, body fillers, primers, oil-based paints, silicones, printer's ink, oil, and grime

Item #	<b>Container Size</b>	Pack
65108*	7.5 fl. oz. bottle	12
65116	15 fl. oz. Brush-Up™ bottle	6
65217	60 fl. oz. with pump	4
* New size		



### **About our Permatex® Brush-Up™ Bottle**

When we surveyed mechanics, they told us that they often have trouble removing deep-down grease and dirt from their hands and around their fingernails. In response, we integrated a bonus Permatex® Nail Brush

featuring multi-level bristles, two nail scrapers, and easy-to-grip ridged sides. The Nail Brush easily reattaches to the bottle

for convenient storage. It comes attached to

our 15 oz. Brush-Up™ bottles of Fast Orange® Pumice Lotion (#25113), Fast Orange® Smooth Lotion (#23113) and Parr® Painter's Clean™ Hand Cleaner, making it quick and easy to thoroughly clean your hands.

See also pages 65 & 66.



### DL® Permatex® Blue Label™ Cream Hand Cleaner

Cream formula waterless hand cleaner. Takes off many difficult to remove substances yet is gentle to hands. Does not leave a greasy feeling after use. The 4.5 lb. can fits most dispensers including Permatex® 95140.

Suggested Applications: Oil, grease, tar, grime, soil, resins, printers' ink, epoxies, paint, rubber cement, gasket and tile cements

Item #	Container Size	Pack	
01013*	14 oz. plastic tub	12	* Now Available with Laundry
01406†	4.5 lb. plastic tub	6	Pre-Stain Formula!

<sup>\*</sup> Biodegradable according to 40 CFR 796.3240 † For use with 95140 Universal Dispenser pg. 68.

### Hand Cleaners — Use with Water



### **NEW!** Permatex® Grease Grabber® Heavy Duty Hand Cleaner

A powerful paste-style hand cleaner formulated with dirt busting "poly" scrubbers that dig out and mop up tough soils. Choose from fresh smelling lemon lime or coconut scents to tackle your dirtiest jobs. It fights foul odors including fuel, oil, lubricant, grease, and much more! Grease Grabber® contains no harsh solvents and is fortified with soothing emollients to keep hard-working hands soft, moisturized, and healthy. Just add a small amount of water to about a tablespoon of Grease Grabber® - a little goes a long way! Pennies per wash economy when dispensed through Poly 500™ Dispenser.

**Suggested Applications:** Grease, oil, hydraulic fluids, glues, adhesives, asphalt, tar, paint, stains, inks

Item #	<b>Container Size</b>	Pack
13112	lemon lime, 12 oz. tub	12
13106†	lemon lime, 4 lb. tub	6
14112	coconut, 12 oz. tub	12
14106†	coconut, 4 lb. tub	6

† For use with 95140 Universal Dispenser pg. 68.





### **Hand Cleaners**

### Bar Soap & Wipes



### Permatex® Fast Orange® Pumice Bar Hand Soap

A new way to clean everyday soils from hands. The large, 5.75 oz. soap bar contains fine pumice for thorough cleaning and leaves hands feeling soft. Ideally suited for the cleaning needs of automotive technicians.

Suggested Applications: Oil, grease, grime, paint & other everyday soils.

Item #	Container Size	Pac
25575	5.75 oz. bars with display carton	24



### Permatex® Fast Orange® Hand Cleaner Wipes


Removes the toughest grease, tar, grime, ink, paints, sealants, adhesives and other difficult soils.
Each pre-moistened wipe has a textured surface on one side that is ideal for cleaning heavy duty soils from hands, tools and work areas. The wipes also have a smooth side for general purpose cleaning.

Suggested Applications: Removes

grease, grime, oils, soil, gasket cement, glues, and inks.

Item #	Container Size	Pack
25025	25-count bucket, wipe (6.125" x 10.5")	6
25072	72-count bucket, wipe (10.5" x 12.25")	6

### Accessories



Item #Container SizePack95140universal dispenser1



### **NEW!** Permatex<sup>®</sup> Spray Nine<sup>®</sup> Poly 500™ Dispenser

Get "pennies per wash" economy out of your Grease Grabber®. The Poly 500™ metered dispensing system delivers the perfect amount of hand cleaner every time! The Poly 500™ can be mounted and features a lockable lid.

**Item # Pack** 71500 1



### Wall-Mounted Wire Bracket

Convenient wall-mounted wire bracket for out-of-the-way storage of your favorite gallon of Permatex® hand cleaner. Designed to fit our standard and low profile gallons (25219, 23218, 27218, 21218, 65217,





### Hand Cleaners

### Hand Cleaner Merchandising/Promotion

### Permatex® Fast Orange® Mini Display

Ideal for aisle ends, automotive, hardware, paint, lawn & garden, and sporting goods departments. Prepacked with skid — just remove shipping carton and you are ready to sell.

Case: 8.75 cu. ft., 235 lbs., 24" x 14" x 45"

Item # Container Size Pack

30058\* 24 x (25219) Pumice, low profile 1

1 gallon bottles with pump

<sup>\*</sup> Made to order or contact your Permatex Sales Representative for details.



### Permatex® Fast Orange® Pumice Cream Hand Cleaner Bonus Pack

Double the cleaning action, this 28 oz. bonus size equals two 14 oz. plastic tubs. Priced to sell!

Item # Container Size Pack

28192 28 oz. plastic tub 12

See also page 65.



### Hand Lotion

### Hands take a beating — Heal them with Permatex® Mechanic's Hand Repair Lotion!



### **NEW!** Permatex® Mechanic's Hand Repair Lotion

Advanced formula smoothes dry, rough, and even cracked skin. Acts as an everyday moisturizer while promoting the healing process of damaged skin caused by physical abuse, grease, and chemicals, etc. Lotion contains rich moisturizing ingredients including aloe vera and vitamin E to help promote healthy skin. It is greaseless and absorbs quickly. Pleasant mild odor.

### **Suggested Applications:**

Use as daily moisturizer, pre-work – use to make clean-up easier, soothing relief – apply to sun and wind burns, cracked hands

Item #Container SizePack3201616 fl. oz. bottle6









### **Hand Protection**

### Disposable & Mechanics Gloves







### NEW!

### Permatex® Black 5 mil Nitrile Disposable Gloves

Nitrile gloves are made from a 100% synthetic rubber that provides superior resistance to a wide range of solvents and hazardous chemicals.\* Nitrile gloves are suitable for users with natural rubber latex sensitivity. They feature textured fingers that provide a secure grip on dirty parts and tools. Our powder-free 5 mil black Nitrile gloves provide increased durability and protection. When superior chemical resistance is required, Black Nitrile Disposable Gloves provide mechanics with ideal heavy-duty hand protection.

**Suggested Applications:** Excellent protection from greases, oil, diesel fuel, acids and many petroleum-based products.

Item #	<b>Container Size</b>	Pack
08184	100-ct. Box - Medium	10 boxes
08185	100-ct. Box - Large	10 boxes
08186	100-ct. Box - X-Large	10 boxes

### **Permatex® Latex Disposable Gloves**

Natural latex gloves are ideal for general automotive and industrial repair work.\* They fit either hand while providing superior manual dexterity. Lightly powdered, the gloves are easy to put on and take off. Each glove features textured fingers that are ideal for gripping dirty parts and tools. Permatex® Latex Disposable Gloves provide comfortable, all-purpose hand protection at an economical price.

**Suggested Applications:** Ideal for all mechanical repairs that do not require extensive chemical resistance.

Item #	Container Size	Pack
09181	100-ct. Box - Medium	10 boxes
09182	100-ct. Box - Large	10 boxes
09183	100-ct. Box - X-Large	10 boxes

### Permatex® Blue 4 mil Nitrile Disposable Gloves

Nitrile gloves are made from a 100% synthetic rubber that provides superior resistance to a wide range of solvents and hazardous chemicals.\*\* Nitrile gloves are suitable for users with natural rubber latex sensitivity. They feature textured fingers that provide a secure grip on dirty parts and tools. Our gloves are lightly powdered, which makes them easier to put on and take off. When superior chemical resistance is required, Permatex® Nitrile Disposable Gloves provide mechanics with ideal heavy-duty hand protection.

**Suggested Applications:** Excellent protection from greases, oil, diesel fuel, acids and many petroleum-based products.

Item #	Container Size	Pack
09184	100-ct. Box - Medium	10 boxes
09185	100-ct. Box - Large	10 boxes
09186	100-ct. Box - X-Large	10 boxes



### **Permatex® Mechanics Gloves**

Mechanics Gloves safeguard hands from harsh work environments where superior hand protection is required. Designed to offer durable, comfortable protection, the triple layer fabric prevents against nicks, cuts and abrasions.\*\*\* Mechanics gloves are tough and lightweight, and feature an elastic cuff with an adjustable hook and loop closure to ensure a secure fit.

**Suggested Applications:** Ideal for all mechanical repairs that do not require extensive chemical resistance.

ltem #	Container Size	Pack
85305	1 pair - Medium	12 pairs
85310	1 pair - Large	12 pairs
85315	1 pair - X-Large	12 pairs



<sup>\*</sup> This product contains natural rubber latex, which may cause allergic reactions in some individuals.

<sup>\*\*</sup> This product is not intended to protect against all chemical compounds.

<sup>\*\*\*</sup> Does not protect against chemical compounds or hot exhaust systems. Gloves are not fire retardant or flame proof.





YES

Permatex® Sensor-Safe Blue Silicone RTV Gasket Maker

### Item # 80022

Valve covers, water pumps, oil pans, timing covers, thermostat housing. Temperature Range: -65°F to 500°F intermittent




### Permatex® Sensor-Safe High-Temp RTV Silicone Gasket Maker

### Item # 81422

High temperature areas, valve covers, oil pans, timing covers, thermostat housings. Temperature Range: -65°F to 500°F intermittent





びかりり > ラリリテデ









### Permatex® Anaerobic Flange Sealant

### Item # 51531

Water pumps, thermostat housings, transmission pans, transmission case covers, transaxle casings, o-ring replacement. Temperature Range: -65°F to 300°F



### Permatex® Anaerobic Gasket Maker

### Item # 51813

Water pumps, thermostat housings, transmission pans, transmission case covers, transaxle casings, o-ring replacement. Temperature Range: -65°F to 300°F



### Permatex® Sensor-Safe Blue RTV Silicone Gasket Maker

80022 3 oz. tube, carded 80628 11 oz. cartridge 81860 7.25 oz. Power Can 85860 7.25 oz. PowerBead™

### Permatex® Anaerobic Flange Sealant

51531 50 ml tube 51580 300 ml cartridge

### Permatex® Anaerobic Gasket Maker

51817 6 ml tube, carded 51813 50 ml tube, carded 51845 300 ml cartridge

### Permatex® High-Temp RTV Red Silicone Gasket Maker

81160 3 oz. tube, carded 81409 11 oz. cartridge 85915 7.25 oz. PowerBead™ 81915 7.25 oz. Power Can


### Permatex® Sensor Safe High-Temp RTV Silicone Gasket Maker

81422 3 oz. tube, carded

### Permatex® Ultra Copper® Maximum Temperature RTV Silicone Gasket Maker

81878 3 oz. tube, carded



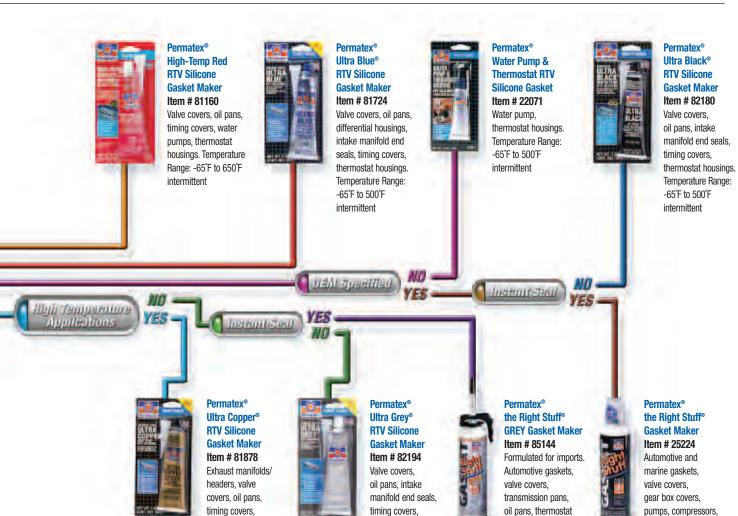

# Permatex® Ultra Blue® Multi-Purpose RTV Silicone Gasket Maker

81724 3.35 oz. tube, carded 85519 9.5 oz. PowerBead<sup>™</sup> 81725 13 oz. cartridge

# Permatex® Water Pump & Thermostat RTV Silicone Gasket

22071 .5 oz. tube, carded

# Permatex® Ultra Grey® Rigid High-Torque RTV Silicone Gasket Maker

thermostat housing,

Temperature Range:

water pumps.

-65°F to 700°F

intermittent

82194 3.5 oz. tube, carded 85084 9.5 oz. PowerBead<sup>™</sup> 82195 13 oz. cartridge<sup>®</sup>

# Permatex® the Right Stuff® GREY Gasket Maker

85144 7.5 oz. PowerBead<sup>™</sup> 34311 5 oz. cartridge 34310 10.1 fl. oz. cartridge

## Permatex® Ultra Black® Maximum Oil Resistance RTV Silicone Gasket Maker

thermostat housings,

transmission pans.

Temperature Range:

water pumps,

-65°F to 500°F

intermittent

82180 3.35 oz. tube, carded 24105 13 oz. cartridge 82080 8.75 oz. Power Can 85080 9.5 oz. PowerBead™ 22072 .5 oz. tube, carded Formulated for imports.

Automotive gaskets, valve covers, transmission pans, oil pans, thermostat housings, water pumps.

Temperature Range:

-75°F to 450°F; 500°F

intermittent

Automotive and marine gaskets, valve covers, gear box covers, pumps, compressors, oil pans, thermostat housings, water pumps.

Temperature Range:

-75°F to 450°F; 500°F

intermittent

# Permatex® the Right Stuff® Gasket Maker

25229 3 oz. Power Can, carded 25223 4 oz. Power Can 25224 7 oz. Power Can 85224 7.5 oz. PowerBead™ 33694 10.1 fl. oz. cartridge 29208 5 oz. cartridge 99070 5 oz. cartridge, 2 pack





## Permatex® High Tack™ Spray-A-Gasket® Sealant

80064 6 oz. aerosol can, 4.75 oz. net wt. 12 oz. aerosol can, 9 oz. net wt. 80065

## Permatex® Hi-Temp RTV Silicone **Gasket Sealant**

22073 .5 oz. tube, carded

# Permatex® Indian Head® **Gasket Shellac Compound**

20539 2 oz. bottle, 12 pack

# Permatex® Hylomar® Universal **Blue Racing Formula Gasket Dressing & Flange Sealant**

7 fl. oz. tube, carded


#### **Permatex® High Tack™ Gasket Sealant**

80062 4 oz. can 80063 16 oz. can

# Permatex® Super High Tack™ **Gasket Sealant**

80060 1.75 oz. tube, carded





## Permatex® Form-A-Gasket® No. 1 Sealant

Item # 80007 Freeze plugs. threaded connections, manifold gaskets Temperature Range: -65°F to 400°F



#### **Permatex®** Tack & Seal™ Sealant

Item # 80938 Air conditioning fuel fittings, radiator hoses, PVC fittings and cork, paper, cardboard, felt and metal gaskets Temperature Range: -65°F to 400°F



## Permatex® Form-A-Gasket® No. 2 Sealant

Item # 80011 Valve covers. oil pan gaskets Temperature Range: -65°F to 400°F



#### Permatex® Ultra **Rubber Gasket** Sealant & Dressing

Item # 85409

Use with rubber gaskets including valve cover & oil pan gaskets, thermostat housings, transmission pans, intake gaskets, gear boxes, axle assemblies Temperature Range: -65°F to 400°F



Item # 80057 Valve cover gaskets, compressors, diesel engine heads

Temperature Range: -65°F to 400°F

## **Permatex® Copper** Spray-A-Gasket® **Hi-Temp Adhesive** Sealant

Item # 80697

Cylinder head gaskets, carburetor gaskets, exhaust manifold gaskets, high temp. applications. Compatible with gasoline Temperature Range: -50°F to 500°F



hoses, solid gasket dressings. Compatible with gasoline Temperature Range:

-65°F to 400°F

**Permatex® Aviation** 

Form-A-Gasket®

#### Permatex® Ultra Rubber Gasket Sealant & Dressing

85409 1 oz. tube, carded

#### Permatex® Form-A-Gasket® No. 1 Sealant

80007 1.5 oz. tube, carded 80008 3 oz. tube, carded 80003 11 oz. tube, boxed

#### Permatex® Super "300"® Form-A-Gasket® Sealant 80057 4 oz. bottle

Permatex® Tack & Seal™

**Gasket Sealant** 

80938 1.25 oz. tube, carded

## Permatex® Copper Spray-A-Gasket® Hi-Temp **Adhesive Sealant**

80697 12 oz. aerosol can, 9 oz. net wt.

#### Permatex® Form-A-Gasket® No. 2 Sealant

80015

1.5 oz. tube, carded 80016 3 oz. tube, carded 80011 11 oz. tube, boxed

#### Permatex® Aviation Form-A-Gasket® No. 3 Sealant

80019 4 oz. bottle 80017 16 oz. bottle





# Gel Twist™ Application Directions:



1. Remove protective cap.



**2.** Turn dial to expose 1/8" to 1/4" of material beyond tip.



**3.** Apply Threadlocker to engagement area of male fitting.



**4.** Assemble parts and tighten to recommended torque.





## Permatex® High Strength Threadlocker RED

Item # 27140
Cylinder block studs, rocker arm studs, ring gear bolts, frame bolts, shock absorber bolts
Temperature Range:

-65°F to 300°F



# Permatex® Permanent Strength Threadlocker RED

Item # 19962 Cylinder block bolts, ring gear bolts, transmission shaft bolts Temperature Range: -65°F to 300°F



#### Permatex® High Temperature Threadlocker RED

Item # 27200
Camshaft sprocket
bolts, idler bearings,
press fit filler tubes,
transmission input
and output shaft
threads, ring gear
or shock bolts
Temperature Range:
-65°F to 450°F



#### Permatex® Large Diameter Threadlocker RED

Item # 27740
Frame brackets,
suspension
fasteners, shock
absorber mounts,
wheel studs
Temperature Range:
-65°F to 300°F



# Permatex® Surface Insensitive Threadlocker BLUE

Item # 24027

Rocker studs, rocker adjustment bolts, valve cover bolts, oil pan bolts, disc brake caliper bolts, alternator mounting bolts, pulley assemblies, intake bolts Temperature Range: -65°F to 300°F



# Permatex® Medium Strength Threadlocker BLUE

Item # 24240

Valve cover bolts, water pump bolts, oil pan bolts, rocker adjustment arm nuts, carburetor studs, case cover bolts, shift lever nuts, disc brake caliper bolts, intake manifold bolts, alternator mounts Temperature Range: -65°F to 300°F



# Permatex® Low Strength Threadlocker PURPLE

Item # 24024

Carburetor screws, relay lock screws, headlamp screws, throttle body assembly screws, choke assembly screws, fuel injection set screws, body panel mounting fasteners Temperature Range:

-65°F to 300°F

#### Permatex® Low Strength Threadlocker PURPLE

24024 6 ml tube, carded

# Permatex® Medium Strength Threadlocker BLUE

19960 5 ml polybag 24206 2.5 ml bottle, carded 24200 6 ml tube, carded 24240 36 ml bottle, carded 24283 90 ml bottle

#### Permatex® Medium Strength Threadlocker BLUE Gel

24005 5 g applicator, carded 24010 10 g applicator, carded

# Permatex® Surface Insensitive Threadlocker BLUE

24027 6 ml tube, carded 24300 10 ml bottle, carded

# Permatex® High Strength Threadlocker RED Gel

27005 5 g applicator, carded 27010 10 g applicator, carded

#### Permatex® High Strength Threadlocker RED

27100 6 ml tube, carded 27140 36 ml bottle, carded 27183 90 ml bottle

# Permatex® Large Diameter Threadlocker RED

27710 10 ml bottle, carded 27740 36 ml bottle, carded

# Permatex® High Temperature Threadlocker RED

24026 6 ml tube, carded 27200 10 ml bottle, carded 27240 36 ml bottle, carded

# Permatex® Permanent Strength Threadlocker RED 19962 6 ml tube, carded

o mi tabo, oardou

# Permatex® Penetrating Grade Threadlocker GREEN

29000 6 ml tube, carded 29040 36 ml tube, carded



# **Complete Auto Care**


# **Under Hood**

Maintenance Solution Maintenance **Solution** Battery Radiator Repair Permatex® Gas Tank & Radiator Repair (p.45) Permatex® Battery Cleaner (p.37 & 54) Permatex® Professional Repair Systems Radiator Repair Kit (p.42) Permatex® Battery Protector & Sealer (p.37) Belts Permatex® Belt Dressing (p.48) Permatex® High Temperature Thread Sealant (p.25) Sealing Brakes Permatex® Brake & Parts Cleaner (p.52) Threadlocking Permatex® Medium Strength Threadlocker Blue (p.22) Engine Pings/Knocks NOS® Octane Boosters (p.59) Permatex® Surface Insensitive Strength Threadlocker Blue (p.22) NOS® Complete Fuel System Cleaner (p.59) Permatex® High Strength Threadlocker Red (p.23) **Engine Deposits** NOS® Fuel Injector Cleaner (p.59) Permatex® Penetrating Grade Threadlocker Green (p.23) Spray Nine® Grez-Off® Heavy Duty Degreaser (p.56) Thread Repair Permatex® Professional Repair Systems Engine Spray Nine® Earth Soap® Concentrated Cleaner (p.57) Stripped Thread Repair Kit (p.26 & 42) No Touch® Engine Detailing Kit (p.63) Tune-Up Permatex® Tune-Up Kit (p.36 & 51) Permatex® the Right Stuff® Gasket Maker (p.11) Permatex® Cold Weld Bonding Compound (p.30) Gaskets Weld Bonding Permatex® Ultra Black® Gasket Maker (p.12) Permatex® Ultra Blue® Gasket Maker (p.12) Permatex® Ultra Grey® Gasket Maker (p.12) Permatex® Ultra Copper® Gasket Maker (p.12) Permatex® Sensor-Safe Hi-Temp RTV Silicone Gasket (p.13) Permatex® Water Pump & Thermostat RTV Silicone Gasket (p.13) Permatex® Gasket Remover (p.16) Permatex® Anaerobic Gasket Maker (p.16) Leak Repair Permatex® Form-A-Seal® Leak Repair (p.33) Lubricating Permatex® Anti-Seize Lubricant (p.47) Permatex® Hi-Temp Metal Repair Metal Repair Compound (p.42)



# **Exterior**

	· <del>-</del>		
Maintenance	Solution	Maintenance	Solution
Adhesive	Permatex® Clear Silicone Adhesive Sealant (p.33)	Glass	Permatex® Bullseye™ Windshield Repair Kit (p.36)
	Permatex® Weatherstrip Cement (p.39)		Permatex® Quick Grid™ Rear Window
Brakes	Permatex® Brake & Parts Cleaner (p.52)		Defogger Repair Kit (p.36)
	Permatex® Disc Brake Quiet (p.45 & 50)		Permatex® Auto Glass Sealer (p.33)
	Permatex® Ultra Disc Brake Caliper Lube (p.45 & 50)		No Touch® Auto Glass Stripper (p.62)
Wheels, Tires	No Touch® Appearance Products (p.61 & 62)		Permatex® Professional Repair Systems
	Permatex® Professional Repair Systems		Windshield Repair Kit (p.41)
	Wheel Restoration Kit (p.40)	Rust	Permatex® Rust Treatment (p.38)
Headlights	Permatex® Professional Repair Systems		Permatex® Rust Dissolver Gel (p.38)
-	Lens Renew Headlight Restoration Kit (p.41)	Steel & Aluminum	Permatex® PermaPoxy™ Multi-Metal Epoxy (p.30)

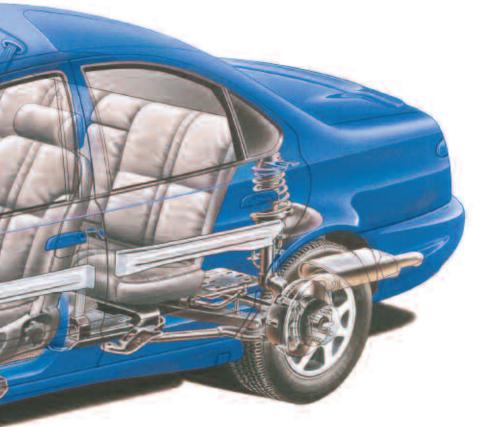

# Interior -

Maintenance	Solution
Adhesive	Permatex® Ultra Bond™
	Super Glue Gel (p.28)
	Permatex® Super Glue (p.29)
	Dr. Bond® Super Glue (p.29)
	Permatex® Body Shop®
	Heavy Duty Spray Adhesive (p.39)
Glass	Permatex® Professional Strength
	Rearview Mirror Adhesive (p.36)
	Permatex® Fast Orange® Glass
	& Multi-Surface Cleaner (p.55)
	Permatex® Professional Repair
	Systems Rearview Mirror Kit (p.41)
Fabric	Permatex® Fabric Repair Kit (p.43)
Leather	Permatex® Ultra Series Vinyl & Leather
	Repair Kit (p.43)
Vinyl	Permatex® Professional Repair System
	Vinyl & Leather Repair Kit (p.43)
	Permatex® Super Clear Vinyl
	Sealant Repair Kit (p.43)
Lighting	Permatex® Bulb/Lamp & Electrical
	Connector Dielectric Grease (p.37 & 51
Surfaces	No Touch® Interior Detailing Mousse
	Cleaner/Protectant (p.63)
	Spray Nine® Multi-Purpose Cleaner
	& Disinfectant (p.56)

# **Under Car**

Maintenance	Solution	Maintenance	Solution
Brake Repair	Permatex® Brake & Parts Cleaner (p.52)	Muffler Repair	Permatex® Hi-Temp Metal Repair Compound (p.44)
	Permatex® Ultra Disc Brake Caliper Lube (p.35 & 50)		Permatex® Muffler & Tailpipe Bandage (p.44)
	Permatex® Disc Brake Quiet (p.45 & 50 )		Permatex® Muffler & Tailpipe Sealer (p.44)
Gas Tank Repair	Permatex® Instant Gas Tank Repair (p.45)		Permatex® Muffler & Tailpipe Putty (p.44)
	Permatex® Gas Tank & Radiator Repair Kit (p.45 & 50)		Permatex® 1000° Plus™ Exhaust Repair Kit (p.44)
Radiator Repair	Permatex® Professional Repair Systems	Undercoating	Permatex® Rust Treatment (p.38)
	Radiator Repair Kit (p.42)		Permatex® Undercoating (p.38)
	Permatex® Gas Tank & Radiator Repair Kit (p.45)		




# **Motorcycle Applications**



Case halves, carburetor gaskets



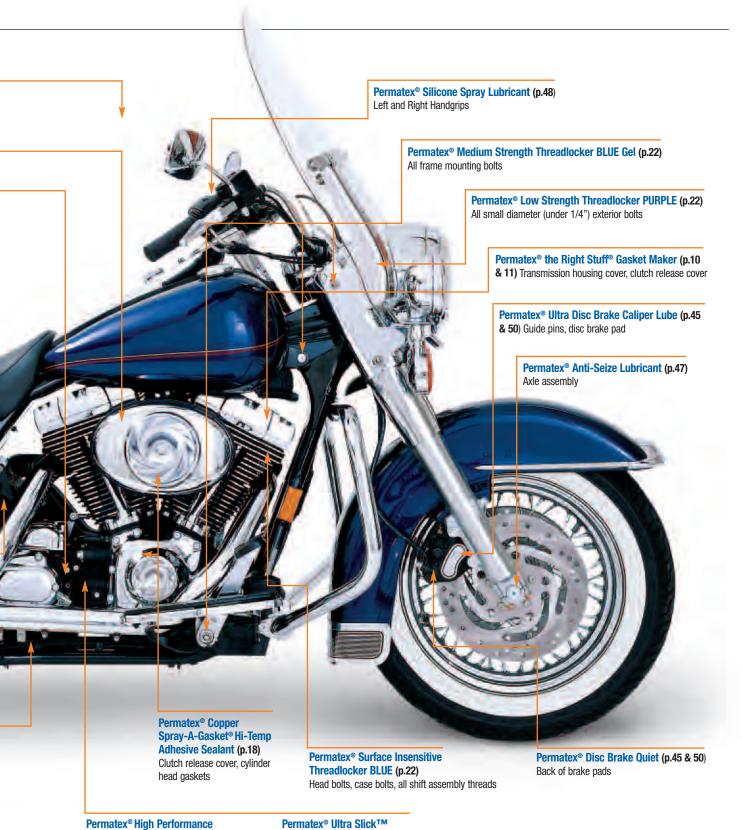

81

Thread Sealant (p.23)

Timing hole plug, oil hose fitting



# Heavy Duty Fleet Repair





# Heavy Duty Fleet Repair

# **Engines**

#### **Product**

Permatex® High Strength Threadlocker RED (p.23)

Permatex® Anti-Seize Lubricant (p.49)

Permatex® the Right Stuff® Gasket Maker (p.11)

Permatex® Gasket Remover (p.16)

Permatex® High Temperature Thread Sealant (p.25)

Permatex® Medium Strength Threadlocker BLUE Gel (p.22)

Permatex® High Temperature Sleeve Retainer (p.27)

# **Typical Applications**

Air Starter Fasteners

Prevents seizing and galling of all metals. Withstand temperatures up to 1600°F

Valve Covers, Oil Pan

Valve Connectors, Oil Pan Covers

Pipe, Water Jacket, Oil Galley Plugs, Oil Pressure & Temperature Sensors, Air Conditioning Fittings, Hydraulic Fittings, Vacuum Line Connectors

Starter Mounts, Alternator Mounts, Engine Mounting Bolts

Cup Plugs, Bushings, Oil Seals





# **Transmissions**

#### Product

Permatex® High Temperature Sleeve Retainer (p.25)

Permatex® High Performance Thread Sealant (p.23)

Permatex® Medium Strength Threadlocker BLUE (p.20)

Permatex® Anaerobic Gasket Maker (p.13) and Permatex® the Right Stuff® Gasket Maker (p.9)

# **Typical Applications**

Retaining Bushings, Cup Plugs, Gears, Dowel Pins, Oil Seals

Drain Plugs, All Tapered Fittings

**Case Cover Bolts** 

Case Covers, Power Divider Shaft Housings, Input/Output Power Shafts, PTO Covers to Housing

# **Differentials**

#### **Product**

Permatex® High Strength Threadlocker RED Gel (p.23)

Permatex® Ultra Grey®Gasket Maker (p.12), Anaerobic Gasket Maker (p.15) and the Right Stuff® Gasket Maker (p.11)

Permatex® High Temperature Thread Sealant (p.25)

Permatex® Medium Strength Threadlocker BLUE (p.22)

Permatex® High Temperature Sleeve Retainer (p.27)

#### **Typical Applications**

Cap Screws, Mounting Studs

Cover Housing Gaskets, Differential, Differential, Assembly to Rear Axle Housing, Power Dividers, Axle Shaft Flanges

Core Plugs, Drain Plugs

Axle Housing Bolts, Oil Seal Retainer Bolts, Axle Shaft Flange Bolts, Differential Drain Plugs

Ring Gear Bolts, Differential Lock Pins

# **Chassis**

#### Product

Permatex® High Strength Threadlocker RED (p.23)

Permatex® Anti-Seize Lubricant (p.49)

Permatex® Pro-Strength Brake & Parts Cleaner (p.52)

Permatex® High Temperature Thread Sealant (p.25)

Permatex® Medium Strength Threadlocker BLUE (p.22)

Permatex® High Temperature Sleeve Retainer (p.27)

## **Typical Applications**

Suspension Fasteners, Shock Absorber Mounts, Wheel Studs

Prevents seizing and galling of all metals. Withstands temperatures up to 1600°F

Quickly dissolves grease, dirt and oil from parts. Prepares mating surfaces for Permatex® products.

Air Brake Fitting

Fuel Tank Fasteners, Lug Nuts

Wheel Bearings, Idler Shafts, Press Fit Bushings

# **Bodies**

#### **Product**

Permatex® High Strength Threadlocker RED (p.23)

Permatex® Super Weatherstrip Adhesive (p.39)

Permatex® Clear Silicone Adhesive Sealant (p.33)

Permatex® Super Glue Adhesive (p.29)

Permatex® Medium Strength Threadlocker BLUE (p.22)

Permatex® Fifth Wheel Lubricant (p.49)

## **Typical Applications**

Exhaust System Mounts, Bumper Fasteners

Carpeting, Headliners, Molding Weatherstripping

Windshields

**Emblems** 

Windshield Wiper Nuts, Lug Nuts, Gear Shift Knob, Door Hardware, Running Light Screws, Horn Mounting

All 5th Wheel Plates



# Automotive OEM Interchange

**HOW TO USE THIS CHART:** Permatex® Automotive Products are specified by nearly every auto, truck and vehicle manufacturer in the world...


	Acura	Audi	BMW	Chrysler	Daewoo	Fiat	Ford	General Motors
Permatex® the Right Stuff® Gasket Maker				4883971 GF-44-A MSGF44B 04883971	PS 9120016		WSE-M4G-323-A6 TA30	12378479 10953472 998-5990 998 5675 12346286 12345997
Permatex® Ultra Black® Gasket Maker				4206070 MSGF44B 04883971			F1AZ-19562-A D6AZ-19562-B E6AZ-19562-A WSK-M4G320-AZ WSE-M4G323-A6 WSE-M4G323-A4 E8AZ-19562-A F6AZ-19562-AA F7AZ-19554-EA TA-30	12345739 12345997 12345997 998 5675 998 5990 10953472
Permatex® Ultra Grey® Gasket Maker	8718-550030 E			82300234 82300235	AA 1204020		WSE-M4G-323-A5 TA29	12346240
Permatex® Blue RTV Silicone Gasket			07-58-9-062-376 11-21-1-262-571					
Permatex® Anaerobic Flange Sealant				M5CD98A 2654871 7778404 J4570650			WSK-M2G-348-A4 TA16	105 2756 1702 1703 998 5361
Permatex® Anaerobic Gasket Maker			0127784	4318083 MSCD 98-D	Gasket Sealant		WSK-M2G348-A5 ESK-M4G-269-A F8AZ-19B508-AB TA16	105 2942 998 5460 105 2943
Permatex® Gear Oil RTV Gasket Maker				05013477AA MSGF46				
Permatex® Automatic Transmission RTV Gasket Maker				05010884AA MSGF41B				
Permatex® Low Strength Threadlocker PURPLE						639428500	WSK-M2G351-A4 ESE-M492204-A1	998 5436 1234 5382
Permatex® Medium Strength Threadlocker BLUE		AMV197500	07-58-9-056-031 0121874	2654392 4318031 MS CC75 04057989		639147100 976173410 639197110	EOAZ-19554-AA WSK-M2G351-A5	12345382 1700 998 5283 9985436
Permatex® Surface Insensitive Threadlocker BLUE			0133789 07-58-9-056-031			886305000	ESK-M4G-247-A2 WSK-M2G351-A7 WSK-M29G351-A2 TA25	
Permatex® Permanent Strength Threadlocker RED		AMV197300	0126374				E2FZ-19554-B WSK-M2G351-A6 TA26	9985300 998 5773 1234593
Permatex® High Strength Threadlocker RED			81229400086 (Specified as 270)	4318032 4057987 MSCD 96-A		976033480	E0AZ-19554-BA WSK-M2G351-A3 ESEM4148A SEEM4203A2	1773 998 5300 9985259
Permatex® High Temperature Threadlocker RED				O 5014205 AA J4570669 8800619 5356 779	Hi-Temp Thread Sealant			12345493 998 5399
Permatex® Large Diameter Threadlocker RED				2654427 MSCD 96-A			WSK-M2G351-A7 ESE-M4G-203A2 TA27	7200 1773 998 5266 1700 1773 12345493
Permatex® Penetrating Grade Threadlocker GREEN				4186369 4187099 MSCC-77			SSM-4G-9520-A WSK-M2G351-A1 ESE-M4G203-A1	998 5306
Permatex® High Temperature Thread Sealant				4318034 4318044 J4570588 2654648 4267247 MSCD-95A			XW7Z-19554-A D8AZ-19554-A WSK-M2G350-A2	12346004 105 2080 998 5253
Permatex® High Performance Thread Sealant				4187257 MSCD-95B	High Performance Thread Sealant		WSK-M292350-A2 ESE-M492-194-8	12346004 998 5427
Permatex® Bearing Mount for Close Fits			07-58-9-056-030 (Specified as 638)	2654484 4187443 MSCD97A MSCD97-B			E0AZ-19554-BA WSK-M2G349-A1 WSK-M2G349-A5	1651343 9985299 9985262 12377901
Permatex® High Temperature Sleeve Retainer		AMV185100 AMV185101		28044924 4856852 MSCD 97-B			ESE-M492-167-A1 WSK-M2G349-A10	998 5299 998 5345 12377901 998 5409
Permatex® Stripped Thread Repair				4467725				
Permatex® Super Glue			0125342			639997540	WSK-M2G402-A2 TA19	998 5413 1052621
Permatex® Flowable Silicone Windshield & Glass Sealer				4467708				
Permatex® Rearview Mirror Adhesive				4293039 MSCC73 05015983AA 4054099	PS 9120006		D9AZ-19954-CA ESB-M2G176-A TA17	1052369
Permatex® Black Super Weatherstrip Adhesive				4773774 MS-CC223			E8AZ19552-A COAZ19552-AA ESB-M2G14-A F6AZ9L494AA TA14	12345096 12345097
Permatex® Anti-Seize Lubricant			18219062-599		133 K		XL2	



this interchange chart provides a guide for selecting the correct Permatex® product for every aftermarket repair.

	Honda	Hyundai	Isuzu	Jaguar	Jeep	Land Rover	Maxion
Permatex® the Right Stuff® Gasket Maker						LRNA-25223	
Permatex® Ultra Black® Gasket Maker					RTV SEALER		
Permatex® Ultra Grey® Gasket Maker	296380 08718-0001 296381 HC2963817 08718-5000040E 08718-0009 08740-99986 08718-0004 08718-0003	231-13800 4C116-21000	1215 1216 1207D				0710129
Permatex® Blue RTV Silicone Gasket			1-8844-36-0				
Permatex® Anaerobic Flange Sealant			1-8844-0145-0 1-8844-6376-0				0710105 70490279 0710125 15060008
Permatex® Anaerobic Gasket Maker			1-8844-222-0			LRNA-51831	
Permatex® Low Strength Threadlocker PURPLE						LRNA-22231	
Permatex® Medium Strength Threadlocker BLUE		242 Blue	1-8844-9032-0 1322 1338 1-8844-9033-0 1324 1364 9-8893-2601-0 1333 9-8893-2605-0 1370-137				15060003
Permatex® Surface Insensitive Threadlocker BLUE	08718-0009		JVSCDS0922 JVSCDS0921	1031240 JVS CDS0921		LRNA-24078	
Permatex® Permanent Strength Threadlocker RED			1-8844-6372-0				
Permatex® High Strength Threadlocker RED			1-8844-6373-0 9-8893-2601-0 9-8893-2602-0	1120333		LRNA-21436 (Specified as 270) LRNA-27131	1506033 0710115
Permatex® High Temperature Threadlocker RED		272 Red				LRNA-27240	
Permatex® Large Diameter Threadlocker RED			1-8844-6374-0				0710108
Permatex® Penetrating Grade Threadlocker GREEN			1320,1321,1323 1-8844-6375-0 1331,1361			LRNA-29031	0710109
Permatex® High Temperature Thread Sealant		565 White					
Permatex® High Performance Thread Sealant						LRNA-21456	
Permatex® Bearing Mount for Close Fits				113072			
Permatex® Bearing Mount for Close Fits				113083		LRNA-21448	
Permatex® Super Glue				301054			0710104
Permatex® Rearview Mirror Adhesive		1.1067-2					
Permatex® Anti-Seize Lubricant		82				LRNA-76732	

# Product Description Code Explanation



continued on page 86



# OEM Interchange

# Automotive Manufacturers

continued from page 85

	Mazda	Mercedes-Benz	Mitsubishi	Nissan	Opel	Rover	Saab	Saturn
Permatex® the Right Stuff® Gasket Maker		A0029897320	3M8663 3M8672 3M8678 3M8679 3M8661					21019581
Permatex® Ultra Black® Gasket Maker			3M8660					
Permatex® Ultra Grey® Gasket Maker	77-300C-30		MD997740 MD997110 MD970389 3M8704 ACH1ZC1X02 & 03 3M8678 & 79 3M8672	999MPAM003 999MP-A7007 KPS51000150				
Permatex® Anaerobic Flange Sealant				C1335-31X25				21005993
Permatex® Anaerobic Gasket Maker				C1335-31X25 999MPAM001			02449790 815373 9321795	
Permatex <sup>®</sup> Medium Strength Threadlocker BLUE	105177743	A00398931710011 A00398931710002 A00398931710004 A00398931710005	3M4177	999MPAM005	L0010184 L0020184		7990963 7496268	21485277
Permatex® Surface Insensitive Threadlocker BLUE						5H4830		
Permatex® Permanent Strength Threadlocker RED	LA1249111 77-300E-10				L0010153 L0020153			21005994
Permatex® High Strength Threadlocker RED		A3459890271 A3459890171	MZ100360 3M4170 3M8730 3M8731	999MPAM004				21005994
Permatex® High Temperature Threadlocker RED			3M8659 3M8730 3M8731	999MPAM004			0245761	
Permatex® Penetrating Grade Threadlocker GREEN								21485276
Permatex® High Temperature Thread Sealant								21485278
Permatex® High Performance Thread Sealant	77-300E-01		999MPAM002	999MPAM002				21485278
Permatex® High Temperature Sleeve Retainer		A00298920710003 A00298920710004 A00298920710005			L0010189 L0020189			21005996
Permatex® Super Glue	77-310C-10	A00398925710001 A00398925710002 A00398925710012				GF044		
Permatex® Rearview Mirror Adhesive	77-310C-01			999MPAM000				21007653
Permatex® Black Super Weatherstrip Adhesive			3M8001 80011					
Permatex® Anti-Seize Lubricant								21485279

# Important Numbers to Remember

For technical advice and assistance, or questions regarding your purchase orders, including electronically transmitted orders (EDI) through Transnet or Eagle,

Call Toll Free......1-87-PERMATEX (877.376.2839)



	Scania	Subaru	Suzuki	Toyota	Valmet	Volvo	Volkswagen
Permatex® Ultra Black® Gasket Maker				00001-01001 00295-00102 00001-01002 00295-01208 004403007 TB1215 TB1207 00295-01282 00295-01281 TB1217B 3MT3#08670			
Permatex® Ultra Grey® Gasket Maker		004403007 TB1215 TB1207 TB1217B 3MT3#08670	99104-31140 (TB1207B specified) 99104-31160 (TB1216 specified)	00001-01008			
Permatex® Anaerobic Flange Sealant	378183			00001-01007			
Permatex® Anaerobic Gasket Maker				00001-01005			
Permatex® Medium Strength Threadlocker BLUE	814283		99000-32020	00001-01003	78723013	591255 8701007 1161054-0	AMV197500
Permatex <sup>®</sup> Surface Insensitive Threadlocker BLUE				00001-01003			
Permatex® Permanent Strength Threadlocker RED	814284 L0020153						AMV197300
Permatex <sup>®</sup> High Strength Threadlocker RED	814282		99000-32030	00001-01004	078723001	591093 1161070	
Permatex® High Temperature Threadlocker RED		TB1303					
Permatex <sup>®</sup> Large Diameter Threadlocker RED					07873002	078723001	
Permatex® Penetrating Grade Threadlocker GREEN	814281				078723020	591264	
Permatex® High Temperature Sleeve Retainer					078723017		AMV185100 AMV185101
Permatex® Rearview Mirror Adhesive						1161375-9	
Permatex® Black Super Weatherstrip Adhesive		3M08011					



continued on page 88





# **OEM Interchange** Heavy Equipment Manufacturers

continued from page 87

	Case	Caterpillar	Cummins	Detroit Diesel	Fiat Allis	Ford
Permatex® Ultra Black® Gasket Maker		4C9612		23509603		
Permatex® Ultra Blue® Gasket Maker	ZPX81724	8T9022		23509543		
Permatex® High Temp Silicone Gasket Maker		8T9013 4C9614				
Permatex® Anaerobic Flange Sealant	ZPX51550 ZPX51530	515	LT-51531		73127654	E2AZ-19562-A
Permatex® Anaerobic Gasket Maker	ZPX51850			23514188 23513509		
Permatex® Form-A-Gasket® No. 1 Sealant		8T9015 4C9501				
Permatex® Form-A-Gasket® No. 2 Sealant	ZPX31389	8T9016 4C9502				
Permatex® Aviation Form-A-Gasket® No. 3 Sealant	ZPX18130	8T9012 4C9505				
Permatex® Medium Strength Threadlocker BLUE	ZPX24210	9S3263 4C4030	3375067 3824040 3824041 3375068	23509535 23509536	75000776	D5AZ-19554-A D5AZ-10544-A
Permatex® Permanent Strength Threadlocker RED	ZPX26210 ZPX26236			23509537 23509538	75000776	
Permatex® High Strength Threadlocker RED	ZPX27136 ZPX27110	7M7456	3824038 3875068		75000779	EOAZ-19554-B
Permatex® Large Diameter Threadlocker RED	ZPX27736				75000779	
Permatex® Penetrating Grade Threadlocker GREEN	ZPX29036	4C9508 4C9509	3823682	23509539	75000780	290
Permatex® High Temperature Thread Sealant	ZPX59250	SP3413	3375065 3375066		75000777	D8AZ-19554-C
Permatex® Bearing Mount For Close Fits	ZPX60936	7M7456 4C4032	3824037 3823718			
Permatex® High Temperature Sleeve Retainer		4C4031 953265	ST-1272-12		75000778	640, 609
Permatex® Bearing Mount For Relaxed Fits	ZPX68036					
Permatex® Super Glue Adhesive	ZPX82196	404 495	404 495		404 495	D7AZ-19554-C
Permatex® Anti-Seize Lubricant	ZPX76716	767	767	23509545	75000781	767
Permatex® O-Ring Splicing Kit		00112	00112		00112	00112
Permatex® Black Silicone Adhesive Sealant	ZPX81158	3S6252				
Permatex® Clear Silicone Adhesive Sealant	ZPX80855 ZPX80050 ZPX30562	8T9014 4C9613				
Permatex® Rust Treatment		8T9017				
Permatex® Surface Prep Activator	ZPX24163		ST-1272-13		75000782	



	GMC	John Deere	Kenworth	Komotsu/Dresser	Mack	International	Volvo GM
Permatex® Ultra Blue® Gasket Maker					5166-58730	1653885C1	V1111015
Permatex® High Temp Silicone Gasket Maker	1052434					554204C1	
Permatex® Anaerobic Flange Sealant	1052357 1052756	TY6304	KW515-50ML	1232272H1	5166-51517	474517C2 1813034C1	
Permatex® Anaerobic Gasket Maker						1693855C1 1693856C1	V1111010
Permatex® Form-A-Gasket® No. 1 Sealant						554206C1	V1111011
Permatex® Form-A-Gasket® No. 2 Sealant				554206C1			
Permatex® Aviation Form-A-Gasket® No. 3 Sealant		TY15934				577588C1 577589C1 577905C1	V1111003 V1111004
Permatex® Medium Strength Threadlocker BLUE	1052279	T43512 TY9370 AT52853	KW242-10ML KW242-50ML		5166-2114 5166-24200 5166-2126		V1111005 V1111006 06479-5002
Permatex® Permanent Strength Threadlocker RED				634017C1	5166-26200	576016C1 576017C1 554210C1	06479-5003 20-700-1460
Permatex® High Strength Threadlocker RED	271	T43513 TY9371	KW271-10ML		5166-2223 5166-27121		
Permatex® Large Diameter Threadlocker RED	277	TY9373					
Permatex® Penetrating Grade Threadlocker GREEN	290	290	290	1232273H1	5166-29021 5166-29026	290	
Permatex® High Temperature Thread Sealant	1052080	TY9374 TY9375	592	634016C1	5166-59214 5166-59231	554209C1 554211C1	20-707-6088 20-700-1462 06479-5004
Permatex® Bearing Mount For Close Fits	609			634018C1		554210C1	V1111007 V1111008
Permatex® High Temperature Sleeve Retainer	1051343 1052624	T43515	KW601-10ML		35, 40, 75, 601, 620	35, 40, 75, 601, 620	20-700-1458 06479-5001
Permatex® Bearing Mount For Relaxed Fits	680	TY15969			5166-68035		
Permatex® Super Glue Adhesive	1052283 1052621	404, 495	404, 495	(495) 634228C1	5166-49411	554208C1	V1111896
Permatex® Anti-Seize Lubricant	767	767	767	844234C1	5166-76759 5166-76764	991441C1 991442C1	
Permatex® O-Ring Splicing Kit	00112	00112	KW400-ORSK		5166-0157	00112	V1111019 06479-505
Permatex® Black Silicone Adhesive Sealant				VS7493		991443C1	V1111020
Permatex® Clear Silicone Adhesive Sealant		TY15130		638896C1	5166-66BR	554204C1	V1111014
Permatex® Surface Prep Activator				644905C1	5166-2556	554207C1	

# **Additional Information**

# ▲ NFPA (National Fire Protection Association) Fire Code 30B

NFPA 30B is a standard that provides minimum requirements for the prevention and control of fires and explosions in facilities that manufacture, store and display aerosol products. Classification of aerosol products is based on their chemical or theoretical heats of combustion, and are designated as Level 1, Level 2 or Level 3 (with Level 3 being the most flammable). For storage purposes, cartons are marked with the appropriate level on at least one side of the package.



# Index By Product Name

Gasketing	Thread Sealants
Permatex® Anaerobic Flange Sealant15	Permatex® High Performance Thread Sealant
Permatex® Anaerobic Gasket Maker	Permatex® High Temperature Thread Sealant
Permatex® Automatic Transmission RTV Gasket Maker	Permatex® Pneumatic/Hydraulic Sealant
Permatex® Aviation Form-A-Gasket® No. 3 Sealant Liquid18	Permatex® Pipe Joint Compound
Permatex® Copper Spray-A-Gasket® Hi-Temp Adhesive Sealant18	Permatex® Thread Sealant with PTFE
Permatex® Form-A-Gasket® No. 1 Sealant	
Permatex® Form-A-Gasket® No. 2 Sealant	Anaerobic Technology
Permatex® Gasket Remover - Low VOC Formula	Permatex® Stripped Thread Repair Kit26, 42
Permatex® Gear Oil RTV Gasket Maker13	Permatex® Surface Prep™ Activator For Anaerobics
Permatex® High Tack™ Gasket Sealant19	
Permatex® High Tack™ Spray-A-Gasket® Sealant19	Retaining Compounds
Permatex® High Temperature Anaerobic Flange Sealant	Permatex® Bearing Mount For Close Fits
Permatex® High-Temp Red RTV Silicone Gasket Maker	Permatex® Bearing Mount For Relaxed Fits
Permatex® Hylomar® Universal Blue Racing Formula Gasket Dressing . 17	Permatex® Bearing Mount For Worn Fits
Permatex® Indian Head® Gasket Shellac Compound18	Permatex® High Temperature Sleeve Retainer
Permatex® MotoSeal® 1 Ultimate Gasket Maker	
Permatex® PowerBead™	Adhesives & Sealants
Permatex® SaferScraper™ Plastic Scraper	Dr. Bond® Plastic Bonder
Permatex® Sensor-Safe Blue RTV Silicone Gasket Maker	Dr. Bond® Super Glue
Permatex® Sensor-Safe High-Temp RTV Silicone Gasket Maker13	Dr. Bond® Super Glue Gel29
Permatex® Sensor-Safe High-Temp Red RTV Silicone Gasket Maker 13	Permatex® Auto Glass Sealer
Permatex® Super "300"® Form-A-Gasket® Sealant	Permatex® Black Rubber Sealant
Permatex® Super High Tack Gasket Sealant19	Permatex® Black Silicone Adhesive Sealant
Permatex® Tack & Seal™ Gasket Sealant	Permatex® Clear RTV Silicone Adhesive Sealant
Permatex® the Right Stuff® Gasket Maker	Permatex® Cold Weld Bonding Compound
Permatex® the Right Stuff® 1 Minute Gasket™	Permatex® Contact Cement
Permatex® the Right Stuff® GREY Gasket Maker	Permatex® Fast Cure Epoxy Cups
Permatex® Ultra Black® RTV Silicone Gasket Maker	Permatex® Flowable Silicone Windshield & Glass Sealer
Permatex® Ultra Blue® RTV Silicone Gasket Maker12	Permatex® Form-A-Seal™ Leak Repair
Permatex® Ultra Copper® RTV Silicone Gasket Maker	Permatex® Liquid Electrical Tape
Permatex® Ultra Grey® RTV Silicone Gasket Maker12	Permatex® Liquid Metal Filler
Permatex® Ultra Rubber Gasket Sealant & Dressing	Permatex® PermaPoxy™ High Strength Epoxy
Permatex® Water Pump & Thermostat RTV Silicone Gasket	Permatex® PermaPoxy™ General Purpose Epoxy
	Permatex® PermaPoxy™ Multi-Metal Epoxy
Threadlockers	Permatex® PermaPoxy™ Plastic Weld31
Permatex® GEL SQUEEZE™ Threadlockers	Permatex® Pit Crew's Choice™ Adhesive & Sealant
Permatex® GEL TWIST™ Threadlockers	Permatex® Spray Sealant Leak Repair32
Permatex® High Strength Threadlocker RED23	Permatex® Super Glue29
Permatex® High Temperature Threadlocker RED	Permatex® Super Glue Gel29
Permatex® Large Diameter Threadlocker RED	Permatex® Ultra Bond™ Super Glue28
Permatex® Low Strength Threadlocker PURPLE22	Permatex® Ultra Bond™ Super Glue Gel
Permatex® Medium Strength Threadlocker BLUE	
Permatex® Medium Strength Threadlocker BLUE Gel	Specialized Maintenance & Repair
Permatex® Multipack Threadlocker Assortment	Permatex® All Purpose Spray Adhesive
Permatex® Penetrating Grade Threadlocker GREEN	Permatex® Battery Cleaner
Permatex® Permanent Strength Threadlocker RED22	Permatex® Battery Installation Kit
Permatex® Permanent Strength Threadlocker RED & Cup/Core	Permatex® Battery Protector & Sealer
Plug Sealant Retaining Compound	Permatex® Black Super Weatherstrip Adhesive
Permatex® Plastic Threadlocker21	Permatex® Body Shop® Heavy Duty Headliner & Carpet Adhesive 39
Permatex® Surface Insensitive Threadlocker BLUE	Permatex® Bulb/Lamp & Electrical Connector Dielectric Grease 37, 51
Permatex® Threadlocker Gels21	Permatex® Bullseye™ Windshield Repair Kit
	Permatex® Complete Rear Window Defogger Repair Kit



Permatex® Dielectric Grease	Permatex® Dielectric Grease51, 51
Permatex® Disc Brake Quiet45, 48	Permatex® Disc Brake Quiet50, 45
Permatex® Electrically Conductive Rear Window Defogger36	Permatex® Fast Break® Super Penetrant
Permatex® Extreme Rearview Mirror Professional Strength Adhesive .36	Permatex® Nickel Anti-Seize 771
Permatex® Fabric Repair Kit	Permatex® Silicone Spray Lubricant
Permatex® Fiberglass Patch Kit43	Permatex® Fifth Wheel Lubricant
Permatex® Fuel Tank Repair Kit	Permatex® Tune-Up Kit51, 37
Permatex® Gas Tank & Radiator Repair	Permatex® Ultra Disc Brake Caliper Lube
Permatex® Headlight Lens Restoration Kit	Permatex® Ultra Disc Brake Caliper Lube Hi-Temp Formula50
Permatex® Heavy Duty Rubberized Undercoating	Permatex® Ultra Slick™ Multi-Purpose Lubricant
Permatex® Hi-Temp Metal Repair Compound44	Permatex® Ultra Slick™ Engine Assembly Lube
Permatex® Instant Gas Tank Repair	Permatex® White Lithium Grease
Permatex® Lens Renew Headlight Restoration Kit	
Permatex® Liquid Electrical Tape	Cleaners
Permatex® Muffler & Tailpipe Bandage44	Permatex® Battery Cleaner
Permatex® Muffler & Tailpipe Putty44	Permatex® Carburetor & Parts Cleaner
Permatex® Muffler & Tailpipe Sealer44	Permatex® Decal & Adhesive Remover
Permatex® O-Ring Splicing Kit	Permatex® Electrical Contact & Parts Cleaner
Permatex® 1000° PLUS™ Exhaust Repair Kit44	Permatex® Eliminator® III Engine Degreaser
Permatex® Plastic Tank Repair	Permatex® Fast Orange® Glass & Multi-Surface Cleaner
Permatex® Professional Strength Rearview Mirror Adhesive36	Permatex® Heavy Duty Aluminum Radiator Flush
Permatex® Prussian Blue	Permatex® Heavy Duty Radiator Cleaner
Permatex® Quick Grid™ Rear Window Defogger Repair Kit36	Permatex® Motor Muscle® Throttle Body, Carb & Choke Cleaner53
Permatex® Radiator Repair Kit	Permatex® Non-Chlorinated Brake & Parts Cleaner
Permatex® Rearview Mirror Adhesive Kit	Permatex® Paint Stripper
Permatex® Rear Window Defogger Tab Adhesive	Permatex® PermaSorb™ Multi-purpose Cellulose Absorbent
Permatex® Rust Dissolver	Permatex® Pro-Strength Brake & Parts Cleaner
Permatex® Rust Treatment38	Permatex® Rust Dissolver Gel
Permatex® Single-Use Pouches	Permatex® SaferScraper™ Plastic Scraper
Permatex® Stripped Thread Repair Kit	Permatex® Wiper Restore™55, 45
Permatex® Super Clear Vinyl Sealant Repair Kit	Spray Nine® BBQ Grill Cleaner
Permatex® Super Weatherstrip Adhesive	Spray Nine® Citrus Blaster™ Heavy Duty Bug, Tar & Asphalt Remover57
Permatex® Tune-Up Kit	Spray Nine® Earth Soap® Concentrated Cleaner
Permatex® Ultra Disc Brake Caliper Lube	Spray Nine® Glass & Stainless Steel Cleaner
Permatex® Ultra Series Vinyl & Leather Repair Kit	Spray Nine® Gloss Car Wash
Permatex® Undercoating	Spray Nine® Grez-off® Heavy Duty Degreaser
Permatex® Valve Grinding Compound	Spray Nine® Multi-Purpose Cleaner & Disinfectant
Permatex® Vinyl & Leather Repair Kit43	Spray Nine® Non-Butyl Cleaner/Degreaser
Permatex® Weatherstrip Cement	
Permatex® Wheel Restoration Kit40	Maintenance & Performance Additives
Permatex® Windshield Repair Kit	NOS® Complete Fuel System Cleaner
Permatex® Wiper Restore <sup>™</sup>	NOS® Fuel Injector Cleaner59
•	NOS® Max Street™ Octane Booster
Lubricants	NOS® Octane Booster Racing Formula59
Permatex® Anti-Seize Lubricant	
Permatex® Belt Dressing & Conditioner	Appearance Products
Permatex® B Force™ Multipurpose Lubricant47	No Touch® All Wheel Care® Wheel Cleaner
Permatex® B Force™ Hydraulic Jack Oil47	No Touch® Auto Glass Stripper
Permatex® Bulb/Lamp & Electrical Connector Dielectric Grease51, 37	No Touch® Engine Detaling Kit
Permatex® Ceramic Extreme Brake Parts Lubricant50, 35	No Touch® High Shine Tire Care61
Permatex® Chain Lube48	No Touch® Instant Rain Shield®
Permatex® Copper Anti-Seize Lubricant	No Touch® Interior Detailing Mousse Cleaner/Protectant

# Index By Product Name (continued)

No Touch® Original Tire Care .......61

No Touch® Perfect Plastic™  No Touch® Screen Clean Kit		Permatex® Mechanic's Hand Repair Lotion Permatex® Parr® Painter's Clean™ Hand Cleaner Permatex® Spray Nine® Poly 500™ Dispenser Permatex® Ultra Cherry™ Pumice Hand Scrub DL® Permatex® Trounce® Lotion & Cream Hand Cleaner Universal Dispenser Wall Mounted Wire Bracket  Hand Protection Permatex® Black 5 mil Nitrile Disposable Gloves Permatex® Blue 4 mil Nitrile Disposable Gloves				
Permatex® Fast Orange® Hand Cleaner Wipes		Permatex® Latex Dispos	sable Gloves	71		
Permatex® Fast Orange® Mini Pallet Display  By Product Number	69	Permatex® Mechanics 6	Gloves			
00112	1C (80003)	18	97BR (80060)	1		
01010		18	98D (80063)	1		
01013	2BR (80016)		98H (80062)			
01020	2C (80011)		99GA (80064)			
01406		18	99MA (80065)	1		
01810		18	101BR (81878)	1		
03325 (3325)			101MA (80697)			
03406			116DA (80070)			
08184			117EA (80072)			
08185	. ,		118DA (82019)			
08186			120DA (80073)	4		
09100			120GA (80074)			
09101			122GA (80075)			
09102			126VR (80729)			
09103	, ,		127MA (80077)			
09104			133AR (81343)			
09117			133K (80078)			
09128			133MA (81464)	4		
09135		13	135EA (81833)			
09136	' '	13	161DA (80577)			
09142		13	195DA (81981)			
09181	- ()	34	599BR (82194)			
09182		34	767 (80208)	4		
09183		34	771 (77124)	4		
09184			3325 (03325)			
09185			11067-2 (81844)			
09186	, ,		12003			
09973	, ,		12010			
09974			12020			
09975	, ,		12103			
09976		35, 37, 51	12203	5		
09977		48	13106			
09978	' '	12	13112			
09979		12	14106			
09980		38	14112			
1BR (80008)		39	14600			
тып (ооооо)		39	15717			
	02 (01030)		10/1/			



# MADE FOR THE PROFESSIONAL®

16067	25219	36071 (NTTW12-6)
19920	25223	36098 (NTSW15-6)
	25224	· · · · · · · · · · · · · · · · · · ·
19960		38490
19962	25229	49450
20297	25238	49550
20353	25247	49650
20356	25544	51031
20539 (5J-1)	25575	51531
* *		
21101S	25831	51580
21105	25905	51813
21108	25909	51817
21155S	26240	51845
21218	26346	54540
21222	26630	56521
21309	26706	59214
21351	26801	59235
21425	26805	6091027
21427	26810	6095027
22058	26815	64000
22071	26825	64040
22072	26830	65108
22074	26832	65116
•		
22701	26855	65217
22705	26984	6805027
22732	27005	71500
22755	27010	75448
22905	27100	77124
22955	27140	77164
23104	27183	80003 (1C)
		` '
23108	27200	80007 (1AR)
23113	27218	80008 (1BR)
23116	27240	80011 (2C)
23217	27710	80015 (2AR)
23218	27740	80016 (2BR)
23319	27828	80017 (3D)
23507	27901	80018 (3J)
23549 (NTBP15-12)	27932	80019 (3H)
23579 (NT21-6)61	28192	80022 (6BR)
24005	29000	80025
24010	29010	80030 (18E)
24024	29040	80032
24026	29132	80036 (34A)
24027	29208	80037 (34B)
24105		
	29520	80038 (35V)
24110	30058	80043 (48TA)53
24115	30878	80045 (51D)25
24124	31163	80050 (66BR)
24125	31824	80051
24163	32016	80052 (68DA)
24200	33013	80056
24206	33406	80057 (83H)
24240	34310	8005947
24283	34311	80060 (97BR)
24300	35013	80062 (98H)
25025	35406	80063 (98D)
25072	36040	80064 (99GA)
25104		* *
	36045	80065 (99MA)
25108	36050	80070 (116DA)
25113	36051 (WPBP15-6)	80071
25116	36052 (NTHS21-6)	
05017	200E2 (NMC20 C) C2	
25217	36053 (AWC20-6)	






# Index By Product Number

80072 (117EA)38	81742	85224
80073 (120DA)	81756 (NJ-1A)	85249
80074 (120GA)	81773 (RT-16-A)	85305
80075 (122GA)	81775 (RT-8-A)	85310
80077 (127MA)45, 50	81781 (VR-8A)	85315
80078 (133K)	81785 (VR-9A)	85409
80185	81786 (VR-12A)	8551917
80190	81833 (135EA)	85742
80208	81840	85860
80265 (FK-98)	81844 (11067-2)	85913
80279	81849 (79DA)	85915
80328 (DCD-19)	81850 (82)	87701
80329 (DWS-37)	81860 (6MA)	87705
80331 (MB-1)	81878 (101BR)	87732
80333 (MP-1)	81913	87755
80334 (MRK-1)	81915	90128
80335 (MTK-1)	81943	93106 (RS6-12)62
80338 (RS-9)33	81950	95140
80345 (WL-9)48	81981 (195DA)	95208 (GS8-12)
80369 (SA-8)37, 54	82019 (118DA)	99070
80370 (SA-9)	82080	800368
80577 (161DA)	82096	AWC20-6 (36053)
80628 (6C)	82099	DCD-19 (80328)
80631 (14AR)	82138	DWS-37 (80329)
80632 (14H)	82180	FK-98 (80265)
80633 (14D)	82190	GS8-12 (95208)
80638 (80BR)	82191	GTR-1 (80884)
80645	82194	MB-1 (80331)
80697 (101MA)	82195	MB-2 (80332)
80729 (126VR)	82196	MP-1 (80333)
80855 (66C)	82220	MRK-1 (80334)
80884 (GTR-1)	82450	NJ-1A (81756)
	82565	NT21-6 (23579)
80938 (9AR)	82580 (46YB)	NTBP15-6 (23549)
81153	82588	NTHS21-6 (36052)
81158 (16BR)	82606	NTSW15-6 (36098)
81160 (26BR)	84101	NTTW12-6
81173 (16C)	84107	RS6-12 (93106)
81180	84109	RS-9 (80338)
81182	84115	RT-16-A (81773)
81343 (133AR)	84160	RT-8-A (81775)
81409 (26C)	84164	SA-8 (80369)
81422 (27BR)	84201	SA-9 (80370)
81464 (133MA)	84209	VR-12A (81786)
81554	84309	VR-1A (80902)
81668	85080	VR-8A (81781)
81724 (77BR)	85084	VR-9A (81785)
81725 (77C)	85120	WL-9 (80345)
81730 (65AR)	85144	WPBP15-6 (36051)
81731 (80)	85176	,
81737	85188	

ANSI is a registered trademark of the American National Standards Institute. Dupli-Color is a trademark of Dupli-Color Products Co. LEXAN is a registered trademark of GE Plastics. Nitrous Oxide Systems and NOS are trademarks of Nitrous Oxide Systems. NSF is a registered trademark of NSF International. Plexiglas is a registered trademark of Arkema, Inc.

All trademarks except where noted are the property of Illinois Tool Works Inc. Copyright © 2011 Permatex, an Illinois Tool Works company. 1007-260 / PX-0078H



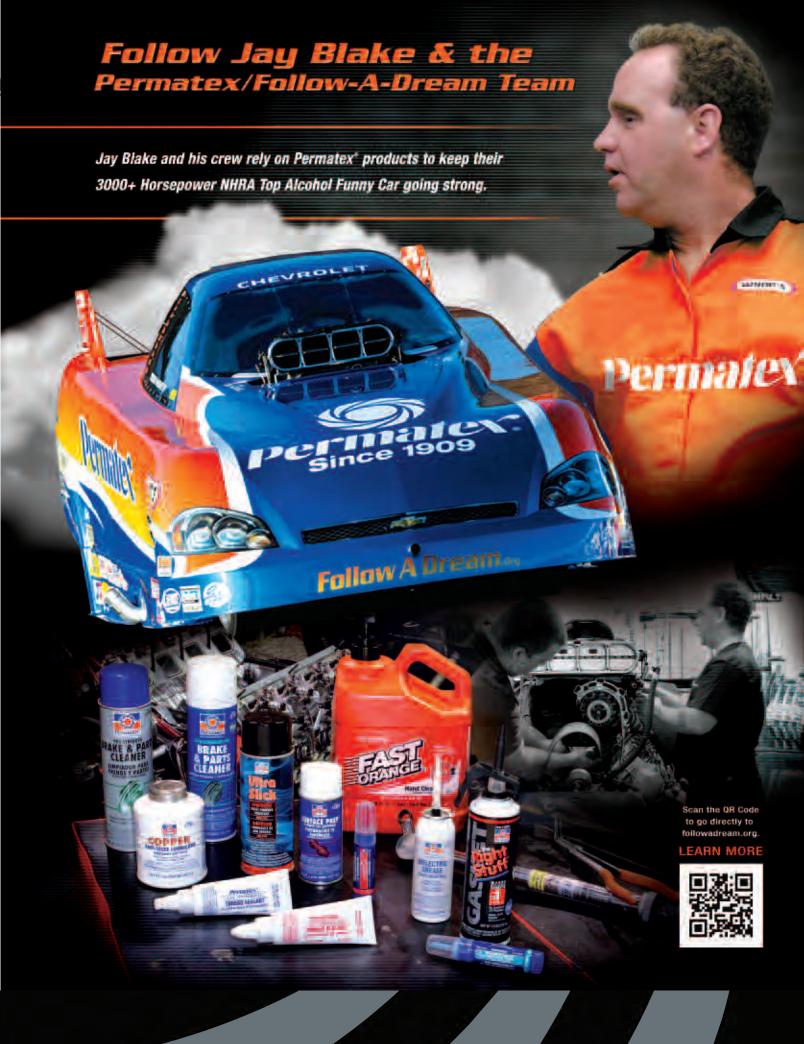





March 30, 2012


# RE: Product offering change in Permatex Catalog 2011-2012 Edition

To Permatex® Customers,

While our current catalog depicts these products, please be advised that on March 1<sup>st</sup>, 2012, the ownership and operations of two well known ITW brands, No Touch® and NOS® were transitioned from Permatex® to ITW Global Brands (ITWGB).

Permatex **no longer** carries the NOS branded performance additives and No Touch appearance products.

• Orders for No Touch/NOS items should be placed with ITW Global Brands.





No Touch® Appearance Products		NOS® Performance Additives	
Item #	Description	Item #	Description
NT21-6	Original Tire Care 21 oz	12010	Octane Booster Racing Formula 12 oz
NTBP15-6	Original Tire Care 18 oz	12003	Max Street™ Octane Booster 16 oz
NTSW15-6	Seriously Wet <sup>™</sup> 15 oz	12103	Fuel Injector Cleaner and Performance Enhancer 16 oz
		12203	Complete Fuel System Cleaner 16 oz

# For more information about these products, contact:

ITW Global Brands Customer Service

Toll Free: 855-888-1990 Local: 860-543-6900

Toll Free Fax: 855-888-1991

For more information, visit www.itwgb.com



Thank you.

The Permatex Marketing Team