


70-025

Unison™ 2-in-1 Underlayment

COMFORT

3/32" polyethylene foam increases cushioning between flooring and subfloor



DURABLE

2 mil. thick top film protects from harmful moisture vapor



ADHESIVE STRIP

Seals out moisture to protect floors

PROTECTION


4" film overlap for seamless protection

VERSATILE

Can be used over radiant heat

DISPLAY

Trilingual display box

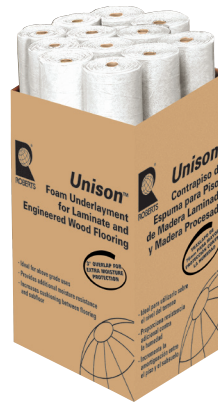

SPECIFICATIONS

UNIT OF MEASURE	12 rolls per case
COVERAGE	100 sq. ft. per roll 1200 sq. ft. per case
WIDTH OF ROLL	4 ft. (48")
LENGTH OF ROLL	25 ft. (300")
THICKNESS	3/32"
WEIGHT PER ROLL	2.5 lbs.
DIAMETER OF ROLL	6-1/2"
R-VALUE*	0.29
STC	54
IIC	61

*R-VALUE refers to the rating used to measure resistance to heat flow

Roberts Underlayment and your laminate floor, the perfect Unison.

In the growing market of laminate and engineered hardwood floating floors, the biggest concerns are noise/sound and water/mold damage. Roberts Underlayments are engineered to meet the highest standards in sound reduction, moisture protection and comfort, and even minor sub-floor corrections.

Quality & Excellence Since 1938.

www.ROBERTSCONSOLIDATED.com

U.S. Headquarters
866 435 8665

Canada
800 840 9422

Europe/Middle East
0031 24 6485348

Australia
011 61 3 9797 1888

New Zealand
64 9 415 9700