

70-185

Soft Stride

Sound Reducing Cushion Underlayment

EFFICIENT

Includes adhesive strip and 3" overlap film for linking multiple rolls

PROTECTION


2 mm foam cushions flooring

QUALITY

Anti-crush technology for excellent performance and long life


CLOSED CELL FOAM

For excellent moisture protection

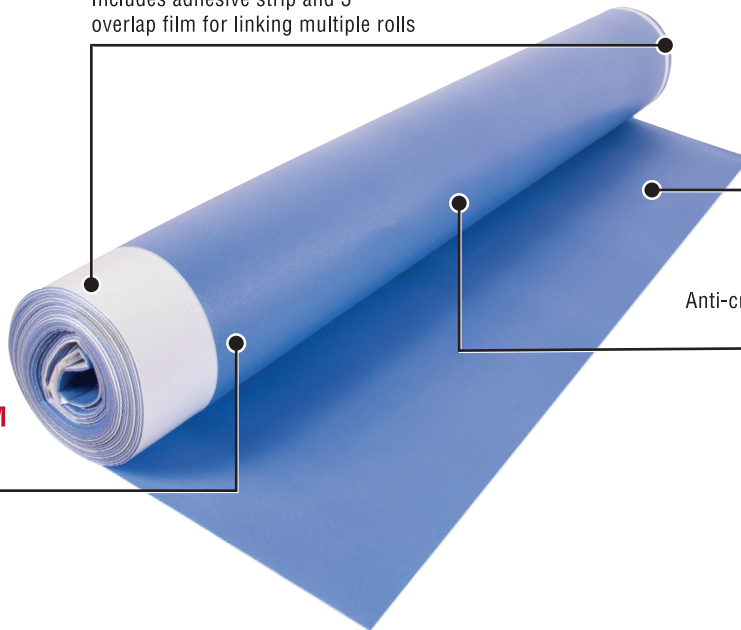

TECHNICAL SPECIFICATIONS

IIC (Impact Sound Transmission Test)	69
STC (Sound Transmission Loss Test)	66
ΔDelta IIC (Sound Transmission Loss Test)	21

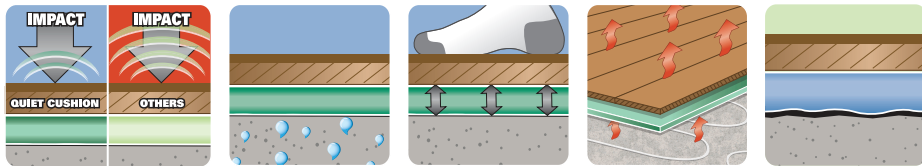

Sound Reduction Moisture Protection Cushions Flooring Radiant Heat Levels Imperfections

IIC measures sound such as moving furniture and walking, STC measures sound such as voices and television. Minimum sound rating required by most building codes and architects is 50. ΔDelta Rating is the only true measurement of sound reduction from a product (not a floor assembly) in the industry.

Soft Stride is a dense foam underlayment that provides excellent sound reduction under floating laminate and engineered flooring. The closed cell foam design provides excellent moisture protection and fights against mold and mildew. The 3" overlap film helps seal out moisture and easily attaches to adhesive strip.

SPECIFICATIONS

ITEM CODE	70-185
UNIT OF MEASURE	12 rolls per case
COVERAGE	100 sq. ft. per roll 1200 sq. ft. per case
WIDTH OF ROLL	43.5"
LENGTH OF ROLL	27.5 ft.
THICKNESS	2 mm
WEIGHT PER ROLL	2.00 lbs.
DIAMETER OF ROLL	6.25"

For use over concrete and wood subfloors

Quality & Excellence Since 1938.

www.ROBERTSCONSOLIDATED.com

U.S. Headquarters
866 435 8665

Canada
800 840 9422

Europe/Middle East
0031 24 6485348

Australia
011 61 3 9797 1888

New Zealand
64 9 415 9700