


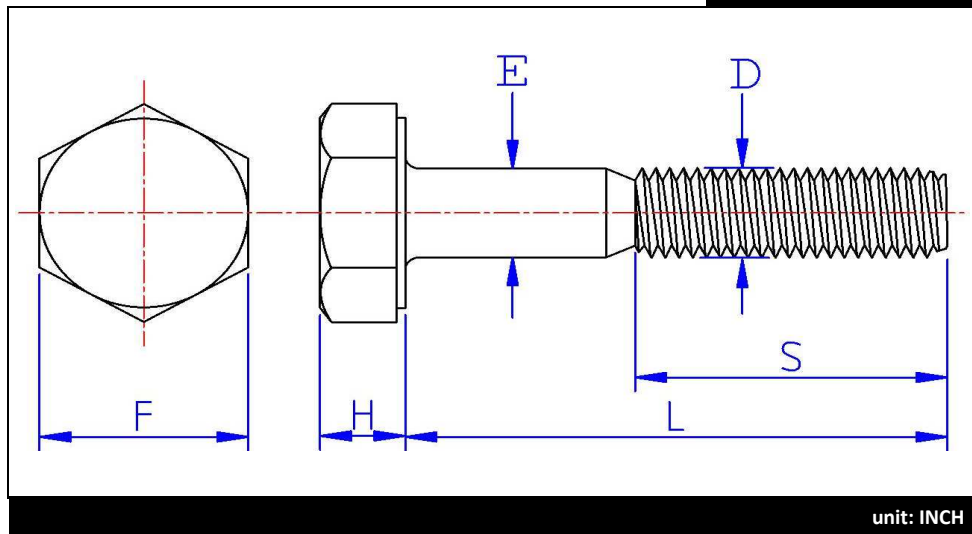

	Diam.	1/4 to 3/8	7/16 to 1/2	9/16 to 3/4
L LENGTH TOLERANCE	≤ 1"	+0 / -0,03	+0 / -0,03	+0 / -0,03
	> 1" to ≤ 2-1/2"	+0 / -0,04	+0 / -0,06	+0 / -0,08
	> 2-1/2" to ≤ 4"	+0 / -0,06	+0 / -0,08	+0 / -0,10
	> 4" to ≤ 6"	+0 / -0,10	+0 / -0,10	+0 / -0,10
	> 6"	+0 / -0,18	+0 / -0,18	+0 / -0,18

S THREAD	≤ 6"	2D+0,25"
	> 6"	2D+0,5"

SCREW		F ACROSS FLAT	H HEAD HEIGHT	E BODY DIAM.	D THREAD DIAM.	THREAD PER INCH
1/4	Min	0,428	0,150	0,245	0,237	20
	Max	0,438	0,163	0,250	0,249	
5/16	Min	0,489	0,195	0,306	0,298	18
	Max	0,500	0,211	0,312	0,311	
3/8	Min	0,551	0.226	0,369	0,360	16
	Max	0,562	0.243	0,375	0,374	
7/16	Min	0,612	0,272	0,430	0,420	14
	Max	0,625	0,291	0,437	0,436	
1/2	Min	0,736	0,302	0,493	0,482	13
	Max	0,750	0,323	0,500	0,499	
5/8	Min	0,922	0,378	0,617	0,605	11
	Max	0,938	0,403	0,625	0,623	
3/4	Min	1,100	0,455	0,741	0,735	10
	Max	1,125	0,483	0,750	0,748	

Hex. Head Cap screw, Grade '2', Zinc

Date: 16 mai 2015

Done by: **P.B**