


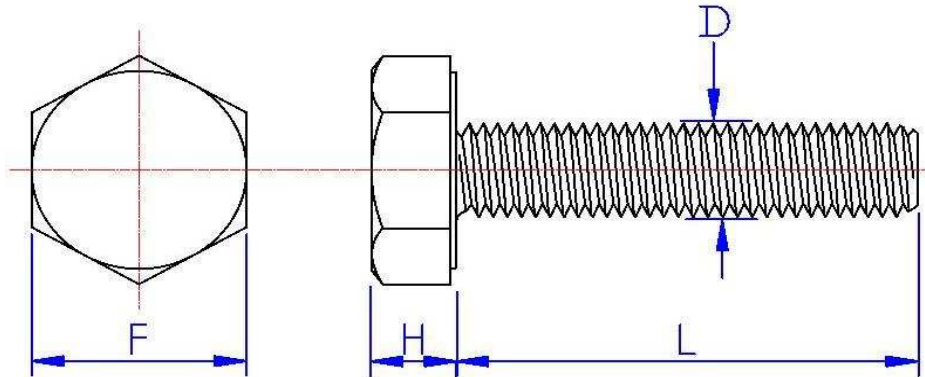

unit: MM  
ISO 4017

|                                 |             |        |
|---------------------------------|-------------|--------|
| <b>L</b><br>LENGTH<br>TOLERANCE | 10 to 18mm  | ± 0.35 |
|                                 | 20 to 30mm  | ± 0.42 |
|                                 | 35 to 50mm  | ± 0.5  |
|                                 | 55 to 80mm  | ± 0.6  |
|                                 | 90 to 120mm | ± 0.7  |

**FULL  
THREAD**

| SCREW      |     | <b>F</b><br>ACROSS FLAT | <b>H</b><br>HEAD HEIGHT | <b>D</b><br>THREAD DIAM. | <b>THREAD</b><br>PITCH MM |
|------------|-----|-------------------------|-------------------------|--------------------------|---------------------------|
| <b>M4</b>  | Min | 6.780                   | 2.675                   | 3.838                    | 0.7                       |
|            | Max | 7.000                   | 2.925                   | 3.978                    |                           |
| <b>M5</b>  | Min | 7.780                   | 3.350                   | 4.826                    | 0.8                       |
|            | Max | 8.000                   | 3.650                   | 4.976                    |                           |
| <b>M6</b>  | Min | 9.780                   | 3.850                   | 5.794                    | 1                         |
|            | Max | 10.000                  | 4.150                   | 5.974                    |                           |
| <b>M8</b>  | Min | 12.730                  | 5.150                   | 7.760                    | 1.25                      |
|            | Max | 13.000                  | 5.450                   | 7.972                    |                           |
| <b>M10</b> | Min | <b>16.730</b>           | 6.220                   | 9.732                    | 1.5                       |
|            | Max | <b>17.000</b>           | 6.580                   | 9.968                    |                           |

**Hex. Head Cap Screws, Full Thread, Zinc plated (Class 8.8)**

Date: 16 février 2016

Done by: P.B.