


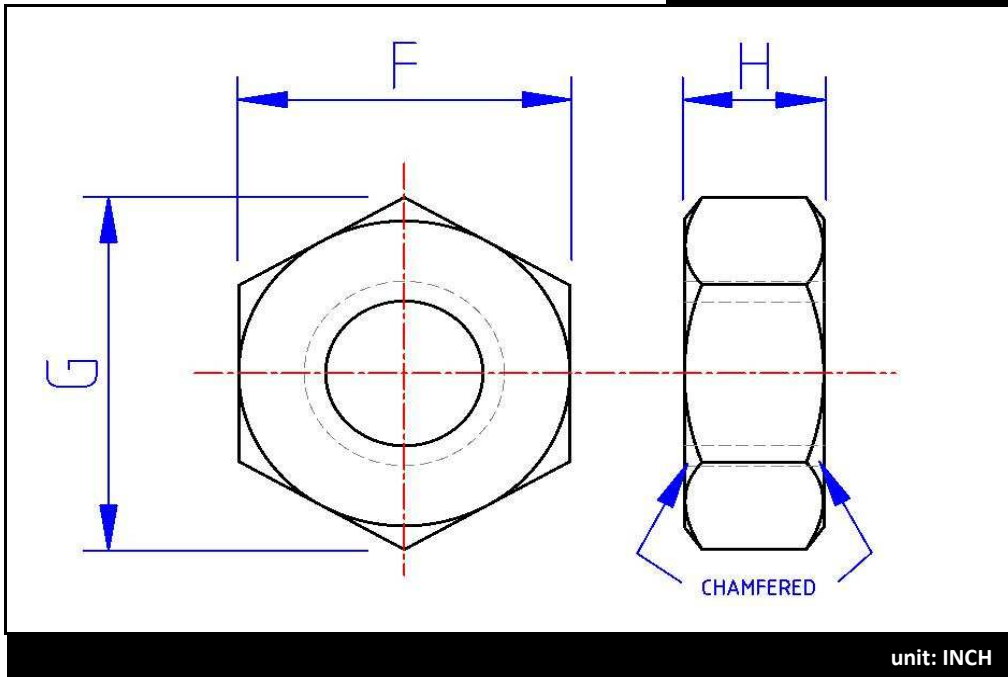

| Diam. of Thread |     | F<br>ACROSS FLAT. | G<br>ACROSS CORNERS | H<br>THICKNESS | THREAD<br>PER INCH |
|-----------------|-----|-------------------|---------------------|----------------|--------------------|
| 1/4             | Min | 0.428             | 0.488               | 0.212          | 20                 |
|                 | Max | 0.438             | 0.505               | 0.226          |                    |
| 5/16            | Min | 0.489             | 0.557               | 0.258          | 18                 |
|                 | Max | 0.500             | 0.577               | 0.273          |                    |
| 3/8             | Min | 0.551             | 0.628               | 0.320          | 16                 |
|                 | Max | 0.563             | 0.650               | 0.337          |                    |
| 7/16            | Min | 0.675             | 0.768               | 0.365          | 14                 |
|                 | Max | 0.688             | 0.794               | 0.385          |                    |
| 1/2             | Min | 0.736             | 0.840               | 0.427          | 13                 |
|                 | Max | 0.750             | 0.866               | 0.448          |                    |

**Hex Nut, Coarse Thread, Stainless Steel 18-8**

Date : 5 novembre 2015

Done by : P.B.