


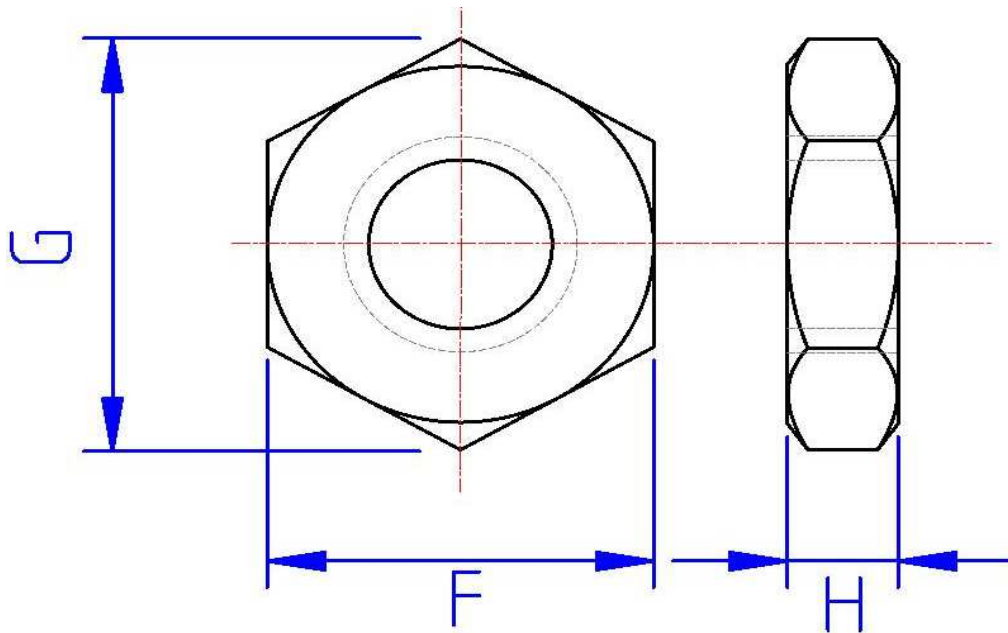

unit: INCH

Diam. of Thread		F ACROSS FLAT.	G ACROSS CORNERS	H THICKNESS	THREAD PER INCH
6-32	Min	0.302	0.344	0.102	32
	Max	0.312	0.361	0.114	
8-32	Min	0.332	0.378	0.117	32
	Max	0.344	0.397	0.130	
10-24	Min	0.362	0.413	0.117	24
	Max	0.375	0.433	0.130	
12-24	Min	0.423	0.482	0.148	24
	Max	0.438	0.505	0.161	

HEX. MACHINE SCREW NUT, STAINLESS STEEL (18-8)

Thread must follow the **UNC-UNF CLASS 2B** specifications

Shall be conform to **ASTM F594**

Date : 12 juin 2015

Done by : **P.B.**