


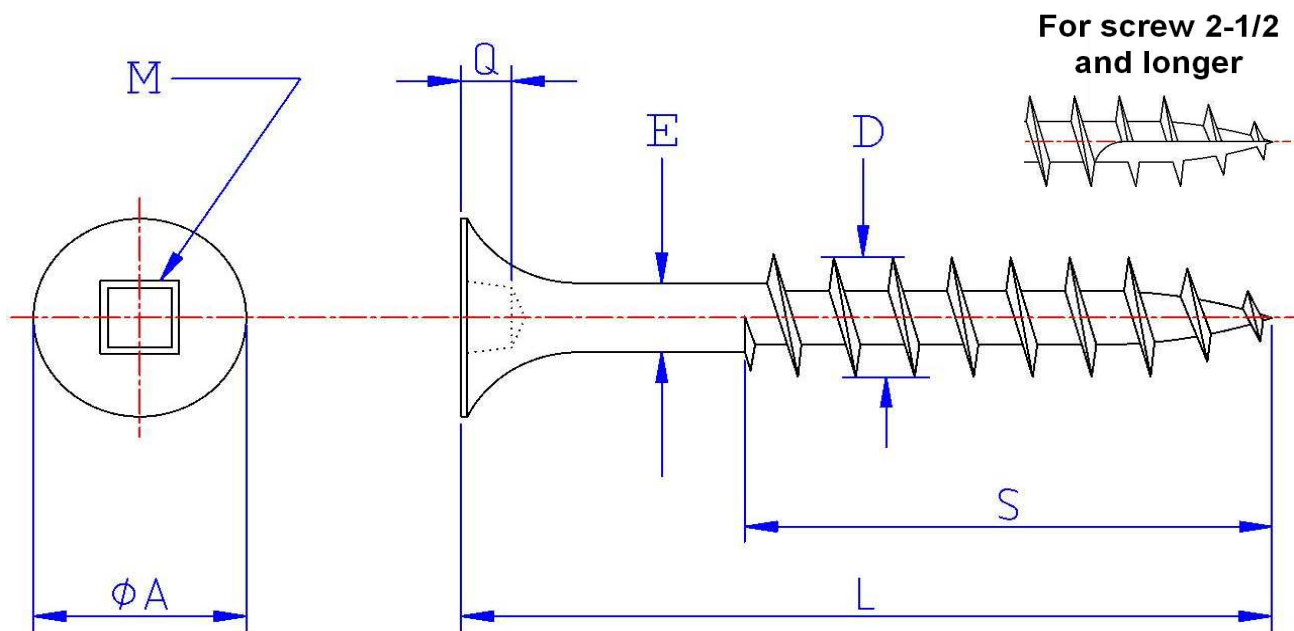

unit: INCH

L LENGTH TOLERANCE	>5/8" to ≤1-1/2"	+0	-0,05
	>1-1/2" to ≤2-3/4"	+0	-0,06
	>2-3/4"	+0	-0,09

S THREAD LENGTH	<1"	Full Thread
	≥1"	2/3 Thread
	≥2-1/2"	1/2 Thread

SCREW	M PUNCH		Q DRIVE DEPTH	A HEAD DIAM.	E BODY DIAM.	D THREAD DIAM.	THREAD PER INCH	TORK INCH/ POUND
# 6	# 2	Min	0,060	0,292	0,103	0,140	12	
		Max	0,075	0,332	0,110	0,152		
# 8	# 2	Min	0,060	0,292	0,121	0,168	10	
		Max	0,075	0,332	0,126	0,179		
# 10	# 2	Min	0,060	0,340	0,142	0,194	9	
		Max	0,075	0,385	0,147	0,205		

Flat bugle head, Square recessed, Coarse thread, Stainless Steel (18-8)
screw 2-1/2" and longer need a "Type 17" point

Date: 6 octobre 2011

Fait par: D.G.