


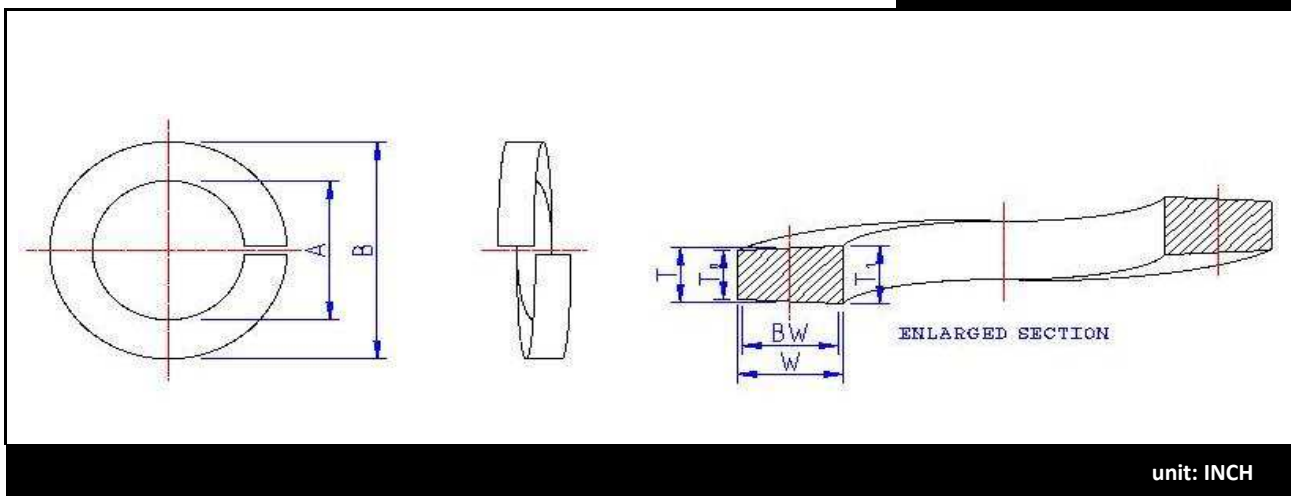

Bolt Size		A Inside Dia.	B Outside Diam.	T THICKNESS ($T_1 + T_0$)/2	W Width	BW Bearing Width
#6	Min	0.141		0.031	0.047	0.033
	Max	0.148	0.250			
#8	Min	0.167		0.040	0.055	0.038
	Max	0.174	0.293			
#10	Min	0.193		0.047	0.062	0.043
	Max	0.200	0.334			
1/4	Min	0.252		0.062	0.109	0.076
	Max	0.260	0.487			
5/16	Min	0.314		0.078	0.125	0.087
	Max	0.322	0.583			
3/8	Min	0.377		0.094	0.141	0.099
	Max	0.385	0.680			
1/2	Min	0.502		0.125	0.171	0.120
	Max	0.512	0.869			

Regular Helical Spring-Lock Washers, Stainless Steel (18-8)

Date : 5 février 2018

Done by : P.B.