




ATTACHES
RELIABLE
FASTENERS

FQMZ...

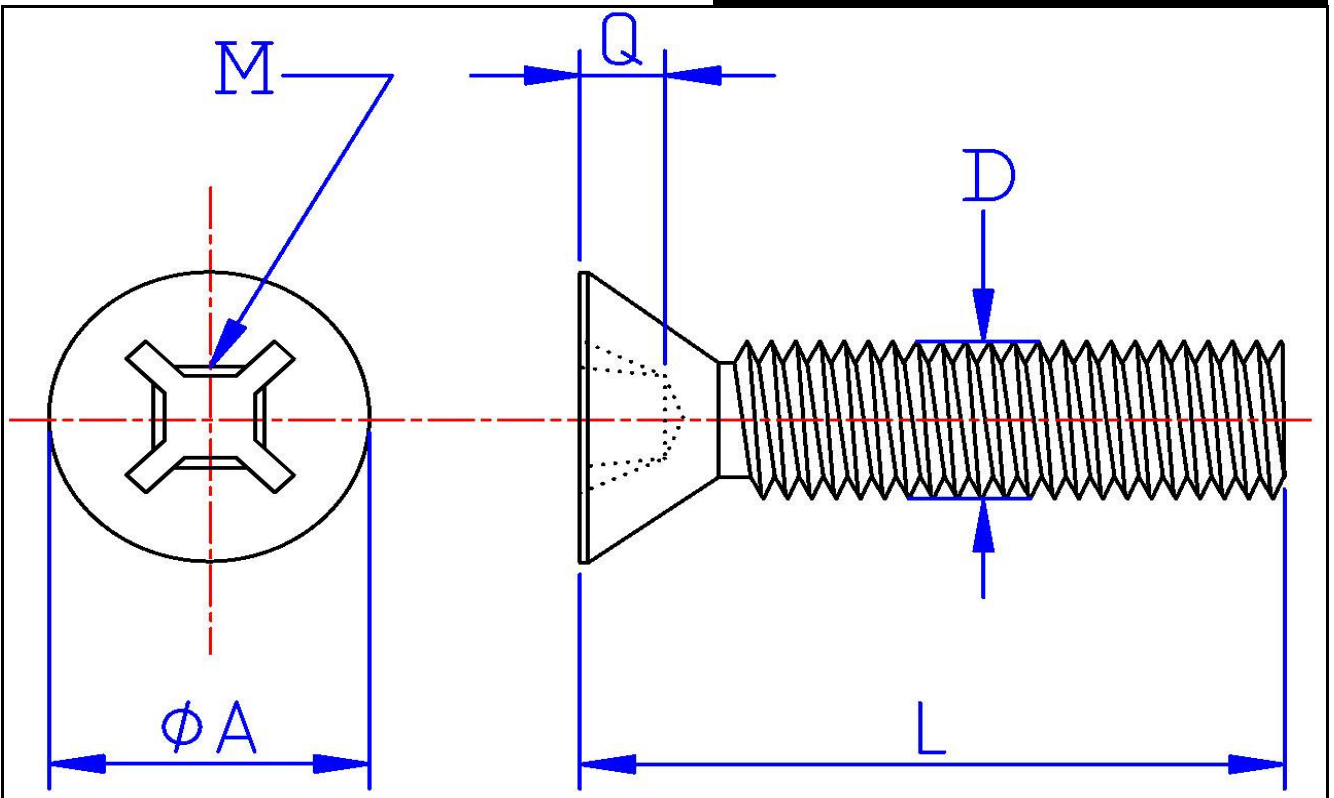

unit: INCH

L LENGHT TOLERANCE	$\leq 1/2"$	+0	-0,02	FULL THREAD
	$> 1/2"$ to $\leq 1"$	+0	-0,03	
	$> 1"$ to $\leq 2"$	+0	-0,06	
	$> 2"$	+0	-0,09	

SCREW	M PUNCH		Q DRIVE DEPTH	A HEAD DIAM.	D THREAD DIAM.	THREAD PER INCH
# 6	# 1	Min	0,050	0,238	0,131	32
		Max	0,065	0,262	,137	
# 8	# 2	Min	0,060	0,285	0,157	32
		Max	0,075	0,312	,163	
# 10 - 24	# 2	Min	0,060	0,333	0,182	24
		Max	0,075	0,362	0,189	
# 10 - 32	# 2	Min	0,060	0,333	0,183	32
		Max	0,075	0,362	,189	
1/4	# 3	Min	0,080	0,442	0,241	20
		Max	0,095	0,477	0,249	
5/16	# 3	Min	0,080	0,556	0,303	18
		Max	0,095	0,597	0,311	

Date: 7 juin 2011

Fait par: D.Y.