


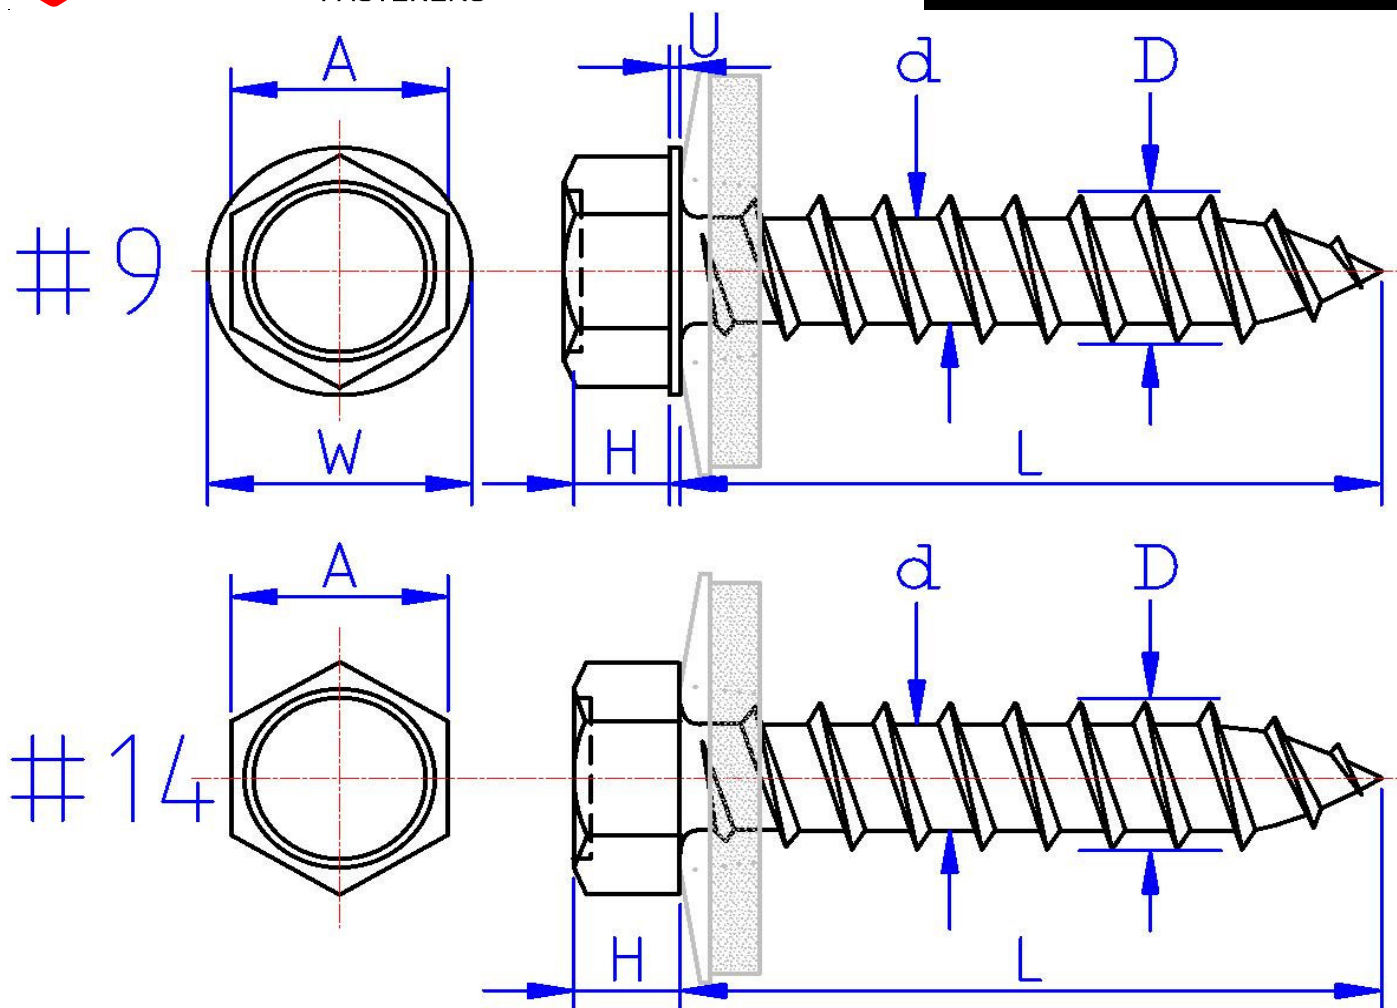

unit: INCH

L LENGHT	≤ 1"	± 0,03
	> 1	± 0,05

FULL THREAD

SCREW		W WASHER DIAM.	U WASHER THICK.	A ACROSS FLAT.	H HEAD HEIGHT.	d MINOR DIAM.	D MAJOR DIAM.	THREAD PER INCH	TORK INCH/POUND
# 9	Min	0,322	0,019	0,244	0,138	0,121	0,175	15	50
	Max	0,348	0,031	0,250	0,149	0,128	0,181		
# 14	Min			0,367	0,185	0,178	0,248	10	125
	Max			0,375	0,205	0,185	0,254		

Assembled with a dish bonded washer (page 2)

Date: 22 juin 2012


Fait par: D.Y.



ATTACHES

RELIABLE
FASTENERS

DBW...

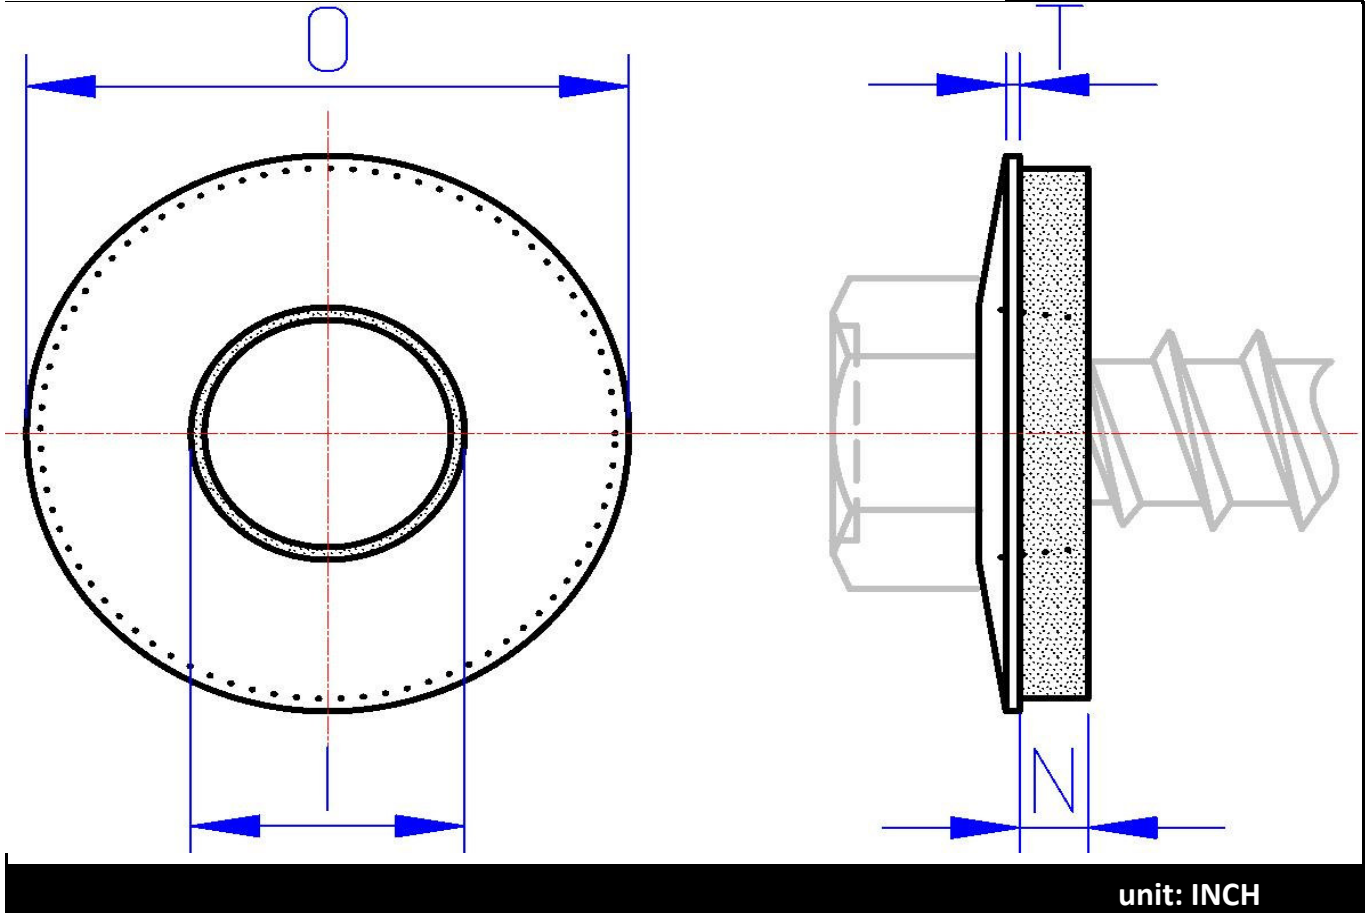

SCREW SIZE		ID	OD	T	N
		INSIDE DIAM.	OUTSIDE DIAM.	PLATE THICKNESS	NEOPREN THICKNESS
# 9	Min	0,200	0,470	0,025	0,058
	Max	0,210	0,490	0,035	0,075
# 14	Min	0,275	0,630	0,025	0,058
	Max	0,285	0,650	0,035	0,075

ID is for steel plate only and does not concern the neoprene

Date: 22 juin 2012

Fait par: D.G.